

---

# **Sugar Developer Guide 11.0**

---

<b>Sugar Developer Guide 11.0</b>	127
Introduction	127
Overview	127
Prerequisites	127
Understanding Sugar's Framework	127
Supported Platforms	128
Sugar Products	128
Basic Development Rules for Sugar Products	128
Development Tools	129
Developer Mode	129
Diagnostic Tool	129
Composer	130
Development Methodology	130
Overview	130
Development Best Practices	130
Using .gitignore Files	131
Recommendations for Development Teams	131
Deploying Sugar Code	131
Packaging	132
Deployment	133
Managing Multiple Environments	133
Consistency	134
Testing	135
Sugar Test Tools	135
Sugar Unit Tests	135
Sugar Performance Tests	136
DevOps	136
Co-Existing with Studio Customizations	137
Composer	138
Overview	138
Autoloader	138
Integrations	138
Internals	138
Optimization	139
Frequently Asked Questions	139
Delivery and Deployment Guide for Enterprises	141
Overview	141
Deploying Application Configuration and Metadata	141
config_override.php	142
database 'config' table	142
Use Case: Deployment of Reports	143
Use Case: Deployment of Dashboards	144
Use Case: Deployment of Roles	145
Use Case: Deployment of Teams	146
Use Case: Deployment of User Settings	146
User preferences	147

---

---

User table	148
Use Case: Deployment of custom fields	148
Use Case: Deployment of custom modules	149
Use Case: Deployment of custom Relationships	150
Use Case: Deployment of custom View or Layout metadata (Web)	150
Use Case: Deployment of custom View or Layout metadata (mobile)	151
Deploying Application Code and Integrations	152
Use Case: Deployment of Logic Hooks and Web Logic Hooks	152
Use Case: Deployment of custom API endpoints	153
Use Case: Deployment of custom Administration Panels	153
Use Case: Deployment of custom Jobs / Schedulers	154
<b>Sugar 10.3 to 11.0 Migration Guide</b>	155
Overview	155
Cloud and On-Site Sugar Release	155
REST API Version Number	155
Changes That May Affect Developers	155
Related Documents	156
<b>User Interface</b>	156
Overview	156
Clients	156
base	156
mobile	157
portal	157
Sidecar	157
Overview	157
Composition	158
Backbone.js	158
Components	159
Layouts	159
Views	160
Fields	160
Context	160
Events	161
Overview	161
Existing Backbone Event Catalog	161
Sidecar Events	162
Bean Events	163
Context Events	163
Utilizing Events	163
Routes	164
Overview	164
Routes	165
Route Definitions	165
Route Patterns	165
Custom Routes	166

route()	166
Example	166
addRoutes()	167
Arguments	167
Example	167
<b>Handlebars</b>	169
Overview	169
Templates	169
Debugging Templates	169
Helpers	169
Creating Helpers	170
<b>Layouts</b>	171
Overview	171
Hierarchy Diagram	172
Sidecar Layout Routing	173
Layout Example	173
JavaScript	173
Layout Definition	174
Application	175
Creating Layouts	175
Overview	175
Creating the Layout	175
Creating a View	176
Navigating to the Layout	177
Overriding Layouts	177
Overview	177
Overriding the Layout	177
Extending the View	181
<b>Views</b>	181
Overview	181
Load Order Hierarchy Diagram	181
Components	182
Controller	182
Handlebar Template	182
Extending Views	183
Create View and Record View Inheritance	184
Basic View Example	184
Controller	185
Attributes	185
Handlebar Template	185
Helpers	186
Cookbook Examples	186
Metadata	186
Overview	186
View Metadata Framework	186
View Metadata	187

---

<b>Fields</b>	192
Overview	192
Hierarchy Diagram	192
Field Example	193
Controller	193
Attributes	194
Handlebar Templates	194
Helpers	194
Cookbook Examples	195
<b>Subpanels</b>	195
Overview	195
Hierarchy Diagram	195
Subpanels and Subpanel Layouts	196
Adding Subpanel Layouts	198
Sidecar Layouts	198
Legacy MVC Subpanel Layouts	199
Fields Metadata	200
Hierarchy Diagram	200
Subpanel List Views	201
<b>Dashlets</b>	203
Overview	203
Hierarchy Diagram	203
Dashlet Views	204
Preview	204
Dashlet View	205
Configuration View	205
Dashlet Example	206
Metadata	206
Controller	208
Workflow	213
Retrieving Data	213
Handlebar Template	213
<b>Drawers</b>	215
Overview	215
Methods	215
Parameters	215
Example	216
app.drawer.close(callbackOptions)	216
Parameters	216
Standard Example	216
Callback Example	216
app.drawer.load(options)	217
Parameters	217
Example	217
app.drawer.reset(triggerBefore)	217
Parameters	217

---

---

Example	217
<b>Alerts</b>	218
Overview	218
Methods	218
Parameters	218
Default Alert Values	219
Alert Examples	219
Confirmation Alert	219
Process Alert	219
app.alert.dismiss(id)	220
Parameters	220
Example	220
app.alert.dismissAll	220
Example	220
Testing in Console	220
<b>Language</b>	221
Overview	221
Methods	221
Parameters	221
Example	221
app.lang.getAppString(key)	221
Parameters	222
Example	222
app.lang.getAppListStrings(key)	222
Parameters	222
Example	222
app.lang.getModuleSingular(moduleKey)	222
Parameters	222
Example	223
app.lang.getLanguage()	223
Example	223
app.lang.updateLanguage(languageKey)	223
Parameters	223
Example	223
Testing in Console	223
<b>MegaMenu</b>	224
Overview	224
Layout Components	224
Link Actions	224
Module Links	225
Module Action Links	225
Adding Module Action Links	225
Removing Module Action Links	226
Profile Action Links	227
Adding Profile Action Links	227
Removing Profile Action Links	228

---

---

Administration Links	229
Overview	229
Example	229
Legacy MVC	230
Overview	231
Model-View-Controller (MVC) Overview	231
SugarCRM MVC Implementation	231
View	232
Overview	232
What are Views?	232
Implementation	233
Class Loading	233
Methods	234
Creating Views	234
Overriding Views	235
Display Options for Views	236
Implementation	236
Controller	237
Overview	237
Controllers	237
Upgrade-Safe Implementation	238
File Structure	238
Implementation	238
Mapping Actions to Files	239
Upgrade-Safe Implementation	240
File Structure	240
Implementation	240
Classic Support (Not Recommended)	240
File Structure	240
Controller Flow Overview	240
Metadata	241
Overview	241
Metadata Framework	241
Application Metadata	242
Module Metadata	242
SearchForm Metadata	243
DetailView and EditView Metadata	246
Examples	255
Hiding the Quotes Module PDF Buttons	255
Overview	255
Hidding the PDF Buttons	255
Manipulating Buttons on Legacy MVC Layouts	258
Overview	258
Metadata	258
Custom Layouts	259
Editing Layouts	259

---

Developer Mode	259
Quick Repair and Rebuild	259
Saving & Deploying the Layout in Studio	260
Adding Custom Buttons	260
JavaScript Actions	260
Example	260
Submitting the Stock View Form	261
Example	261
Submitting Custom Forms	263
Example	263
Removing Buttons	264
Manipulating Layouts Programmatically	266
Overview	266
The ParserFactory	266
Modifying Layouts to Display Additional Columns	267
Overview	267
Resolution	267
On-Site	268
Examples	270
Changing the ListView Default Sort Order	270
Overview	270
Customization Information	270
Extending the Search Form	271
Extending the List View	271
Extending the Sugar Controller	274
<b>Data Framework</b>	275
<b>Modules</b>	275
Overview	275
Module Definitions	275
Hierarchy Diagram	275
\$moduleList	276
\$beanList	276
\$beanFiles	276
\$modInvisList	277
\$modules_exempt_from_availability_check	277
\$report_include_modules	277
\$adminOnlyList	277
\$bwcModules	277
<b>Models</b>	278
Overview	278
SugarObject Templates	278
SugarObject Interfaces	278
File Structure	279
Implementation	279
Performance Considerations	280



---

Cache Files	280
<b>SugarBean</b>	280
Overview	280
<b>CRUD Handling</b>	280
Creating and Retrieving Records	280
Obtaining the Id of a Recently Saved Bean	280
Saving a Bean with a Specific ID	281
Distinguishing New from Existing Records	282
Retrieving a Bean by Unique Field	282
Updating a Bean	283
Updating a Bean Without Changing the Date Modified	284
Deleting a Bean	284
<b>Fetching Relationships</b>	285
Fetching Related Records	285
Fetching Related Record IDs	285
Fetching a Parent Record	286
<b>Customizing Core SugarBeans</b>	287
Overview	287
Customizing a Core Module	287
Extending the SugarBean	287
Register the Custom Class	289
Things to Note	289
<b>Implementing Custom SugarBean Templates</b>	290
Overview	290
Creating a Custom SugarBean Template	290
Using a Custom Bean Template	299
Creating Custom Vardef Templates	301
Using a Custom Vardef Template	302
<b>BeanFactory</b>	304
Overview	304
Creating a SugarBean Object	304
newBeanByName()	304
Retrieving a SugarBean Object	304
retrieveBean()	305
Retrieving Module Keys	305
getBeanName()	305
<b>Vardefs</b>	306
Overview	306
Dictionary Array	306
Duplicate Check Array	307
Fields Array	307
Indices Array	309
Relationships Array	310
Visibility Array	310
Extending Vardefs	311

---

Manually Creating Custom Fields	311
Overview	311
Using ModuleInstaller to Create Custom Fields	311
Using the Vardef Extensions	314
Specifying Custom Indexes for Import Duplicate Checking	317
Overview	317
Resolution	318
Working With Indexes	319
Overview	319
Index Metadata	319
Creating Indexes	320
Removing Indexes	321
Example	321
Creating Indexes for Import Duplicate Checking	322
Example	323
Fields	324
Overview	324
SugarField Widgets	324
Implementation	324
Relationships	325
Overview	326
Definitions	326
Database Structure	326
Relationship Cache	326
Custom Relationships	327
Overview	327
Creating Custom Relationships	327
Defining the Relationship MetaData	327
MetaData Example	329
Defining the Relationship in the TableDictionary	331
TableDictionary Example	331
Subpanels	332
Overview	332
Hierarchy Diagram	332
Subpanels and Subpanel Layouts	333
Adding Subpanel Layouts	335
Sidecar Layouts	335
Legacy MVC Subpanel Layouts	336
Fields Metadata	337
Hierarchy Diagram	337
Subpanel List Views	338
Database	340
Overview	340
Primary Keys, Foreign Keys, and GUIDs	341
Indexes	342

Doctrine	342
DBManager	343
SugarQuery	343
SugarBean	343
DBManager	343
Overview	344
Instantiating the DBManager Object	344
Querying The Database	344
SELECT queries	344
<strong>Legacy:</strong>	344
<strong>Best Practice:</strong>	344
<strong>Legacy:</strong>	345
<strong>Best Practice:</strong>	345
Retrieving Results	345
Best Practice:	346
fetchAll() Example	346
fetch() Example	346
Retrieving a Single Result	346
Limiting Results	347
Legacy:	347
Prepared Statements:	347
INSERT queries	347
<strong>Legacy:</strong>	348
Best Practice:	348
UPDATE queries	348
<strong>Legacy:</strong>	348
<strong>Best Practice:</strong>	348
<strong>Legacy:</strong>	348
<strong>Best Practice:</strong>	348
Generating SQL Queries from SugarBean	349
Select Queries	349
Count Queries	349
SugarQuery	349
Overview	350
Setup	350
Basic Usage	350
from()	350
Arguments	350
Returns	352
select()	352
Arguments	352
Returns	352
where()	352
Arguments	353
Returns	353

Relationships	353
Arguments	353
Returns	354
joinTable()	354
Arguments	355
Returns	355
Altering Results	355
distinct()	356
Arguments	356
Returns	356
limit()	356
Arguments	356
Returns	357
offset()	357
Arguments	357
Returns	357
orderBy()	357
Arguments	358
Returns	358
Execution	358
execute()	358
Arguments	359
Returns	359
compile()	359
Arguments	360
Returns	360
SugarQuery Conditions	360
Overview	360
Where Clause	360
equals()   notEquals()	361
Arguments	361
Returns	361
equalsField()   notEqualsField()	361
Arguments	362
Returns	362
isEmpty()   isEmpty()	362
Arguments	362
Returns	362
isNull()   notNull()	362
Arguments	363
Returns	363
contains()   notContains()	363
Arguments	363
Returns	364
starts()   ends()	364
Arguments	364

Returns	364
in()   notIn()	364
Arguments	365
Returns	365
between()	365
Arguments	366
Returns	366
lt()   lte()   gt()   gte()	366
Arguments	366
Returns	367
dateRange()	367
Arguments	367
Returns	367
dateBetween()	368
Arguments	368
Returns	368
Combinations	368
queryAnd()	368
queryOr()	369
Advanced Techniques	370
Overview	370
Get First Record	370
getOne()	370
Aggregates	370
Arguments	371
Returns	371
Joins	371
joinName()	371
Arguments	372
Returns	372
Unions	372
union()	372
Arguments	374
Returns	374
Having	374
having()	374
Arguments	375
Returns	375
Raw Methods	376
whereRaw()	376
Arguments	376
Returns	377
groupByRaw()	377
Arguments	377
Returns	378
orderByRaw()	378

Arguments	378
Returns	378
havingRaw()	379
Arguments	380
Returns	380
<b>Architecture</b>	380
<b>Overview</b>	380
<b>Platform</b>	380
<b>Front-End Framework</b>	382
<b>Metadata</b>	382
<b>Extensions</b>	383
<b>Autoloader</b>	383
<b>Overview</b>	383
<b>SugarAutoLoader</b>	383
Included File Extensions	383
Class Loading Directories	384
Ignored Directories	384
<b>Configuration API</b>	385
<b>Overview</b>	385
addDirectory(\$dir)	385
addPrefixDirectory(\$prefix, \$dir)	385
<b>File Check API</b>	386
<b>Overview</b>	386
existing(...)	386
existingCustom(...)	386
existingCustomOne(...)	386
fileExists(\$filename)	387
getDirFiles(\$dir, \$get_dirs = false, \$extension = null)	387
getFilesCustom(\$dir, \$get_dirs = false, \$extension = null)	387
lookupFile(\$paths, \$file)	388
requireWithCustom(\$file, \$both = false)	388
<b>File Map Modification API</b>	388
<b>Overview</b>	388
addToMap(\$filename, \$save = true)	388
delFromMap(\$filename, \$save = true)	389
put(\$filename, \$data, \$save = false)	389
touch(\$filename, \$save = false)	389
unlink(\$filename, \$save = false)	389
<b>Metadata API</b>	390
<b>Overview</b>	390
<b>Metadata Loading</b>	390
loadWithMetafiles(\$module, \$varname)	390
loadPopupMeta(\$module, \$metadata = null)	391
loadExtension(\$extname, \$module = "application")	391
<b>Caching</b>	391

Overview	391
Developer Mode	392
<b>Uploads</b>	392
Overview	392
Uploads	392
Upload Extensions	393
How Files Are Stored	394
Email Attachments	394
Picture Fields	394
Knowledge Base Attachments	395
Module Loadable Packages	395
CSV Imports	395
Working with File Uploads	396
Overview	396
Retrieving a Files Upload Location	396
Retrieving a Files Full File System Location	396
Retrieving a Files Contents	397
Duplicating a File	397
<b>Email</b>	397
Overview	397
Email Tables	397
Helper Queries	399
Retrieve All Records Related to an Email Address	400
Retrieve All Emails Sent From An Email Address	400
Cleanup Duplicate Email Addresses	400
Email Address Validation	401
Server Side	402
Client Side	402
Mailer Factory	402
Overview	402
Mailers	402
System Mailer	403
<strong>Example</strong>	403
User Mailer	403
<strong>Example</strong>	403
Populating the Mailer	403
Example	403
Setting the Body	403
Example	404
Adding Recipients	404
Example	404
Clearing Recipients	404
Example	404
Adding Attachments	404
Example	405

Sending Emails	405
Example	405
<b>Email Addresses</b>	<b>406</b>
Overview	406
Client Side	406
Sidecar	407
Fetching Email Addresses in Sidecar	407
Fetching a Primary Email Address in Sidecar	407
Fetching an Email Address by Properties in Sidecar	407
Validating Email Addresses in Sidecar	408
Iterating Email Address in Sidecar	408
Updating Email Addresses in Sidecar	408
Adding Email Addresses in Sidecar	408
Removing Email Addresses in Sidecar	409
Server Side	410
SugarBean	410
Fetching Email Addresses Using the SugarBean	410
Fetching a Primary Email Address Using the SugarBean	410
Fetching an Email Address by Properties Using the SugarBean	411
Validating Email Addresses Using the SugarBean	411
Iterating Email Addresses Using the SugarBean	411
Fetching Beans by Email Address Using the SugarBean	411
Updating Email Addresses Using the SugarBean	412
Adding Email Addresses Using the SugarBean	412
Removing Email Addresses Using the SugarBean	412
PDF Templates	412
REST API	413
Creating Email Addresses Using the REST API	413
Updating Email Addresses Using the REST API	414
Legacy Email Fields	415
Creating Email Addresses Using Direct SQL	415
Checking for Duplicates	416
Removing Duplicates	417
<b>Logging</b>	<b>418</b>
Overview	418
SugarLogger	418
Log Levels	418
Considerations	419
Logging Messages	419
Using LogManager	419
Log Rotation	420
Debugging Messages with _ppl()	420
PSR-3	421
Log Levels	421
Considerations	421
Logging Messages	422



Creating Custom Loggers	422
Custom Loggers	422
PSR-3 Logger	424
Overview	424
Architecture	424
Factory	424
Methods	425
<strong>Arguments</strong>	425
Example	425
Handlers	425
Factory Interface	425
Methods	426
create(\$level, \$config)	426
Returns	426
Implementations	426
Configuration	426
Formatters	427
Processors	427
Factory Interface	428
Methods	428
create(\$config)	428
Returns	428
Implementations	428
BacktraceProcessor	428
RequestProcessor	429
Configuration	430
Usage	430
Basic Usage	430
Configuring Channels	431
Default Channels	431
Customization	432
Adding a Custom Handler	432
SugarLogger	433
Overview	433
LoggerTemplate	433
Methods	433
<strong>Arguments</strong>	434
Implementations	434
SugarLogger	434
SugarPsrLogger	434
Log Level Mappings	434
LoggerManager	435
Methods	435
setLevel(\$level)	435
<strong>Arguments</strong>	435
Example	435

assert(\$message, \$condition)	436
<strong>Arguments</strong>	436
Example	436
wouldLog(\$level)	436
<strong>Arguments</strong>	436
Example	436
setLogger(\$level, \$logger)	437
<strong>Arguments</strong>	437
Example	437
getAvailableLoggers()	437
<strong>Arguments</strong>	437
Example	437
getLoggerLevels()	437
<strong>Arguments</strong>	438
Example	438
Adding a Custom SugarLogger	438
Logic Hooks	439
Overview	439
Hook Definitions	439
Methodologies	440
Module Extension Hooks	440
Module Hooks	440
Application Extension Hooks	440
Application Hooks	440
Definition Properties	441
hook_version	441
hook_array	441
Hook Method	442
Namespaced Hooks	442
Hooks without Namespaces	443
Considerations	444
Application Hooks	445
after_entry_point	445
Overview	445
Definition	445
Arguments	445
Considerations	445
Change Log	446
Example	446
after_load_user	447
Overview	447
Definition	447
Arguments	447
Change Log	447
Example	448

after_session_start	449
Overview	449
Definition	449
Arguments	449
Change Log	449
Example	449
after_ui_footer	451
Overview	451
Definition	451
Arguments	451
Considerations	451
Change Log	452
Example	452
after_ui_frame	453
Overview	453
Definition	453
Arguments	453
Considerations	454
Change Log	454
Example	454
Application Hook	455
entry_point_variables_setting	456
Overview	456
Definition	457
Arguments	457
Considerations	457
Change Log	457
Example	457
handle_exception	458
Overview	458
Definition	459
Arguments	459
Considerations	459
Change Log	459
Example	459
server_round_trip	460
Overview	460
Definition	461
Arguments	461
Considerations	461
Change Log	461
Example	461
<b>Module Hooks</b>	<b>463</b>
after_delete	463
Overview	463
Definition	463

Arguments	463
Examples	463
Creating a Core Logic Hook	464
after_fetch_query	466
Overview	466
Definition	466
Arguments	466
Change Log	466
Examples	466
Creating a Core Logic Hook	467
after_relationship_add	469
Overview	469
Definition	469
Arguments	469
Considerations	469
Change Log	470
Examples	470
Creating a Core Logic Hook	471
after_relationship_delete	472
Overview	472
Definition	472
Arguments	472
Considerations	473
Change Log	473
Examples	473
Creating a Core Logic Hook	474
after_restore	475
Overview	475
Definition	476
Arguments	476
Examples	476
Creating a Core Logic Hook	477
after_retrieve	478
Overview	478
Definition	478
Arguments	479
Considerations	479
Examples	479
Creating a Core Logic Hook	480
after_save	481
Overview	481
Definition	481
Arguments	481
Considerations	482
Examples	482
Creating a Core Logic Hook	483

<b>before_delete</b>	484
Overview	485
Definition	485
Arguments	485
Examples	485
Creating a Core Logic Hook	486
<b>before_fetch_query</b>	487
Overview	487
Definition	487
Arguments	488
Change Log	488
Examples	488
Creating a Core Logic Hook	489
<b>before_relationship_add</b>	490
Overview	490
Definition	490
Arguments	491
Considerations	491
Change Log	491
Creating a Logic Hook using the Extension Framework	491
<b>before_relationship_delete</b>	492
Overview	493
Definition	493
Arguments	493
Considerations	493
Change Log	493
Creating a Logic Hook using the Extension Framework	494
<b>before_restore</b>	495
Overview	495
Definition	495
Arguments	495
Examples	495
Creating a Core Logic Hook	496
<b>before_save</b>	497
Overview	498
Definition	498
Arguments	498
Considerations	498
Examples	498
Creating a Core Logic Hook	499
<b>process_record</b>	501
Overview	501
Definition	501
Arguments	501
Considerations	501
Change Log	501

Examples	502
Creating a Core Logic Hook	503
User Hooks	504
after_login	504
Overview	504
Definition	504
Arguments	504
Change Log	505
Example	505
after_logout	506
Overview	506
Definition	506
Arguments	506
Change Log	507
Example	507
before_logout	508
Overview	508
Definition	508
Arguments	508
Change Log	508
Example	509
login_failed	510
Overview	510
Definition	510
Arguments	510
Change Log	510
Example	510
Job Queue Hooks	512
job_failure	512
Overview	512
Definition	512
Arguments	512
Change Log	512
Example	513
job_failure_retry	514
Overview	514
Definition	514
Arguments	514
Change Log	514
Example	514
SNIP Hooks	516
after_email_import	516
Overview	516
Definition	516
Arguments	516
Considerations	516

Change Log	517
Example	517
before_email_import	518
Overview	518
Definition	518
Arguments	518
Considerations	518
Change Log	519
Example	519
API Hooks	520
after_routing	520
Overview	520
Definition	520
Arguments	520
Considerations	521
Change Log	521
Example	521
before_api_call	522
Overview	522
Definition	522
Arguments	522
Considerations	523
Change Log	523
Example	523
before_filter	524
Overview	524
Definition	524
Arguments	525
Considerations	525
Change Log	525
Example	525
before_respond	526
Overview	527
Definition	527
Arguments	527
Considerations	527
Change Log	527
Example	527
before_routing	529
Overview	529
Definition	529
Arguments	529
Considerations	529
Change Log	529
Example	530

Web Logic Hooks	531
Overview	531
Arguments	531
Example	532
Result	532
Logic Hook Release Notes	535
10.2.0	535
7.0.0RC1	535
6.6.0	535
6.5.0RC1	535
6.4.5	536
6.4.4	536
6.4.3	536
6.0.0RC1	536
5.0.0a	536
4.5.0c	537
Languages	537
Overview	537
Language Keys	537
Change Log	539
Application Labels and Lists	540
Overview	540
Application Labels and Lists	541
Customizing Application Labels and Lists	541
Hierarchy Diagram	541
Retrieving Labels	542
Retrieving Lists	542
Accessing Application Strings in Sidecar	543
\$app_strings	543
\$app_list_strings	543
Module Labels	544
Overview	544
Module Labels	544
Customizing Labels	545
Label Cache	545
Hierarchy Diagram	545
Retrieving Labels	546
Accessing Module Strings in Sidecar	546
\$mod_strings	547
Managing Lists	547
Overview	547
Managing Lists With Studio	547
Directly Modifying Lists	548
Managing Lists With Dropdown Helper	548
Language Packs	549



Overview	549
Creating a Language Pack	549
Application and Module Strings	550
Dashlet Strings	553
Templates	554
Configuration	554
Module Loadable Packages	554
Example Manifest File	554
<b>Extensions</b>	<b>555</b>
Overview	556
Extensions Properties	556
ActionFileMap	557
Overview	557
Properties	557
Implementation	558
File System	558
Module Loadable Package	559
Installdef Properties	559
ActionReMap	560
Overview	560
Properties	560
Implementation	560
File System	561
Module Loadable Package	561
Installdef Properties	561
ActionViewMap	562
Overview	562
Properties	562
Implementation	563
File System	563
Module Loadable Package	564
Installdef Properties	564
<b>Administration</b>	<b>565</b>
Overview	565
Properties	565
Implementation	566
File System	566
Module Loadable Package	567
Installdef Properties	567
<b>Application Schedulers</b>	<b>569</b>
Overview	569
Properties	569
Implementation	569
File System	569
Module Loadable Package	570
Installdef Properties	570

Console	571
Overview	571
Properties	572
Implementation	572
File System	572
Module Loadable Package	572
Installdef Properties	572
	573
Dependencies	573
Overview	573
Properties	574
Implementation	574
File System	574
Module Loadable Package	575
Installdef Properties	575
EntryPointRegistry	576
Overview	576
Properties	576
Implementation	577
File System	577
Module Loadable Package	578
Installdef Properties	578
Extensions	579
Overview	579
Properties	579
Parameters	579
Implementation	580
File System	580
Module Loadable Package	581
Installdef Properties	581
FileAccessControlMap	582
Overview	582
Properties	582
Implementation	582
File System	582
Module Loadable Package	583
Installdef Properties	583
Include	584
Overview	584
Properties	584
Implementation	585
File System	585
Module Loadable Package	585
Installdef Properties	585
JSGroupings	587

---

Overview	587
Properties	587
Implementation	588
File System	588
Appending to Existing JSGroupings	589
Module Loadable Package	589
Installdef Properties	590
Considerations	591
Language	591
Overview	591
Properties	591
Implementation	592
File System	592
Creating New Module Label	593
Module Loadable Package	593
Installdef Properties	593
Layoutdefs	594
Overview	594
Properties	594
Implementation	595
File System	595
Module Loadable Package	596
Installdef Properties	596
LogicHooks	597
Overview	597
Properties	597
Implementation	598
File System	598
Module Loadable Package	599
Installdef Properties	599
Alternative Installdef	600
Properties	600
Modules	602
Overview	602
Properties	602
Implementation	602
File System	602
Module Loadable Package	603
Installdef Properties	603
Platforms	604
Overview	604
Properties	605
Implementation	605
File System	605
Module Loadable Package	606
Installdef Properties	606

---

ScheduledTasks	607
Overview	607
Properties	607
Implementation	608
File System	608
Module Loadable Package	608
Installdef Properties	609
Sidecar	610
Overview	610
Properties	610
Implementation	610
File System	610
Module Loadable Package	611
Installdef Properties	611
TinyMCE	612
Overview	612
Properties	613
Implementation	613
File System	613
Module Loadable Package	614
Installdef Properties	614
UserPage	615
Overview	615
Properties	615
Implementation	615
File System	616
Module Loadable Package	616
Installdef Properties	616
Utils	617
Overview	617
Properties	618
Implementation	618
File System	618
Module Loadable Package	619
Installdef Properties	619
Vardefs	620
Overview	620
Properties	620
Implementation	620
File System	620
Module Loadable Package	621
Installdef Properties	621
Creating Custom Fields	622
WirelessLayoutdefs	622
Overview	622

Properties	622
Implementation	623
File System	623
Module Loadable Package	624
Installdef Properties	624
WirelessModuleRegistry	625
Overview	625
Properties	625
Implementation	625
File System	625
Module Loadable Package	626
Installdef Properties	626
Filters	627
Overview	627
Operators	628
Example	634
Sub-Expressions	634
Module Expressions	635
Filter Examples	635
Adding Initial Filters to Lookup Searches	637
Adding Initial Filters to Drawers from a Controller	640
Duplicate Check	641
Overview	642
Default Strategy	642
Custom Filter	642
Example	643
Custom Strategies	645
Duplicate Check Class	645
Example	645
Vardef Settings	646
Programmatic Usage	647
Elastic Search	647
Overview	648
Resources	648
Deployment	648
Framework	649
Main Components	649
Mapping Manager	649
Example Mapping	650
Index Manager	652
Indexer & Queue Manager	653
Global Search Provider	654
Query Builder	654
ACL	658
Visibility	658

Global Search	659
Overview	659
Configuring Search Results	659
Primary and Secondary Fields	659
Examples	661
Adding Fields to the Primary Row	661
Adding Fields to the Secondary Row	662
Sugar Logic	664
Overview	664
Terminology	664
Sugar Formula Engine	665
Types	665
Number Type	665
String Type	666
Boolean Type	666
Enum Type (list)	666
Link Type (relationship)	666
Functions	667
Triggers	667
Actions	667
notActions	667
Dependencies	668
Calculated Fields	668
Dependent fields	669
Dependent dropdowns	669
Clearing the Sugar Logic Cache	670
Dependency Actions	670
Overview	670
Dependency Parameters	670
ReadOnly	671
Overview	671
Implementation	671
ReadOnly Parameters	671
Example	672
Considerations	673
SetOptions	673
Overview	673
Implementation	673
Setoptions Parameters	674
Examples	674
Using an Existing DropDown List	674
Complex Dynamic Lists	675
SetPanelVisibility	676
Overview	677
Implementation	677
SetPanelVisibility Parameters	677

Example	677
SetRequired	678
Overview	678
Implementation	679
SetRequired Parameters	679
Example	679
SetValue	680
Overview	680
Implementation	680
SetValue Parameters	681
Examples	681
Dependency Extensions	681
Chaining Dependencies	682
Dependencies in Field Definitions	683
SetVisibility	684
Overview	684
Implementation	684
SetVisibility Parameters	684
Examples	685
SetVisibility Dependency Extensions	685
Visibility Dependencies in Field Definitions	685
Extending Sugar Logic	687
Overview	687
Writing a Custom Formula Function	687
Writing a Custom Action	689
Using Sugar Logic Directly	691
Accessing an External API with a Sugar Logic Action	692
Creating a Custom Dependency for a View	695
Creating a Custom Dependency Using Metadata	697
Using Dependencies in Logic Hooks	698
Overview	698
Administration	699
Overview	699
The Administration Class	699
Creating / Updating Settings	699
Retrieving Settings	700
Considerations	700
Configurator	701
Overview	701
Retrieving Settings	701
Creating / Updating Settings	701
Considerations	702
Core Settings	702
Overview	702
Settings Architecture	702

Settings	702
activitystreamcleaner	703
activitystreamcleaner.keep_all_relationships_activities	703
activitystreamcleaner.limit_scheduler_run	703
activitystreamcleaner.months_to_keep	704
activity_streams	704
activity_streams.erasure_job_delay	705
activity_streams.erasure_job_limit	705
additional_js_config	706
additional_js_config.alertAutoCloseDelay	706
additional_js_config.authStore	707
additional_js_config.disableOmnibarTypeahead	707
additional_js_config.logger.write_to_server	708
additional_js_config.sidecarCompatMode	709
admin_access_control	709
admin_export_only	710
allow_oauth_via_get	710
allow_pop_inbound	710
allow_sendmail_outbound	711
analytics	712
analytics.connector	712
analytics.enabled	712
analytics.id	713
api	713
api.timeout	714
authenticationClass	714
aws	714
aws.aws_key	715
aws.aws_secret	715
aws.upload_bucket	715
cache	716
cache.backend	716
cache.encryption_key	717
cache.multi_tenant	717
cache_dir	718
cache_expire_timeout	718
calendar	719
calendar.day_timestep	719
calendar.default_view	719
calendar.items_draggable	720
calendar.items_resizable	720
calendar.show_calls_by_default	720
calendar.week_timestep	721
check_query	721
check_query_cost	721
clear_resolved_date	722



cloud_insight	722
cloud_insight.enabled	722
cloud_insight.key	723
cloud_insight.url	723
collapse_subpanels	723
cron	724
cron.enforce_runtime	724
cron.max_cron_jobs	725
cron.max_cron_runtime	725
cron.min_cron_interval	726
csrf	726
csrf.soft_fail_form	726
csrf.token_size	727
customPortalPlatforms	727
custom_help_base_url	728
custom_help_url	728
dbconfig	729
dbconfig.db_host_instance	729
dbconfig.db_host_name	729
dbconfig.db_manager	730
dbconfig.db_name	730
dbconfig.db_password	731
dbconfig.db_port	731
dbconfig.db_type	731
dbconfig.db_user_name	732
dbconfigoption.autofree	732
dbconfigoption.collation	733
dbconfigoption.debug	733
dbconfigoption.persistent	733
dbconfigoption.ssl	734
dbconfigoption.ssl_options	734
dbconfigoption.ssl_options.ssl_capath	734
dbconfigoption.ssl_options.ssl_cert	735
dbconfigoption.ssl_options.ssl_cipher	735
dbconfigoption.ssl_options.ssl_key	736
default_currency_significant_digits	736
default_date_format	736
default_decimal_seperator	737
default_email_client	737
default_language	737
default_number_grouping_seperator	738
default_permissions	738
default_permissions.dir_mode	739
default_permissions.file_mode	739
default_permissions.group	740
default_permissions.user	740

default_user_is_admin	741
developerMode	741
diagnostic_file_max_lifetime	742
disabled_languages	742
disable_count_query	742
disable_export	743
disable_related_calc_fields	743
disable_team_access_check	744
disable_unknown_platforms	744
disable_uw_upload	745
disable_vcr	745
dump_slow_queries	746
email_address_separator	746
email_default_client	747
email_default_delete_attachments	747
email_default_editor	748
email_mailer_timeout	748
enable_inline_reports_edit (Deprecated in future release)	749
enable_link_to_drawer	749
enable_long_text_search	749
enable_mobile_redirect	750
enable_one_index	750
exclude_notifications	751
exclude_notifications.module	751
external_cache	752
external_cache.memcache	752
external_cache.memcache.host	752
external_cache.memcache.port	753
external_cache.redis	753
external_cache.redis.host	753
external_cache.redis.persistent	754
external_cache.redis.port	754
external_cache.redis.timeout	754
external_cache_db_gc_probability	755
external_cache_db_gc_threshold	755
external_cache_disabled	756
external_cache_disabled_memcached	756
external_cache_disabled_wincache	757
external_cache_force_backend	757
forms	758
forms.requireFirst	758
freebusy_use_vcal_cache	758
gs_use_shortcut_operator	759
hide_admin_licensing	759
hide_full_text_engine_config	760
hide_subpanels	760

hide_subpanels_on_login	761
hint	761
hint.hint_install_target_geo	762
history_max_viewed	763
host_name	763
installer_locked	763
jobs	764
jobs.hard_lifetime	764
jobs.max_retries	764
jobs.min_retry_interval	765
jobs.soft_lifetime	765
jobs.timeout	765
languages	766
list_max_entries_per_page	766
list_report_max_per_page	767
logger	767
logger.channels	767
logger.channels.authentication	768
logger.channels.authentication.handlers	768
logger.channels.authentication.level	768
logger.channels.authentication.processors	769
logger.channels.channel	769
logger.channels.channel.handlers	770
logger.channels.channel.level	770
logger.channels.channel.processors	771
logger.channels.db	771
logger.channels.db.handlers	772
logger.channels.db.level	772
logger.channels.db.processors	772
logger.channels.input_validation	773
logger.channels.input_validation.handlers	773
logger.channels.input_validation.level	773
logger.channels.input_validation.processors	774
logger.channels.metadata	774
logger.channels.metadata.handlers	774
logger.channels.metadata.level	775
logger.channels.metadata.processors	775
logger.channels.rest	776
logger.channels.rest.handlers	776
logger.channels.rest.level	776
logger.channels.rest.processors	777
logger.file.dateFormat	777
logger.file.ext	777
logger.file.maxLogs	778
logger.file.maxSize	778
logger.file.name	779

logger.file.suffix	779
logger.level	780
logger_visible	780
log_dir	781
log_file	781
log_memory_usage	782
maintenanceMode	782
marketing_extras_enabled	783
mark_emails_seen	783
mass_actions	783
mass_actions.mass_delete_chunk_size	784
mass_actions.mass_link_chunk_size	784
mass_actions.mass_update_chunk_size	784
mass_actions.max_records_to_merge	785
max_aggregate_email_attachments_bytes	785
max_session_time	786
metrics_enabled	786
metric_providers	787
metric_settings	787
minify_resources	787
moduleInstaller	788
moduleInstaller.disableActions	788
moduleInstaller.disableFileScan	789
moduleInstaller.packageScan	789
moduleInstaller.validExt	790
mso_fixup_paragraph_tags	790
new_email_addresses_opted_out	791
noPrivateTeamUpdate	791
oauth2	792
oauth2.access_token_lifetime	792
oauth2.refresh_token_lifetime	793
oauth_token_expiry	793
oauth_token_life	794
passwordHash	794
passwordHash.algo	794
passwordHash.allowLegacy	795
passwordHash.backend	796
passwordHash.options	797
passwordHash.options.cost	797
passwordHash.options.rounds	798
passwordHash.rehash	798
passwordsetting	799
passwordsetting.forgotpasswordON	799
passwordsetting.linkexpiration	800
passwordsetting.onelower	800
passwordsetting.onenumber	800

passwordsetting.oneupper	801
passwordsetting.systemexpirationtype	801
pdf_file_max_lifetime	802
perfProfile	802
perfProfile.TeamSecurity	803
perfProfile.TeamSecurity.default	803
perfProfile.TeamSecurity.default.disable_subquery_optimizer_hint	803
perfProfile.TeamSecurity.default.teamset_prefetch	804
perfProfile.TeamSecurity.default.teamset_prefetch_max	805
perfProfile.TeamSecurity.default.use_denorm	805
perfProfile.TeamSecurity.default.where_condition	806
perfProfile.TeamSecurity.gs_use_normalized_teams	806
perfProfile.TeamSecurity.inline_update	807
pmse_settings_default	808
pmse_settings_default.error_number_of_cycles	808
pmse_settings_default.error_timeout	808
pmse_settings_default.logger_level	808
processes_auto_save_interval	809
processes_auto_validate_on_autosave	809
processes_auto_validate_on_import	810
push_notification	810
push_notification.enabled	810
push_notification.service_provider	811
require_accounts	812
rest_response_etag_cache_age	812
roleBasedViews	812
SAML_provisionUser	813
SAML_X509Cert	813
schedule_report_with_chart	813
search_engine	814
search_engine.max_bulk_delete_threshold	814
search_engine.max_bulk_query_threshold	815
search_engine.max_bulk_threshold	815
search_engine.postpone_job_time	816
search_wildcard_infront	816
session_dir	816
showThemePicker	817
show_download_tab	817
site_url	818
slow_query_time_msec	818
smtp_mailer_debug	819
stack_trace_errors	819
studio_max_history	819
sugar_version	820
time_aware_job_max_batch_size	820
tmp_dir	821

tmp_file_max_lifetime	821
tracker_max_display_length	822
uninstall_timeout	822
unique_key	822
upload_badext	823
upload_dir	823
upload_maxsize	824
upload_wrapper_class	824
use_common_ml_dir	825
use_php_code_json	825
use_real_names	826
use_sprites	826
validation	826
validation.compat_mode	827
validation.soft_fail	827
vcal_time	828
verify_client_ip	829
wl_list_max_entries_per_page	829
wl_list_max_entries_per_subpanel	829
xhprof_config	830
xhprof_config.enable	830
xhprof_config.filter_wt	831
xhprof_config.flags	831
xhprof_config.ignored_functions	831
xhprof_config.log_to	832
xhprof_config.manager	832
xhprof_config.memory_limit	833
xhprof_config.mongodb_collection	833
xhprof_config.mongodb_db	833
xhprof_config.mongodb_options	834
xhprof_config.mongodb_uri	834
xhprof_config.sample_rate	834
xhprof_config.save_to	835
xhprof_config.track_elastic	835
xhprof_config.track_elastic_backtrace	835
xhprof_config.track_sql	836
xhprof_config.track_sql_backtrace	836
xhprof_config.track_sql_backtrace	837
<b>Silent Installer Settings</b>	<b>837</b>
<b>Overview</b>	<b>837</b>
config_si.php	837
<b>Essential Settings</b>	<b>838</b>
<b>General System Settings</b>	<b>838</b>
setup_site_url	839
setup_site_admin_user_name	839
setup_site_admin_password	839

demoData	839
Database Settings	839
setup_db_host_instance	840
setup_db_host_name	840
setup_db_port_num	840
setup_db_database_name	840
setup_db_admin_user_name	840
setup_db_admin_password	841
Recommended Database Settings	841
setup_db_create_database	841
setup_db_drop_tables	841
Extended Database Settings	841
setup_db_options	841
Full-Text Search (ElasticSearch) Settings	842
setup_fts_host	842
setup_fts_port	842
Advanced Full-Text Search Configuration Settings	842
setup_fts_curl	842
License Settings	843
setup_license_key	843
setup_license_key_users	843
setup_license_key_expire_date	843
setup_site_sugarbeet_automatic_checks	843
setup_license_key_oc_licences	844
setup_num_lic_oc	844
Making the Web Request	844
Configuring a Sugar-Specific Database User during Install	844
same	844
auto	845
provide	845
create	845
Other Silent Install Config Options	846
cache_dir	846
Locale Settings	846
export_delimiter	846
default_export_charset	846
default_currency_iso4217	847
default_currency_name	847
default_currency_significant_digits	847
default_currency_symbol	847
default_language	847
default_date_format	848
default_time_format	848
default_decimal_seperator	848
default_number_grouping_seperator	848
default_locale_name_format	848

Module Loader	849
Introduction to the Manifest	849
Overview	849
Manifest Definitions	849
key	850
name	850
description	850
built_in_version	850
version	851
acceptable_sugar_versions	851
acceptable_sugar_flavors	851
author	852
readme	852
icon	852
is_uninstallable	852
published_date	853
remove_tables	853
type	853
dependencies	854
uninstall_before_upgrade	854
Manifest Example	854
Installation Definitions	855
\$installdef Actions	855
action_file_map	855
action_remap	856
action_view_map	856
administration	856
appscheduledefs	856
beans	856
connectors	857
copy	857
csp	858
custom_fields	858
console	859
dashlets	859
dependencies	860
entrypoints	860
extensions	860
file_access	861
hookdefs	861
id	861
image_dir	861
jsgroups	862
language	862
layoutdefs	862
layoutfields	862



logic_hooks	862
platforms	863
pre_execute	863
post_execute	864
pre_uninstall	864
post_uninstall	865
relationships	865
scheduledefs	866
sidecar	866
tinymce	866
user_page	866
utils	866
vardefs	867
wireless_modules	867
wireless_subpanels	867
<b>Module Loader Restrictions</b>	<b>868</b>
Overview	868
Access Controls	868
Enabling Package Scan	868
Enabling File Scan	868
Valid Extension Types	869
Denylisted Classes	869
Denylisted Function Calls	870
Health Check	876
Disabling File Scan	876
Extending the List of Valid Extension Types	876
Denylisting Additional Function Calls	876
Overriding Denylisted Function Calls	877
Disabling Restricted Copy	877
Module Loader Actions	877
Disabling Module Loader Actions	878
Disabling Upgrade Wizard	879
<b>Module Loader Restriction Alternatives</b>	<b>879</b>
Overview	879
Denylisted Functions	879
array_filter()	880
copy()	881
file_exists()	881
file_get_contents()	882
fwrite()	882
Adding/Removing Logic Hooks	882
getimagesize()	883
<b>Sugar Exchange Package Guidelines</b>	<b>884</b>
Overview	884
Best Practices	884
Use a consistent coding style	884

Invest in unit testing during development	885
Use Sugar REST APIs	885
Use Module Builder when possible	885
Use Extension framework and Dashlets for Sugar code customizations	885
Security Guidelines	886
Use TLS/SSL for web services calls	886
Do not hardcode sensitive information	886
User Interface Guidelines	886
Use the Sugar 7 Styleguide	886
Don't use incompatible UI frameworks or external CSS libraries	887
Encapsulation Guidelines	887
Use Extensions framework and Custom Modules as much as possible	887
Avoid customizations to core Sugar application files	887
Use Package Scanner to ensure your Sugar Package is ready for SugarCloud	888
Performance Guidelines	888
Index for large frequently used queries	888
Add scheduled jobs to prune large database tables	888
Ensure your application does not block user interface during long running processes	889
<b>Module Builder</b>	889
Overview	889
Creating New Modules	889
Understanding Object Templates	890
Editing Module Fields	890
Editing Module Layouts	891
Building Relationships	891
Publishing and Uploading Packages	891
Adding Custom Logic Using Code	892
Logic Hooks	892
Custom Bean files	892
Using the New Module	893
<b>Best Practices</b>	893
Overview	893
Goal	894
Build Your Module in Module Builder	894
Never Redeploy a Package	894
Every Module in Module Builder Gets Its Very Own Package	894
Create Relationships in Studio After the Module Is Deployed	894
Delete the Package from Module Builder Once It Is Deployed	895
<b>Quotes</b>	895
Overview	895
Quote Identifiers	895
Creating Custom Identifiers	895
User Field with Pseudo-Random Values	896
Related Field Value and Auto-Incrementing Number	896
Record Layout	896

Grand Totals Header	896
Modifying Fields in the Grand Totals Header	897
Example	897
Modifying Buttons in the Grand Totals Header	898
Example	899
List Header	901
Modifying Fields in the List Header	901
Example	902
Modifying Row Actions in the List Header	904
Example	905
Group Header	907
Modifying Fields in the Group Header	907
Example	908
Modifying Row Actions in the Group Header	908
Example	909
Group List	912
Modifying Fields in the Group List	912
Example	912
Modifying Row Actions in the Group List	915
Example	916
Group Footer	918
Modifying Fields in the Group Footer	918
Example	919
Grand Totals Footer	919
Modifying Fields in the Grand Totals Footer	920
Example	920
Record View	921
Adding Custom Related Fields to Model	921
Quote PDFs	923
PDF Manager Templates	924
Smarty Templates	924
Creating Custom PDF Templates	925
Creating the TCPDF Template	925
Hiding PDF Buttons	930
<b>SugarBPM</b>	<b>932</b>
Introduction	933
<b>SugarBPM Modules</b>	<b>933</b>
Process Definitions	933
Business Rules	933
Email Templates	934
Processes	934
Database Tables	934
Relationships	936
Flows	937
Extension and Customization	939

Caveats	939
<b>Extending SugarBPM (Process Manager)</b>	<b>940</b>
Introduction	940
Process Manager	940
Limitations	940
Library Structure	941
Examples	941
Getting a SugarBPM Element Object	943
Getting and Using a Process Manager Field Evaluator Object	944
Getting an Exception Object with Logging	946
Maintaining State Throughout a Process	948
<b>Entry Points</b>	<b>950</b>
Overview	950
Accessing Entry Points	950
Creating Custom Entry Points	950
Overview	951
Custom Entry Points	951
Example	951
<b>Job Queue</b>	<b>952</b>
Overview	952
Stages	953
Execution Stage	953
Cleanup Stage	953
Schedulers	954
Overview	954
Config Settings	954
Considerations	954
Creating Custom Schedulers	955
Overview	955
Defining the Job Label	955
Defining the Job Function	955
Using the New Job	956
Scheduler Jobs	956
Overview	956
Properties	956
Creating a Job	957
Job Targets	957
Running the Job	957
Job status	958
Job Resolution	958
Job Logic Hooks	958
Creating Custom Jobs	958
Overview	958
How it Works	959
Creating the Job	959

Queuing Logic Hook Actions	960
Overview	960
Example	960
Access Control Lists	962
Overview	962
Actions	963
Field Actions	963
Context	963
SugarACL	964
checkAccess()	964
Arguments	964
Returns	964
checkField()	965
Arguments	965
Returns	965
getFieldAccess()	965
Arguments	965
Returns	966
filterModuleList()	966
Arguments	966
Returns	967
disabledModuleList()	967
Arguments	967
Returns	968
moduleSupportsACL()	968
Arguments	969
Returns	969
listFilter()	969
Arguments	970
Returns	971
SugarBean Usage	971
getACLCategory()	971
Arguments	972
Returns	972
ACLAccess()	972
Arguments	972
Returns	973
ACLFieldAccess()	973
Arguments	973
Returns	973
ACLFieldGet()	974
Arguments	974
Returns	974
ACLFilterFields()	974
Arguments	974
Returns	975

ACLFilterFieldList()	975
Arguments	976
Returns	977
Legacy Methods	977
ACLController::checkAccess()	977
ACLController::moduleSupportsACL()	977
ACLController::displayNoAccess()	977
<b>Teams</b>	978
Overview	978
Database Tables	978
Module Team Fields	979
Team Sets (team_set_id)	979
Primary Team (team_id)	979
Team Security	979
TeamSetLink	980
Manipulating Teams Programmatically	980
Overview	981
Fetching Teams	981
Adding Teams	981
Considerations	982
Removing Teams	982
Considerations	982
Replacing Team Sets	982
Considerations	983
Creating and Retrieving Team Set IDs	984
Adding Additional Access	984
Visibility Framework	985
Overview	985
Custom Row Visibility	985
Visibility Class	985
Example	986
<b>Tags</b>	994
Overview	994
The Tags Module	994
The "tag" Field Type	995
The Taggable Implementation	995
The Tagging Relationship Structure	995
Tagging in Action	996
Tagging Records from the API	996
Mass Updating Tags on Records Via the API	997
Fetching Tags on a Record	997
Filtering a Record List by Tags	998
Fetching a list of Tags from the Tags module	999
Manipulating Tags Programmatically	999
Creating a New Tag and Adding to a Record	999

---

Removing Tags from a Record .....	1.000
Synchronizing Tags by Name With API Helpers .....	1.000
<b>TinyMCE</b> .....	1.001
Overview .....	1.001
TinyMCE Field Type (htmleditable_tinymce) .....	1.002
Converting a Text Area to a TinyMCE Editor .....	1.002
Configuring the TinyMCE Editor .....	1.002
Plugins .....	1.003
Configuring the TinyMCE Editors used in BWC Modules .....	1.004
Overriding Buttons .....	1.004
Example File .....	1.004
Overriding Default Settings .....	1.005
Example File .....	1.005
Creating Plugins .....	1.006
Modifying the TinyMCE Editor .....	1.006
Overview .....	1.006
Overriding Buttons .....	1.006
Example File .....	1.007
Overriding Default Settings .....	1.008
Example File .....	1.008
Creating Plugins .....	1.008
<b>SugarPDF</b> .....	1.009
Overview .....	1.009
PDF Classes .....	1.009
TCPDF .....	1.009
Sugarpdf .....	1.009
ViewSugarpdf .....	1.011
SugarpdfFactory .....	1.011
SugarpdfHelper .....	1.012
PdfManagerHelper .....	1.012
FontManager .....	1.012
Generating a PDF .....	1.013
PDF Settings .....	1.015
Settings .....	1.015
Displaying and Editing Settings .....	1.015
PDF Fonts .....	1.017
Font Cache .....	1.017
<b>DateTime</b> .....	1.017
Overview .....	1.017
Setting .....	1.017
Formatting .....	1.018
TimeDate Class .....	1.019
Setting .....	1.019
Formatting .....	1.020
getNow .....	1.020
Parameters .....	1.020

---

Example	1.021
fromUser	1.021
Parameters	1.021
Example	1.021
asUser	1.022
Parameters	1.022
Example	1.022
fromDb	1.022
Parameters	1.022
Example	1.023
fromString	1.023
Parameters	1.023
Example	1.023
get_db_date_time_format	1.023
Parameters	1.023
Example	1.024
to_display_date_time	1.024
Parameters	1.024
Example	1.025
Parsing	1.025
parseDateRange	1.025
Parameters	1.025
Example	1.026
Shortcuts	1.027
Overview	1.027
Shortcut Sessions	1.027
Register	1.028
Shortcut IDs	1.028
Global shortcuts	1.028
Shortcut Keys	1.028
Additional Features	1.028
Input Focus	1.029
Limitations	1.029
Shortcuts Help	1.029
Advanced Features	1.029
Dynamically saving, creating new, and restoring sessions	1.029
Example	1.030
Themes	1.031
Overview	1.032
Theme Variables	1.032
Custom Themes	1.032
Adding CSS	1.033
Overriding CSS Definitions	1.034
Overriding the MegaMenu	1.034
Web Accessibility	1.039



---

Overview	1.039
Introduction	1.039
How It Works	1.040
Plugins	1.040
Click	1.041
Label	1.042
API	1.042
SUGAR.accessibility.run()	1.042
Arguments	1.042
Returns	1.043
SUGAR.accessibility.whichHelpers()	1.043
Returns	1.043
SUGAR.accessibility.getElementTag()	1.043
Arguments	1.043
Returns	1.044
Validation Constraints	1.044
Overview	1.044
Constraints	1.044
Symfony Validation Constraints	1.044
Basic Constraints	1.044
String Constraints	1.045
Number Constraints	1.045
Comparison Constraints	1.045
Date Constraints	1.045
Collection Constraints	1.046
File Constraints	1.046
Financial and other Number Constraints	1.046
Other Constraints	1.046
Sugar Constraints	1.047
Custom Constraints	1.047
Using Constraints in API End Points	1.049
Valid Payload - POST to /phoneCheck	1.051
<strong>Result</strong>	1.051
Invalid Payload - POST to /phoneCheck	1.051
Result	1.052
CLI	1.052
Overview	1.052
Commands	1.052
Usage	1.054
Help	1.054
Custom Commands	1.057
Best Practices	1.057
Command Namespace	1.057
PHP Namespace	1.057
Mode	1.058

---

Class Definition	1.058
Methods	1.059
Registering Command	1.060
Example	1.060
<b>Performance Tuning</b>	<b>1.062</b>
<b>Sugar Performance</b>	<b>1.062</b>
Overview	1.063
General Settings in Sugar	1.063
Sugar Performance Settings	1.064
BWC Modules	1.064
General Environment Checks	1.064
PHP Caching	1.065
<b>PHP Profiling</b>	<b>1.066</b>
Overview	1.066
<b>Integrating Sugar With New Relic APM for Performance Management</b>	<b>1.067</b>
Overview	1.067
Prerequisites	1.067
Steps to Complete	1.067
Installing the New Relic for PHP Agent	1.068
Configuring Sugar to Work With New Relic for PHP	1.068
Using New Relic for PHP	1.068
Overview Dashboard	1.069
Transactions	1.071
Summary	1.074
<b>Backward Compatibility</b>	<b>1.074</b>
Overview	1.074
URL Differences	1.075
Studio Differences	1.075
<b>Enabling Backward Compatibility</b>	<b>1.076</b>
Overview	1.076
<b>Enabling Backward Compatibility</b>	<b>1.076</b>
Enabling BWC	1.076
Updating the MegaMenu Module Link	1.077
Updating the MegaMenu Sub-Navigation Links	1.077
<b>Verifying BWC Is Enabled</b>	<b>1.079</b>
Using Developer Tools in Google Chrome	1.079
Using Firebug in Google Chrome or Mozilla Firefox	1.079
<b>Converting Legacy Modules To Sidecar</b>	<b>1.080</b>
Overview	1.080
Steps to Complete	1.080
<b>Integration</b>	<b>1.081</b>
Overview	1.081
<b>Best Practices</b>	<b>1.082</b>
Overview	1.082
Latency When Posting Data To Sugar	1.082

Disabling Related Calculation Fields	1.082
Disabling Logic Hooks	1.082
Disabling Workflows	1.083
Queuing Data in the Job Queue	1.083
<b>Web Services</b>	<b>1.084</b>
Overview	1.084
Versioning	1.084
Quick Reference	1.084
REST API	1.086
Overview	1.086
What Is REST?	1.086
Getting Started	1.086
Authentication	1.087
Avoiding Login Conflicts	1.088
Input / Output Data Types	1.089
Date Handling	1.089
Endpoints	1.090
/Accounts/:record/link/:link_name/filter GET	1.090
Overview	1.090
Summary	1.090
Request Arguments	1.090
Filter Expressions	1.092
Basic	1.092
Example	1.092
Full	1.092
Example	1.092
Sub-expressions	1.093
Example	1.094
Modules	1.094
Example	1.094
Response Arguments	1.094
Response	1.095
Change Log	1.100
/Activities GET	1.100
Summary:	1.100
Query Parameters:	1.101
Input Example:	1.101
Output Example:	1.101
/Activities/filter GET	1.102
Summary:	1.102
Query Parameters:	1.102
Input Example:	1.103
Output Example:	1.103
/Administration/aws GET	1.104
Overview	1.104
Summary	1.104

Request Arguments	1.104
Response	1.104
/Administration/aws POST	1.105
Overview	1.105
Summary	1.105
Request Arguments	1.105
Response	1.105
/Administration/elasticsearch/indices GET	1.106
Overview	1.106
Summary	1.106
Response	1.106
Change Log	1.108
/Administration/elasticsearch/mapping GET	1.108
Overview	1.108
Summary	1.109
Response	1.109
Change Log	1.110
/Administration/elasticsearch/queue GET	1.110
Overview	1.111
Summary	1.111
Response	1.111
Change Log	1.111
/Administration/elasticsearch/refresh/enable POST	1.112
Overview	1.112
Summary	1.112
Response	1.112
Change Log	1.112
/Administration/elasticsearch/refresh/status GET	1.113
Overview	1.113
Summary	1.113
Response	1.113
Change Log	1.113
/Administration/elasticsearch/refresh/trigger POST	1.113
Overview	1.114
Summary	1.114
Response	1.114
Change Log	1.114
/Administration/elasticsearch/replicas/enable POST	1.114
Overview	1.114
Summary	1.115
Response	1.115
Change Log	1.115
/Administration/elasticsearch/replicas/status GET	1.115
Overview	1.115
Summary	1.115
Response	1.115

Change Log	1.116
/Administration/elasticsearch/routing GET	1.116
Overview	1.116
Summary	1.116
Response	1.116
Change Log	1.117
/Administration/idm/migration/disable POST	1.117
Overview	1.118
Summary	1.118
Request Arguments	1.118
Response	1.118
Change Log	1.118
/Administration/idm/migration/enable POST	1.118
Overview	1.118
Summary	1.119
Request Arguments	1.119
Response	1.119
Change Log	1.119
/Administration/idm/users GET	1.119
Overview	1.119
Summary	1.119
Request Arguments	1.120
Filter Expressions	1.123
Basic	1.123
Example	1.123
Full	1.123
Example	1.123
Sub-expressions	1.124
Example	1.125
Modules	1.125
Example	1.125
Response Arguments	1.126
Response	1.126
Change Log	1.129
/Administration/license/limits GET	1.129
Overview	1.129
Summary	1.129
Request Arguments	1.129
Response	1.130
Change Log	1.130
/Administration/packages GET	1.130
Overview	1.130
Summary	1.130
Response	1.131
/Administration/packages POST	1.132
Overview	1.132

Summary	1.132
Sample Request	1.132
Response	1.132
/Administration/packages/:file_install/install GET	1.133
Overview	1.133
Summary	1.133
Response	1.133
/Administration/packages/:id/disable GET	1.134
Overview	1.134
Summary	1.134
Response	1.134
/Administration/packages/:id/enable GET	1.135
Overview	1.135
Summary	1.135
Response	1.135
/Administration/packages/:id/uninstall GET	1.136
Overview	1.136
Summary	1.136
Response	1.136
/Administration/packages/installed GET	1.137
Overview	1.137
Summary	1.137
Response	1.137
/Administration/packages/staged GET	1.138
Overview	1.138
Summary	1.138
Response	1.138
/Administration/packages/:unFile DELETE	1.139
Overview	1.139
Summary	1.139
Response	1.139
/Administration/search/fields GET	1.140
Overview	1.140
Summary	1.140
Request Arguments	1.140
Response	1.140
Response using order_by_boost	1.141
Change Log	1.141
/Administration/search/reindex POST	1.141
Overview	1.142
Summary	1.142
Request Arguments	1.142
Response	1.143
Change Log	1.143
/Administration/search/status GET	1.143
Overview	1.143

Summary	1.143
Response	1.143
Change Log	1.144
/Administration/settings/auth GET	1.144
Overview	1.144
Summary	1.144
Response if enabled only local auth provider	1.144
Response if enabled local and ldap auth providers	1.145
Response if enabled local and saml auth providers	1.146
Change Log	1.148
/Administration/settings/idmMode DELETE	1.148
Overview	1.148
Summary	1.149
Response when IDM mode has been disabled	1.149
Change Log	1.149
/Administration/settings/idmMode POST	1.149
Overview	1.149
Summary	1.149
Request to enable IDM-mode.	1.149
Response when IDM mode has been enabled	1.150
Change Log	1.151
/Calendar/invitee_search GET	1.151
Overview	1.151
Request Arguments	1.151
Response Arguments	1.152
Response	1.152
Change Log	1.154
/Calls POST	1.154
Overview	1.154
Request Arguments	1.154
Request	1.155
Response Arguments	1.155
Response	1.155
Change Log	1.155
/Calls/:record DELETE	1.156
Overview	1.156
Request Arguments	1.156
Request	1.156
Response Arguments	1.156
Response	1.156
Change Log	1.157
/Calls/:record PUT	1.157
Overview	1.157
Request Arguments	1.157
Request	1.157
Response Arguments	1.158

Response	1.158
Change Log	1.158
/Cases/clients/portal PUT	1.158
Overview	1.158
Summary	1.159
Request Arguments	1.159
Response Arguments	1.159
Response	1.159
/CommentLog/:record GET	1.160
Overview	1.160
Request Arguments	1.160
Response Arguments	1.161
Response	1.161
Change Log	1.163
/ConsoleConfiguration/config POST	1.163
Overview	1.163
Request Arguments	1.163
URL Example	1.164
Request Payload Example	1.164
Response Arguments	1.169
Response Codes and Error Messages	1.172
Change Log	1.172
/ConsoleConfiguration/default-metadata GET	1.173
Overview	1.173
Request Arguments	1.173
URL Parameters	1.173
URL Example	1.173
Result Arguments	1.174
Response Codes and Error Messages	1.178
Change Log	1.178
/Contact/:record/Cases GET	1.178
Overview	1.178
Summary	1.178
Request	1.179
Request Arguments	1.179
Response	1.180
Response Arguments	1.181
Change Log	1.181
/Contacts/:record/freebusy GET	1.181
Summary:	1.181
Request	1.181
Response	1.182
/Currencies GET	1.182
Summary:	1.182
Url Parameters:	1.182
Possible Errors	1.183



Url Example:	1.183
Output Example:	1.183
/Dashboards/Activities GET	1.183
Overview	1.183
Summary	1.183
Notice	1.184
Request Arguments	1.184
Response Arguments	1.185
Response	1.186
Change Log	1.186
/Dashboards GET	1.187
Overview	1.187
Summary	1.187
Notice	1.187
Request Arguments	1.188
Response Arguments	1.189
Response	1.189
Change Log	1.190
/Dashboards POST	1.191
Notice	1.191
Request Arguments	1.191
Request	1.191
Response Arguments	1.192
Response	1.192
Change Log	1.193
/Dashboards/<module> GET	1.193
Overview	1.193
Summary	1.194
Notice	1.194
Request Arguments	1.194
Response Arguments	1.195
Response	1.196
Change Log	1.196
/Dashboards/<module> POST	1.197
Notice	1.197
Request Arguments	1.197
Request	1.197
Response Arguments	1.198
Response	1.198
Change Log	1.199
/DataArchiver/:id/run POST	1.200
Overview	1.200
Summary	1.200
Request Arguments	1.200
Response	1.200
Change Log	1.200

/Documents/:record/file/:field POST	1.200
Overview	1.201
Request Arguments	1.201
Request	1.201
Response Arguments	1.201
Response	1.202
Change Log	1.202
/Documents/:record/file/:field PUT	1.202
Overview	1.202
Request Arguments	1.203
Request	1.203
Response Arguments	1.203
Response	1.204
Change Log	1.204
/EmailAddresses POST	1.204
Overview	1.205
Summary	1.205
Request Arguments	1.205
Request	1.205
Response Arguments	1.205
Response	1.206
Change Log	1.206
/EmailAddresses/:record PUT	1.206
Overview	1.206
Summary	1.206
Request Arguments	1.207
Request	1.207
Response Arguments	1.207
Response	1.207
Change Log	1.208
/Emails GET	1.208
Overview	1.208
Summary	1.208
Filter By Sender	1.208
Filter By Recipients	1.209
Filter By Sender and Recipients	1.211
Change Log	1.213
/Emails POST	1.213
Overview	1.213
Summary	1.213
Creating an Archived Email	1.213
Request	1.222
Response	1.223
Creating a Draft	1.224
Request	1.231
Response	1.232

Sending an Email	1.233
Request	1.240
Response	1.241
Change Log	1.241
/Emails/count GET	1.242
Overview	1.242
Summary	1.242
Filter By Sender	1.242
Filter By Recipients	1.243
Filter By Sender and Recipients	1.245
Change Log	1.246
/Emails/filter GET	1.247
Overview	1.247
Summary	1.247
Filter By Sender	1.247
Filter By Recipients	1.248
Filter By Sender and Recipients	1.250
Change Log	1.251
/Emails/filter POST	1.252
Overview	1.252
Summary	1.252
Request Arguments	1.252
Filter Expressions	1.254
Basic	1.254
Example	1.254
Full	1.254
Example	1.254
Sub-expressions	1.255
Example	1.256
Modules	1.256
Example	1.256
Response Arguments	1.256
Response	1.257
Change Log	1.262
/Emails/filter/count GET	1.262
Overview	1.262
Summary	1.262
Request Arguments	1.263
Filter Expressions	1.264
Basic	1.264
Example	1.264
Full	1.265
Example	1.265
Sub-expressions	1.266
Example	1.266
Modules	1.267

Example	1.267
Response Arguments	1.267
Response	1.267
Change Log	1.273
/Emails/filter/count POST	1.273
Overview	1.273
Summary	1.273
Request Arguments	1.273
Filter Expressions	1.275
Basic	1.275
Example	1.275
Full	1.275
Example	1.276
Sub-expressions	1.277
Example	1.277
Modules	1.277
Example	1.278
Response Arguments	1.278
Response	1.278
Change Log	1.283
/Emails/:record GET	1.284
Overview	1.284
Fields	1.284
Request	1.284
Response	1.285
Change Log	1.287
/Emails/:record PUT	1.287
Overview	1.287
Summary	1.287
Updating an Archived Email	1.287
Request	1.288
Response	1.288
Updating a Draft	1.289
Request	1.296
Response	1.297
Sending an Email	1.298
Request	1.305
Response	1.305
Change Log	1.306
/Emails/:record/link POST	1.306
Overview	1.307
Summary	1.307
Change Log	1.307
/Emails/:record/link/:link_name/add_record_list/:remote_id POST	1.307
Overview	1.307
Summary	1.307

Change Log	1.307
/Emails/:record/link/:link_name/:remote_id DELETE	1.308
Overview	1.308
Summary	1.308
Change Log	1.308
/Emails/:record/link/:link_name/:remote_id POST	1.308
Overview	1.309
Summary	1.309
Change Log	1.309
/EmbeddedFiles/:record/file/:field GET	1.309
Overview	1.309
Request Arguments	1.309
Response Arguments	1.309
Response	1.310
Change Log	1.310
/EmbeddedFiles/:record/file/:field POST	1.310
Overview	1.310
Request Arguments	1.310
Request	1.311
Response Arguments	1.311
Response	1.311
Change Log	1.312
/EmbeddedFiles/:record/file/:field PUT	1.312
Overview	1.312
Request Arguments	1.312
Request	1.313
Response Arguments	1.313
Response	1.313
Change Log	1.314
/Employees GET	1.314
Overview	1.314
Summary	1.314
Request Arguments	1.315
Filter Expressions	1.318
Basic	1.318
Example	1.318
Full	1.318
Example	1.318
Sub-expressions	1.319
Example	1.320
Modules	1.320
Example	1.320
Response Arguments	1.321
Response	1.321
Change Log	1.322
/ExpressionEngine/:record/related GET	1.322

Summary:	1.322
Query Parameters:	1.322
Input Example:	1.323
Output Example:	1.323
/ExpressionEngine/:record/related POST	1.324
Summary:	1.324
Query Parameters:	1.324
Input Example:	1.325
Output Example:	1.325
/Filters GET	1.326
Overview	1.326
Summary	1.326
Request Arguments	1.326
Filter Expressions	1.329
Basic	1.329
Example	1.329
Full	1.330
Example	1.330
Sub-expressions	1.331
Example	1.331
Modules	1.332
Example	1.332
Response Arguments	1.332
Response	1.332
Change Log	1.333
/ForecastManagerWorksheets GET	1.334
Summary:	1.334
Url Parameters:	1.334
Possible Errors	1.334
Url Example:	1.335
Output Example:	1.335
/ForecastManagerWorksheets/assignQuota POST	1.336
Summary:	1.336
Parameters:	1.336
Input Example:	1.337
Output Example:	1.337
/ForecastManagerWorksheets/export GET	1.337
Overview	1.337
Request Arguments	1.337
Request	1.338
Exporting Records by a List of IDs	1.338
Exporting Records Using a Filter	1.338
Exporting a Sample Result Set	1.338
Response Arguments	1.339
Response	1.339
Change Log	1.340

/ForecastManagerWorksheets/filter GET	1.340
Summary:	1.340
Query Parameters:	1.340
Possible Errors	1.340
Url Example:	1.341
Output Example:	1.341
/ForecastManagerWorksheets/filter POST	1.341
Summary:	1.341
Query Parameters:	1.342
Possible Errors	1.342
Url Example:	1.342
Output Example:	1.342
/ForecastManagerWorksheets/:timeperiod_id GET	1.343
Summary:	1.343
Url Parameters:	1.343
Possible Errors	1.343
Url Example:	1.344
Output Example:	1.344
/ForecastManagerWorksheets/:timeperiod_id/:user_id GET	1.345
Summary:	1.345
Url Parameters:	1.345
Possible Errors	1.346
Url Example:	1.346
Output Example:	1.346
/ForecastWorksheets GET	1.347
Summary:	1.348
Url Parameters:	1.348
Query Parameters:	1.348
Possible Errors	1.348
Url Example:	1.349
Output Example:	1.349
/ForecastWorksheets/export GET	1.349
Overview	1.349
Request Arguments	1.350
Request	1.350
Exporting Records by a List of IDs	1.350
Exporting Records Using a Filter	1.350
Exporting a Sample Result Set	1.351
Response Arguments	1.351
Response	1.351
Change Log	1.352
/ForecastWorksheets/filter GET	1.352
Summary:	1.352
Query Parameters:	1.353
Possible Errors	1.353
Url Example:	1.353

Output Example:	1.353
/ForecastWorksheets/filter POST	1.354
Summary:	1.354
Query Parameters:	1.354
Possible Errors	1.355
Url Example:	1.355
Output Example:	1.355
/ForecastWorksheets/:record PUT	1.356
Summary:	1.356
Query Parameters:	1.356
Input Example:	1.356
Output Example:	1.357
/ForecastWorksheets/:timeperiod_id GET	1.357
Summary:	1.357
Url Parameters:	1.357
Query Parameters:	1.358
Possible Errors	1.358
Url Example:	1.358
Output Example:	1.358
/ForecastWorksheets/:timeperiod_id/:user_id GET	1.359
Summary:	1.359
Url Parameters:	1.359
Query Parameters:	1.360
Possible Errors	1.360
Url Example:	1.360
Output Example:	1.360
/Forecasts GET	1.361
Overview	1.361
Request Arguments	1.361
Response Arguments	1.361
Response	1.361
Change Log	1.364
/Forecasts/config POST	1.364
Summary:	1.364
Query Parameters:	1.364
Input Example:	1.364
Output Example:	1.365
/Forecasts/config PUT	1.365
Summary:	1.365
Query Parameters:	1.366
Input Example:	1.366
Output Example:	1.366
/Forecasts/enum/selectedTimePeriod GET	1.367
Summary:	1.367
Query Parameters:	1.367
Input Example:	1.367



Output Example:	1.367
/Forecasts/init GET	1.368
Summary:	1.368
Query Parameters:	1.368
Input Example:	1.368
Output Example:	1.369
/Forecasts/reportees/:user_id GET	1.369
Summary:	1.369
Query Parameters:	1.370
Input Example:	1.370
Output Example:	1.370
/Forecasts/:timeperiod_id/progressManager/:user_id GET	1.371
Summary:	1.371
Query Parameters:	1.371
Input Example:	1.371
Output Example:	1.372
/Forecasts/:timeperiod_id/progressRep/:user_id GET	1.372
Summary:	1.372
Query Parameters:	1.372
Input Example:	1.373
Output Example:	1.373
/Forecasts/:timeperiod_id/quotas/direct/:user_id GET	1.373
Summary:	1.373
Query Parameters:	1.373
Input Example:	1.374
Output Example:	1.374
/Forecasts/:timeperiod_id/quotas/rollup/:user_id GET	1.374
Summary:	1.374
Query Parameters:	1.374
Input Example:	1.375
Output Example:	1.375
/Forecasts/:timeperiod_id/:user_id/chart/:display_manager GET	1.375
Summary:	1.375
Query Parameters:	1.375
Input Example:	1.376
Output Example:	1.376
/Forecasts/user/:user_id GET	1.377
Summary:	1.377
Query Parameters:	1.377
Input Example:	1.377
Output Example:	1.377
/Genericsearch GET	1.378
Overview	1.378
Summary	1.378
Request Arguments	1.378
Response Arguments	1.379

Response	1.379
/Genericsearch POST	1.380
Overview	1.380
Summary	1.380
Request Arguments	1.380
Response Arguments	1.381
Response	1.381
/integrate/<module>/:lhs_sync_key_field_name/:lhs_sync_key_field_value/link/:link_name/:rhs_sync_key_field_name/:rhs_sync_key_field_value DELETE	1.382
Overview	1.382
Request Arguments	1.382
Request	1.383
Response Arguments	1.383
Response	1.383
Status 422	1.383
Change Log	1.384
/integrate/<module>/:lhs_sync_key_field_name/:lhs_sync_key_field_value/link/:link_name/:rhs_sync_key_field_name/:rhs_sync_key_field_value POST	1.384
Overview	1.384
Request Arguments	1.384
Request	1.385
Response Arguments	1.385
Response	1.386
Status 422	1.386
Change Log	1.386
/integrate/<module>/:record_id/:sync_key_field_name/:sync_key_field_value PATCH	1.386
Overview	1.386
Request Arguments	1.387
Request	1.387
Response	1.387
Change Log	1.387
/integrate/<module>/:record_id/:sync_key_field_name/:sync_key_field_value PUT	1.388
Overview	1.388
Request Arguments	1.388
Request	1.389
Response	1.389
Change Log	1.389
/integrate/<module>/:sync_key_field_name/:sync_key_field_value DELETE	1.389
Overview	1.389
Request Arguments	1.389
Request	1.390
Response Arguments	1.390
Response	1.390
Change Log	1.390
/integrate/<module>/:sync_key_field_name/:sync_key_field_value GET	1.391
Overview	1.391
Request Arguments	1.391

Request	1.391
Response Arguments	1.392
Response	1.392
Failed Response	1.392
Change Log	1.392
/integrate/<module>/:sync_key_field_name/:sync_key_field_value PATCH	1.392
Overview	1.393
Request Arguments	1.393
Request	1.393
Response Arguments	1.393
Response	1.394
Change Log	1.394
/integrate/<module>/:sync_key_field_name/:sync_key_field_value PUT	1.394
Overview	1.394
Request Arguments	1.395
Request	1.395
Response Arguments	1.395
Response	1.395
Change Log	1.396
/KBContents GET	1.396
Overview	1.396
Summary	1.396
Request Arguments	1.396
Filter Expressions	1.399
Basic	1.400
Example	1.400
Full	1.400
Example	1.400
Sub-expressions	1.401
Example	1.401
Modules	1.402
Example	1.402
Response Arguments	1.402
Response	1.403
Change Log	1.404
/KBContents/config POST	1.404
Summary:	1.404
Query Parameters:	1.404
Input Example:	1.404
Output Example:	1.405
/KBContents/config PUT	1.405
Summary:	1.405
Query Parameters:	1.405
Input Example:	1.405
Output Example:	1.406
/KBContents/duplicateCheck POST	1.406

Overview	1.406
Request Arguments	1.406
Request	1.406
Response Arguments	1.407
Response	1.407
Change Log	1.409
<b>/KBContents/filter GET</b>	<b>1.409</b>
Overview	1.409
Summary	1.410
Request Arguments	1.410
Filter Expressions	1.413
Basic	1.413
Example	1.413
Full	1.413
Example	1.414
Sub-expressions	1.415
Example	1.415
Modules	1.415
Example	1.415
Response Arguments	1.416
Response	1.416
Change Log	1.417
<b>/KBContents/:record/link POST</b>	<b>1.417</b>
Overview	1.417
Request Arguments	1.418
Request	1.418
Response Arguments	1.418
Response	1.419
Change Log	1.424
<b>/KBContents/:record/notuseful PUT</b>	<b>1.424</b>
Overview	1.424
Request Arguments	1.424
Response Arguments	1.424
Response	1.424
Change Log	1.425
<b>/KBContents/:record/useful PUT</b>	<b>1.426</b>
Overview	1.426
Request Arguments	1.426
Response Arguments	1.426
Response	1.426
Change Log	1.427
<b>/Leads POST</b>	<b>1.428</b>
Summary:	1.428
Query Parameters:	1.428
<b>/Leads/:leadId/convert POST</b>	<b>1.428</b>
Summary:	1.429

Post Parameters:	1.429
/Leads/:record/freebusy GET	1.432
Summary:	1.432
Request	1.432
Response	1.432
/Leads/register POST	1.433
Overview	1.433
Request Arguments	1.433
Request	1.433
Response Arguments	1.433
Response	1.434
Change Log	1.434
/Mail POST	1.435
Overview	1.435
Query String Parameters	1.435
Input Parameters	1.435
Input Example	1.436
Result	1.438
Output Example	1.438
Change Log	1.439
/Mail/address/validate POST	1.439
Overview	1.439
Request Arguments	1.439
Request	1.439
Response Arguments	1.440
Response	1.440
Change Log	1.440
/Mail/archive POST	1.440
Overview	1.440
Query String Parameters	1.441
Input Parameters	1.441
Input Example	1.442
Result	1.444
Output Example	1.444
Change Log	1.445
/Mail/attachment POST	1.445
Overview	1.445
Query String Parameters	1.445
Input Parameters	1.445
Input Example	1.445
Result	1.446
Output Example	1.446
Change Log	1.446
/Mail/attachment/cache DELETE	1.446
Overview	1.447
Query Parameters:	1.447

Input Example:	1.447
Output Example:	1.447
Change Log	1.447
/Mail/attachment/:file_guid DELETE	1.447
Overview	1.448
Query Parameters:	1.448
Input Example:	1.448
Output Example:	1.448
Change Log	1.448
/Mail/recipients/find GET	1.449
Overview	1.449
Request Arguments	1.449
Request	1.449
Response Arguments	1.450
Response	1.450
Change Log	1.452
/Mail/recipients/lookup POST	1.452
Overview	1.452
Request	1.452
Response	1.453
Change Log	1.453
/Meetings POST	1.453
Overview	1.453
Request Arguments	1.454
Request	1.454
Response Arguments	1.454
Response	1.454
Change Log	1.455
/Meetings/:record DELETE	1.455
Overview	1.455
Request Arguments	1.455
Request	1.455
Response Arguments	1.455
Response	1.456
Change Log	1.456
/Meetings/:record PUT	1.456
Overview	1.456
Request Arguments	1.456
Request	1.456
Response Arguments	1.457
Response	1.457
Change Log	1.457
/Meetings/:record/external GET	1.457
Summary:	1.458
Query Parameters:	1.458
Input Example:	1.458

Output Example:	1.458
/Notifications GET	1.458
Overview	1.458
Summary	1.459
Request Arguments	1.459
Filter Expressions	1.462
Basic	1.462
Example	1.462
Full	1.462
Example	1.463
Sub-expressions	1.464
Example	1.464
Modules	1.464
Example	1.465
Response Arguments	1.465
Response	1.465
Change Log	1.466
/Opportunities/config POST	1.466
Overview	1.467
Summary	1.467
Request Arguments	1.467
Request	1.467
Response Arguments	1.467
Response	1.467
Change Log	1.468
/Opportunities/enum/:field GET	1.468
Overview	1.468
Request Arguments	1.468
Response Arguments	1.468
Response	1.468
Change Log	1.469
/Opportunities/:record PUT	1.469
Overview	1.469
Request Arguments	1.469
Request	1.469
Link fields	1.470
Response Arguments	1.470
Response	1.470
Change Log	1.472
/OutboundEmailConfiguration/list GET	1.473
Overview	1.473
Summary	1.473
Response	1.473
Change Log	1.474
/OutboundEmail POST	1.474
Overview	1.474

Summary	1.474
Request Arguments	1.474
Request	1.476
Response Arguments	1.476
Response	1.477
Change Log	1.478
<b>/OutboundEmail/:record PUT</b>	<b>1.478</b>
Overview	1.478
Summary	1.478
Request Arguments	1.478
Request	1.480
Response Arguments	1.480
Response	1.481
Change Log	1.482
<b>/PdfManager GET</b>	<b>1.482</b>
Overview	1.482
Summary	1.482
Request Arguments	1.482
Filter Expressions	1.485
Basic	1.486
Example	1.486
Full	1.486
Example	1.486
Sub-expressions	1.487
Example	1.487
Modules	1.488
Example	1.488
Response Arguments	1.488
Response	1.489
Change Log	1.490
<b>/PdfManager/generate GET</b>	<b>1.490</b>
Overview	1.490
Summary	1.490
Request Arguments	1.490
Request	1.491
Response	1.491
Change Log	1.491
<b>/ProductTemplates/tree GET</b>	<b>1.491</b>
Summary:	1.492
Query Parameters:	1.492
Response Parameters:	1.492
Response:	1.493
<b>/ProductTemplates/tree POST</b>	<b>1.493</b>
Summary:	1.493
Query Parameters:	1.494
Response Parameters:	1.494



Response:	1.495
/Quotes/config GET	1.495
Overview	1.495
Summary	1.495
Request Arguments	1.496
Response Arguments	1.496
Response	1.496
Change Log	1.541
/Quotes/config POST	1.541
Overview	1.541
Summary	1.541
Request Arguments	1.541
Sample Request	1.543
Response Arguments	1.547
Response	1.547
Change Log	1.552
/Quotes/:record/opportunity POST	1.552
Overview	1.552
Summary	1.552
Request Arguments	1.552
Response Arguments	1.552
Response	1.552
/Reports/:record/chart GET	1.560
Overview	1.560
Summary	1.560
Request Arguments	1.560
Request Example	1.560
Response Arguments	1.560
Response	1.560
/Reports/:record/record_count GET	1.561
Overview	1.561
Summary	1.561
Request Arguments	1.561
Request Example	1.562
Response Arguments	1.563
Response	1.563
/Reports/:record/records GET	1.563
Overview	1.563
Summary	1.563
Request Arguments	1.563
Request Example	1.565
Response Arguments	1.565
Response	1.565
/RevenueLineItems/multi-quote POST	1.566
Summary:	1.566
Query Parameters:	1.566

Valid Urls:	1.567
Input Example:	1.567
Output Example:	1.567
<b>/RevenueLineItems/:record/quote POST</b>	<b>1.567</b>
Summary:	1.567
Query Parameters:	1.567
Valid Urls:	1.568
Output Example:	1.568
<b>/Tags/:record PUT</b>	<b>1.568</b>
Overview	1.568
Request Arguments	1.568
Request	1.568
Link fields	1.569
Response Arguments	1.569
Response	1.569
Change Log	1.571
<b>/Teams/:record/link POST</b>	<b>1.572</b>
Overview	1.572
Request Arguments	1.572
Request	1.572
Response Arguments	1.573
Response	1.573
Change Log	1.578
<b>/Teams/:record/link/:link_name/:remote_id DELETE</b>	<b>1.578</b>
Overview	1.578
Request Arguments	1.578
Response Arguments	1.579
Response	1.579
Change Log	1.582
<b>/Teams/:record/link/:link_name/:remote_id POST</b>	<b>1.583</b>
Overview	1.583
Query String Parameters	1.583
Response Arguments	1.583
Response	1.583
Change Log	1.587
<b>/TimePeriods GET</b>	<b>1.587</b>
Overview	1.587
Summary	1.587
Request Arguments	1.588
Filter Expressions	1.591
Basic	1.591
Example	1.591
Full	1.591
Example	1.591
Sub-expressions	1.593
Example	1.593

Modules	1.593
Example	1.593
Response Arguments	1.594
Response	1.594
Change Log	1.595
/TimePeriods/current GET	1.595
Summary:	1.595
Output Example:	1.596
/TimePeriods/:date GET	1.596
Summary:	1.596
Output Example:	1.596
/TimePeriods/filter GET	1.597
Overview	1.597
Summary	1.597
Request Arguments	1.597
Filter Expressions	1.600
Basic	1.600
Example	1.600
Full	1.601
Example	1.601
Sub-expressions	1.602
Example	1.602
Modules	1.603
Example	1.603
Response Arguments	1.603
Response	1.603
Change Log	1.604
/Users GET	1.605
Overview	1.605
Summary	1.605
Request Arguments	1.605
Filter Expressions	1.608
Basic	1.608
Example	1.608
Full	1.609
Example	1.609
Sub-expressions	1.610
Example	1.610
Modules	1.611
Example	1.611
Response Arguments	1.611
Response	1.611
Change Log	1.613
/Users/:record DELETE	1.613
Summary:	1.613
/Users/:record/freebusy GET	1.613

Summary:	1.613
Request	1.613
Response	1.614
/Users/:record/link POST	1.614
Overview	1.614
Request Arguments	1.614
Request	1.615
Response Arguments	1.615
Response	1.615
Change Log	1.620
/Users/:record/link/:link_name/:remote_id DELETE	1.621
Overview	1.621
Request Arguments	1.621
Response Arguments	1.621
Response	1.621
Change Log	1.625
/Users/:record/link/:link_name/:remote_id POST	1.625
Overview	1.625
Query String Parameters	1.625
Response Arguments	1.625
Response	1.626
Change Log	1.629
/VCardDownload GET	1.630
Overview	1.630
Request Arguments	1.630
Request	1.630
Response Arguments	1.630
Response	1.630
Change Log	1.631
/bulk POST	1.631
Overview	1.631
Summary	1.631
Request Arguments	1.631
Request Example	1.632
Response	1.632
Response Example	1.633
Change Log	1.634
/collection/:collection_name GET	1.634
Overview	1.634
Summary	1.634
Request Arguments	1.634
Response Arguments	1.635
Response	1.635
Change Log	1.636
/connectors GET	1.636
Overview	1.637

Request Arguments	1.637
Result Arguments	1.637
Change Log	1.639
/connector/twitter/currentUser GET	1.639
Overview	1.639
Request Arguments	1.639
Response Arguments	1.639
Response	1.640
Change Log	1.642
/connector/twitter/:twitterId GET	1.643
Overview	1.643
Request Arguments	1.643
Response Arguments	1.643
Response	1.643
Change Log	1.646
/css GET	1.646
Overview	1.646
Request Arguments	1.646
Request	1.647
Response	1.647
Change Log	1.647
/css/preview GET	1.648
Overview	1.648
Request Arguments	1.648
Request	1.648
Response Arguments	1.649
Change Log	1.649
/globalsearch GET	1.649
Overview	1.649
Summary	1.649
Request Arguments	1.650
Request	1.651
Response Arguments	1.652
Response	1.652
Change Log	1.652
/globalsearch POST	1.652
Overview	1.653
Summary	1.653
Request Arguments	1.653
Request	1.655
Response Arguments	1.655
Response	1.655
Change Log	1.655
/help GET	1.656
Overview	1.656
Request Arguments	1.656

Response Arguments	1.656
Response	1.656
Change Log	1.656
/help/exceptions GET	1.657
Overview	1.657
Request Arguments	1.657
Response Arguments	1.657
Response	1.657
Change Log	1.657
/logger POST	1.658
Overview	1.658
Request Arguments	1.658
Response Arguments	1.658
Response	1.658
Change Log	1.658
/login/content GET	1.659
Overview	1.659
Request Arguments	1.659
Response Arguments	1.659
Response	1.660
Change Log	1.660
/login/marketingContentUrl GET	1.660
Overview	1.660
Summary	1.660
Request Arguments	1.661
Response Arguments	1.661
Response	1.661
/me GET	1.662
Overview	1.662
Request Arguments	1.662
Response Arguments	1.662
Response Portal User	1.662
Change Log	1.663
/me PUT	1.663
Overview	1.663
Request Arguments	1.663
Response Arguments	1.663
Response Portal User Example	1.664
Change Log	1.664
/me/following GET	1.664
Overview	1.664
Request Arguments	1.665
Response Arguments	1.665
Response	1.665
Change Log	1.665
/me/password POST	1.665

Overview	1.665
Summary	1.665
Request Arguments	1.666
Request	1.666
Response Arguments	1.666
Response	1.666
Change Log	1.666
/me/password PUT	1.667
Overview	1.667
Summary	1.667
Request Arguments	1.667
Request	1.667
Response Arguments	1.667
Response	1.668
Change Log	1.668
/me/preference/:preference_name DELETE	1.668
Overview	1.668
Request Arguments	1.668
Response Arguments	1.668
Response	1.669
Change Log	1.669
/me/preference/:preference_name GET	1.669
Overview	1.669
Request Arguments	1.669
Response Arguments	1.669
Response	1.670
Change Log	1.670
/me/preference/:preference_name POST	1.670
Overview	1.670
Request Arguments	1.670
Response Arguments	1.670
Response	1.671
Change Log	1.671
/me/preference/:preference_name PUT	1.671
Overview	1.671
Request Arguments	1.671
Response Arguments	1.671
Response	1.672
Change Log	1.672
/me/preferences GET	1.672
Overview	1.672
Request Arguments	1.672
Response Arguments	1.672
Response	1.673
Change Log	1.673
/me/preferences PUT	1.673

Overview	1.673
Request Arguments	1.673
Response Arguments	1.673
Response	1.674
Change Log	1.674
/metadata/<module>/:segment GET	1.674
Overview	1.674
Summary	1.674
Request Arguments	1.674
Response	1.674
Change Log	1.675
/<module>/Activities GET	1.675
Summary:	1.675
Query Parameters:	1.675
Input Example:	1.676
Output Example:	1.676
/<module>/Activities/filter GET	1.677
Summary:	1.677
Query Parameters:	1.677
Input Example:	1.677
Output Example:	1.678
/<module>/MassUpdate DELETE	1.679
Overview	1.679
Query String Parameters	1.679
Request	1.679
Response Arguments	1.679
Output Done Example	1.679
Change Log	1.680
/<module>/MassUpdate PUT	1.680
Overview	1.680
Query String Parameters	1.680
Request	1.681
Mass Updating Records with Teams	1.681
Mass Add Leads, Contacts or Prospects to a Target List	1.681
Response Arguments	1.682
Output Done Example	1.682
Change Log	1.682
/<module> GET	1.683
Overview	1.683
Summary	1.683
Request Arguments	1.683
Filter Expressions	1.686
Basic	1.686
Example	1.686
Full	1.687
Example	1.687



Sub-expressions	1.688
Example	1.688
Modules	1.689
Example	1.689
Response Arguments	1.689
Response	1.689
Change Log	1.690
/<module> POST	1.691
Overview	1.691
Request Arguments	1.691
Request	1.691
Link fields	1.691
Response Arguments	1.692
Response	1.692
Change Log	1.694
/<module>/append/:target POST	1.694
Overview	1.694
Request Arguments	1.694
Request	1.694
Response Arguments	1.695
Response	1.695
Change Log	1.695
/<module>/audit/export GET	1.695
Overview	1.695
Request Arguments	1.696
Query Parameters	1.696
Response Arguments	1.696
Response	1.696
Change Log	1.697
/<module>/config GET	1.697
Overview	1.697
Summary	1.698
Request Arguments	1.698
Response Arguments	1.698
Response	1.698
Change Log	1.699
/<module>/config POST	1.700
Overview	1.700
Summary	1.700
Request Arguments	1.700
Request	1.700
Response Arguments	1.700
Response	1.701
Change Log	1.701
/<module>/config PUT	1.701
Overview	1.701

Summary	1.701
Request Arguments	1.701
Request	1.702
Response Arguments	1.702
Response	1.702
Change Log	1.702
<code>/&lt;module&gt;/count GET</code>	1.702
Overview	1.703
Summary	1.703
Request Arguments	1.703
Filter Expressions	1.706
Basic	1.706
Example	1.706
Full	1.707
Example	1.707
Sub-expressions	1.708
Example	1.708
Modules	1.708
Example	1.709
Response Arguments	1.709
Response	1.709
Change Log	1.710
<code>/&lt;module&gt;/customfield POST</code>	1.711
Overview	1.711
Summary	1.711
Request Arguments	1.711
Request Examples	1.711
Response	1.713
Change Log	1.714
<code>/&lt;module&gt;/customfield/:field DELETE</code>	1.714
Overview	1.714
Summary	1.714
Request Arguments	1.714
Response	1.715
Response Codes and Error Messages	1.715
Change Log	1.715
<code>/&lt;module&gt;/duplicateCheck POST</code>	1.715
Overview	1.715
Request Arguments	1.715
Request	1.716
Response Arguments	1.716
Response	1.716
Change Log	1.718
<code>/&lt;module&gt;/enum/:field GET</code>	1.719
Overview	1.719
Request Arguments	1.719

Response Arguments	1.719
Response	1.719
Change Log	1.720
/<module>/export/:record_list_id GET	1.720
Overview	1.720
Request Arguments	1.720
Request	1.720
Exporting Records by a List of IDs	1.721
Exporting Records Using a Filter	1.721
Exporting a Sample Result Set	1.721
Response Arguments	1.721
Response	1.722
Change Log	1.722
/<module>/favorites GET	1.723
Overview	1.723
Summary	1.723
Request Arguments	1.723
Request	1.723
Response Arguments	1.724
Response	1.724
Change Log	1.731
/<module>/favorites POST	1.731
Overview	1.731
Summary	1.731
Request Arguments	1.731
Request	1.732
Response Arguments	1.732
Response	1.732
Change Log	1.739
/<module>/file/vcard_import POST	1.740
Overview	1.740
Request Arguments	1.740
Request	1.740
Response Arguments	1.740
Response	1.741
Change Log	1.741
/<module>/filter GET	1.741
Overview	1.741
Summary	1.741
Request Arguments	1.741
Filter Expressions	1.744
Basic	1.745
Example	1.745
Full	1.745
Example	1.745
Sub-expressions	1.746

Example	1.746
Modules	1.747
Example	1.747
Response Arguments	1.747
Response	1.748
Change Log	1.749
/<module>/filter POST	1.749
Overview	1.749
Summary	1.749
Request Arguments	1.750
Filter Expressions	1.751
Basic	1.751
Example	1.751
Full	1.752
Example	1.752
Sub-expressions	1.753
Example	1.753
Modules	1.753
Example	1.754
Response Arguments	1.754
Response	1.754
Change Log	1.759
/<module>/filter/count GET	1.760
Overview	1.760
Summary	1.760
Request Arguments	1.760
Filter Expressions	1.762
Basic	1.762
Example	1.762
Full	1.762
Example	1.762
Sub-expressions	1.763
Example	1.764
Modules	1.764
Example	1.764
Response Arguments	1.765
Response	1.765
Change Log	1.770
/<module>/filter/count POST	1.770
Overview	1.770
Summary	1.770
Request Arguments	1.771
Filter Expressions	1.772
Basic	1.772
Example	1.772
Full	1.773

Example	1.773
Sub-expressions	1.774
Example	1.774
Modules	1.775
Example	1.775
Response Arguments	1.775
Response	1.775
Change Log	1.781
/<module>/globalsearch GET	1.781
Overview	1.781
Summary	1.781
Request Arguments	1.781
Request	1.783
Response Arguments	1.783
Response	1.784
Change Log	1.784
/<module>/globalsearch POST	1.784
Overview	1.784
Summary	1.784
Request Arguments	1.785
Request	1.787
Response Arguments	1.787
Response	1.787
Change Log	1.787
/<module>/insertafter/:target POST	1.788
Overview	1.788
Request Arguments	1.788
Request	1.788
Response Arguments	1.788
Response	1.788
Change Log	1.789
/<module>/insertbefore/:target POST	1.789
Overview	1.789
Request Arguments	1.789
Request	1.790
Response Arguments	1.790
Response	1.790
Change Log	1.790
/<module>/:lhs_sync_key_field_value/link_by_sync_keys/:link_name/:rhs_sync_key_field_value DELETE	1.791
Overview	1.791
Request Arguments	1.791
Request	1.791
Response Arguments	1.791
Response	1.792
Status 422	1.792
Change Log	1.792

<code>/&lt;module&gt;/:lhs_sync_key_field_value/link_by_sync_keys/:link_name/:rhs_sync_key_field_value</code>	POST	...	1.792
Overview			1.792
Request Arguments			1.793
Request			1.793
Response Arguments			1.793
Response			1.793
Status 422			1.794
Change Log			1.794
<code>/&lt;module&gt;/prepend/:target</code>	POST		1.794
Overview			1.794
Request Arguments			1.794
Request			1.795
Response Arguments			1.795
Response			1.795
Change Log			1.795
<code>/&lt;module&gt;/recent-product</code>	GET		1.796
Overview			1.796
Summary			1.796
Request Arguments			1.796
Response Arguments			1.796
Response			1.796
Change Log			1.805
<code>/&lt;module&gt;/recent-product</code>	POST		1.805
Overview			1.805
Summary			1.805
Request Arguments			1.805
Response Arguments			1.805
Response			1.805
Change Log			1.814
<code>/&lt;module&gt;/:record</code>	DELETE		1.814
Overview			1.814
Request Arguments			1.814
Response Arguments			1.814
Response			1.815
Change Log			1.815
<code>/&lt;module&gt;/:record</code>	GET		1.815
Overview			1.815
Request Arguments			1.815
Response Arguments			1.815
Response			1.816
Change Log			1.818
<code>/&lt;module&gt;/:record</code>	PUT		1.818
Overview			1.818
Request Arguments			1.818
Request			1.818
Link fields			1.819

Response Arguments	1.819
Response	1.819
Change Log	1.821
/<module>/record_list POST	1.822
Overview	1.822
Summary	1.822
Request Arguments	1.822
Request Example	1.822
Response Arguments	1.822
Output Example	1.823
/<module>/record_list/:record_list_id DELETE	1.823
Overview	1.823
Summary	1.823
Request Arguments	1.823
Request Example	1.824
Response Arguments	1.824
/<module>/record_list/:record_list_id GET	1.824
Overview	1.824
Summary	1.824
Request Arguments	1.824
Request Example	1.825
Response Arguments	1.825
Output Example	1.825
/<module>/:record/audit GET	1.825
Overview	1.825
Request Arguments	1.826
Query Parameters	1.826
Response Arguments	1.826
Response	1.827
Change Log	1.827
/<module>/:record/children GET	1.828
Overview	1.828
Request Arguments	1.828
Response Arguments	1.828
Response	1.828
Change Log	1.829
/<module>/:record/collection/:collection_name GET	1.830
Overview	1.830
Summary	1.830
Request Arguments	1.830
Response Arguments	1.831
Response	1.832
Change Log	1.833
/<module>/:record/collection/:collection_name/count GET	1.833
Overview	1.833
Summary	1.833

Request Arguments	1.833
Response Arguments	1.833
Response	1.834
Change Log	1.834
/<module>/:record/favorite DELETE	1.834
Overview	1.834
Request Arguments	1.834
Response Arguments	1.834
Response	1.835
Change Log	1.837
/<module>/:record/favorite PUT	1.837
Overview	1.837
Request Arguments	1.837
Response Arguments	1.837
Response	1.838
Change Log	1.840
/<module>/:record/file GET	1.840
Overview	1.840
Request Arguments	1.840
Response Arguments	1.840
Response	1.841
Change Log	1.843
/<module>/:record/file/:field DELETE	1.843
Overview	1.844
Request Arguments	1.844
Response Arguments	1.844
Response	1.844
Change Log	1.844
/<module>/:record/file/:field GET	1.845
Overview	1.845
Request Arguments	1.845
Response Arguments	1.845
Response	1.845
Change Log	1.845
/<module>/:record/file/:field POST	1.846
Overview	1.846
Request Arguments	1.846
Request	1.846
Response Arguments	1.847
Response	1.847
Change Log	1.847
/<module>/:record/file/:field PUT	1.847
Overview	1.848
Request Arguments	1.848
Request	1.848
Response Arguments	1.848



Response	1.849
Change Log	1.849
/<module>/:record/link POST	1.850
Overview	1.850
Request Arguments	1.850
Request	1.850
Response Arguments	1.851
Response	1.851
Change Log	1.856
/<module>/:record/link/activities GET	1.856
Summary:	1.856
Query Parameters:	1.856
Input Example:	1.857
Output Example:	1.857
/<module>/:record/link/activities/filter GET	1.858
Summary:	1.858
Query Parameters:	1.858
Input Example:	1.858
Output Example:	1.859
/<module>/:record/link/history GET	1.860
Overview	1.860
Summary	1.860
Request Arguments	1.860
/<module>/:record/link/:link_name GET	1.861
Overview	1.861
Summary	1.861
Request Arguments	1.862
Filter Expressions	1.863
Basic	1.863
Example	1.863
Full	1.864
Example	1.864
Sub-expressions	1.865
Example	1.865
Modules	1.866
Example	1.866
Response Arguments	1.866
Response	1.866
Change Log	1.871
/<module>/:record/link/:link_name POST	1.872
Overview	1.872
Request Arguments	1.872
Request	1.872
Response Arguments	1.872
Response	1.873
Change Log	1.876

/<module>/:record/link/:link_name/add_record_list/:remote_id POST	1.876
Overview	1.876
URL Arguments	1.877
Request	1.877
Response Arguments	1.877
Response	1.877
Change Log	1.879
/<module>/:record/link/:link_name/count GET	1.879
Overview	1.879
Summary	1.879
Request Arguments	1.879
Filter Expressions	1.881
Basic	1.881
Example	1.881
Full	1.881
Example	1.882
Sub-expressions	1.883
Example	1.883
Modules	1.883
Example	1.883
Response Arguments	1.884
Response	1.884
Change Log	1.889
/<module>/:record/link/:link_name/filter GET	1.890
Overview	1.890
Summary	1.890
Request Arguments	1.890
Filter Expressions	1.891
Basic	1.891
Example	1.892
Full	1.892
Example	1.892
Sub-expressions	1.893
Example	1.893
Modules	1.894
Example	1.894
Response Arguments	1.894
Response	1.895
Change Log	1.900
/<module>/:record/link/:link_name/filter/count GET	1.900
Overview	1.900
Summary	1.900
Request Arguments	1.901
Filter Expressions	1.902
Basic	1.902
Example	1.902

Full	1.903
Example	1.903
Sub-expressions	1.904
Example	1.904
Modules	1.904
Example	1.905
Response Arguments	1.905
Response	1.905
Change Log	1.910
/<module>/:record/link/:link_name/filter/leancount GET	1.911
Overview	1.911
Summary	1.911
Request Arguments	1.911
Filter Expressions	1.913
Basic	1.913
Example	1.913
Full	1.913
Example	1.913
Sub-expressions	1.914
Example	1.915
Modules	1.915
Example	1.915
Response Arguments	1.915
Response	1.916
Change Log	1.921
/<module>/:record/link/:link_name/leancount GET	1.921
Overview	1.921
Summary	1.921
Request Arguments	1.922
Filter Expressions	1.923
Basic	1.923
Example	1.923
Full	1.924
Example	1.924
Sub-expressions	1.925
Example	1.925
Modules	1.926
Example	1.926
Response Arguments	1.926
Response	1.926
Change Log	1.931
/<module>/:record/link/:link_name/:remote_id DELETE	1.932
Overview	1.932
Request Arguments	1.932
Response Arguments	1.932
Response	1.932

Change Log	1.936
/<module>/:record/link/:link_name/:remote_id GET	1.936
Overview	1.936
Request Arguments	1.936
Response Arguments	1.937
Response	1.937
Change Log	1.939
/<module>/:record/link/:link_name/:remote_id POST	1.939
Overview	1.940
Query String Parameters	1.940
Response Arguments	1.940
Response	1.940
Change Log	1.944
/<module>/:record/link/:link_name/:remote_id PUT	1.944
Overview	1.944
Request Arguments	1.944
Request	1.944
Response Arguments	1.945
Response	1.945
Change Log	1.948
/<module>/:record/link/related_activities GET	1.948
Overview	1.949
Request Arguments	1.949
Response Arguments	1.950
Response	1.950
Change Log	1.952
/<module>/:record/moveafter/:target PUT	1.952
Overview	1.952
Request Arguments	1.952
Response Arguments	1.952
Response	1.953
Change Log	1.953
/<module>/:record/movebefore/:target PUT	1.953
Overview	1.953
Request Arguments	1.953
Response Arguments	1.954
Response	1.954
Change Log	1.954
/<module>/:record/movefirst/:target PUT	1.954
Overview	1.954
Request Arguments	1.954
Response Arguments	1.955
Response	1.955
Change Log	1.955
/<module>/:record/movelast/:target PUT	1.955
Overview	1.955

Request Arguments	1.956
Response Arguments	1.956
Response	1.956
Change Log	1.956
/<module>/:record/next GET	1.956
Overview	1.957
Request Arguments	1.957
Response Arguments	1.957
Response	1.957
Change Log	1.958
/<module>/:record/parent GET	1.958
Overview	1.958
Request Arguments	1.958
Response Arguments	1.958
Response	1.958
Change Log	1.959
/<module>/:record/path GET	1.959
Overview	1.959
Request Arguments	1.959
Response Arguments	1.960
Response	1.960
Change Log	1.961
/<module>/:record/pii GET	1.961
Overview	1.961
Version Requirements	1.961
Request Arguments	1.961
Response Arguments	1.962
Response	1.962
Change Log	1.963
/<module>/:record/prev GET	1.963
Overview	1.963
Request Arguments	1.963
Response Arguments	1.964
Response	1.964
Change Log	1.964
/<module>/:record/subscribe POST	1.965
Summary:	1.965
Query Parameters:	1.965
Input Example:	1.965
Output Example:	1.965
/<module>/:record/unfavorite PUT	1.965
Overview	1.966
Request Arguments	1.966
Response Arguments	1.966
Response	1.966
Change Log	1.968

/<module>/:record/unsubscribe DELETE	1.968
Summary:	1.969
Query Parameters:	1.969
Input Example:	1.969
Output Example:	1.969
/<module>/:record/vcard GET	1.969
Overview	1.969
Request Arguments	1.969
Response Arguments	1.970
Response	1.970
Change Log	1.970
/<module>/:root/tree GET	1.970
Overview	1.971
Request Arguments	1.971
Response Arguments	1.971
Response	1.971
Change Log	1.975
/<module>/sync_key/:sync_key_field_value DELETE	1.976
Overview	1.976
Request Arguments	1.976
Request	1.976
Response Arguments	1.976
Response	1.976
Change Log	1.977
/<module>/sync_key/:sync_key_field_value GET	1.977
Overview	1.977
Request Arguments	1.977
Request	1.977
Response Arguments	1.977
Response	1.978
Failed Response	1.978
Change Log	1.978
/<module>/sync_key/:sync_key_field_value PATCH	1.978
Overview	1.978
Request Arguments	1.979
Request	1.979
Response Arguments	1.979
Response	1.979
Change Log	1.979
/<module>/sync_key/:sync_key_field_value PUT	1.980
Overview	1.980
Request Arguments	1.980
Request	1.980
Response Arguments	1.980
Response	1.981
Change Log	1.981

/<module>/temp/file/:field POST	1.981
Overview	1.981
Request Arguments	1.981
Request	1.982
Response Arguments	1.982
Response	1.982
Change Log	1.983
/<module>/temp/file/:field/:temp_id GET	1.983
Overview	1.983
Request Arguments	1.983
Response Arguments	1.983
Response	1.983
Change Log	1.984
/mostactiveusers GET	1.985
Overview	1.985
Request Arguments	1.985
Request	1.985
Response Arguments	1.985
Change Log	1.986
/oauth2/bwc/login POST	1.986
ATTENTION: FOR INTERNAL USAGE ONLY	1.987
Overview	1.987
/oauth2/logout POST	1.987
Overview	1.987
Request Arguments	1.987
Response Arguments	1.987
Response	1.987
Change Log	1.987
/oauth2/sudo/:user_name POST	1.988
Overview	1.988
Request Arguments	1.988
Request	1.988
Response Arguments	1.988
Response	1.989
Change Log	1.989
/oauth2/token POST	1.989
Overview	1.989
Request Arguments	1.990
Request for Password Grant Types	1.991
Request for Refresh Token Grant Types	1.991
Response Arguments	1.991
Response	1.992
Change Log	1.992
/password/request GET	1.993
Overview	1.993
Request Arguments	1.993

Request	1.993
Response Arguments	1.993
Response	1.993
Change Log	1.994
/ping GET	1.994
Overview	1.994
Request Arguments	1.994
Response Arguments	1.994
Response	1.994
Change Log	1.994
/ping/whattimeisit GET	1.995
Overview	1.995
Request Arguments	1.995
Response Arguments	1.995
Response	1.995
Change Log	1.995
/pmse_Business_Rules GET	1.996
Overview	1.996
Summary	1.996
Request Arguments	1.996
Filter Expressions	1.999
Basic	1.999
Example	1.999
Full	2.000
Example	2.000
Sub-expressions	2.001
Example	2.001
Modules	2.002
Example	2.002
Response Arguments	2.002
Response	2.002
Change Log	2.003
/pmse_Business_Rules/file/businessrules_import POST	2.004
Overview	2.004
Summary	2.004
Request Arguments	2.004
Request	2.004
Response Arguments	2.004
Response	2.005
/pmse_Business_Rules/:record/brules GET	2.005
Overview	2.005
Summary	2.005
Request Arguments	2.005
Response Arguments	2.005
Response	2.006
/pmse_Emails_Templates GET	2.006



Overview	2.006
Summary	2.006
Request Arguments	2.006
Filter Expressions	2.009
Basic	2.009
Example	2.010
Full	2.010
Example	2.010
Sub-expressions	2.011
Example	2.011
Modules	2.012
Example	2.012
Response Arguments	2.012
Response	2.013
Change Log	2.014
/pmse_Emails_Templates/file/emailtemplates_import POST	2.014
Overview	2.014
Summary	2.014
Request Arguments	2.014
Request	2.014
Response Arguments	2.015
Response	2.015
/pmse_Emails_Templates/:/find_modules GET	2.015
Overview	2.015
Summary	2.015
Request Arguments	2.015
Request	2.016
Response Arguments	2.016
Response	2.016
/pmse_Emails_Templates/:record/etemplate GET	2.018
Overview	2.018
Summary	2.018
Request Arguments	2.019
Response Arguments	2.019
Response	2.019
/pmse_Emails_Templates/variables/find GET	2.019
Overview	2.019
Summary	2.019
Request Arguments	2.019
Request	2.020
Response Arguments	2.021
Response	2.021
/pmse_Inbox/AdhocReassign PUT	2.024
Overview	2.024
Summary	2.024
/pmse_Inbox/AdhocReassign/:data/:flowId GET	2.024

Overview	2.024
Summary	2.024
/pmse_Inbox/ReassignForm PUT	2.025
Overview	2.025
Summary	2.025
/pmse_Inbox/ReassignForm/:data/:flowId GET	2.025
Overview	2.025
Summary	2.025
/pmse_Inbox GET	2.025
Overview	2.025
Summary	2.026
Request Arguments	2.026
Response Arguments	2.027
Response	2.027
/pmse_Inbox/cancelCases PUT	2.029
Overview	2.029
Summary	2.029
Request Arguments	2.029
Response Arguments	2.029
Response	2.029
/pmse_Inbox/case/:id/:idflow GET	2.029
Overview	2.030
Summary	2.030
Request Arguments	2.030
Response Arguments	2.030
Response	2.030
/pmse_Inbox/casesList GET	2.033
Overview	2.033
Summary	2.034
Request Arguments	2.034
Response Arguments	2.035
Response	2.035
/pmse_Inbox/changeCaseUser/:cas_id GET	2.036
Overview	2.036
Summary	2.036
/pmse_Inbox/clearLog/:typelog PUT	2.037
Overview	2.037
Summary	2.037
Request Arguments	2.037
Response Arguments	2.037
Response	2.037
/pmse_Inbox/delete_notes/:id DELETE	2.037
Overview	2.037
Summary	2.037
Request Arguments	2.038
Response Arguments	2.038

Response	2.038
/pmse_Inbox/engine_claim PUT	2.038
Overview	2.038
Summary	2.038
Request Arguments	2.038
Response	2.039
/pmse_Inbox/engine_route PUT	2.039
Overview	2.039
Summary	2.039
Request Arguments	2.039
Response Arguments	2.039
Response	2.040
/pmse_Inbox/filter GET	2.040
Overview	2.040
Summary	2.040
Request Arguments	2.040
Response Arguments	2.041
Response	2.041
/pmse_Inbox/getLog GET	2.043
Overview	2.043
Summary	2.043
Request Arguments	2.043
Response Arguments	2.043
Response	2.044
/pmse_Inbox/historyLog/:filter GET	2.044
Overview	2.044
Summary	2.044
Request Arguments	2.044
Response Arguments	2.044
Response	2.045
/pmse_Inbox/note_list/:cas_id GET	2.045
Overview	2.045
Summary	2.045
Request Arguments	2.046
Response Arguments	2.046
Response	2.046
/pmse_Inbox/reactivateFlows PUT	2.047
Overview	2.047
Summary	2.047
/pmse_Inbox/reassignFlows PUT	2.047
Overview	2.047
Summary	2.047
Request Arguments	2.048
Response Arguments	2.048
Response	2.048
/pmse_Inbox/reassignFlows/:record GET	2.048

Overview	2.048
Summary	2.048
Request Arguments	2.049
Response Arguments	2.049
Response	2.049
/pmse_Inbox/:record/file/:field GET	2.050
Overview	2.050
Summary	2.050
Request Arguments	2.050
Response	2.050
/pmse_Inbox/save_notes POST	2.051
Overview	2.051
Summary	2.051
Request Arguments	2.051
Response Arguments	2.051
Response	2.052
/pmse_Inbox/settings GET	2.052
Overview	2.052
Summary	2.052
Request Arguments	2.052
Response Arguments	2.053
Response	2.053
/pmse_Inbox/settings PUT	2.053
Overview	2.053
Summary	2.053
Request Arguments	2.053
Response Arguments	2.054
Response	2.054
/pmse_Inbox/unattendedCases GET	2.054
Overview	2.054
Summary	2.054
Request Arguments	2.055
Response Arguments	2.055
Response	2.055
/pmse_Inbox/userListByTeam/:id GET	2.056
Overview	2.056
Summary	2.056
/pmse_Project/ActivityDefinition/:record GET	2.056
Overview	2.056
Summary	2.057
Request Arguments	2.057
Response Arguments	2.057
Response	2.057
/pmse_Project/ActivityDefinition/:record PUT	2.065
Overview	2.065
Summary	2.065

Request Arguments	2.065
Request Payload	2.066
Response Arguments	2.066
Response	2.066
/pmse_Project/CrmData/:data/:filter GET	2.066
Overview	2.067
Summary	2.067
Request Arguments	2.067
Request	2.067
Response Arguments	2.067
Response	2.067
/pmse_Project/CrmData/:record/:filter PUT	2.069
Overview	2.069
Summary	2.069
Request Arguments	2.069
Request	2.069
Request Payload	2.070
Response Arguments	2.070
Response	2.070
/pmse_Project/EventDefinition/:record GET	2.070
Overview	2.070
Summary	2.070
Request Arguments	2.071
Request	2.071
Response Arguments	2.071
Response	2.071
/pmse_Project/EventDefinition/:record PUT	2.074
Overview	2.074
Summary	2.074
Request Arguments	2.074
Request Payload	2.074
Start Event	2.075
Timer Event	2.075
Receive Message Event	2.075
Send Message Event	2.076
End Event	2.077
Response Arguments	2.077
Response	2.077
/pmse_Project/GatewayDefinition/:record GET	2.078
Overview	2.078
Summary	2.078
Request Arguments	2.078
Response Arguments	2.078
Response	2.078
/pmse_Project/GatewayDefinition/:record PUT	2.079
Overview	2.079

Summary	2.079
Request Arguments	2.079
Request Payload	2.080
Response Arguments	2.080
Response	2.080
/pmse_Project GET	2.080
Overview	2.080
Summary	2.080
Request Arguments	2.081
Filter Expressions	2.084
Basic	2.084
Example	2.084
Full	2.084
Example	2.084
Sub-expressions	2.086
Example	2.086
Modules	2.086
Example	2.086
Response Arguments	2.087
Response	2.087
Change Log	2.088
/pmse_Project/file/project_import POST	2.088
Overview	2.088
Summary	2.089
Request Arguments	2.089
Request	2.089
Response Arguments	2.089
Response	2.089
Compatibility	2.090
Change Log	2.090
/pmse_Project/project/:record GET	2.090
Overview	2.090
Summary	2.090
Request Arguments	2.090
Response Arguments	2.091
Response	2.091
/pmse_Project/project/:record PUT	2.102
Overview	2.102
Summary	2.102
Request Arguments	2.102
Request Payload	2.103
Response Arguments	2.103
Response	2.103
/pmse_Project/:record/dproject GET	2.104
Overview	2.104
Summary	2.104

Request Arguments	2.104
Response Arguments	2.104
Response	2.104
/pmse_Project/:record/verify GET	2.105
Overview	2.105
Summary	2.105
Request Arguments	2.105
Response Arguments	2.105
Response	2.105
/pmse_Project/validateCrmData/:data/:filter GET	2.105
Overview	2.106
Summary	2.106
Request Arguments	2.106
Request	2.106
Response Arguments	2.106
Response	2.107
/recent GET	2.107
Overview	2.107
Request Arguments	2.107
Request	2.108
Response Arguments	2.108
Response	2.108
Change Log	2.113
/rssfeed GET	2.114
Overview	2.114
Request Arguments	2.114
Request	2.114
Response Arguments	2.114
Response	2.115
Change Log	2.116
/search GET	2.116
Overview	2.116
Request Arguments	2.116
Response Arguments	2.117
Response	2.118
Change Log	2.119
/theme GET	2.119
Overview	2.119
Request Arguments	2.119
Request	2.119
Response Arguments	2.120
Response	2.120
Change Log	2.121
/theme POST	2.121
Overview	2.121
Request Arguments	2.121

Request	2.121
Response Arguments	2.122
Response	2.122
Change Log	2.122
<b>Extending Endpoints</b>	2.122
Overview	2.122
Custom Endpoints	2.123
Defining New Endpoints	2.123
registerApiRest() Method	2.124
Endpoint Method	2.126
Help Documentation	2.127
Quick Repair and Rebuild	2.129
Example	2.129
Redefining Existing Endpoints	2.130
Endpoint Scoring	2.131
Endpoint Versioning	2.133
<b>API Exceptions</b>	2.135
Overview	2.135
Stock Exceptions	2.136
Using Exceptions	2.139
Custom Exceptions	2.139
Example	2.140
<b>Legacy API</b>	2.141
Overview	2.141
<b>SOAP VS REST</b>	2.141
<b>REST</b>	2.141
How do I access the REST service?	2.142
Input / Output Datatypes	2.142
Defining your own Datatypes	2.142
REST Failure Response	2.142
<b>SOAP</b>	2.143
How do I access the SOAP service?	2.143
WS-I 1.0 Compliancy	2.143
URL Parameters	2.143
use	2.144
Validation	2.144
SOAP Failure Response	2.144
<b>What is NuSOAP?</b>	2.144
Overview	2.144
Where Can I Get It?	2.144
How Do I Use It?	2.145
Example	2.145
<b>Methods</b>	2.145
get_available_modules	2.145
Overview	2.145
Available APIs	2.146



Definition	2.146
Parameters	2.146
Result	2.146
Change Log	2.146
PHP	2.147
get_document_revision	2.147
Overview	2.147
Available APIs	2.147
Definition	2.147
Parameters	2.147
Result	2.148
Change Log	2.148
PHP	2.148
get_entries	2.149
Overview	2.149
Available APIs	2.149
Definition	2.149
Parameters	2.149
Result	2.150
Change Log	2.150
PHP	2.150
get_entries_count	2.151
Overview	2.151
Available APIs	2.152
Definition	2.152
Parameters	2.152
Result	2.152
Change Log	2.152
PHP	2.153
get_entry	2.153
Overview	2.153
Available APIs	2.153
Definition	2.153
Parameters	2.154
Result	2.154
Change Log	2.155
PHP	2.155
get_entry_list	2.156
Overview	2.156
Available APIs	2.156
Definition	2.156
Parameters	2.156
Result	2.157
Change Log	2.158
PHP	2.158
get_language_definition	2.159

Overview	2.159
Available APIs	2.159
Definition	2.160
Parameters	2.160
Result	2.160
Change Log	2.160
PHP	2.160
get_last_viewed	2.161
Overview	2.161
Available APIs	2.161
Definition	2.161
Parameters	2.161
Result	2.162
Change Log	2.162
PHP	2.162
get_modified_relationships	2.163
Overview	2.163
Available APIs	2.163
Definition	2.163
Parameters	2.163
Result	2.164
Change Log	2.165
Considerations	2.165
PHP	2.165
get_module_fields	2.166
Overview	2.166
Available APIs	2.166
Definition	2.166
Parameters	2.167
Result	2.167
Change Log	2.167
PHP	2.167
get_module_fields_md5	2.168
Overview	2.168
Available APIs	2.168
Definition	2.168
Parameters	2.168
Result	2.168
Change Log	2.169
PHP	2.169
get_module_layout	2.169
Overview	2.169
Available APIs	2.169
Definition	2.170
Parameters	2.170
Result	2.170

Change Log	2.171
PHP	2.171
get_module_layout_md5	2.172
Overview	2.172
Available APIs	2.172
Definition	2.172
Parameters	2.172
Result	2.173
Change Log	2.173
PHP	2.173
get_note_attachment	2.174
Overview	2.174
Available APIs	2.174
Definition	2.174
Parameters	2.174
Result	2.174
Change Log	2.175
PHP	2.175
get_quotes_pdf	2.176
Overview	2.176
Available APIs	2.176
Definition	2.176
Parameters	2.176
Result	2.176
Change Log	2.176
PHP	2.177
get_relationships	2.177
Overview	2.177
Available APIs	2.177
Definition	2.177
Parameters	2.177
Result	2.178
Change Log	2.179
PHP	2.179
get_report_entries	2.180
Overview	2.181
Available APIs	2.181
Definition	2.181
Parameters	2.181
Result	2.181
Change Log	2.182
Considerations	2.182
PHP	2.182
get_report_pdf	2.183
Overview	2.183
Available APIs	2.183

Definition	2.183
Parameters	2.183
Result	2.183
Change Log	2.183
PHP	2.184
get_server_info	2.184
Overview	2.184
Available APIs	2.184
Definition	2.184
Parameters	2.184
Result	2.185
Change Log	2.185
PHP	2.185
get_upcoming_activities	2.185
Overview	2.186
Available APIs	2.186
Definition	2.186
Parameters	2.186
Result	2.186
Change Log	2.186
PHP	2.187
get_user_id	2.187
Overview	2.187
Available APIs	2.187
Definition	2.187
Parameters	2.187
Result	2.188
Change Log	2.188
PHP	2.188
get_user_team_id	2.188
Overview	2.188
Available APIs	2.188
Definition	2.188
Parameters	2.189
Result	2.189
Change Log	2.189
PHP	2.189
job_queue_cycle	2.189
Overview	2.189
Available APIs	2.190
Definition	2.190
Parameters	2.190
Result	2.190
Change Log	2.190
PHP	2.191
job_queue_next	2.191

Overview	2.191
Available APIs	2.191
Definition	2.191
Parameters	2.191
Result	2.192
Change Log	2.192
PHP	2.192
job_queue_run	2.192
Overview	2.192
Available APIs	2.193
Definition	2.193
Parameters	2.193
Result	2.193
Change Log	2.193
PHP	2.194
login	2.194
Overview	2.194
Available APIs	2.194
Definition	2.194
Parameters	2.194
Result	2.195
Change Log	2.196
PHP	2.197
logout	2.197
Overview	2.197
Available APIs	2.197
Definition	2.198
Parameters	2.198
Result	2.198
Change Log	2.198
PHP	2.198
oauth_access	2.199
Overview	2.199
Available APIs	2.199
Definition	2.199
Parameters	2.199
Result	2.199
Change Log	2.199
PHP	2.199
seamless_login	2.200
Overview	2.200
Available APIs	2.200
Definition	2.200
Parameters	2.200
Result	2.200
Change Log	2.201

Considerations	2.201
PHP	2.201
search_by_module	2.201
Overview	2.201
Available APIs	2.201
Definition	2.202
Parameters	2.202
Result	2.202
Change Log	2.203
PHP	2.203
set_campaign_merge	2.204
Overview	2.204
Available APIs	2.204
Definition	2.204
Parameters	2.204
Result	2.205
Change Log	2.205
PHP	2.205
set_document_revision	2.206
Overview	2.206
Available APIs	2.206
Definition	2.206
Parameters	2.206
Result	2.207
Change Log	2.207
PHP	2.207
set_entries	2.208
Overview	2.208
Available APIs	2.208
Definition	2.208
Parameters	2.208
Result	2.208
Change Log	2.209
Considerations	2.209
PHP	2.209
set_entry	2.210
Overview	2.210
Available APIs	2.211
Definition	2.211
Parameters	2.211
Result	2.211
Change Log	2.211
Considerations	2.212
PHP	2.212
set_note_attachment	2.213
Overview	2.213

Available APIs	2.213
Definition	2.213
Parameters	2.213
Result	2.214
Change Log	2.214
PHP	2.214
set_relationship	2.215
Overview	2.215
Available APIs	2.215
Definition	2.215
Parameters	2.215
Result	2.216
Change Log	2.216
PHP	2.217
set_relationships	2.218
Overview	2.218
Available APIs	2.218
Definition	2.218
Parameters	2.218
Result	2.219
Change Log	2.219
PHP	2.220
snip_import_emails	2.221
Overview	2.221
Available APIs	2.221
Definition	2.221
Parameters	2.222
Result	2.222
Change Log	2.223
snip_update_contacts	2.223
Overview	2.223
Available APIs	2.223
Definition	2.223
Parameters	2.223
Result	2.223
Change Log	2.224
Extending v1 - v4.1 Web Services	2.224
Overview	2.224
Extending the API	2.224
Defining the Entry Point Location	2.224
Define the SugarWebServiceImpl Class	2.225
Define the Registry Class	2.226
Define the REST Entry Point	2.226
Define the SOAP Entry Point	2.227
REST Release Notes	2.227
Overview	2.228

Release Notes	2.228
v4	2.228
v3_1	2.228
v3	2.228
v2_1	2.229
v2 (REST API was introduced into SugarCRM)	2.229
SOAP Release Notes	2.230
Overview	2.230
Release Notes	2.230
v4	2.230
v3_1	2.230
v3	2.230
v2_1	2.231
v2	2.231
SugarHttpClient	2.233
Overview	2.233
The SugarHttpClient Class	2.233
Making a Request	2.234
ExternalResourceClient	2.235
Overview	2.235
Self-Signed Certificates	2.235
IP vs Domain/Hostnames via DNS	2.235
Local Endpoints	2.236
Sugar Proxy	2.236
Test your customization	2.237
Examples of Replacing cURL	2.237
HTTP GET	2.237
HTTP POST	2.239
Authenticated Endpoints (CURLOPT_USERPWD)	2.240
Stream	2.240
Socket	2.241
Upload a file	2.243
Migration	2.243
Migrating From On-Site to SugarCloud	2.244
Overview	2.244
Prerequisites	2.244
Migration	2.244
Case Portal	2.244
Files and Folders	2.244
Database	2.245
Upload	2.246
Migrating From SugarCloud to On-Site	2.246
Overview	2.246
Prerequisites	2.246
Steps to Complete	2.247



Migrating From SugarCloud to On-Site	2.251
Overview	2.251
Prerequisites	2.251
Steps to Complete	2.251
Migrating From a Broken Instance to a Clean Install	2.255
Overview	2.255
Requirements	2.256
Migrating to a New Instance	2.256
Importing Records	2.257
Importing Email Addresses	2.257
Overview	2.257
Importing via API	2.257
Importing New Records	2.257
Email1 Field	2.258
Email Link Field	2.258
Updating Existing Records	2.259
Email1 Field	2.259
Email Link Field	2.259
Importing via Database	2.260
Checking for Duplicates	2.261
Removing Duplicates	2.262
Security	2.263
Endpoints and Entry Points	2.263
Overview	2.263
Description	2.263
Legacy Entry Points	2.264
REST API Endpoints	2.264
Publication History	2.265
Web Server Configuration	2.265
Overview	2.265
SugarCRM .htaccess file	2.266
Securing .htaccess	2.266
Prevent version exposure	2.267
Directory listing and index page	2.267
Additional Options directives	2.268
Web server permissions	2.268
Disable unnecessary loadable modules	2.269
HTTP methods	2.269
Secure HTTP traffic	2.270
Cipher suite hardening	2.271
Public trusted root CA's	2.272
HSTS header	2.272
CSP header	2.273
Additional security headers	2.273
Secure cookie settings	2.274

---

Security modules .....	2.274
Additional resources .....	2.275
Publication History .....	2.275
<b>XSS Prevention .....</b>	<b>2.275</b>
Overview .....	2.275
Best Practices .....	2.275
Creating Safe Variables .....	2.276
JavaScript .....	2.276
Vulnerable Setup .....	2.276
Protected Setup .....	2.276
Handlebars Templates .....	2.277
<b>Cookbook .....</b>	<b>2.278</b>
<b>Adding Buttons to the Application Footer .....</b>	<b>2.278</b>
Overview .....	2.278
Steps To Complete .....	2.279
Creating the Custom View .....	2.279
Appending the View to Layout Metadata .....	2.280
<b>Adding Buttons to the Record View .....</b>	<b>2.281</b>
Overview .....	2.281
Steps To Complete .....	2.281
Defining the Metadata .....	2.281
Adding Custom Buttons .....	2.284
Defining the Button Label .....	2.293
Extending and Overriding the Controller .....	2.293
Adding Buttons without Overriding View Controllers .....	2.294
Create a Custom Button .....	2.294
Appending Buttons to Metadata .....	2.298
Defining the Button Labels .....	2.300
<b>Adding Field Validation to the Record View .....</b>	<b>2.300</b>
Overview .....	2.300
Error Messages .....	2.301
Custom Error Messages .....	2.302
Method 1: Extending the RecordView and CreateView Controllers .....	2.302
Method 2: Overriding the RecordView and CreateView Layouts .....	2.305
<b>Adding an Existing Note to an Email as Attachment .....</b>	<b>2.312</b>
Overview .....	2.312
Key Concepts .....	2.312
PHP .....	2.313
Javascript .....	2.314
REST API .....	2.315
Fetch Original Note .....	2.315
Create and Relate a Note .....	2.315
<b>Adding the Email Field to a Bean .....</b>	<b>2.316</b>
Overview .....	2.316
Steps to Complete .....	2.316

---

Creating a Custom Vardef file for email Field and Relationships .....	2.316
Creating a Custom Bean and Modifying the Save Function .....	2.320
Replacing the Stock Bean with a Custom Bean .....	2.322
Adding the Emails Field to the Record View .....	2.323
<b>Converting Address' Country Field to a Dropdown .....</b>	<b>2.331</b>
Overview .....	2.331
Use Case .....	2.331
Prerequisites .....	2.331
Steps to Complete .....	2.332
Updating the Field Type for List View Filter .....	2.334
Application .....	2.334
<b>Changing the Default Module When Logging a New Call or Meeting .....</b>	<b>2.336</b>
Overview .....	2.336
Prerequisites .....	2.336
Steps to Complete .....	2.336
Calls .....	2.337
Meetings .....	2.337
<b>Creating Custom Field Types .....</b>	<b>2.338</b>
Overview .....	2.338
Naming a Custom Field Type in Sugar .....	2.339
Creating the JavaScript Controller .....	2.339
Defining the Handlebar Templates .....	2.340
Detail View .....	2.340
Edit View .....	2.341
List View .....	2.341
Adding the Field Type to Studio .....	2.342
Creating the Form Controller .....	2.345
Creating the Smarty Template .....	2.346
Registering the Field Type .....	2.348
Creating Language Definitions .....	2.349
Adding the Custom Field to the Type List .....	2.349
Creating Labels for Studio .....	2.350
Defining Dropdown Controls .....	2.350
Enabling Search and Filtering .....	2.351
Defining the Filter Operators .....	2.351
Defining the Sugar Widget .....	2.351
<b>Creating an Auto-Incrementing Field .....</b>	<b>2.353</b>
Overview .....	2.353
Case 1: Auto-Incrementing a Field Using a Logic Hook .....	2.353
Case 2: Creating an Auto-Incrementing Field on the Database .....	2.354
<b>Customizing Prefill Fields When Copying Records .....</b>	<b>2.356</b>
Overview .....	2.356
Modifying the Copy Prefill View Using the Vardefs .....	2.356
Modifying the Copy Prefill View Using JavaScript Controllers .....	2.357
<b>Customizing the Email Editor Buttons .....</b>	<b>2.358</b>

---

Overview .....	2.358
Modifying The View .....	2.359
Using Custom Module Metadata .....	2.359
Using The Module Extension Framework .....	2.360
Toolbar Format .....	2.361
Customizing the Start Speed of List View Search .....	2.361
Overview .....	2.361
Prerequisites .....	2.361
Use Case .....	2.362
Steps to Complete .....	2.362
Disabling RLI Alerts on Opportunities .....	2.363
Overview .....	2.363
Overriding the Record View .....	2.364
Disabling Tooltips .....	2.364
Overview .....	2.364
Steps to Complete .....	2.364
Appending to JSGroupings .....	2.365
Quick Repair and Rebuild .....	2.365
Dynamically Hiding Subpanels Based on Record Values .....	2.366
Overview .....	2.366
Example .....	2.366
Enabling Importing for Custom Modules .....	2.368
Overview .....	2.368
Steps to Complete .....	2.368
Application .....	2.370
Increasing the Number of Dashboards Displayed in the Home Menu .....	2.371
Overview .....	2.371
Use Case .....	2.371
Prerequisites .....	2.371
Steps to Complete .....	2.372
Application .....	2.373
Logic Hooks .....	2.373
Comparing Bean Properties Between Logic Hooks .....	2.374
Overview .....	2.374
Storing and Comparing Values .....	2.374
Preventing Infinite Loops with Logic Hooks .....	2.375
Overview .....	2.375
Saving in an After Save Hook .....	2.376
Related Record Save Loops .....	2.377
Modifying Calendar Item Colors .....	2.381
Overview .....	2.382
Modifying the Calendar Activity Colors .....	2.382
Customizing colors based on event status .....	2.384
Modifying Layouts to Display Additional Columns .....	2.386
Overview .....	2.386

---

Resolution	2.386
Column Widths	2.388
<b>Modifying Subpanel Action Buttons</b>	<b>2.388</b>
Overview	2.388
Steps to Complete	2.389
Using a Custom Panel-Top View for a Specific Relationship	2.390
<b>Module Loadable Packages</b>	<b>2.391</b>
<b>Creating an Installable Package for a Logic Hook</b>	<b>2.391</b>
Overview	2.392
Logic Hook File vs. Logic Hook Definition	2.392
The Logic Hook	2.392
Logic Hook Definition	2.392
Logic Hook File	2.393
Distributed Plugin	2.393
Package Example	2.393
Promotion Process	2.395
Package Example	2.395
Conditionally Add or Remove Logic Hook via post_execute script	2.397
Package Example	2.397
<b>Creating an Installable Package That Copies Files</b>	<b>2.399</b>
Overview	2.400
Manifest Example	2.400
Copied File Example	2.400
<b>Creating an Installable Package that Creates New Fields</b>	<b>2.401</b>
Overview	2.401
Manifest Example	2.401
Language Example	2.405
<b>Removing Files with an Installable Package</b>	<b>2.405</b>
Overview	2.405
Manifest Example	2.406
<b>Passing Data to Templates</b>	<b>2.407</b>
Overview	2.407
Steps to Complete	2.407
<b>Prepopulating the Compose Email View</b>	<b>2.409</b>
Overview	2.409
Create a Custom Compose Email View	2.409
<b>Refreshing Subpanels on the RecordView</b>	<b>2.411</b>
Overview	2.411
Refreshing Subpanels	2.411
Adding the Button Metadata	2.411
<b>Removing the Account Requirement on Opportunities</b>	<b>2.414</b>
Overview	2.415
Removing the Requirement in Configuration	2.415
Removing the Requirement in Vardefs	2.415
Removing the Requirement in View Metadata	2.416

Application	2.417
Web Services	2.417
REST API	2.418
Bash	2.418
How to Export a List of Records	2.418
Overview	2.418
Exporting Records	2.418
Filtering Records	2.419
Response	2.419
Creating a Record List	2.420
Response	2.420
Exporting Records	2.421
Response	2.421
How to Filter a List of Records	2.422
Overview	2.422
Filtering Records	2.422
Filtering Records	2.423
Response	2.424
How to Favorite a Record	2.425
Overview	2.425
Favoriting a Record	2.425
Favoriting a Record	2.425
Response	2.425
How to Manipulate File Attachments	2.429
Overview	2.429
Manipulating File Attachments	2.429
Submitting a File Attachment	2.429
Create Note	2.430
Add An Attachment to the Note	2.430
Response	2.430
Getting a File Attachment	2.431
Response	2.431
How to Fetch Related Records	2.432
Overview	2.433
Fetching Related Records	2.433
Fetching Related Records	2.433
Response	2.434
How to Manipulate Records (CRUD)	2.442
Overview	2.442
CRUD Operations	2.442
Creating a Record	2.442
Response	2.443
Getting a Record	2.446
Response	2.446
Updating a Record	2.447
Response	2.447

Deleting a Record	2.450
Response	2.451
How to Follow a Record	2.451
Overview	2.451
Following a Record	2.451
Following a Record	2.452
Response	2.452
How to Unfavorite a Record	2.452
Overview	2.452
Unfavoriting a Record	2.452
Unfavoriting a Record	2.453
Response	2.453
How to Unfollow a Record	2.456
Overview	2.456
Unfollowing a Record	2.457
Unfollowing a Record	2.457
Response	2.457
How to Get the Most Active Users	2.458
Overview	2.458
Get Most Active Users	2.458
Active Users	2.458
Response	2.458
How to Authenticate and Log Out	2.459
Overview	2.459
Authenticating	2.459
Response	2.460
Logout	2.460
Response	2.461
How to Ping	2.461
Overview	2.461
Pinging	2.461
Pinging	2.461
Response	2.462
How to Fetch the Current Users Time	2.462
Overview	2.462
Authenticating	2.462
Getting the Current Time and Date for the User	2.462
Response	2.463
How to Fetch Recently Viewed Records	2.463
Overview	2.463
Authenticating	2.463
Recently Viewed Records	2.463
Response	2.464
How to Use the Global Search	2.472
Authenticating	2.472
Searching Records	2.473

Response	2.473
How to Check for Duplicate Records	2.483
Overview	2.483
Duplicate Records	2.483
Retrieving Duplicates	2.483
Response	2.483
How to Manipulate Quotes	2.489
Overview	2.489
Manipulating Quotes	2.489
Creating a Quote	2.490
Response	2.492
Modifying the Quote's Product Bundles	2.497
Response Payload	2.498
How to Manipulate Tags (CRUD)	2.498
Overview	2.498
Authentication	2.498
Creating Tags	2.498
Response	2.499
Creating Records with Tags	2.500
Response	2.501
Reading/Retrieving Tags	2.503
Response	2.504
Updating Tags	2.505
Response	2.505
Deleting Tags	2.507
Response	2.507
PHP	2.507
How to Export a List of Records	2.507
Overview	2.508
Exporting Records	2.508
Filtering Records	2.509
Request Payload	2.510
Response	2.511
Creating a Record List	2.512
Request Payload	2.512
Response	2.513
Exporting Records	2.513
Response	2.514
Download	2.515
How to Filter a List of Records	2.515
Overview	2.515
Filtering Records	2.515
Filtering Records	2.516
Request Payload	2.518
Response	2.519
Download	2.519



How to Favorite a Record	2.519
Overview	2.519
Favoriting a Record	2.520
Favoriting a Record	2.521
Request Payload	2.521
Response	2.522
Download	2.525
How to Manipulate File Attachments	2.525
Overview	2.525
Manipulating File Attachments	2.525
Submitting a File Attachment	2.526
Request	2.528
Response	2.529
Getting a File Attachment	2.530
Request	2.531
Response	2.531
Download	2.532
How to Fetch Related Records	2.532
Overview	2.532
Fetching Related Records	2.532
Fetching Related Records	2.534
Request	2.534
Response	2.534
Download	2.543
How to Manipulate Records (CRUD)	2.543
Overview	2.543
CRUD Operations	2.543
Creating a Record	2.544
Request Payload	2.545
Response	2.545
Getting a Record	2.549
Updating a Record	2.550
Request Payload	2.550
Response	2.551
Deleting a Record	2.554
Request Payload	2.554
Response	2.555
Download	2.555
How to Follow a Record	2.555
Overview	2.555
Following a Record	2.555
Following a Record	2.556
Request Payload	2.557
Response	2.557
Download	2.557
How to Unfavorite a Record	2.558

Overview	2.558
Unfavoriting a Record	2.558
Unfavoriting a Record	2.559
Request Payload	2.560
Response	2.560
Download	2.563
How to Unfollow a Record	2.563
Overview	2.563
Unfollowing a Record	2.563
Unfollowing a Record	2.565
Request Payload	2.565
Response	2.565
Download	2.566
How to Get the Most Active Users	2.566
Overview	2.566
Get Most Active Users	2.566
Active Users	2.567
Request	2.568
Response	2.568
Download	2.569
How to Authenticate and Log Out	2.569
Overview	2.569
Authenticating	2.569
Request Payload	2.571
Response	2.571
Logout	2.571
Response	2.572
Download	2.572
How to Ping	2.572
Overview	2.572
Pinging	2.572
Pinging	2.574
Response	2.574
Download	2.574
How to Fetch the Current Users Time	2.575
Overview	2.575
Authenticating	2.575
Getting the Current Time and Date for the User	2.576
Request	2.576
Response	2.577
Downloads	2.577
How to Fetch Recently Viewed Records	2.577
Overview	2.577
Authenticating	2.577
Recently Viewed Records	2.578
Request	2.579

Response	2.579
Downloads	2.588
How to Use the Global Search	2.588
Overview	2.588
Authenticating	2.588
Searching Records	2.589
Request	2.590
Response	2.590
Downloads	2.600
How to Check for Duplicate Records	2.600
Overview	2.600
Duplicate Records	2.600
Retrieving Duplicates	2.601
Request Payload	2.602
Response	2.602
Download	2.608
How to Manipulate Quotes	2.608
Overview	2.608
Manipulating Quotes	2.608
Creating a Quote	2.609
Request Payload	2.612
Response	2.614
Modifying the Quote's Product Bundles	2.620
Request Payload	2.622
Response Payload	2.622
Download	2.622
How to Manipulate Tags (CRUD)	2.623
Overview	2.623
Authentication	2.623
Creating Tags	2.624
Request Payload	2.625
Response	2.625
Creating Records with Tags	2.626
Request Payload	2.627
Response	2.628
Reading/Retrieving Tags	2.631
Request Payload	2.631
Response	2.632
Updating Tags	2.633
Request Payload	2.634
Response	2.634
Deleting Tags	2.635
Request Payload	2.636
Response	2.636
Legacy API	2.636

REST	2.637
PHP	2.637
Creating Documents	2.637
Overview	2.637
Example	2.637
Result	2.640
Creating Notes with Attachments	2.641
Overview	2.641
Example	2.641
Result	2.644
Creating or Updating a Record	2.644
Overview	2.645
Example	2.645
Result	2.647
Creating or Updating Multiple Records	2.647
Overview	2.647
Example	2.647
Result	2.650
Creating or Updating Teams	2.650
Overview	2.650
Example	2.650
Result	2.653
Logging In	2.654
Overview	2.654
Standard Authentication Example	2.654
LDAP Authentication Example	2.655
Result	2.657
Relating Quotes and Products	2.659
Overview	2.659
Example	2.660
Result	2.665
Retrieving a List of Fields From a Module	2.668
Overview	2.668
Example	2.669
Result	2.671
Retrieving a List of Records	2.672
Overview	2.672
Example	2.672
Result	2.675
Retrieving a List of Records With Related Info	2.677
Overview	2.677
Example	2.677
Result	2.680
Retrieving Email Attachments	2.686
Overview	2.686
Example	2.686

	Result	2.689
	Retrieving Multiple Records by ID	2.697
	Overview	2.697
	Example	2.697
	Result	2.700
	Retrieving Records by Email Domain	2.701
	Overview	2.702
	Example	2.702
	Result	2.705
	Retrieving Related Records	2.720
	Overview	2.720
	Example	2.720
	Results	2.723
	Searching Records	2.725
	Overview	2.725
	Example	2.725
	Result	2.728
SOAP		2.729
C#		2.730
	Creating or Updating a Record	2.730
	Overview	2.730
	Example	2.730
	Result	2.733
	Logging In	2.733
	Overview	2.733
	Example	2.733
	Result	2.735
PHP		2.735
	Creating Documents	2.735
	Overview	2.735
	Example	2.735
	Result	2.738
	Creating Notes with Attachments	2.738
	Overview	2.738
	Example	2.738
	Result	2.741
	Creating or Updating a Record	2.741
	Overview	2.741
	Example	2.741
	Result	2.743
	Creating or Updating Multiple Records	2.743
	Overview	2.743
	Example	2.744
	Result	2.746
	Creating or Updating Teams	2.746
	Overview	2.746

Example	2.746
Result	2.748
Logging In	2.749
Overview	2.749
Standard Authentication Example	2.749
SugarIdentity Enabled Authentication Example	2.750
LDAP Authentication Example	2.751
Result	2.752
Relating Quotes and Products	2.754
Overview	2.754
Example	2.754
Result	2.759
Retrieving a List of Fields From a Module	2.760
Overview	2.760
Example	2.761
Result	2.762
Retrieving a List of Records	2.763
Overview	2.763
Example	2.764
Result	2.766
Retrieving a List of Records With Related Info	2.768
Overview	2.768
Example	2.768
Result	2.770
Retrieving Multiple Records by ID	2.777
Overview	2.777
Example	2.777
Result	2.779
Retrieving Records by Email Domain	2.781
Overview	2.781
Example	2.781
Result	2.784
Retrieving Related Records	2.799
Overview	2.799
Example	2.799
Result	2.801
Searching Records	2.803
Overview	2.803
Example	2.803
Result	2.805

---

# Sugar Developer Guide 11.0

The Sugar Developer Guide describes how to configure and customize Sugar by making code- and database-level changes to the Sugar file system. You will need direct access to the server along with the proper file-system permissions to alter files in the Sugar instance directory.

Sugar customers that are hosted on Sugar's cloud service cannot directly access their database's file system but can work with a Certified Sugar Partner to customize their Sugar deployment. For a list of Certified Sugar Partners, please refer to the [Partner Page](#) to find a reselling partner to help with your development needs.

**Last Modified:** 2021-02-17 02:44:13

## Introduction

### Overview

The Sugar Developer Guide is an essential resource for developers who are new to Sugar or to CRM and web-based applications. It describes how to configure and customize the Sugar platform for a broad range of tasks applicable to any organization that has a need to manage business relationships with people.

### Prerequisites

Using and understanding the documentation contained in the Sugar Developer Guide requires basic programming and software development knowledge. Specifically, you should be familiar with the PHP general-purpose scripting language and the SQL programming language for accessing databases.

### Understanding Sugar's Framework

Designed as the most modern web-based CRM platform available today, Sugar has quickly become the business application standard for companies around the world. The Sugar application framework has a sophisticated extension model built into it, allowing developers to make significant customizations to the application in an upgrade-safe and modular manner. It is easy to modify the core files in the

---

distribution; you should always check for an upgrade-safe way to make changes. Educating developers on how to make upgrade-safe customizations is one of the key goals of this Developer Guide. For more information on Sugar's structure, please review the [architecture](#) section.

## Supported Platforms

Originally, Sugar was written on the LAMP stack (i.e. Linux, Apache, MySQL, and PHP), but has since added support for every operating system on which the PHP programming language runs, for the Microsoft IIS web server, and for the Microsoft SQL Server, IBM DB2 , and Oracle databases. For more information about supported software versions and recommended stacks, please refer to the main [Supported Platforms](#) page.

## Sugar Products

Sugar has several CRM products available: Sugar Sell, Sugar Serve, Sugar Ultimate, Sugar Enterprise, and Sugar Professional, which are all sold under a commercial subscription agreement. These products are developed by the same development team using the same source tree with different modules and features available depending on the product. A comparison of each product's features is available in the License Types section of the [User Management](#) documentation in the Administration Guide.

## Basic Development Rules for Sugar Products

Unless SugarCRM has given you express permission to do so, the following are what not to do when you are configuring, customizing or modifying this Sugar product:

- Do not remove or alter any SugarCRM or Sugar copyright, trademark or proprietary notices that appear in the Sugar products.
- Do not "fork" the Sugar software (e.g., take a copy of source code from this product and start independent development on it, creating a distinct and separate piece of software).
- Do not modify, remove or disable any portion of SugarCRM's "Critical Control Software."
- Do not combine or use the Sugar products with any code that is licensed under a prohibited license (e.g., AGPL, GPL v3, Creative Commons or another similar license that would "taint" the Sugar products and require you to share the source code for this product with a third party).



- 
- Do not use any part of the Sugar products for the purpose of building a competitive product or service or copying its features or user interface.

## Development Tools

Sugar has a set of built-in tools that you can use to your advantage when troubleshooting or developing.

### Developer Mode

Developer Mode will allow for Sugar to recompile cached files when the page is reloaded. The following file types are rebuilt:

- Handlebar Templates (.hbt)
- Smarty Templates (.tpl)
- JavaScript Controllers (.js)

When Developer Mode is enabled, The Sidecar JavaScript library references the full JavaScript files located in `./sidecar/` rather than the concatenated and minified cached versions. You can turn on Developer Mode by navigating to Admin > System Settings. For more information, please refer to the [System](#) documentation.

**Note:** This setting should remain off unless developing because it will degrade system performance.

### Diagnostic Tool

When troubleshooting issues, you may find the diagnostic tool to be helpful. This tool will export a zipped package containing the requested diagnostics and is available even if you are hosting your instance on Sugar's cloud service.

The diagnostic tool has the ability to export the following:

- SugarCRM config.php
- SugarCRM Custom directory
- phpinfo()
- MySQL - Configuration Table Dumps
- MySQL - All Tables Schema
- MySQL - General Information
- MD5 info
  - Copy files.md5
  - Copy MD5 Calculated array

- 
- BeanList/BeanFiles files exist
  - SugarCRM Log File
  - Sugar schema output (VARDEFS)

You can use the diagnostic tool by navigating to Admin > Diagnostic Tool. For more information, please refer to the [System](#) documentation in the Administration Guide.

## Composer

When building applications, some developers prefer to use Composer to manage their external dependencies and make them more intuitive. For more information, please refer to the [Composer](#) documentation.

**Last Modified:** 2021-02-17 02:44:13

# Development Methodology

## Overview

This page discusses standard practices that we recommend for improving the success rates of Sugar development projects.

## Development Best Practices

When developing Sugar customizations as part of an on-site CRM project implementation, we recommended placing the entire Sugar application filesystem under source code management. Sugar developers know that customizations made to Sugar are placed under the `./custom/` directory. But during the lifecycle of a CRM implementation, you will need to upgrade Sugar versions, which will change core files. Many projects will also need to track other related project files that may not all be Sugar platform code. For example, pre-flight SQL scripts, data migration scripts, Web server configuration settings, etc.

For SugarCloud projects and ISVs, if you are building a custom module package or

---

integration designed to be installed into many Sugar instances (including SugarCloud instances), then tracking only `./custom/` directory files should be enough.

## Using `.gitignore` Files

Today, many developers choose to use [Git](#) as their source control management. There are certain Sugar application files that you do not want to track; most of these are generated files that are created at runtime or are Sugar instance-specific configuration files.

Below is a sample `.gitignore` file that you can use or adapt to the source control management system of your choice.

```
*.log
/.htaccess
/config.php
/config_override.php
/cache
/upgrades/module
/upload
/custom/blowfish
/custom/history
/custom/application/Ext
/custom/modules/*/Ext
/custom/Extension/**/*orderMapping.php
```

## Recommendations for Development Teams

Code quality is important to maintain because Sugar customizations run in the same environment as the rest of the Sugar application. Here are a few best practices to help development teams uphold code quality.

- Adopt an appropriate Git workflow for development. For reference, see Atlassian's tutorial on [Git workflow options](#).
- Develop within feature branches that are tested before being merged back into master to keep master stable.
- Avoid workflows that involve developers committing directly into the master branch to prevent code destabilization.
- Development teams should always perform code reviews before merging in new code.

---

## Deploying Sugar Code

Where you plan to deploy Sugar code is the biggest factor in determining how Sugar code should be deployed and how your project should be managed.

Are you working on a Sugar project for an on-premise Sugar implementation? Are you working on a custom module that you plan on distributing through SugarExchange? Are you planning a solely REST API integration? The answers to these questions guide how you should develop and deploy Sugar code.

- **Sugar on-site projects** : Develop these customizations using the exact version and flavor of Sugar that you plan to use in production.
- **SugarCloud projects** : Develop these customizations on the latest available version of Sugar for the particular flavor the customer has purchased.
- **Custom modules or integrations** : If you plan on distributing your customization to many Sugar customers via [SugarExchange](#) or channel partners, design your customization with Sugar's cloud service in mind.
  - Sugar's cloud service is more restrictive than our on-site installs regarding supported customizations.
  - A customization designed for Sugar's cloud service can be supported in Sugar on-site instances, but the inverse is not always true.

For more information on Sugar's cloud service restrictions, please refer to the [SugarCloud Policy Guide](#).

## Packaging

The packaging of customizations is not a concern for many Sugar projects. Many projects just use Git (or some other file version control) to manage the distribution and deployment of Sugar code customizations. However, there are situations where the packaging of Sugar customizations is necessary.

If you plan on distributing Sugar custom code, then you must package your customization as a [Module Loadable Package](#) (a .zip file that includes all custom code along with a manifest file). It is easy to write a script to build a module loadable package either from custom directory content or by extracting customizations out of a development environment. See examples on Github [here](#) and [here](#).

In some Enterprise environments, changes are tightly controlled, and ownership of various Sugar application components may be spread across multiple teams, requiring a coordinated deployment. For example, a Database Administrator (DBA)

---

may be responsible for implementing database schema (DDL) changes and a System Administrator may be responsible for implementing file system changes.

For these situations:

File system changes can be accounted for using Git to determine the difference between current production state and the latest changes to be deployed.

DDL changes can be accounted for via deploying latest file system changes on a clone of Sugar production instance and running [Quick Repair](#) command. Sugar will prompt you with any DDL changes that need to be made that you can then capture and share with your DBA.

Data Manipulation Language (DML) changes, if necessary, should be managed within SQL or PHP scripts.

## Deployment

If using the traditional Git-based deployment, then deploying new Sugar code is as easy as checking out the latest branch and then running [Quick Repair and Rebuild](#). Run the quick repair from the Sugar user interface, or [script](#) it for fully automated deployment.

When deploying to an instance on Sugar's cloud service, it is necessary to install the package manually using [Module Loader](#). It is not possible to automate the deployment of packages into instances on Sugar's cloud service.

In a coordinated deployment, database changes should be deployed first, followed by filesystem changes, followed by a Quick Repair (if permitted) to clear system caches. You can clear caches manually by deleting the contents of the `./cache/` directory and then truncate the `metadata_cache` table in the Sugar database. The Sugar application regenerates these caches as needed.

Using Sugar Studio to deploy changes into new environments (especially Production) is not recommended. Manually re-creating customizations using the Studio user interface can be error-prone. It also runs the risk of inadvertently overwriting other code customizations. It may be initially slower to create a custom field, etc. manually using extensions on filesystem but, in the long run, you benefit from better change management and automation.

## Managing Multiple Environments

CRMs are business-critical applications so development should never be performed

---

directly on your production environment. A typical Sugar project involves multiple staging environments as well as individual development environments that each Sugar developer uses for actual coding.

SugarCRM recommends 4 different environments:

- **Production environment** : used by real users
- **User Acceptance Test (UAT) environment** : used by business stakeholders to sign off on changes that go into production
- **Quality Assurance environment** : used for test and validation of new features and bug fixes
- **Development environments** : used by individual Sugar developers to create and test code (often running on a local laptop or PC)

Code changes that flow upstream from a development environment should not be allowed into production without going through quality assurance (QA) and user acceptance testing (UAT) first. The intermediate environments serve as gates between development and production that help intercept problems before they reach production.

User and CRM data that needs to flow downstream from production environment should pass through intermediate environments as well to ensure consistency and that it is cleaned or anonymized of any personally identifiable or sensitive information.

## Consistency

Maintaining as much consistency as possible for each of these environments is essential. Inconsistent environments can create issues where bugs are reproducible in one environment and not others (for example, a bug that only appears in production). Many times, these bugs are traced to configuration parameters that are not directly related to Sugar or the features and customizations under development.

To replicate your production environment as accurately as possible, we recommend you use VM or container technology in your development and QA environments.

Your UAT environment should match the infrastructure of your production environment.

SugarCRM uses a variety of container technologies in developing the core Sugar application and for working on Sugar projects. In particular, we use Virtual Box, VMWare, Amazon AMIs, Docker containers, Vagrant, and Packer. SugarCRM Engineering also uses Puppet to centrally manage the provisioning and

---

configuration of all these different environments.

## Testing

SugarCRM recommends using a variety of testing methods to ensure the quality of your Sugar project. Perform unit testing, functional testing (either manual or GUI automation), system integration testing, user acceptance testing, and performance testing.

- **Unit testing** should be applied to ensure that even the smallest code units within your application are behaving as expected.
- **Functional testing** should be performed to ensure that each feature and function behaves the way it was designed.
- **System Integration testing** should be performed to ensure that Sugar co-exists with external systems and that data flows between all these systems successfully.
- **User acceptance testing** should be performed by key stakeholders to ensure that your project is meeting business requirements.
- **Performance testing** should be performed to ensure that the Sugar application's responsiveness meets user expectations and that the application continues to scale.

In our experience, neglecting any of these tests can negatively impact a Sugar project in terms of maintainability, customer satisfaction, and business success.

In the next section, we introduce some tools and open-source resources that can help you start a QA practice for your project.

## Sugar Test Tools

For Sugar customers and partners, SugarCRM provides [Test Tools](#) that can be used to verify and perform quality assurance on Sugar customizations. Use of Sugar test technology requires familiarity with [PHPUnit](#) for PHP unit testing, [Jasmine](#) for JavaScript unit testing, and [Apache JMeter](#) for performance load testing.

## Sugar Unit Tests

The Sugar Unit Test suites are the automated unit tests developed and maintained by SugarCRM Engineering during the process of building and releasing each new Sugar release. As part of our development process, these tests are required to run "green" (100% passing) at all times on each master release branch. Essentially,

---

these tests form a regression test suite for an uncustomized version of Sugar running in our controlled build environment.

With that understanding, here is a recommended approach to take advantage of these unit tests.

- Run test suite against an uncustomized copy of Sugar in your development environment to establish a baseline. Not all tests may immediately pass; some may fail due to configuration differences between your development environment and SugarCRM Engineering's controlled build environment.
- Correct any observed failures or skip/remove the failing tests to create a base test suite that is 100% passing.
- As you develop customizations on Sugar, ensure that your base test suite continues to pass.
- Create new tests for new code customizations that you create.

## Sugar Performance Tests

Instead of sanitizing data from a production environment for purposes of load testing, SugarCRM provides an open source tool called [Tidbit](#) that can be used to generate pseudo-random data to populate a Sugar instance with representable data.

We also provide Apache JMeter scenarios to Sugar customers and partners who request access. These JMeter scenarios can be used to drive a simulated load against the Sugar REST API interface used by Sugar. They can validate that your customizations have not had an unexpected impact on the performance of a Sugar instance.

## DevOps

In order to facilitate and streamline development processes, Sugar recommends implementing DevOps automation. Use a tool such as [Jenkins](#) to orchestrate test automation, stage changes in any environment (dev, QA, UAT, and prod) for manual verification, and manage the promotion of changes from one environment to the next.

- Perform automated tests (e.g. unit tests) on each commit.
- Stage development changes on at least a nightly basis for use by QA or demos.
- Automate the rollback of changes in any environment as needed.
- Automate notifications to affected and responsible parties whenever a test fails, or a build fails to deploy.



---

## Co-Existing with Studio Customizations

Sugar Studio and Module Builder enable administrator users to implement quick changes to a Sugar environment. But Sugar Studio lacks the rigorous change control that larger CRM projects need. Sometimes, Studio changes can even break code-level Sugar customizations. For this reason, we often discourage using Studio on heavily customized Sugar instances.

However, if Sugar Studio is an important up-front requirement for a CRM project, then there are strategies you can adopt for your customizations to avoid conflicts.

Sugar Studio can be used to modify the layouts, fields, and relationships for the majority of modules in Sugar. Module Builder can be used to define new modules along with their layouts, fields, and relationships. In practice, this means that the fields and layouts for any module's record view, list view, mobile view, and subpanels can be customized using simple administration tools.

Studio users, therefore, could potentially break code customizations that are reliant on a particular field or having a field on a particular layout or location. Here are some practices to avoid conflicts between Studio customizations and custom code:

- Avoid custom record, list, and subpanel view controllers because Studio users can change fields and layouts that affect expectations within your controller code.
- Avoid custom record validations because Studio users can change fields and layouts that affect expectations within your validation code.
- Avoid hard-coded integrations that rely on a particular field because Studio users can change fields that affect expectations within your integration.
- Avoid new field and relationship vardefs customizations because Studio users can create new fields and relationships.
- Avoid viewdefs customizations for record, list, and subpanel layouts because Studio users perform these customizations.

Many customizations have a smaller risk of side effects related to Studio customizations. Here is a list of some changes that administrator users cannot perform via Studio:

- Adding custom dashlets
- Adding custom layouts or additions to footer or header
- Adding custom actions in record view action dropdown
- Adding metadata-aware integrations that discover fields and modules on the system
- Adding logic hooks

---

Conversely, certain customizations can provide Studio users with additional tools:

- Adding custom Sugar Logic functions
- Adding custom Sugar field types

**Last Modified:** 2021-07-28 14:26:39

## Composer

### Overview

Composer dependency management is the de facto standard for managing PHP dependencies. Sugar platform ships with all required code bundled and optimized together for our developers. The installer will, however, deploy both `composer.json` and `composer.lock` in the web root directory as a reference of all dependencies which are controlled by Composer.

### Autoloader

Sugar has a custom autoloader that is [PSR-0](#) and [PSR-4](#) compliant and integrates with Composer's mapping definitions.

### Integrations

When updating the Composer configuration, Composer will generate different mappings based on the settings of every dependency:

- Class map
- PSR-0 map
- PSR-4 map
- Include paths (deprecated)

SugarCRM's autoloader uses those generated maps directly to initialize itself and to figure out how to load different classes.

### Internals

---

To prevent endless file stats, Sugar's autoloader maintains a full list of all files at its disposal. This list is only generated once and is maintained in `./cache/file_map.php`. Most of the Sugar codebase uses the autoloader to determine whether a file is available rather than performing expensive `file_exists` calls.

A second file, stored in `./cache/class_map.php`, maintains a flat list of class-name-to-file mappings. When you make any changes to the file system, clear both files before testing new code.

## Optimization

When updating dependencies through Composer, Sugar team uses the optimize flag: `composer update --optimize-autoloader --no-dev`". By doing so, Composer will scan all files in the packages it manages and create a full list of PSR-0 and PSR-4 class name-to-file mappings instead of performing this lookup on the fly by the autoloader itself at runtime.

## Frequently Asked Questions

### **Is the composer package required to install a Sugar instance?**

No. The Sugar installer ships with all required code bundled together. The installer process does not execute any Composer commands. The installer will deploy both `composer.json` and `composer.lock` in the web root directory as a reference of all dependencies which are controlled by Composer.

### **Why does Sugar ship `./composer.json` and `./composer.lock` if the installer doesn't rely on them?**

Composer is used internally during development to manage Sugar's dependencies on third-party libraries and packages. The Composer files are shipped during development to manage Sugar's dependencies on third-party libraries and packages. The composer files are shipped with the product to give our customers the ability to expand from them.

### **Is the Composer package required to upgrade a Sugar instance?**

No. The Sugar upgrader ships, just like the installer, with all required code bundled together. The upgrade process will validate the present Composer configuration and verify if it is compatible with the upgrade. In the case of a custom configuration, the upgrade process will report any issues which need to be resolved by the system administrator before the upgrade can proceed.

---

## **Why are there no wildcards in the version constraints? Doesn't composer.lock keep track of exact version numbers?**

The lock file is designed to lock the dependencies to a specific version, but to protect our customers from unintentionally pulling in newer versions of dependencies owned by SugarCRM, we have chosen to use explicit version numbers in the composer.json file too.

## **May I change the version number of a package?**

You cannot change version numbers for packages added by Sugar. Sugar will always configure exact version numbers for all of its dependencies. Changing these version numbers will result in an unsupported platform. The version constraints of packages not owned by Sugar may be modified at the developer's discretion.

## **Can I use Composer's autoloader?**

We strongly recommend against using Composer's autoloader. The Sugar autoloader is fully compatible with the [PSR-0](#) and [PSR-4](#) autoloading recommendations from PHP-FIG, which makes the registration of an additional autoloader like the one from Composer redundant. Sugar's autoloader consumes the different mappings which are generated by Composer directly.

## **How can I optimize the autoloader?**

Sugar ships with an optimized class map out of the box, which is pre-generated through Composer. This class map contains all different class-to-file mappings known to the dependencies managed by Composer. When customizing the Composer configuration, it is sufficient to run `composer update --optimize-autoloader` which will refresh the class map. SugarCRM's autoloader takes full advantage of this optimization.

## **Can I load customizations in Sugar through Composer?**

Although not yet available out of the box, we are investigating this as a future capability.

## **Can I move the vendor directory out of the web root?**

You cannot currently move the vendor directory, but we are investigating this as a future capability.

## **The Composer integration in Sugar is not flexible enough for me. What can I do?**

We continuously strive to make our platform better and to facilitate both end-users

---

and developers. Our goal is to deliver a state-of-the-art environment. Do not hesitate to reach out to Sugar Support if we have overlooked your use case or if there are too many constraints in the current implementation to make this a useful feature.

**Last Modified:** 2022-03-25 16:31:42

## **Delivery and Deployment Guide for Enterprises**

### **Overview**

SugarCRM Professional Services has a set of best practices for managing instances, delivering upgraded customizations, and deploying those upgraded customizations into Sugar on-site for our Enterprise customers. The following is an example of deployment practices used by SugarCRM Professional Services team when engaged on Enterprise Sugar development projects. It does not list all possible customizations that can be made in the system, it is intended to be used as a guide for how to automate the deployment of certain types of customizations into an on-premise Sugar instance. The techniques below cannot be used with Sugar's cloud service.

## **Deploying Application Configuration and Metadata**

### **Use Case: Deployment of System Settings**

System settings are stored in various places. In this section, we will address each type of storage for settings, and how to migrate each.

#### **Storage types:**

- **config\_override.php**
  - This is a file stored in the Sugar root directory that allows for overriding core config values (found in config.php). In the UI, the main place to make changes to this is via Admin -> System Settings
- **database 'config' table**
  - It is loaded, used, and accessible throughout the Sugar application through the Config API.
  - System Tab Settings
  - Forecasting Settings
  - Portal Settings

- 
- This is a simple key/value/category store. There aren't too many components that use this. Here are some:

## **config\_override.php**

### **System considerations:**

- File System:
  - *config\_override.php* is placed in Sugar web root directory
- Scripts required
  - PHP
    - You will need to write a script to read the current *config\_override.php* and merge the existing array with the new values you'd like to change. This can be done one time, and re-used for all future *config\_override.php* changes

### **Steps to migrate:**

1. Assess the values to be changed, added, or removed
2. Write a script to read the existing *config\_override.php*, make the changes to the array, and re-write the file back to the system.

## **database 'config' table**

### **System considerations:**

- Database:
  - *The 'config' table stores all these values. They are stored in a very simple table schema.*
- Scripts required
  - PHP
    - Write a simple PHP script to use Sugar object API. See Figure 1

### **Steps to migrate:**

1. Write script to use our object API for config table changes (See Figure 1)
2. Copy script to Sugar root directory
3. Execute the script
4. Remove the script

---

## Screenshots:

Figure 1:

```
<?php
define('sugarEntry', true);
require_once('include/entryPoint.php');

$administration = BeanFactory::getBean('Administration');
$administration->saveSetting('MySettings', 'disable_useredit', 'no');
```

## Use Case: Deployment of Reports

The customer creates a report in the Reports module. They would like to deploy that report so that end users can all access and run it.

### System considerations:

- Database
  - Row is inserted into the Reports module (saved\_reports table)
  - (For new team combinations) Row is inserted into the team\_sets table
  - (For new team combinations) Rows are inserted into the team\_sets\_teams table
- Scripts required
  - SQL
    - Retrieve the relevant rows (saved\_reports, team\_sets, team\_sets\_teams) and create a SQL script to insert them.

### Additional notes:

- In the System considerations section, "new combination of teams" means that when creating the report, the end user created the Report with a set of teams that doesn't exist on any other record. This results in new entries in the team\_sets and team\_sets\_teams tables.

### Steps to migrate:

1. Build a report in the dev instance
2. Select the database rows associated with that report (saved\_reports, possibly team\_sets and team\_sets\_teams tables)
  1. example: "SELECT \* FROM saved\_reports WHERE id = 'REPORT\_ID'"

- 
3. Export the row/rows into a SQL file
  4. Execute on the next system

## Use Case: Deployment of Dashboards

The customer wants to deploy the pre-built dashboards in an automated way. See Figure 1 below. This example has two dashboards, "Help Dashboard" and "My Dashboard". Each dashboard has zero or more dashlets.

### System considerations:

- Database:
  - Row is inserted into the **dashboards** table for each user dashboard. The metadata column stores all the dashlets associated with that dashboard, and the assigned\_user\_id column stores the user who will see this dashboard.
- Scripts required
  - PHP
    - After deploying the **dashboards** you will need to run the **Quick Repair and Rebuild** script found in the admin section.
    - Custom scripts: **YES (if applying to multiple users)**
      - Because users and id are dynamic, if applying to multiple users, you will need a custom script to retrieve those user ids and set them for each sql insert.
  - SQL
    - *Script required to import the entry from the **dashboards** table.*

### Steps to migrate:


1. Build a dashlet against a specific user
2. Select the database rows associated with that user
  - a. example: "SELECT \* FROM dashlets WHERE assigned\_user\_id = 'USER\_ID'"
3. Pick the dashboard you'd like to apply to other users, and export it into a SQL file
4. Decide what set of users you need to create the dashboard for.
5. Write a script to pull that list of users, dynamically set the assigned\_user\_id and id (id must be unique) with the insert query you exported in step 3, and run for each one of those users.



---

## Screenshots:

Figure 1

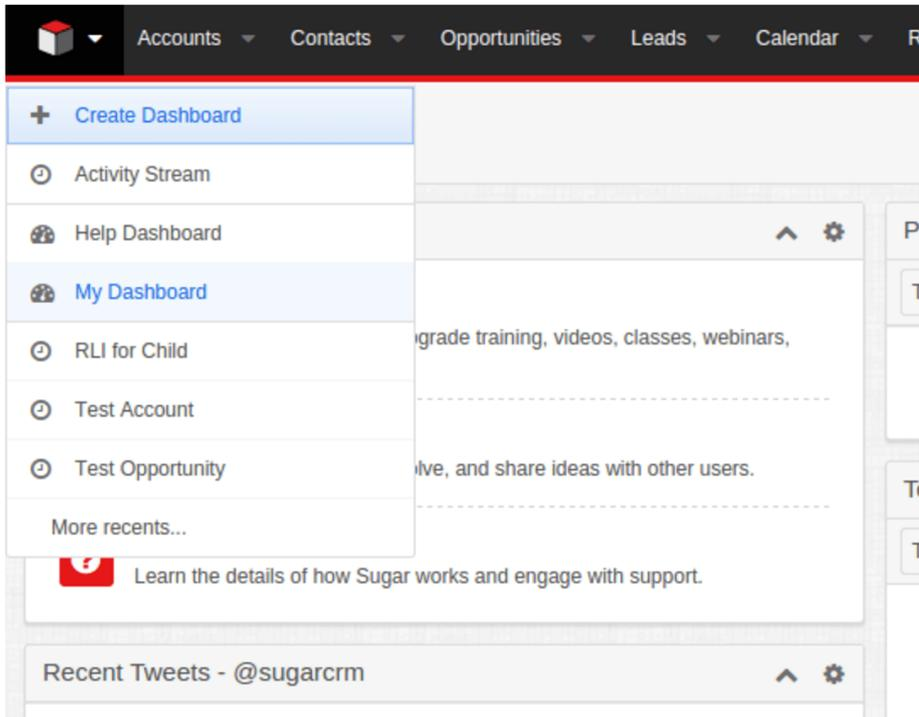

## Use Case: Deployment of Roles

The customer wants to deploy the roles in an automated way. This includes creating new roles and updating previously existing roles.

### System considerations:

- Database:
  - Row is inserted into the ***acl\_roles*** table for each role setting. Depending on how specific the role is, we might have ***acl\_fields*** and ***acl\_actions*** mapped to roles through ***acl\_roles\_actions***
- Scripts required
  - PHP
    - Sugar has a SugarACL object API that can be used to create, read, and write roles and role definitions.

### Steps to migrate:

1. Write a script using our object API to create or write roles
  1. Define the metadata for the changes or additions to be made
  2. Write logic to add/update based on metadata

- 
2. Execute script on dev instance and confirm changes
  3. Use script to promote to next instance
  4. Note: See functional sample script below

1. <https://gist.github.com/sadekbaroudi/3191513e2bbce2170326>

## Use Case: Deployment of Teams

The customer wants to deploy the teams in an automated way. This should be done via the Sugar object API.

### System considerations:

- Scripts required
  - PHP
    - *Follow steps in "Additional Notes" section below for details on building Team scripts.*
    - *TeamSets are cached per user by SugarCache. SugarCache should be cleared after installing new teams.*

### Additional notes:

To build a script to do this, see the following:

- modules/Teams/Save.php
  - This file is called when a user posts data through the form in the UI. This code should be replicated (until the Teams module is refactored).
- modules/Teams/Team.php
  - function save() - this should be called as part of the save
  - function mark\_deleted() - this should be called on the object when you want to delete a team, be sure to make sure there are no related users before doing so.

### Steps to migrate:

1. Write a script using our Teams object API
  1. Create needed team object
  2. Set appropriate data on object and/or POST data
  3. After saving, potentially add users to the team
2. Execute script on dev instance and confirm changes
3. Use script to promote to next instance

---

## Use Case: Deployment of User Settings

The customer wants to deploy the user settings in an automated way. There are a couple of places where we store User settings.

### Storage types:

- User Preferences

This is a key value pair with a serialized and then base64 encoded value. We store many user preferences, all encoded. These are non-critical settings, and can be blown away. However, doing so will require the user to reconfigure their preferences. The data is stored in the `user_preferences` table. This includes data such as: Subpanel display order, Timezone preferences, etc.

- Users module settings

These are direct values on the Users module (`users` table). Here we track persistent User attributes such as: Address, Phone number, etc

### User preferences

#### System considerations:

- Database:
  - *Row is inserted into the **user\_preferences** table for each user setting change.*
- Scripts required
  - PHP
    - In order to update values with a user's preferences, you would need to write a custom script to read, update, and rewrite to the `user_preferences` table

#### Steps to Migrate:

1. Write a script using our User Preferences API
  1. Query the database to retrieve the row for a given user
  2. base64 decode the value
  3. unserialize the value
  4. update the data required
  5. serialize the data
  6. base64 encode
  7. rewrite the row to the database
  8. (repeat for all applicable users)

- 
1. (See modules/UserPreferences/UserPreference.php or modules/Users/User.php, specifically getPreference() and setPreference())
  2. Load the User object
  3. Call getPreference for the specified value
  4. Make changes
  5. Call setPreference for the specified value
1. Better performance method (direct database queries and updates):
  2. More robust, but slower performance method (API):

## User table

### System considerations:

- Database:
  - *Users table is updated*
- Scripts required:
  - SQL
    - You can directly update the Users table directly, provided the data is not encoded or encrypted (like password).

### Steps to Migrate:

1. Write a SQL script to update values in the users table based on need
2. Execute script on dev instance and confirm changes
3. Use script to promote to next instance

## Use Case: Deployment of custom fields

A user wants to deploy custom fields created in an automated way. This includes anything created through Studio.

### System considerations:

- File System:
  - *Files are potentially created in the following directories:*
    - *Custom field vardef:*  
*custom/Extension/modules/<module\_name>/Ext/Vardefs/sugarfield\_<field\_name>.php*
    - *Custom field label (and app\_list\_string if necessary): ./custo*

---

*m/Extension/modules/Accounts/Ext/Language/en\_us.lang.php*

- Database:
  - *The <module\_name>\_cstm table is created, if it doesn't already exist.*
  - *The field <field\_name>\_c is created against that table*
- Scripts required
  - A Quick Repair and Rebuild is required after copying the files and fields\_meta\_data table values.
  - SQL
    - You will need to insert the relevant entries from the fields\_meta\_data table

### **Steps to migrate:**

1. Export the fields\_meta\_data entries for the custom fields into a script
2. Copy the files for the custom fields
3. Apply #1 and #2 to another system, and execute a **Quick Repair and Rebuild**
  1. Execute the DDL generated by the QRR above

## **Use Case: Deployment of custom modules**

A developer creates a custom module and wants to deploy it, this use case refers to a basic module, because each additional feature (logic hooks, relationships, dependencies, etc) has its own deployment scenario.

### **System considerations:**

- File System:
  - *./custom/Extension/application/Ext/Include/<package\_name>.php*
  - *./modules/<new\_module>/\**
  - *./custom/modules/<new\_module>/\**
  - *./custom/themes/default/images/\*<new\_module>\*(.gif/png)*
  - *./custom/Extension/modules/<new\_module>/\**
- Database:
  - *new tables <new\_module> and <new\_module>\_audit*
    - *Note: the DDL gets generated by the Quick Repair and Rebuild script, at which point you can execute manually or automatically*
  - *fields\_meta\_data table*
    - *Note: this stores all the custom fields built through Studio*

---

*(not Module Builder) after the module is deployed. Make sure you retrieve all rows from this table that apply to this module and create a SQL script to insert into the next system*

- Scripts required
  - *After deploying the custom module, you will need to run the **Quick Repair and Rebuild** script found in the admin section.*
  - SQL
    - *Script required to import the entry from the `<new_module>` and `<new_module>_audit` table.*
    - *Script required to import `fields_meta_data` table entries for this module (if there are any)*

### **Additional notes:**

- For a full custom module deployment scenario, this deployment scenario should be ran **first** then all of the extended module features deployment scenarios should be run:

### **Steps to migrate:**

1. Copy all files listed in file system section above
2. Export `fields_meta_data` table entries as apply to the custom module (if any)
3. Run Quick Repair and Rebuild
  1. Either manually or automatically run the DDL output from QRR
4. Test functionality

## **Use Case: Deployment of custom Relationships**

A user wants to deploy custom relationships created in an automated way. This includes anything created through Studio.

Follow the same instructions as for Custom Fields, but:

- Ignore the `fields_meta_data` table
- Be sure to consider the following:
  - `custom/Extension/modules/<side_1_of_relationship>/Ext/`
  - `custom/Extension/modules/<side_2_of_relationship>/Ext/`
  - `custom/Extension/modules/relationships/`

Otherwise, the same process applies.

---

## Use Case: Deployment of custom View or Layout metadata (Web)

The user creates custom layouts and views for web from studio and wants to deploy them.

### System considerations:

- File System:
  - **Layouts:**
    - `./custom/modules/<module>/clients/<platform>/layouts/<layout>/<layout>.php`
  - **Views**
    - *Creating a layout from Studio actually augments the Sidecar view metadata instead of Sidecar layout metadata*
    - `./custom/modules/<module>/clients/<platform>/views/<layout>/<layout>.php`
- Scripts required
  - *After deploying you will need to run the **Quick Repair and Rebuild** script found in the admin section.*

### Additional notes:

- *For layouts(record) you have the option to simply save the modified layout. In this case the metadata for the layout can be found in `./custom/working/modules/<module>/<platform>/views/<view>/<view>.php`*
- *Layouts created from studio create views in `./custom/modules/<module>/views`  
The created views can be **record** | **list** | **selection-list***
- *For the two popup layouts(created from studio), extra metadata is provided in the `./custom/modules/<module>/metadata/popupdefs.php`*

## Use Case: Deployment of custom View or Layout metadata (mobile)

The user creates custom layouts and views for mobile from studio and wants to deploy them.

### System considerations:

- File System: YES
  - **Layouts:**

- 
- `./custom/modules/<module>/clients/mobile/layouts/<layout>/<layout>.php`
  - **Views**
    - `./custom/modules/<module>/clients/mobile/views/<view>/<view>.php`
  - Database: NO
  - Scripts required
    - *After deploying you will need to run the **Quick Repair and Rebuild** script found in the admin section.*

#### **Additional notes:**

- *Layouts and views are handled the same as with web. From Studio, you can augment **detail**, **edit** and **list** views.*

## **Deploying Application Code and Integrations**

### **Use Case: Deployment of custom CSS (LESS)**

In order to update branding, developers can deploy customized CSS.

#### **System considerations:**

- File System: YES
  - `./custom/themes/custom.less`
- Scripts required
  - *You will need to run the **Quick Repair and Rebuild** script found in the admin section to rebuild the Sugar CSS bundles.*

### **Use Case: Deployment of Logic Hooks and Web Logic Hooks**

The developer creates custom logic hooks, they want to deploy them.

#### **System considerations:**

#### **Logic Hook:**

- File System: YES
  - **application hooks :**
    - `./custom/Extension/application/Ext/LogicHooks/<file>.php`
  - **module specific hooks:**
    - `./custom/Extension/modules/<module>/Ext/LogicHooks/<fil`



---

e>.php

- Scripts required
  - You will need to run the **Quick Repair and Rebuild** script found in the admin section to rebuild the extensions.

### **Web Logic Hook:**

- Database: YES
  - **Only for weblogic hooks** : row is inserted into the **weblogichooks** table.
- Scripts required
  - After deploying the custom hooks and database entry in the **weblogichooks** table, you will need to run the **Quick Repair and Rebuild** script found in the admin section.
  - SQL
    - Script required to import the entry from the **weblogichooks** table.

## **Use Case: Deployment of custom API endpoints**

The user creates a custom api endpoints, he wants to deploy them.

### **System considerations:**

- File System
  - clients/<platform>/api/\*
  - modules/:module/clients/<platform>/api/\*
  - custom/clients/<platform>/api\*
  - custom/modules/<module>/clients/<platform>/api/\*
- Scripts required
  - After deploying the custom api you will need to run the **Quick Repair and Rebuild** script found in the admin section. This will rebuild the `./cache/file_map.php` and `./cache/include/api/ServiceDictionary.rest.php` files to make your endpoint available.

### **Additional notes:**

- Logic for how api endpoints are loaded, can be found in `./include/api/ServiceDictionary.php` (where api endpoints are loaded from, how they are built on Quick Build and Repair, etc.)

---

## Use Case: Deployment of custom Administration Panels

The user creates custom administration panels, and wants to deploy them.

### System considerations:

- File System:
  - `./custom/Extension/modules/Administration/Ext/Administration/<filename>.php`
  - `./custom/Extension/modules/Administration/Ext/Language/<language.name>.php`
  - `./custom/themes/default/images/<icon_image_name>.<img_extension>`

and depending on the **admin panel url**, either:

- `./custom/modules/<linkUrlModule>/*`

or

- `./custom/modules/<linkUrlModule>/clients/base/layouts/<route_name>/*`
- `./custom/modules/<linkUrlModule>/clients/base/views/<route_name>/*`
- Scripts required
  - *After deploying the admin panels, you will need to run the **Quick Repair and Rebuild** script found in the admin section.*

### Additional notes:

- The admin url can specify new sidecar routes, old bwc routes, edit view files, plain scripts, or just open a drawer. Determining the additional resources to be copied may be impossible without a standard in place.

## Use Case: Deployment of custom Jobs / Schedulers

The user creates custom jobs and schedulers, and wants to deploy them.

### System considerations:

- File System: **YES**:
  - `./custom/Extension/modules/Schedulers/Ext/ScheduledTasks/<jobname>.php`
  - `./custom/Extension/modules/Schedulers/Ext/Language/<langtype.job>`

---

*bname>.php*

- Database: **YES**
  - Row is inserted into the **schedulers** table, if a job is added as a scheduled job using Administration > Scheduler.
- Scripts required
  - After deploying the custom jobs, you will need to run the **Quick Repair and Rebuild** script found in the admin section.
  - **SQL**
    - Script required to import the entry from the **schedulers** table.

Last Modified: 2021-02-17 02:44:13

## Sugar 10.3 to 11.0 Migration Guide

### Overview

The purpose of this document is to provide insight to Sugar Developers for upgrading custom Sugar code, extensions, and integrations to the Sugar 11.0 (Q2 2021) release.

### Cloud and On-Site Sugar Release

For those looking to upgrade from Sugar 10.0, you will be catching up with additional content released last 10.1 (Q3 2020), 10.2 (Q4 2020), and 10.3 (Q1 2021). In addition to this guide, please review the [Sugar 10.1](#), [Sugar 10.2](#), and [Sugar 10.3](#) migration guides and the [release notes linked below](#) to get a full view of changes since Sugar 10.0.

### REST API Version Number

The current version for the Sugar [REST API](#) is 11\_12.

### Changes That May Affect Developers

The changes in Sugar 11.0 (Q2 2021) that could cause an immediate impact on customizations and integrations that were built for earlier versions of Sugar are

---

highlighted in the following Developer Blog post in the SugarClub community:

- [Sugar 11.0 \(Q2 2021\) Customization Guide](#)

## Related Documents

For more information about what changed in Sugar 11.0.x, please refer to the following related document(s):

- [What to Expect When Upgrading to Sugar 11.0 \(Q2 2021\)](#)
- [11.0.0 Upgrade Paths](#)
- [11.0.x Supported Platforms](#)
- Release Notes
  - [Sugar Sell 11.0.0 Release Notes](#)
  - [Sugar Serve 11.0.0 Release Notes](#)
  - [Sugar Ultimate 11.0.0 Release Notes](#)
  - [Sugar Enterprise 11.0.0 Release Notes](#)
  - [Sugar Professional 11.0.0 Release Notes](#)

**Last Modified:** 2021-04-02 16:06:44

## User Interface

### Overview

Sugar's user interface is dependent on the client (i.e. base, mobile, or portal) being used to access the system. Clients are the various platforms that use Sugar's APIs to render the user interface. Each platform type will have a specific path for its components. While the Developer Guide mainly covers the [base client type](#), the following sections will outline the various metadata locations.

### Clients

Clients are the various platforms that access and use [Sidecar](#) to render content. Depending on the platform you are using, the layout, view, and metadata will be driven based on its client type. The following sections describe the client types.

---

## base

The base client is the Sugar application that you use to access your data from a web browser. The framework's specific views, layouts, and fields are rendered using [Sidecar](#). Files specific to this client type can be found in the following directories:

- ./clients/base/
- ./custom/clients/base/
- ./modules/<module>/clients/base/
- ./custom/modules/<module>/clients/base/

## mobile

The mobile client is the [Sugar Mobile](#) application that you use to access data from your mobile device. The framework-specific views, layouts, and fields for this application are found in the following directories:

- ./clients/mobile/
- ./custom/clients/mobile/
- ./modules/<module>/clients/mobile/
- ./custom/modules/<module>/clients/mobile/

## portal

The portal client is the customer self-service portal application that comes with Sugar Enterprise and Sugar Ultimate. The framework-specific views, layouts, and fields for this application are found in the following directories:

- ./clients/portal/
- ./custom/clients/portal/
- ./modules/<module>/clients/portal/
- ./custom/modules/<module>/clients/portal/

**Last Modified:** 2021-02-17 02:44:13


# Sidecar

## Overview

---

Sidecar is a platform that moves processing to the client side to render pages as single-page web apps. Sidecar contains a complete Model-View-Controller (MVC) framework based on the Backbone.js library.

By creating a single-page web app, server load drastically decreases while the client's performance increases because the application is sending pure JSON data in place of HTML. The JSON data, returned by the v10 API, defines the application's modules, records, and ACLs, allowing UI processing to happen on the client side and significantly reducing the amount of data to transfer.

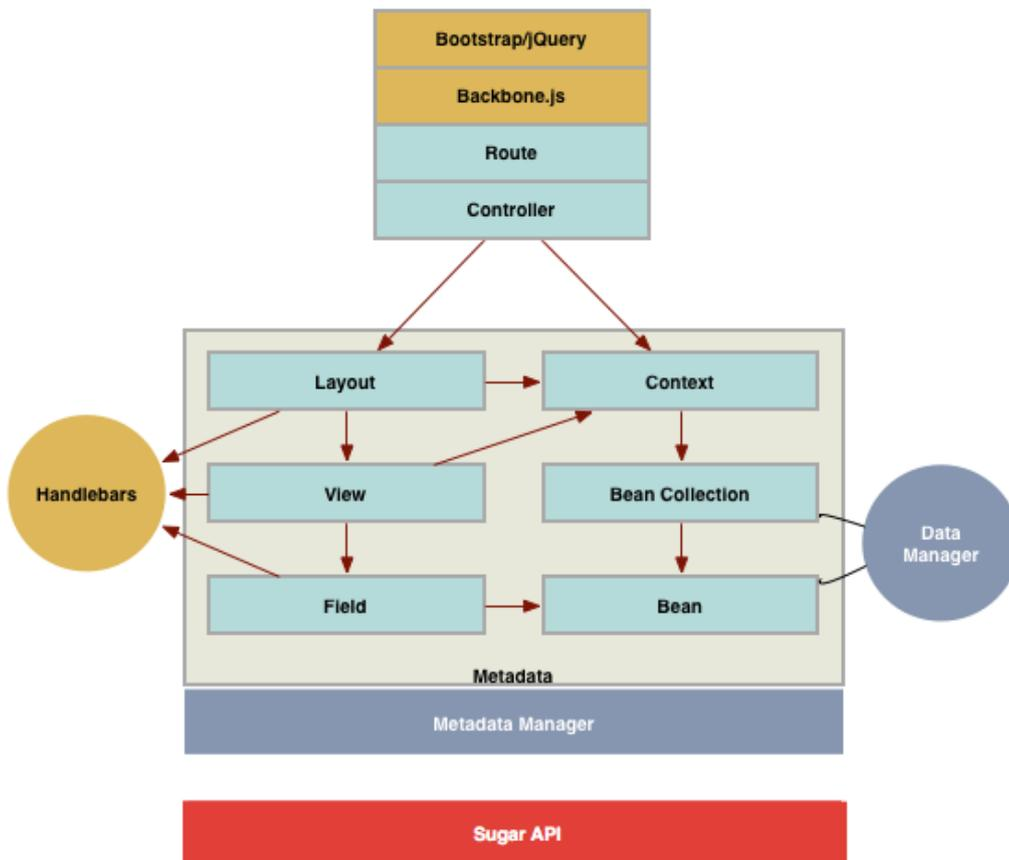

## Composition

Sidecar contains the following parts, which are briefly explained in the sections below:

- [Backbone.js](#)
- [Components](#) (Layouts, Views, and Fields)
- [Context](#)

---

## Backbone.js

**Backbone.js** is a lightweight JavaScript framework based on MVP (model-view-presenter) application design. It allows developers to easily interact with a RESTful JSON API to fetch models and collections for use within their user interface.

For more information about Backbone.js, please refer to their documentation at [Backbone.js](#).

## Components


Everything that is renderable on the page is a component. A layout is a component that serves as a canvas for one or more views and other layouts. All pages will have at least one master layout, and that master layout can contain multiple nested layouts.

## Layouts

Layouts are components that render the overall page. They define the rows, columns, and fluid layouts of content that gets delivered to the end user.

Example layouts include:

- Rows
- Columns
- Bootstrap fluid layouts
- Drawers and dropdowns

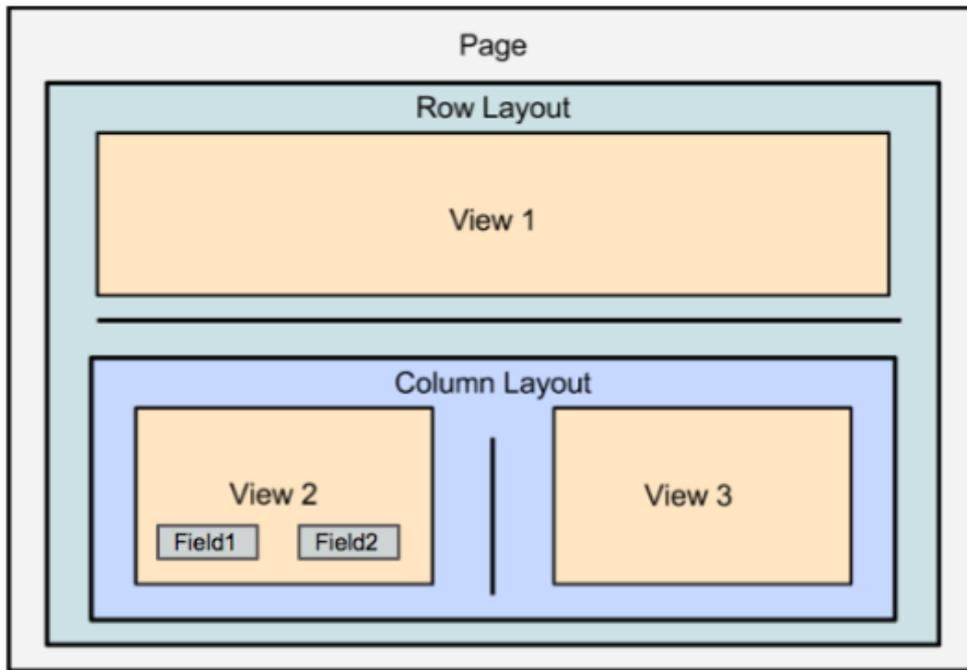

For more information about the various layouts, please refer to the [Layouts](#) page of this documentation.

## Views

Views are components that render data from a context and may or may not include field components. Example views include not only record and list views but also widgets such as:

- Graphs or other data visualizations
- External data views such as Twitter, LinkedIn, or other web service integrations
- The global header

For more information about views, please refer to the [Views](#) page of this documentation.

## Fields

Fields render widgets for individual values that have been pulled from the models and also handle formatting (or stripping the formatting of) field values. Like layouts and views, fields extend Backbone views.

For more information about the various layouts, please refer to the [Fields](#) page of this documentation.



---

## Context

A Context is a container for the relevant data for a page, and it has three major attributes:

- **Module** : The name of the module this context is based on
- **Model** : The primary or selected model for this context
- **Collection** : The set of models currently loaded in this context

Contexts are used to retrieve related data and to paginate through lists of data.

**Last Modified:** 2021-02-17 02:44:13

## Events

### Overview

The Backbone events module is a lightweight pub-sub pattern that gets mixed into each Backbone class (Model, View, Collection, Router, etc.). This means that you can listen to or dispatch custom named events from any Backbone object.

Backbone events should not be confused with a [jQuery events](#), which are used for working with DOM events in an API. Backbone supports an events hash on views that can be used to attach event handlers to DOM using jQuery. These are not Backbone events. This can be confusing because, among other similarities, both interfaces include an on() function and allow you to attach an event handler. The targets for jQuery events are DOM elements. The target for Backbone events are Backbone objects.

Sidecar classes extend these base Backbone classes. So each Sidecar object (Layouts, Views, Fields, Beans, Contexts, etc.) supports Backbone events.

### Existing Backbone Event Catalog

The current catalog of Backbone [events](#) is supported and triggered by the Sugar application. For example, we can listen to built-in Backbone [router](#) events, such as the route event, that is triggered by Sidecar. Try running the following JavaScript code from your browser's console:

```
SUGAR.App.router.on('route', function(arguments) {
    console.log(arguments);
});
```

As you click through the Sugar application, each time the router is called, you will see routing events appear in your browser console.

## Sidecar Events

### Global Application Events

Application events are all triggered on the app.events (SUGAR.App.events) object. Below is a list of application events with a description of when you can expect them to fire. However, please note that these events can be triggered in more than one place and some events, such as app:sync:error, can trigger events such as app:logout.

Name	Description
app:init	Triggered after the Sidecar application initializes <b>Note:</b> Initialization registers events, builds out Sidecar API objects, loads public metadata and config, and initializes modules.
app:start	Triggered after the Sidecar application starts
app:sync	Triggered when metadata is being synced with the user interface, for example, after login has occurred
app:sync:complete	Triggered after metadata has completely synced
app:sync:error	Triggered when metadata sync fails
app:sync:public:error	Triggered when public metadata sync fails during initialization
app:view:change	Triggered when a new view is loaded
app:locale:change	Triggered when the locale changes
lang:direction:change	Triggered when the locale changes and the direction of the language is different
app:login	Triggered when the "Login" route is called

app:login:success	Triggered after a successful login
app:logout	Triggered when the application is logging out
app:logout:success	Triggered after a successful logout

## Bean Events

The following table lists bean object events.

Name	Description
acl:change	Triggered when the ACLs change for that module
acl:change:<fieldName>	Triggered when the ACLs change for a particular field in that module
validation:success	Triggered when bean validation is valid
validation:complete	Triggered when bean validation completes
error:validation	Triggered when bean validation has an error
error:validation:<fieldName>	Triggered when a particular field has a bean validation error
attributes:revert	Triggered when the bean reverts to the previous attributes

## Context Events

The context object is used to facilitate communication between different Sidecar components on the page using events. For example, the `button:save_button:click` event triggers whenever a user clicks the Save button. The record view uses this event to run Save routines without being tightly coupled to a particular Save button. A list of these contextual events is not plausible because the user interface is continuously changing between versions, and there are many more possibilities based on the views and layouts in each version.

## Utilizing Events

---

Application events can be bound to in any custom JavaScript controller or any JavaScript file loaded into Sugar and included on the page (such as via JSGroupings framework). An example below shows how one could add custom JavaScript code to trigger after the application log out.

```
./custom/include/javascript/myAppLogoutSuccessEvent.js
```

```
(function(app){
    app.events.on('app:logout:success', function(data) {
        //Add Logic Here
        console.log(data);
    });
})(SUGAR.App);
```

With the custom event JavaScript file written and in place, include it into the system using the [JSGroupings extension](#).

```
./custom/Extension/application/Ext/JSGroupings/myAppLogoutSuccessEvent.php
```

```
foreach ($js_groupings as $key => $groupings) {
    foreach ($groupings as $file => $target) {
        //if the target grouping is found
        if ($target == 'include/javascript/sugar_grp7.min.js') {
            //append the custom JavaScript file
            $js_groupings[$key]['custom/include/javascript/myAppLogout
SuccessEvent.js'] = 'include/javascript/sugar_grp7.min.js';
        }
        break;
    }
}
```

Once in place, navigate to Admin > Repair > Rebuild JS Grouping Files. After the JSGroupings are rebuilt, clear your browser cache and the custom JavaScript will now trigger after a successful logout.

**Last Modified:** 2021-02-17 02:44:13

## Routes

## Overview

---

Routes determine where users are directed based on patterns in the URL.

## Routes

Routes, defined in `./include/javascript/sugar7.js`, are URL patterns signified by a hashtag ("`#`") in the URL. An example module URL pattern for the Sugar application is `http://{site url}/#<module>`. This route would direct a user to the list view for a given module. The following sections will outline routes and how they are defined.

## Route Definitions

The router accepts route definitions in the following format:

```
routes = [
  {
    name: "My First Route",
    route: "pattern/to/match",
    callback: function()
    {
      //handling logic here.
    }
  },
  {
    name: "My Second Route",
    route: "pattern/:variable",
    callback: "<callback name>"
  }
]
```

A route takes in three properties: the name of the route, the route pattern to match, and the callback to be called when the route is matched. If a default callback is desired, you can specify the callback name as a string.

## Route Patterns

Route patterns determine where to direct the user. An example of routing is done when navigating to an account record. When doing this you may notice that your URL is:

```
http://{site url}/#Accounts/aaaaaaaa-bbbb-cccc-dddd-eeeeeeeeeeee
```

---

A stock route's definition is defined in `./include/javascript/sugar7.js` as:

```
{
  name: "record",
  route: ":module/:id"
},
```

Variables in the route pattern are prefixed with a colon such as `:variable`. The route pattern above contains two variables:

- `module`
- `id`

## Custom Routes

As of 7.8.x, you can add the routes during the initialization of the Router, so custom routes can be registered in the Sidecar router during both `router:init` and `router:start` events. It is recommended to register them in the Initialization event before any routing has occurred. There are two methods in the Sidecar Router, which allow for adding custom routes:

### **route()**

#### **Arguments**

<b>Name</b>	<b>Required</b>	<b>Type</b>	<b>Description</b>
route	true	string	The Route pattern to be matched by the URL Fragment
name	true	string	The unique name of the Route
callback	true	function	The callback function for the Route

### **Example**

The following example registers a custom Route during the `router:init` event, using the `route()` method.

```
./custom/javascript/customRoutes.js
```

---

```
(function(app){
  app.events.on("router:init", function(){
    //Register the route #test/123
    app.router.route("test/:id", "test123", function() {
      console.log(arguments);
      app.controller.loadView({
        layout: "custom_layout",
        create: true
      });
    });
  });
})(SUGAR.App);
```

## addRoutes()

When you need to add multiple routes, you can define the routes in an array and pass the entire array to the `addRoutes()` method on the Sidecar Router to ensure they are registered. Please note, the `addRoutes()` method utilizes the above `route()` method to register the routes with the Backbone Router. The Backbone router redirects after the first matching route. Due to this, the order in which the routes are listed in the array is important as it will determine which route will be used by the application. It is recommended that the most specific routes be listed first in the array so that they are recognized first, instead of those routes which may contain a variable.

### Arguments

Name	Required	Type	Description
routes	true	array	An array of route definition as defined above.

## Example

The following example registers custom Route during the `router:init` event, using the `addRoutes()` method.

The route's JavaScript controller can exist anywhere you'd like. For our purposes, we created it in `./custom/javascript/customRoutes.js`. This file will contain your custom route definitions.

---

`./custom/javascript/customRoutes.js`

```
(function(app){
  app.events.on("router:init", function(){
    var routes = [
      {
        route: 'test/doSomething',
        name: 'testDoSomething',
        callback: function(){
          alert("Doing something...");
        }
      },
      {
        route: 'test/:id',
        name: 'test123',
        callback: function(){
          console.log(arguments);
          app.controller.loadView({
            layout: "custom_layout",
            create: true
          });
        }
      }
    ];
    app.router.addRoutes(routes);
  })
})(SUGAR.App);
```

Next, create the JSGrouping extension. This file will allow Sugar to recognize that you've added custom routes.

`./custom/Extension/application/Ext/JSGroupings/myCustomRoutes.php`

```
<?php

foreach ($js_groupings as $key => $groupings) {
  $target = current(array_values($groupings));

  //if the target grouping is found
  if ($target == 'include/javascript/sugar_grp7.min.js') {
    //append the custom JavaScript file
    $js_groupings[$key]['custom/javascript/customRoutes.js'] = 'in
clude/javascript/sugar_grp7.min.js';
  }
}
```



---

Once your files are in place, navigate to Admin > Repairs > Quick Repair & Rebuild. For additional information, please refer to the [JSGroupings](#) framework.

**Last Modified:** 2021-02-17 02:44:13

## Handlebars

### Overview

The Handlebars library, located in `./sidecar/lib/handlebars/`, is a JavaScript library that lets Sugar create semantic templates. Handlebars help render content for [layouts](#), [views](#), and [fields](#) for Sidecar. Using Handlebars, you can make modifications to the display of content such as adding HTML or CSS.

For more information on the Handlebars library, please refer to their website at <http://handlebarsjs.com>.

### Templates

The Handlebars templates are stored in the filesystem as `.hbs` files. These files are stored along with the view, layout, and field metadata and are loaded according to the inheritance you have selected in your controller. To view the list of available templates, or to see if a custom-created template is available, you can open your browser's console window and inspect the `Handlebars.templates` namespace.

### Debugging Templates

When working with Handlebar templates, it can be difficult to identify where an issue is occurring or what a variable contains. To assist with troubleshooting this, you can use the log helper. The log helper will output the contents of this and the variable passed to it in your browser's console.

This is an example of using the logger in a handlebars template:

```
{{log this}}
```

### Helpers

---

Handlebar Helpers are a way of adding custom functionality to the templates. Helpers are located in the following places:

- `./sidecar/src/view/hbs-helpers.js` : Sidecar uses these helpers by default
- `./include/javascript/sugar7/hbs-helpers.js` : Additional helpers used by the base client

## Creating Helpers

When working with Handlebar templates, you may need to create your helper. To do this, follow these steps:

1. Create a Handlebars helper file in the `./custom/` directory. For this example, we will create two functions to convert a string to uppercase or lowercase:

`./custom/JavaScript/my-handlebar-helpers.js`

```
/**
 * Handlebars helpers.
 *
 * These functions are to be used in handlebars templates.
 * @class Handlebars.helpers
 * @singleton
 */
(function(app) {
  app.events.on("app:init", function() {

    /**
     * convert a string to upper case
     */
    Handlebars.registerHelper("customUpperCase", function (text)
    {
      return text.toUpperCase();
    });

    /**
     * convert a string to lower case
     */
    Handlebars.registerHelper("customLowerCase", function (text)
    {
      return text.toLowerCase();
    });

  });
});
```

---

```
})(SUGAR.App);
```

2. Next, create a JSGrouping extension in `./custom/Extension/application/Ext/JSGroupings/`. Name the file uniquely for your customization. For this example, we will create:

```
./custom/Extension/application/Ext/JSGroupings/my-handlebar-helpers.php
```

```
<?php
```

```
//Loop through the groupings to find include/javascript/sugar_grp7.min.js
foreach($js_groupings as $key => $groupings) {
    foreach($groupings as $file => $target) {
        if ($target == 'include/javascript/sugar_grp7.min.js') {
            //append the custom helper file
            $js_groupings[$key]['custom/JavaScript/my-handlebar-helpers.js'] = 'include/javascript/sugar_grp7.min.js';
        }

        break;
    }
}
```

3. Finally, navigate to Admin > Repair and perform the following two repair sequences to include the changes:
  - Quick Repair and Rebuild
  - Rebuild JS Groupings.

You can now use your custom helpers in the HBS files by using:

```
{{customUpperCase "MyString"}}
{{customLowerCase "MyString"}}
```

**Note:** You can also access the helpers function from your browsers developer console using `Handlebars.helpers`


**Last Modified:** 2021-02-17 02:44:13

## Layouts

---

## Overview


Layouts are component plugins that define the overall layout and positioning of the page. Layouts replace the previous concept of MVC views and are used system-wide to generate rows, columns, bootstrap fluid layouts, and pop-ups by wrapping and placing multiple views or nested layouts on a page.

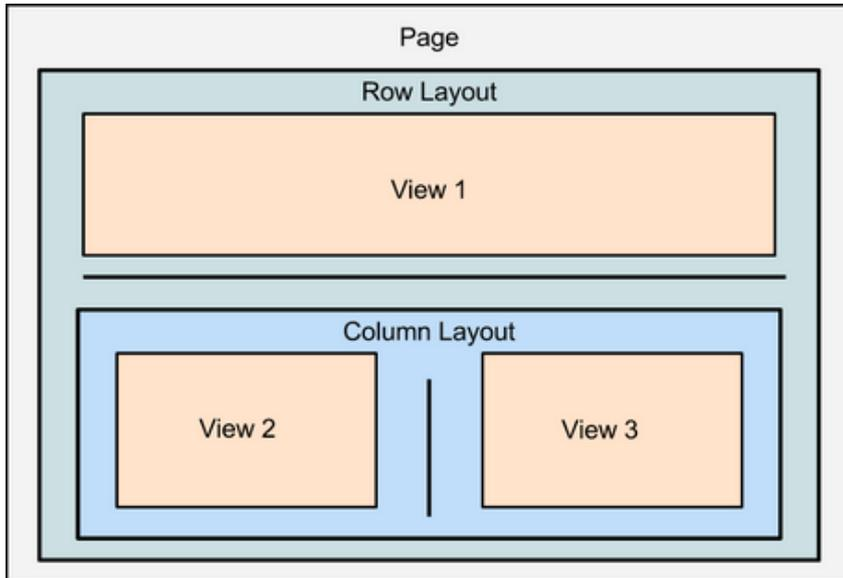

Layout components are typically made up of a controller JavaScript file (.js) and a PHP file (.php), however, layout types vary and are not dependent on having both files.

## Hierarchy Diagram

The layout components are loaded in the following manner:

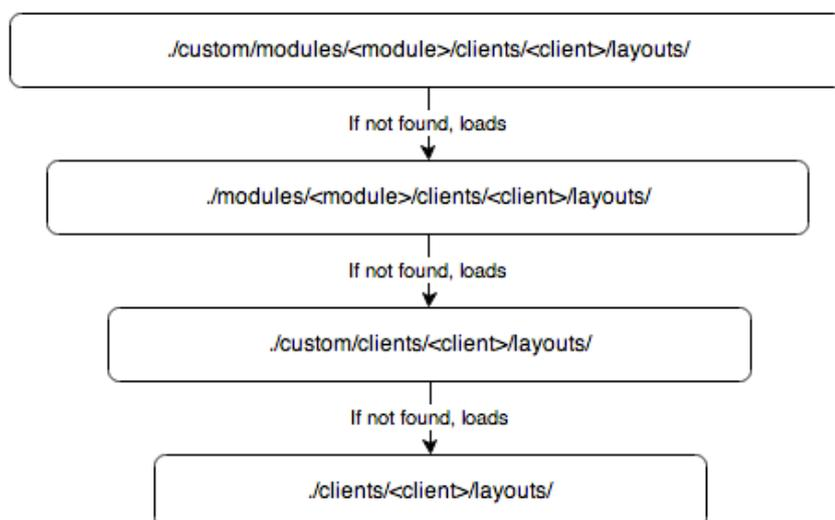

---

**Note:** The Sugar application client type is "base". For more information on the various client types, please refer to the [User Interface](#) page.

## Sidecar Layout Routing

Sidecar uses [routing](#) to determine where to direct the user. To route the user to a specific page in Sugar, refer to the following default URL formats:

Behavior	URL Format
Route the user to the list layout for a module	http://{site url}/#<module>/
Route the user to the record layout for a specific record	http://{site url}/#<module>/f82d09cb-48cd-a1fb-beae-521cf39247b5
Route the user to a custom layout for the module	http://{site url}/#<module>/layout/<layout>

## Layout Example

The list layout, located in `./clients/base/layouts/list/`, handles the layout for the list view. The sections below outline the various files that render this view.

### JavaScript

The file `list.js`, shown below, contains the JavaScript used to place the layout content.

```
./clients/base/layouts/list/list.js
```

```
/**
 * Layout that places components using bootstrap fluid layout divs
 * @class View.Layouts.ListLayout
 * @extends View.FluidLayout
 */
({
  /**
   * Places a view's element on the page.
   * @param {View.View} comp
   * @protected

```

---

```

    * @method
    */

    _placeComponent: function(comp, def) {
        var size = def.size || 12;

        // Helper to create boiler plate layout containers
        function createLayoutContainers(self) {
            // Only creates the containers once
            if (!self.$el.children()[0]) {
                comp.$el.addClass('list');
            }
        }
        createLayoutContainers(this);
        // All components of this layout will be placed within the
        // innermost container div.
        this.$el.append(comp.el);
    }
})

```

## Layout Definition

The layout definition is contained as an array in `list.php`. This layout definition contains four views:

- `massupdate`
- `massaddtolist`
- `recordlist`
- `list-bottom`

`./clients/base/layouts/list/list.php`

```
<?php
```

```

$viewdefs['base']['layout']['list'] = array(
    'components' =>
    array(
        array(
            'view' => 'massupdate',
        ),
        array(
            'view' => 'massaddtolist',
        ),
        array(
            'view' => 'recordlist',

```

---

```
        'primary' => true,
    ),
    array(
        'view' => 'list-bottom',
    ),
),
'type' => 'simple',
'name' => 'list',
'span' => 12,
);
```

## Application

For information on working with layouts, please refer to the [Creating Layouts](#) and [Overriding Layouts](#) pages for practical examples.

**Last Modified:** 2021-02-17 02:44:13

# Creating Layouts

## Overview

This example explains how to create a custom layout to define the various components that load on a page.

## Creating the Layout

This example creates a component named "my-layout", which will render a custom view named "my-view".

```
./custom/clients/base/layouts/my-layout/my-layout.php
```

```
<?php
    $viewdefs['base']['layout']['my-layout'] = array(
        'type' => 'simple',
        'components' => array(
            array(
                'view' => 'my-view',
```

---

```
    ),
  ),
);
```

## Creating a View

The view component will render the actual content we want to see on the page. The view below will display a clickable cube icon that will spin when clicked by the user.

```
./custom/clients/base/views/my-view/my-view.js
```

```
({
  className: 'my-view tcenter',
  cubeOptions: {
    spin: false
  },
  events: {
    'click .sugar-cube': 'spinCube'
  },
  spinCube: function() {
    this.cubeOptions.spin = !this.cubeOptions.spin;
    this.render();
  }
})
```

```
./custom/clients/base/views/my-view/my-view.hbs
```

```
<style>
  div.my-view
  {
    padding-top: 5%;
  }
  div.my-view .sugar-cube
  {
    fill:#bbbbbb;
    height:200px;
    width:200px;
    display: inline;
  }
</style>

<h1>My View</h1>
```



---

```
{{{subFieldTemplate 'sugar-cube' 'detail' cubeOptions}}}
```

```
<p>Click to spin the cube!</p>
```

Once the files are in place, navigate to Admin > Repair and perform a Quick Repair and Rebuild.

## Navigating to the Layout

To see this new layout and view, navigate to `http://{site url}/#<module>/layout/my-layout`.

**Last Modified:** 2021-02-17 02:44:13

## Overriding Layouts

### Overview

This page explains how to override a stock layout component. For this example, we will extend the stock record view and create a custom view named "my-record" that will be used in our record layout's override. This example involves two steps:

1. [Override the Layout](#)
2. [Extend the View](#)

These steps are explained in the following sections.

### Overriding the Layout

First, copy `./clients/base/layouts/record/record.php` to `./custom/clients/base/layouts/record/record.php`. Once copied, modify the following line from:

```
'view' => 'record',
```

To:

---

```
'view' => 'my-record',
```

That line will change the record layout from using the base record.js view, `./clients/base/views/record/record.js`, to instead use a custom view that we will create in `./custom/clients/base/views/my-record/my-record.js`. At this point, the custom layout override should be very similar to the example below:

```
./custom/clients/base/layouts/record/record.php
```

```
<?php
```

```
$viewdefs['base']['layout']['record'] = array(
    'components' => array(
        array(
            'layout' => array(
                'type' => 'default',
                'name' => 'sidebar',
                'components' => array(
                    array(
                        'layout' => array(
                            'type' => 'base',
                            'name' => 'main-pane',
                            'css_class' => 'main-pane span8',
                            'components' => array(
                                array(
                                    'view' => 'my-record',
                                    'primary' => true,
                                ),
                                array(
                                    'layout' => 'extra-info',
                                ),
                                array(
                                    'layout' => array(
                                        'type' => 'filterpanel',
                                        'last_state' => array(
                                            'id' => 'record-
filterpanel',
                                            'defaults' => array(
                                                'toggle-
view' => 'subpanels',
                                            ),
                                        ),
                                    'refresh_button' => true,
```

---

```

'availableToggles' => array(
    array(
        'name' => 'subpanels',
        'icon' => 'fa-table',
        'label' => 'LBL_DATA_V
IEW',
    ),
    array(
        'name' => 'list',
        'icon' => 'fa-table',
        'label' => 'LBL_LISTVI
EW',
    ),
    array(
        'name' => 'activitystr
eam',
        'icon' => 'fa-clock-
o',
        'label' => 'LBL_ACTIVI
TY_STREAM',
    ),
),
'components' => array(
    array(
        'layout' => 'filter',
        'xmeta' => array(
            'layoutType' => ''
,
        ),
        'loadModule' => 'Filte
rs',
    ),
    array(
        'view' => 'filter-
rows',
    ),
    array(
        'view' => 'filter-
actions',
    ),
    array(
        'layout' => 'activitys
tream',
        'context' =>
array(
            'module' => 'Activ

```

---

ities',

```
        ),
    ),
    array(
        'layout' => 'subpanels
    ),
    ),
    ),
    ),
    ),
    ),
    array(
        'layout' => array(
            'type' => 'base',
            'name' => 'dashboard-pane',
            'css_class' => 'dashboard-pane',
            'components' => array(
                array(
                    'layout' => array(
                        'type' => 'dashboard',
                        'last_state' => array(
                            'id' => 'last-visit',
                        )
                    ),
                    'context' => array(
                        'forceNew' => true,
                        'module' => 'Home',
                    ),
                    'loadModule' => 'Dashboards',
                ),
            ),
        ),
    ),
    array(
        'layout' => array(
            'type' => 'base',
            'name' => 'preview-pane',
            'css_class' => 'preview-pane',
            'components' => array(
                array(
                    'layout' => 'preview',
                ),
            ),
        ),
    ),
),
```

---

```
        ),
    },
    ),
),
);
```

## Extending the View

For this example, we will extend the stock record view and create a custom view named my-record that will be used in our record layouts override.

```
./custom/clients/base/views/my-record/my-record.js
```

```
({
  extendsFrom: 'RecordView',

  initialize: function (options) {
    this._super("initialize", [options]);

    //log this point
    console.log("**** Override called");
  }
})
```

Once the files are in place, navigate to Admin > Repair > Quick Repair and Rebuild.

**Last Modified:** 2021-02-17 02:44:13

## Views


### Overview

Views are component plugins that render data from a context. View components may contain field components and are typically made up of a [controller](#) JavaScript file (.js) and at least one [Handlebars](#) template (.hbs).

---

## Load Order Hierarchy Diagram

The view components are loaded in the following manner:

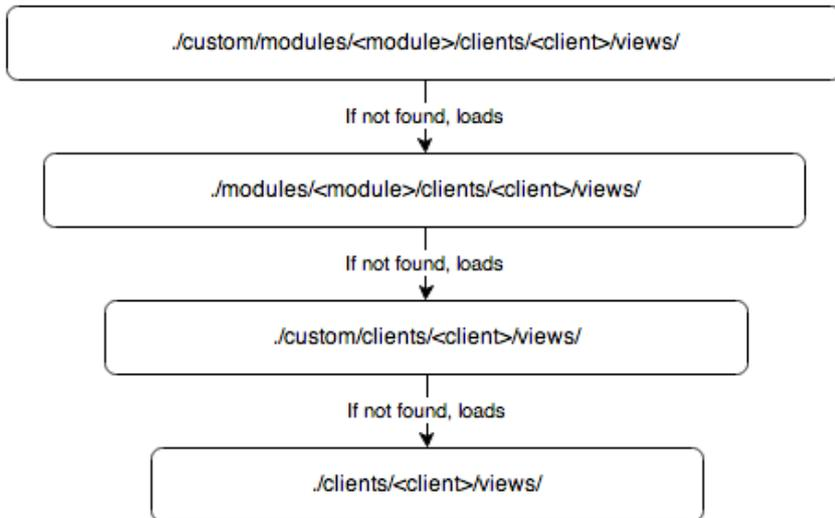

**Note:** The Sugar application's client type is "base". For more information on the various client types, please refer to the [User Interface](#) page.

## Components

Views are made up of a controller and a Handlebar template.

### Controller

The view's controller is what controls the view in how data is loaded, formatted, and manipulated. The controller is the JavaScript file named after the view. A controller file can be found in any of the directories shown in the [hierarchy diagram](#) above. In the example of the record view, the main controller file is located in `./clients/base/views/record/record.js` and any modules extending this controller will have a file located in `./modules/<module>/clients/base/views/record/record.js`.

### Handlebar Template

The views template is built on Handlebars and is what adds the display markup for the data. The template is typically named after the view or an action in the view. In the example of the record view, the main template is located in `./clients/base/views/record/record.hbs`. This template will take the data fetched from the REST API to render the display for the user. More information on

---

templates can be found in the [Handlebars](#) section.

## Extending Views


When working with module views, it is important to understand the difference between overriding and extending a view. Overriding is essentially creating or copying a view to be used by your application that is not extending its parent. By default, some module views already extend the core `./clients/base/views/record/record.js` controller. An example of this is the accounts `RecordView`

```
./modules/Accounts/clients/base/views/record/record.js
```

```
({
  extendsFrom: 'RecordView',


  /**
   * @inheritdoc
   */
  initialize: function(options) {
    this.plugins = _.union(this.plugins || [], ['HistoricalSummary
  ']);
    this._super('initialize', [options]);
  }
})
```

As you can see, this view has the property: `extendsFrom: 'RecordView'`. This property tells Sidecar that the view is going to extend its parent `RecordView`. In addition to this, you can see that the `initialize` method is also calling `this._super('initialize', [options]);`. Calling `this._super` tells Sidecar to execute the parent function. The major benefit of doing this is that any updates to `./clients/base/views/record/record.js` will be reflected for the module without any modifications being made to `./modules/Accounts/clients/base/views/record/record.js`. You should note that when using `extendsFrom`, the parent views are called similarly to the load hierarchy:

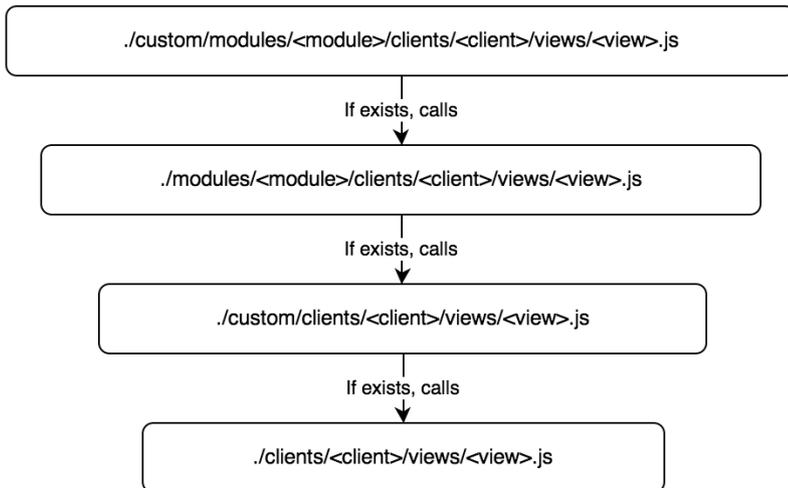

## Create View and Record View Inheritance

The diagram below demonstrates the inheritance of the create and record views for the Quotes module. This inheritance structure is the same for stock and custom modules alike.

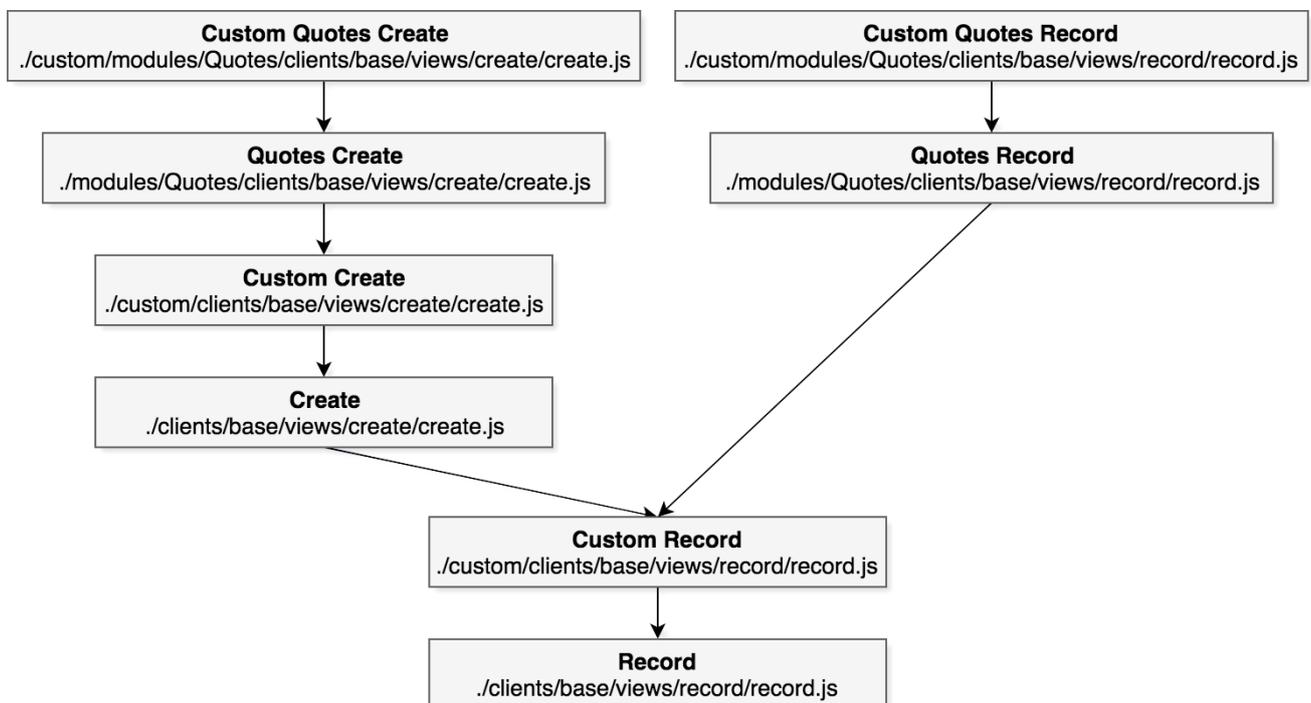

## Basic View Example



---

A simple view for beginners is the access-denied view. The view is located in `./clients/base/views/access-denied/` and is what handles the display for restricted access. The sections below will outline the various files that render this view.

## Controller

The `access-denied.js`, shown below, controls the manipulation actions of the view.

`./clients/base/views/access-denied/access-denied.js`

```
({
  className: 'access-denied tcenter',
  cubeOptions: {spin: false},
  events: {
    'click .sugar-cube': 'spinCube'
  },

  spinCube: function() {
    this.cubeOptions.spin = !this.cubeOptions.spin;
    this.render();
  }
})
```

## Attributes

Attribute	Description
<code>className</code>	The CSS class to apply to the view.
<code>cubeOptions</code>	A set of options that are passed to the <code>spinCube</code> function when called.
<code>events</code>	A list of the view events. This view executes the <code>spinCube</code> function when the sugar cube is clicked.
<code>spinCube</code>	Function to control the start and stop of the cube spinning.

## Handlebar Template

The `access-denied.hbs` file defines the format of the views content. As this view is used for restricting access, it displays a message to the user describing the restriction.

---

./clients/base/views/access-denied/access-denied.hbs

```
<div class="error-message">
  <h1>{{str 'ERR_NO_VIEW_ACCESS_TITLE'}}</h1>
  <p>{{str 'ERR_NO_VIEW_ACCESS_REASON'}}</p>
  <p>{{str 'ERR_NO_VIEW_ACCESS_ACTION'}}</p>
</div>

{{{subFieldTemplate 'sugar-cube' 'detail' cubeOptions}}}
```

## Helpers

Name	Description
str	Handlebars helper to render the label string
subFieldTemplate	Handlebars helper to render the cube content

## Cookbook Examples

When working with views, you may find the follow cookbook examples helpful:

- [Adding Buttons to the Record View](#)
- [Adding Field Validation to the Record View](#)
- [Passing Data to Templates](#)

**Last Modified:** 2021-02-17 02:44:13

## Metadata

### Overview

This page is an overview of the metadata framework for Sidecar modules.

### View Metadata Framework

---

A module's view-specific metadata can be found in the modules view file:

```
./modules/<module>/clients/<client>/views/<view>/<view>.php
```

Any edits made in Admin > Studio will be reflected in the file:

```
./custom/modules/<module>/clients/<client>/views/<view>/<view>.php
```

**Note:** The Sugar application's client type is "base". For more information on the various client types, please refer to the [User Interface](#) page.

**Note:** In the case of metadata, custom view metadata files are respected over the stock view metadata files.

## View Metadata

The Sidecar views metadata is very similar to that of the MVC metadata, however, there are some basic differences. All metadata for Sidecar follows the format:

```
$viewdefs['<module>']['base']['view']['<view>'] = array();
```

An example of this is the account's record layout shown below:

```
./modules/Accounts/clients/base/views/record/record.php
```

```
<?php
```

```
$viewdefs['Accounts']['base']['view']['record'] = array(
    'panels' => array(
        array(
            'name' => 'panel_header',
            'header' => true,
            'fields' => array(
                array(
                    'name' => 'picture',
                    'type' => 'avatar',
                    'width' => 42,
                    'height' => 42,
                    'dismiss_label' => true,
                    'readonly' => true,
                ),
                'name',
                array(
                    'name' => 'favorite',
                    'label' => 'LBL_FAVORITE',
```

---

```

        'type' => 'favorite',
        'dismiss_label' => true,
    ),
    array(
        'name' => 'follow',
        'label' => 'LBL_FOLLOW',
        'type' => 'follow',
        'readonly' => true,
        'dismiss_label' => true,
    ),
)
),
array(
    'name' => 'panel_body',
    'columns' => 2,
    'labelsOnTop' => true,
    'placeholders' => true,
    'fields' => array(
        'website',
        'industry',
        'parent_name',
        'account_type',
        'assigned_user_name',
        'phone_office',
    ),
),
array(
    'name' => 'panel_hidden',
    'hide' => true,
    'columns' => 2,
    'labelsOnTop' => true,
    'placeholders' => true,
    'fields' => array(
        array(
            'name' => 'fieldset_address',
            'type' => 'fieldset',
            'css_class' => 'address',
            'label' => 'Billing Address',
            'fields' => array(
                array(
                    'name' => 'billing_address_street',
                    'css_class' => 'address_street',
                    'placeholder' => 'LBL_BILLING_ADDRESS_STRE
ET',
                ),
                array(

```

---

---

```

        'name' => 'billing_address_city',
        'css_class' => 'address_city',
        'placeholder' => 'LBL_BILLING_ADDRESS_CITY
',
    ),
    array(
        'name' => 'billing_address_state',
        'css_class' => 'address_state',
        'placeholder' => 'LBL_BILLING_ADDRESS_STAT
E',
    ),
    array(
        'name' => 'billing_address_postalcode',
        'css_class' => 'address_zip',
        'placeholder' => 'LBL_BILLING_ADDRESS_POST
ALCODE',
    ),
    array(
        'name' => 'billing_address_country',
        'css_class' => 'address_country',
        'placeholder' => 'LBL_BILLING_ADDRESS_COUN
TRY',
    ),
),
array(
    'name' => 'fieldset_shipping_address',
    'type' => 'fieldset',
    'css_class' => 'address',
    'label' => 'Shipping Address',
    'fields' => array(
        array(
            'name' => 'shipping_address_street',
            'css_class' => 'address_street',
            'placeholder' => 'LBL_SHIPPING_ADDRESS_STR
EET',
        ),
        array(
            'name' => 'shipping_address_city',
            'css_class' => 'address_city',
            'placeholder' => 'LBL_SHIPPING_ADDRESS_CIT
Y',
        ),
        array(
            'name' => 'shipping_address_state',
            'css_class' => 'address_state',

```

---

```

        'placeholder' => 'LBL_SHIPPING_ADDRESS_STA
TE',
    ),
    array(
        'name' => 'shipping_address_postalcode',
        'css_class' => 'address_zip',
        'placeholder' => 'LBL_SHIPPING_ADDRESS_POS
TALCODE',
    ),
    array(
        'name' => 'shipping_address_country',
        'css_class' => 'address_country',
        'placeholder' => 'LBL_SHIPPING_ADDRESS_COU
NTRY',
    ),
    array(
        'name' => 'copy',
        'label' => 'NTC_COPY_BILLING_ADDRESS',
        'type' => 'copy',
        'mapping' => array(
            'billing_address_street' => 'shipping_
address_street',
            'billing_address_city' => 'shipping_ad
dress_city',
            'billing_address_state' => 'shipping_a
ddress_state',
            'billing_address_postalcode' => 'shipp
ing_address_postalcode',
            'billing_address_country' => 'shipping
_address_country',
        ),
    ),
),
array(
    'name' => 'phone_alternate',
    'label' => 'LBL_OTHER_PHONE',
),
'email',
'phone_fax',
'campaign_name',
array(
    'name' => 'description',
    'span' => 12,
),
'sic_code',

```

---

```

'ticker_symbol',
'annual_revenue',
'employees',
'ownership',
'rating',
array(
    'name' => 'date_entered_by',
    'readonly' => true,
    'type' => 'fieldset',
    'label' => 'LBL_DATE_ENTERED',
    'fields' => array(
        array(
            'name' => 'date_entered',
        ),
        array(
            'type' => 'label',
            'default_value' => 'LBL_BY',
        ),
        array(
            'name' => 'created_by_name',
        ),
    ),
),
'team_name',
array(
    'name' => 'date_modified_by',
    'readonly' => true,
    'type' => 'fieldset',
    'label' => 'LBL_DATE_MODIFIED',
    'fields' => array(
        array(
            'name' => 'date_modified',
        ),
        array(
            'type' => 'label',
            'default_value' => 'LBL_BY',
        ),
        array(
            'name' => 'modified_by_name',
        ),
    ),
),
),
),
),
);

```

---

The metadata for a given view can be accessed using `app.metadata.getView` within your controller. An example fetching the view metadata for the Accounts RecordView is shown below:

```
app.metadata.getView('Accounts', 'record');
```

You should note that this can also be accessed in your browser's console window by using the global App Identifier:

```
App.metadata.getView('Accounts', 'record');
```

**Last Modified:** 2021-02-17 02:44:13

## Fields


### Overview

Fields are component plugins that render and format field values. They are made up of a controller JavaScript file (.js) and at least one Handlebars template (.hbt). For more information regarding the data handling of a field, please refer the data framework [fields](#) documentation. For information on creating custom field types, please refer the [Creating Custom Field Types](#) cookbook example.

### Hierarchy Diagram

The field components are loaded in the following manner:



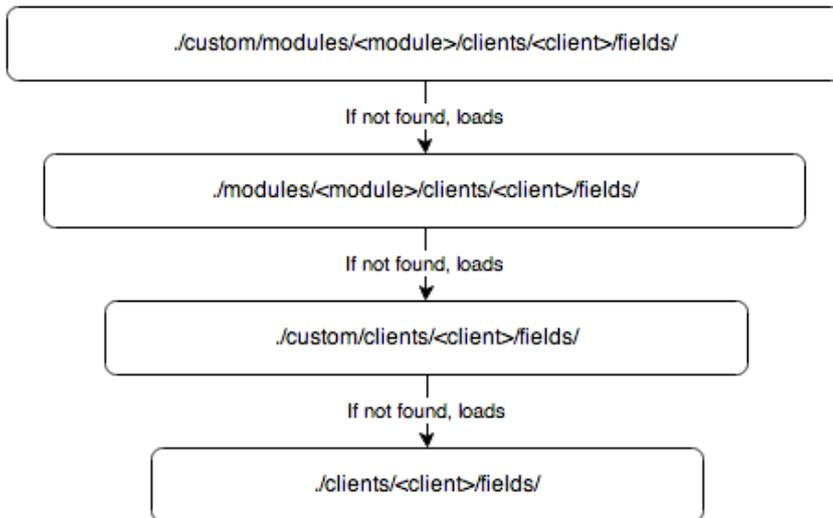

**Note:** The Sugar application's client type is "base". For more information on the various client types, please refer to the [User Interface](#) page.

## Field Example

The bool field, located in `./clients/base/fields/bool/`, handles the display of checkbox boolean values. The sections below outline the various files that render this field type.

### Controller

The `bool.js` file is shown below, overrides the base `_render` function to disable the field. The `format` and `unformat` functions handle the manipulation of the field's value.

`./clients/base/fields/bool/bool.js`

```

({
  _render: function() {
    app.view.Field.prototype._render.call(this);

    if(this.tplName === 'disabled') {
      this.$(this.fieldTag).attr("disabled", "disabled");
    }
  },
  unformat: function(value){
    value = this.$el.find(".checkbox").prop("checked") ? "1" : "0"
  }
});
return value;

```

```

    },
    format:function(value){
        value = (value=="1") ? true : false;
        return value;
    }
})

```

## Attributes

Attribute	Description
_render	Function to render the field.
unformat	Function to dynamically check the checkbox based on the value.
format	Function to format the value for storing in the database.

## Handlebar Templates

The edit.hbs file defines the display of the control when the edit view is used. This layout is for displaying the editable form element that renders a clickable checkbox control for the user.

./clients/base/fields/bool/edit.hbs

```

{{#if def.text}}
    <label>
        <input type="checkbox" class="checkbox"{{#if value}} checked{{
/if}}> {{str def.text this.module}}
    </label>
{{else}}
    <input type="checkbox" class="checkbox"{{#if value}} checked{{/if}}
>
{{/if}}

```

## Helpers

Helpers	Description
str	Handlebars helper to render the label string.

---

The detail.hbs file defines the display of the control when the detail view is used. This layout is for viewing purposes only so the control is disabled by default.

```
./clients/base/fields/bool/detail.hbs
```

```
<input type="checkbox" class="checkbox"{{#if value}} checked{{/if}} disabled>
```

The list.hbs file defines the display of the control when the list view is used. This view is also for viewing purposes only so the control is disabled by default.

```
./clients/base/fields/bool/list.hbs
```

```
<input type="checkbox" class="checkbox"{{#if value}} checked{{/if}} disabled>
```

## Cookbook Examples

When working with fields, you may find the follow cookbook examples helpful:

- [Creating Custom Field Types](#)
- [Converting Address' Country Field to a Dropdown](#)

**Last Modified:** 2021-02-17 02:44:13

## Subpanels

### Overview

For Sidecar, Sugar's subpanel layouts have been modified to work as simplified metadata. This page is an overview of the metadata framework for subpanels.


The reason for this change is that previous versions of Sugar generated the metadata from various sources such as the SubPanelLayout and MetaDataManager classes. This eliminates the need for generating and processing the layouts and allows the metadata to be easily loaded to Sidecar.

**Note:** Modules running in backward compatibility mode do not use the Sidecar subpanel layouts as they use the legacy MVC framework.

---

## Hierarchy Diagram

When loading the Sidecar subpanel layouts, the system processes the layout in the following manner:

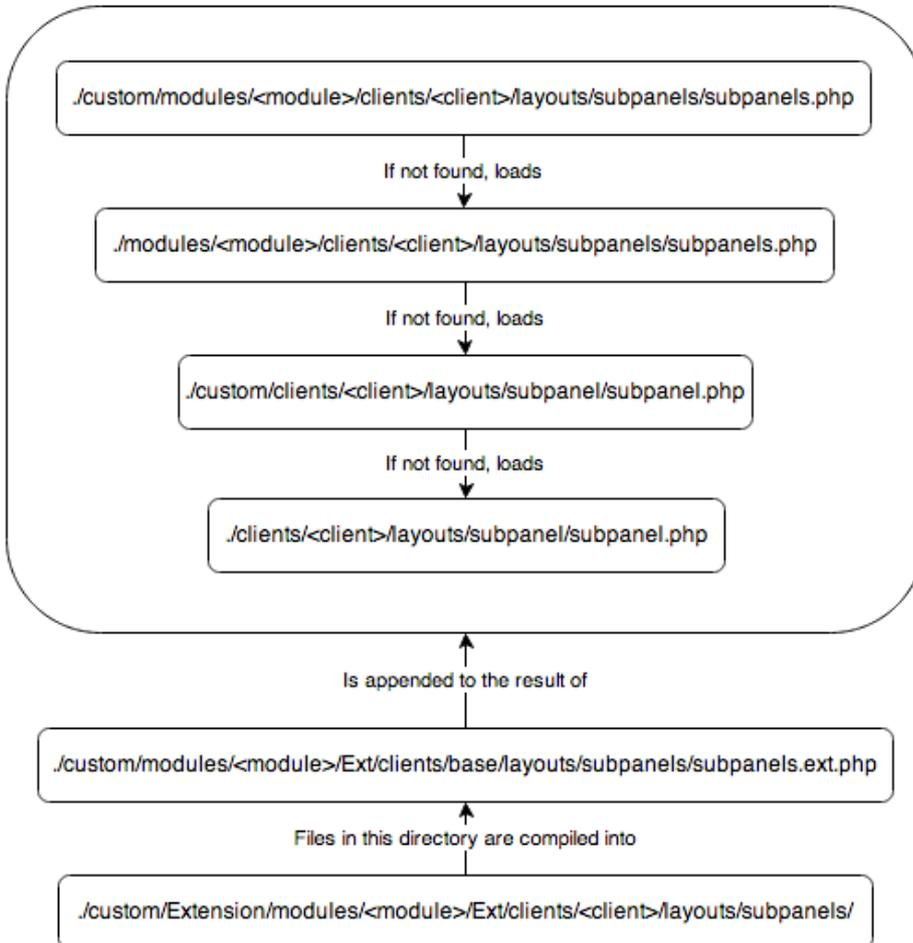

**Note:** The Sugar application's client type is "base". For more information on the various client types, please refer to the [User Interface](#) page.

## Subpanels and Subpanel Layouts

Sugar contains both a subpanels (plural) layout and a subpanel (singular) layout. The subpanels layout contains the collection of subpanels, whereas the subpanel layout renders the actual subpanel widget.

An example of a stock module's subpanels layout is:

```
./modules/Bugs/clients/base/layouts/subpanels/subpanels.php
```

---

```
<?php
$viewdefs['Bugs']['base']['layout']['subpanels'] = array (
    'components' => array (
        array (
            'layout' => 'subpanel',
            'label' => 'LBL_DOCUMENTS_SUBPANEL_TITLE',
            'context' => array (
                'link' => 'documents',
            ),
        ),
        array (
            'layout' => 'subpanel',
            'label' => 'LBL_CONTACTS_SUBPANEL_TITLE',
            'context' => array (
                'link' => 'contacts',
            ),
        ),
        array (
            'layout' => 'subpanel',
            'label' => 'LBL_ACCOUNTS_SUBPANEL_TITLE',
            'context' => array (
                'link' => 'accounts',
            ),
        ),
        array (
            'layout' => 'subpanel',
            'label' => 'LBL_CASES_SUBPANEL_TITLE',
            'context' => array (
                'link' => 'cases',
            ),
        ),
    ),
    'type' => 'subpanels',
    'span' => 12,
);
```

You can see that the layout incorporates the use of the subpanel layout for each module. As most of the subpanel data is similar, this approach allows us to use less duplicate code. The subpanel layout, shown below, shows the three views that make up the subpanel widgets users see.

[./clients/base/layouts/subpanel/subpanel.php](/clients/base/layouts/subpanel/subpanel.php)

```
<?php
```

---

```
$viewdefs['base']['layout']['subpanel'] = array (
    'components' => array (
        array (
            'view' => 'panel-top',
        )
        array (
            'view' => 'subpanel-list',
        ),
        array (
            'view' => 'list-bottom',
        ),
    ),
    'span' => 12,
    'last_state' => array(
        'id' => 'subpanel'
    ),
);
```

## Adding Subpanel Layouts

When a new relationship is deployed from Studio, the relationship creation process will generate the layouts using the extension framework. You should note that for stock relationships and custom deployed relationships, layouts are generated for both Sidecar and Legacy MVC Subpanel formats. This is done to ensure that any related modules, whether in Sidecar or Backward Compatibility mode, display a related subpanel as expected.

### Sidecar Layouts

Custom Sidecar layouts, located in `./custom/Extension/modules/<module>/Ext/clients/<client>/layouts/subpanels/`, are compiled into `./custom/modules/<module>/Ext/clients/<client>/layouts/subpanels/subpanels.ext.php` using the extension framework. When a relationship is saved, layout files are created for both the "base" and "mobile" client types.

For example, deploying a 1:M relationship from Bugs to Leads will generate the following Sidecar files:

```
./custom/Extension/modules/Bugs/Ext/clients/base/layouts/subpanels/bugs_leads_1_Bugs.php
```

```
<?php
```

---

```
$viewdefs['Bugs']['base']['layout']['subpanels']['components'][] = array (
    'layout' => 'subpanel',
    'label' => 'LBL_BUGS_LEADS_1_FROM_LEADS_TITLE',
    'context' =>
    array (
        'link' => 'bugs_leads_1',
    ),
);
```

```
./custom/Extension/modules/Bugs/Ext/clients/mobile/layouts/subpanels/bugs_leads_1_Bugs.php
```

```
<?php
```

```
$viewdefs['Bugs']['mobile']['layout']['subpanels']['components'][] = array (
    'layout' => 'subpanel',
    'label' => 'LBL_BUGS_LEADS_1_FROM_LEADS_TITLE',
    'context' =>
    array (
        'link' => 'bugs_leads_1',
    ),
);
```

**Note:** The additional legacy MVC layouts generated by a relationships deployment are described below.

## Legacy MVC Subpanel Layouts

Custom Legacy MVC Subpanel layouts, located in `./custom/Extension/modules/<module>/Ext/Layoutdefs/`, are compiled into `./custom/modules/<module>/Ext/Layoutdefs/layoutdefs.ext.php` using the extension framework. You should also note that when a relationship is saved, wireless layouts, located in `./custom/Extension/modules/<module>/Ext/WirelessLayoutdefs/`, are created and compiled into `./custom/modules/<module>/Ext/Layoutdefs/layoutdefs.ext.php`.

An example of this is when deploying a 1-M relationship from Bugs to Leads, the following layoutdef files are generated:

```
./custom/Extension/modules/Bugs/Ext/Layoutdefs/bugs_leads_1_Bugs.php
```

```
<?php
```

---

```
$layout_defs["Bugs"]["subpanel_setup"]['bugs_leads_1'] = array (
    'order' => 100,
    'module' => 'Leads',
    'subpanel_name' => 'default',
    'sort_order' => 'asc',
    'sort_by' => 'id',
    'title_key' => 'LBL_BUGS_LEADS_1_FROM_LEADS_TITLE',
    'get_subpanel_data' => 'bugs_leads_1',
    'top_buttons' =>
    array (
        0 =>
        array (
            'widget_class' => 'SubPanelTopButtonQuickCreate',
        ),
        1 =>
        array (
            'widget_class' => 'SubPanelTopSelectButton',
            'mode' => 'MultiSelect',
        ),
    ),
);
```

./custom/Extension/modules/Bugs/Ext/WirelessLayoutdefs/bugs\_leads\_1\_Bugs.php

```
<?php
```

```
$layout_defs["Bugs"]["subpanel_setup"]['bugs_leads_1'] = array (
    'order' => 100,
    'module' => 'Leads',
    'subpanel_name' => 'default',
    'title_key' => 'LBL_BUGS_LEADS_1_FROM_LEADS_TITLE',
    'get_subpanel_data' => 'bugs_leads_1',
);
```


## Fields Metadata

Sidecar's subpanel field layouts are initially defined by the subpanel list-view metadata.

## Hierarchy Diagram

The subpanel list metadata is loaded in the following manner:



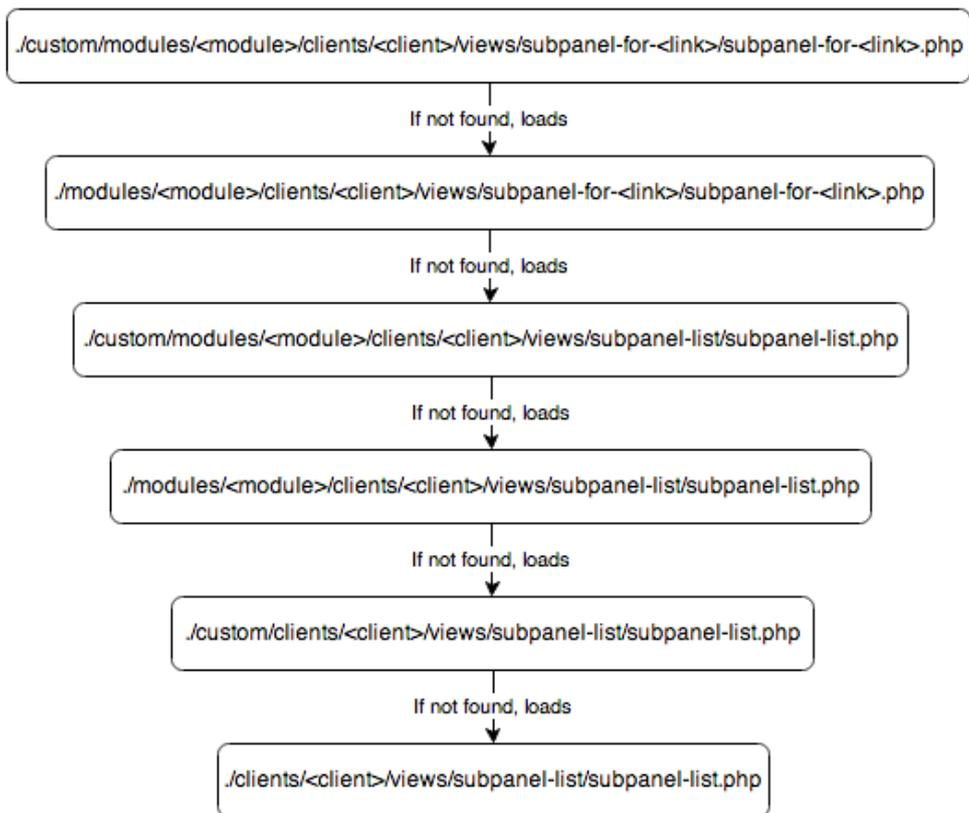

**Note:** The Sugar application's client type is "base". For more information on the various client types, please refer to the [User Interface](#) page.

## Subpanel List Views

By default, all modules come with a default set of subpanel fields for when they are rendered as a subpanel. An example of this is can be found in the Bugs module:

```
./modules/Bugs/clients/base/views/subpanel-list/subpanel-list.php
```

```
<?php
```

```

$subpanel_layout['list_fields'] = array (
  'full_name' =>
  array (
    'type' => 'fullname',
    'link' => true,
    'studio' =>
    array (
      'listview' => false,
    ),
    'vname' => 'LBL_NAME',
    'width' => '10%',
  )
);

```

---

```
'default' => true,
),
'date_entered' =>
array (
  'type' => 'datetime',
  'studio' =>
array (
  'portaleditview' => false,
),
  'readonly' => true,
  'vname' => 'LBL_DATE_ENTERED',
  'width' => '10%',
  'default' => true,
),
'refered_by' =>
array (
  'vname' => 'LBL_LIST_REFERED_BY',
  'width' => '10%',
  'default' => true,
),
'lead_source' =>
array (
  'vname' => 'LBL_LIST_LEAD_SOURCE',
  'width' => '10%',
  'default' => true,
),
'phone_work' =>
array (
  'vname' => 'LBL_LIST_PHONE',
  'width' => '10%',
  'default' => true,
),
'lead_source_description' =>
array (
  'name' => 'lead_source_description',
  'vname' => 'LBL_LIST_LEAD_SOURCE_DESCRIPTION',
  'width' => '10%',
  'sortable' => false,
  'default' => true,
),
'assigned_user_name' =>
array (
  'name' => 'assigned_user_name',
  'vname' => 'LBL_LIST_ASSIGNED_TO_NAME',
  'widget_class' => 'SubPanelDetailViewLink',
  'target_record_key' => 'assigned_user_id',
```

---

```
        'target_module' => 'Employees',
        'width' => '10%',
        'default' => true,
    ),
    'first_name' =>
    array (
        'usage' => 'query_only',
    ),
    'last_name' =>
    array (
        'usage' => 'query_only',
    ),
    'salutation' =>
    array (
        'name' => 'salutation',
        'usage' => 'query_only',
    ),
);
```

To modify this layout, navigate to Admin > Studio > {Parent Module} > Subpanels > Bugs and make your changes. Once saved, Sugar will generate `./custom/modules/Bugs/clients/<client>/views/subpanel-for-<link>/subpanel-for-<link>.php` which will be used for rendering the fields you selected.

You should note that, just as Sugar mimics the Sidecar layouts in the legacy MVC framework for modules in backward compatibility, it also mimics the field list in `./modules/<module>/metadata/subpanels/default.php` and `./custom/modules/<module>/metadata/subpanels/default.php`. This is done to ensure that any related modules, whether in Sidecar or Backward Compatibility mode, display the same field list as expected.

**Last Modified:** 2021-02-17 02:44:13

## Dashlets


### Overview

Dashlets are special view-component plugins that render data from a context and make use of the Dashlet plugin. They are typically made up of a controller JavaScript file (.js) and at least one Handlebars template (.hbs).

---

## Hierarchy Diagram

Sugar loads the dashlet view components in the following manner:

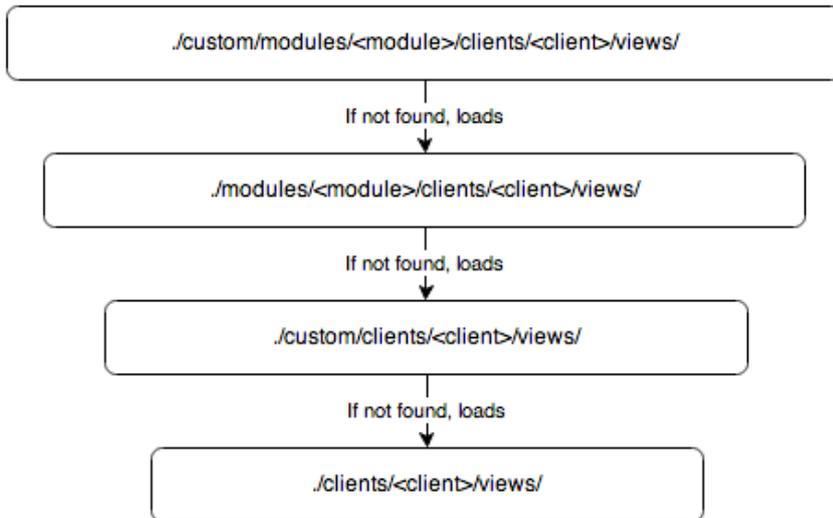

**Note:** The Sugar application's client type is "base". For more information on the various client types, please refer to the [User Interface](#) page.

## Dashlet Views

There are three views when working with dashlets: [Preview](#), [Dashlet View](#), and [Configuration View](#). The following sections discuss the differences between views.


### Preview

The preview view is used when selecting dashlets to add to your homepage. Preview variables in the metadata will be assigned to the custom model variables.

```
'preview' => array(  
  'key1' => 'value1',  
),
```


The values in the preview metadata can be retrieved using:

```
this.model.get("key1");
```

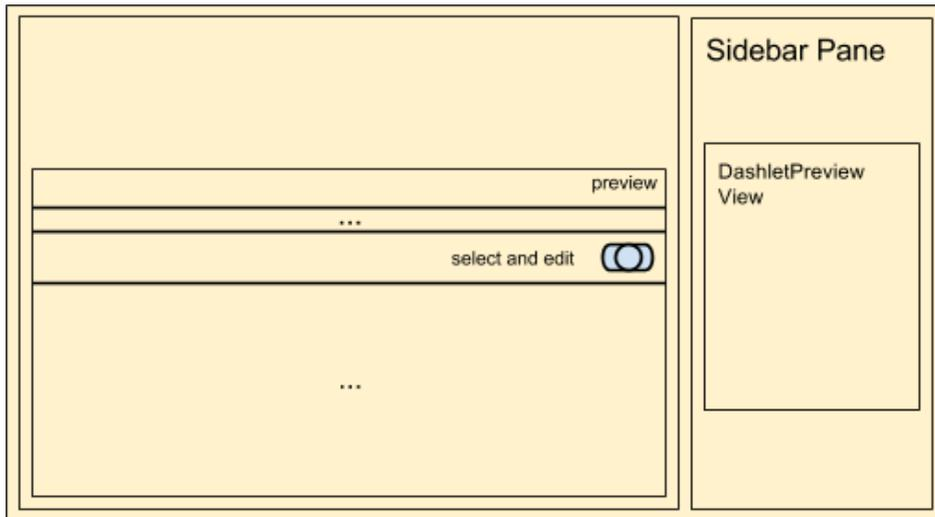

## Dashlet View

The dashlet view will render the content for the dashlet. It will also contain the settings for editing, removing, and refreshing the dashlet.

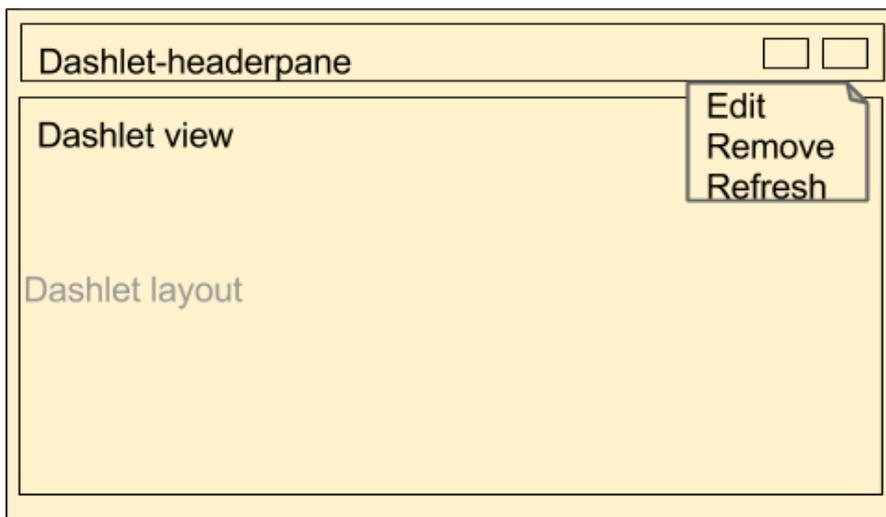

## Configuration View


The configuration view is displayed when a user clicks the 'edit' option on the dashlet frame's drop-down menu. Config variables in the metadata will be assigned to the custom model variables

```
'config' => array(
    //key value pairs of attributes
    'key1' => 'value1',
),
```

---

The values in the config metadata can be retrieved using:

```
this.model.get("key1");
```

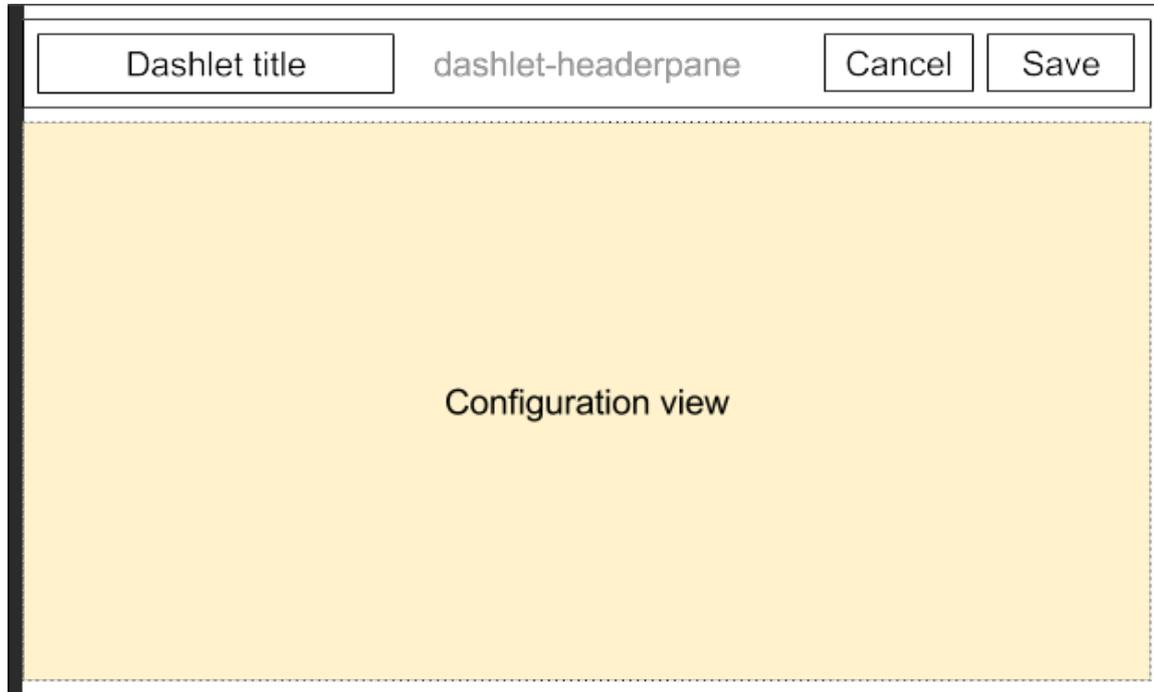

## Dashlet Example

The RSS feed dashlet, located in `./clients/base/views/rssfeed/`, handles the display of RSS feeds to the user. The sections below outline the various files that render this dashlet.

## Metadata

The Dashlet view contains the 'dashlets' metadata:

Parameters	Type	Required	Description
label	String	yes	The name of the dashlet
description	String	no	A description of the dashlet
config	Object	yes	Pre-populated variables in the configuration view

			<b>Note:</b> Config variables in the metadata are assigned to the custom model variables.
preview	Object	yes	Pre-populated variables in the preview
filter	Object	no	Filter for display

The RSS feed dashlets metadata is located in:

`./clients/base/views/rssfeed/rssfeed.php`

```
<?php
```

```
/*
 * Your installation or use of this SugarCRM file is subject to the applicable
 * terms available at
 * http://support.sugarcrm.com/Resources/Master_Subscription_Agreements/.
 * If you do not agree to all of the applicable terms or do not have the
 * authority to bind the entity as an authorized representative, then do not
 * install or use this SugarCRM file.
 *
 * Copyright (C) SugarCRM Inc. All rights reserved.
 */
```

```
$viewdefs['base']['view']['rssfeed'] = array(
    'dashlets' => array(
        array(
            'label' => 'LBL_RSS_FEED_DASHLET',
            'description' => 'LBL_RSS_FEED_DASHLET_DESCRIPTION',
            'config' => array(
                'limit' => 5,
                'auto_refresh' => 0,
            ),
        ),
        'preview' => array(
            'limit' => 5,
            'auto_refresh' => 0,
            'feed_url' => 'http://blog.sugarcrm.com/feed/',
        ),
    ),
);
```

---

```

        ),
    ),
),
'panels' => array(
    array(
        'name' => 'panel_body',
        'columns' => 2,
        'labelsOnTop' => true,
        'placeholders' => true,
        'fields' => array(
            array(
                'name' => 'feed_url',
                'label' => 'LBL_RSS_FEED_URL',
                'type' => 'text',
                'span' => 12,
                'required' => true,
            ),
            array(
                'name' => 'limit',
                'label' => 'LBL_RSS_FEED_ENTRIES_COUNT',
                'type' => 'enum',
                'options' => 'tasks_limit_options',
            ),
            array(
                'name' => 'auto_refresh',
                'label' => 'LBL_DASHLET_REFRESH_LABEL',
                'type' => 'enum',
                'options' => 'sugar7_dashlet_reports_auto_refresh_
options',
            ),
        ),
    ),
),
);

```

## Controller

The rssfeed.js controller file, shown below, contains the JavaScript to render the news articles on the dashlet. The Dashlet view must include 'Dashlet' plugin and can override initDashlet to add additional custom process while it is initializing.

./clients/base/views/rssfeed/rssfeed.js

```

/*
 * Your installation or use of this SugarCRM file is subject to the ap

```



---

```

plicable
* terms available at
* http://support.sugarcrm.com/Resources/Master_Subscription_Agreement
s/.
* If you do not agree to all of the applicable terms or do not have t
he
* authority to bind the entity as an authorized representative, then
do not
* install or use this SugarCRM file.
*
* Copyright (C) SugarCRM Inc. All rights reserved.
*/
/**
* RSS Feed dashlet consumes an RSS Feed URL and displays it's content
as a list
* of entries.
*
* The following items are configurable.
*
* - {number} limit Limit imposed to the number of records pulled.
* - {number} refresh How often (minutes) should refresh the data coll
ection.
*
* @class View.Views.Base.RssfeedView
* @alias SUGAR.App.view.views.BaseRssfeedView
* @extends View.View
*/
({
  plugins: ['Dashlet'],

  /**
   * Default options used when none are supplied through metadata.
   *
   * Supported options:
   * - timer: How often (minutes) should refresh the data collection
   *
   * - limit: Limit imposed to the number of records pulled.
   *
   * @property {Object}
   * @protected
   */
  _defaultOptions: {
    limit: 5,
    auto_refresh: 0
  },

```

---

```

/**
 * @inheritdoc
 */
initialize: function(options) {
    options.meta = options.meta || {};
    this._super('initialize', [options]);
    this.loadData(options.meta);
},

/**
 * Init dashlet settings
 */
initDashlet: function() {
    // We only need to handle this if we are NOT in the configure
screen
    if (!this.meta.config) {
        var options = {};
        var self = this;
        var refreshRate;

        // Get and set values for limits and refresh
options.limit = this.settings.get('limit') || this._defaultOptions.limit;
        this.settings.set('limit', options.limit);

        options.auto_refresh = this.settings.get('auto_refresh') |
| this._defaultOptions.auto_refresh;
        this.settings.set('auto_refresh', options.auto_refresh);

        // There is no default for this so there's no pointing in
setting from it
options.feed_url = this.settings.get('feed_url');

        // Set the refresh rate for setInterval so it can be check
ed ahead
// of time. 60000 is 1000 miliseconds times 60 seconds in
a minute.
refreshRate = options.auto_refresh * 60000;

        // Only set up the interval handler if there is a refreshR
ate higher
// than 0
if (refreshRate > 0) {
    if (this.timerId) {
        clearInterval(this.timerId);
    }
}

```

---

---

```

        this.timerId = setInterval(_.bind(function() {
            if (self.context) {
                self.context.resetLoadFlag();
                self.loadData(options);
            }
        }, this), refreshRate);
    }
}

// Validation handling for individual fields on the config
this.layout.before('dashletconfig:save', function() {
    // Fields on the metadata
    var fields = _.flatten(_.pluck(this.meta.panels, 'fields')
);

    // Grab all non-valid fields from the model
    var notValid = _.filter(fields, function(field) {
        return field.required && !this.dashModel.get(field.name);
    }, this);

    // If there no invalid fields we are good to go
    if (notValid.length === 0) {
        return true;
    }

    // Otherwise handle notification of invalidation
    _.each(notValid, function(field) {
        var fieldOnView = _.find(this.fields, function(comp,
cid) {
            return comp.name === field.name;
        });

        fieldOnView.model.trigger('error:validation:' + field
.name, {required: true});
    }, this);

    // False return tells the drawer that it shouldn't close
    return false;
}, this);
},

/**
 * Handles the response of the feed consumption request and sets d
ata from
 * the result

```

---

```

*
* @param {Object} data Response from the rssfeed API call
*/
handleFeed: function (data) {
    if (this.disposed) {
        return;
    }

    // Load up the template
    _.extend(this, data);
    this.render();
},

/**
* Loads an RSS feed from the RSS Feed endpoint.
*
* @param {Object} options The metadata that drives this request
*/
loadData: function(options) {
    if (options && options.feed_url) {
        var callbacks = {success: _.bind(this.handleFeed, this), e
rror: _.bind(this.handleFeed, this)},
            limit = options.limit || this._defaultOptions.limit,
            params = {feed_url: options.feed_url, limit: limit},
            apiUrl = app.api.buildURL('rssfeed', 'read', '', param
s);

        app.api.call('read', apiUrl, {}, callbacks);
    }
},

/**
* @inheritdoc
*
* New model related properties are injected into each model:
*
* - {Boolean} overdue True if record is prior to now.
*/
_renderHtml: function() {
    if (this.meta.config) {
        this._super('_renderHtml');
        return;
    }

    this._super('_renderHtml');
}


```

---

```
})
```

## Workflow

When triggered, the following procedure will render the view area:

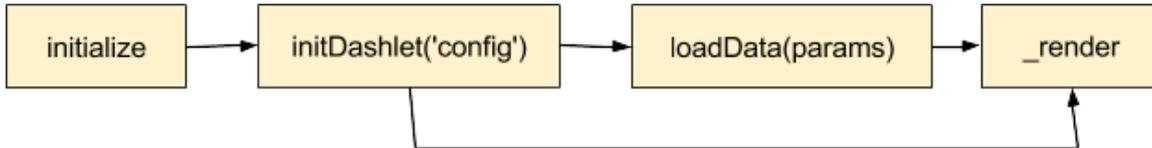

## Retrieving Data

Use the following commands to retrieve the corresponding data:

Data Location	Element	Command
Main pane	Record View	this.model
	Record View	this.context.parent.get("model")
	List View	this.context.parent.get("collection")
Metadata		this.dashletConfig['metadata_key']
Module vardefs		app.metadata.getModule("ModuleName")
Remote data	Bean	new app.data.createBean("Module") new app.data.createBeanCollection("Module")
	RestAPI	app.api.call(method, url, data, callbacks, options)
	Ajax Call	\$.ajax()
User inputs		this.settings.get("custom_key")

## Handlebar Template

The rssfeed.hbs template file defines the content of the view. This view is used for

---

rendering the markup rendering in the dashlet content.

./clients/base/views/rssfeed/rssfeed.hbs

```
{{!--
/*
 * Your installation or use of this SugarCRM file is subject to the ap
plicable
 * terms available at
 * http://support.sugarcrm.com/Resources/Master_Subscription_Agreement
s/.
 * If you do not agree to all of the applicable terms or do not have t
he
 * authority to bind the entity as an authorized representative, then
do not
 * install or use this SugarCRM file.
 *
 * Copyright (C) SugarCRM Inc. All rights reserved.
*/
--}}
{{#if feed}}
  <div class="rss-feed">
    <h4>
      {{#if feed.link}}<a href="{{feed.link}}">{{/if}}
      {{feed.title}}
      {{#if feed.link}}</a>{{/if}}
    </h4>
    <ul>
      {{#each feed.entries}}
        <li class="news-article">
          <a href="{{link}}">Dashlets</a>
          {{#if author}} - {{str "LBL_RSS_FEED_AUTHOR"}} {{autho
r}}</if}}
        </li>
      {{/each}}
    </ul>
  </div>
{{else}}
  <div class="block-footer">
    {{#if errorThrown}}
    {{str "LBL_NO_DATA_AVAILABLE"}}
    {{else}}
    {{loading 'LBL_ALERT_TITLE_LOADING'}}
    {{/if}}
  </div>
{{/if}}
```

# Drawers

## Overview

The drawer layout widget, located in `./clients/base/layouts/drawer/`, is used to display a window of additional content to the user. This window can then be closed to display the content the user was previously viewing.

## Methods

### `app.drawer.open(layoutDef, onClose)`

The `app.drawer.open(layoutDef, onClose)` method displays a new content window over the current view.

## Parameters

Name	Required	Description
<code>layoutDef.layout</code>	yes	The id of the layout to load.
<code>layoutDef.context</code>	no	Additional data you would like to pass to the drawer. Data passed in can be retrieved from the view using:  <code>this.context.get('&lt;data key&gt;');</code>  <b>Note:</b> Be very careful about what you pass in as data to the drawer. As the data is passed in by reference, when the drawer is closed, the context is destroyed.

onClose	no	Optional callback handler for when the drawer is closed.
---------	----	--

## Example

```
app.drawer.open({
  layout: 'my-layout',
  context: {
    myData: data
  },
},
function() {
  //on close, throw an alert
  alert('Drawer closed.');
```

## app.drawer.close(callbackOptions)

The `app.drawer.close(callbackOptions)` method dismisses the topmost drawer.

### Parameters

Name	Required	Description
callbackOptions	no	Any parameters passed into the close method will be passed to the callback.

### Standard Example

```
app.drawer.close();
```

### Callback Example

```
//open drawer
app.drawer.open({
  layout: 'my-layout',
},
```



---

```
function(message1, message2) {
    alert(message1);
    alert(message2);
});

//close drawer
app.drawer.close('message 1', 'message 2');
```

## **app.drawer.load(options)**

Loads a new layout into an existing drawer.

### **Parameters**

<b>Name</b>	<b>Description</b>
options.layout	The id of the layout to load.

### **Example**

```
app.drawer.load({
    layout: 'my-second-layout',
});
```

## **app.drawer.reset(triggerBefore)**

The `app.drawer.reset(triggerBefore)` method destroys all drawers at once. By default, whenever the application is routed to another page, `reset()` is called.

### **Parameters**

<b>Name</b>	<b>Required</b>	<b>Description</b>
triggerBefore	no	Determines whether to triggerBefore. Defaults to false.

### **Example**

---

```
app.drawer.reset();
```

**Last Modified:** 2021-02-17 02:44:13

## Alerts

### Overview

The alert view widget, located in `./clients/base/views/alert/`, displays helpful information such as loading messages, notices, and confirmation messages to the user.

### Methods

#### **app.alert.show(id, options)**

The `app.alert.show(id, options)` method displays an alert message to the user with the options provided.

#### Parameters

Name	Description
id	The id of the alert message. Used for dismissing specific messages.
options.level	The alert level
options.title	The alert's title, which corresponds to the alert's level
options.messages	The message that the user sees <b>Note:</b> Process alerts do not display messages.
options.autoClose	Whether or not to auto-close the alert popup
options.onClose	Callback handler for closing confirmation alerts
options.onCancel	Callback handler for canceling confirmation alerts

options.onLinkClick	Callback handler for click actions on a link inside of the alert
---------------------	--

## Default Alert Values

Alert Level	Alert Appearance	Alert Title
info	blue	"Notice"
success	green	"Success"
warning	yellow	"Warning!"
error	red	"Error"
process	loading message	"Loading..."
confirmation	confirmation dialog	"Warning"

## Alert Examples

### Standard Alert

```
app.alert.show('message-id', {
  level: 'success',
  messages: 'Task completed!',
  autoClose: true
});
```

### Confirmation Alert

```
app.alert.show('message-id', {
  level: 'confirmation',
  messages: 'Confirm?',
  autoClose: false,
  onConfirm: function(){
    alert("Confirmed!");
  },
  onCancel: function(){
    alert("Cancelled!");
  }
});
```

### Process Alert

---

```
app.alert.show('message-id', {
  level: 'process',
  title: 'In Process...' //change title to modify display from 'Loading...'
});
```

## **app.alert.dismiss(id)**

The `app.alert.dismiss(id)` method dismisses an alert message from view based on the message id.

### **Parameters**

<b>Name</b>	<b>Description</b>
id	The id of the alert message to dismiss.

### **Example**

```
app.alert.dismiss('message-id');
```

## **app.alert.dismissAll**

The `app.alert.dismissAll` dismisses all alert messages from view.

### **Example**

```
app.alert.dismissAll();
```

## **Testing in Console**

To test alerts, you can trigger them in your browser's developer tools by using the global `App` variable as shown below:

```
App.alert.show('message-id', {
  level: 'success',
  messages: 'Successful!',
  autoClose: false
});
```

---

```
});
```

**Last Modified:** 2021-02-17 02:44:13

# Language

## Overview

The language library, located in `./sidecar/src/core/language.js`, is used to manage the user's display language as well as fetch labels and lists. For more information on customizing languages, please visit the [language framework](#) documentation.

## Methods

### **app.lang.get(key, module, context)**

The `app.lang.get(key, module, context)` method fetches a string for a given key. The method searches the module strings first and then falls back to the app strings. If the label is a template, it will be compiled and executed with the given context.

### Parameters

Name	Required	Description
key	yes	The key of the string to retrieve
module	no	The Sugar module that the label belongs to
context	no	Template context

### Example

```
app.lang.get('LBL_NAME', 'Accounts');
```

### **app.lang.getAppString(key)**

---

The `app.lang.getAppString(key)` method retrieves an application string for a given key.

### Parameters

Name	Required	Description
key	yes	The key of the string to retrieve

### Example

```
app.lang.getAppString('LBL_MODULE');
```

### **app.lang.getAppListStrings(key)**

The `app.lang.getAppListStrings(key)` method retrieves an application list string or object.

### Parameters

Name	Required	Description
key	yes	The key of the string to retrieve

### Example

```
app.lang.getAppListStrings('sales_stage_dom');
```

### **app.lang.getModuleSingular(moduleKey)**

The `app.lang.getModuleSingular(moduleKey)` method retrieves an application list string or object.

### Parameters

Name	Required	Description
------	----------	-------------

---

moduleKey	yes	The module key of the singular module label to retrieve
-----------	-----	---

### Example

```
app.lang.getModuleSingular("Accounts");
```

## app.lang.getLanguage()

The app.lang.getLanguage() method retrieves the current user's language key.

### Example

```
app.lang.getLanguage();
```

## app.lang.updateLanguage(languageKey)

The app.lang.updateLanguage(languageKey) method updates the current user's language key.

### Parameters

Name	Required	Description
languageKey	yes	Language key of the language to set for the user

### Example

```
app.lang.updateLanguage('en_us');
```

## Testing in Console

To test out the language library, you can trigger actions in your browsers developer tools by using the global Apps variable as shown below:

---


```
App.lang.getAppListStrings('sales_stage_dom');
```

**Last Modified:** 2021-02-17 02:44:13

## MegaMenu

### Overview

The MegaMenu is the header navigation bar located at the top of every Sugar page. It is the primary tool used to navigate the front end of the Sugar application.



### Layout Components

The MegaMenu layout, located in `./clients/base/layouts/header/header.php`, is composed of the module-list and quicksearch layouts as well as the notifications, profileactions and quickcreate views. To customize these components, you can create your own layout override in `./custom/clients/base/layouts/header/header.php` to reference your own custom components.

### Link Actions

The following properties define the navigation, display, and visibility of all links in the system:

Name	Description
<code>acl_action</code>	The ACL action is used to verify the user has access to a specific action required for the link
<code>acl_module</code>	The ACL module is used to verify if the user has access to a specific module required for the link
<code>icon</code>	The bootstrap icon to display next to the link (the full list of icons are listed in




	Admin > Styleguide > Core Elements > Base CSS > Icons)
label	The label key that contains your link's display text
openwindow	Specifies whether or not the link should open in a new window
route	The route to direct the user. For sidecar modules, this is #<module>, but modules in backward compatibility mode are routed as #bwc/index.php?module=<module>. <b>Note:</b> External links require the full URL as well as openwindow set to true.
submenu	An array of sub-navigation links <b>Note:</b> Sub-navigation links contain these same basic link properties.

## Module Links

Module links are the top-level links for each available module, represented as tabs in the navigation bar (or, sometimes, the overflow menu). When a top-level link is clicked, the user is directed to the selected module's list view layout. These top-level links are also expandable elements that contain sub-navigation menu links, which are outlined in the following section.

## Module Action Links

The module action links are displayed to the user when they click the down arrow next to a module link.

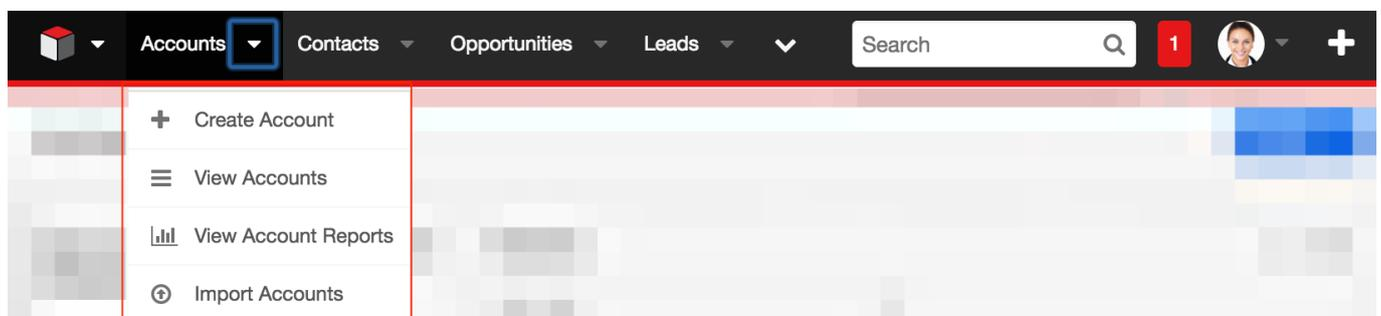

## Adding Module Action Links

---

The example below demonstrates how to add a module action link that points to the Leads module. To define your own module action link, you must create your own label extension for the link's display label:

```
./custom/Extension/application/Ext/Language/en_us.addModuleLink.php
```

```
<?php

//create the links label
$app_strings['LNK_LEADS_C'] = 'View Leads';
```

Now create the module action link extension:

```
./custom/Extension/modules/<module>/Ext/clients/base/menus/header/addModule
Link.php
```

```
<?php

$viewdefs['<module>']['base']['menu']['header'][] = array(
    'route'=>'#Leads',
    'label' =>'LNK_LEADS_C',
    'acl_module'=>'Leads',
    'icon' => 'icon-user',
);
```

Once you have created the extension files, navigate to Admin > Repair > Quick Repair and Rebuild. This will append your profile action item to the existing list of links.

**Note:** You may need to refresh the page to see the new profile menu items.

## Removing Module Action Links

To remove a module action link, loop through the list of module actions and remove the item by one of its properties. For your reference, the stock module actions can be found in

```
./modules/<module>/clients/base/menus/header/header.php.
```

```
./custom/Extension/modules/<module>/Ext/clients/base/menus/header/removeMod
uleLink.php
```

```
if (isset($viewdefs['<module>']['base']['menu']['header'])) {
    foreach ($viewdefs['<module>']['base']['menu']['header'] as $key =
> $moduleAction) {
        //remove the link by label key
```

```

        if (in_array($moduleAction['label'], array('<link label key>'))
    )) {
            unset($viewdefs['<module>']['base']['menu']['header'][$key
    ]);
        }
    }
}


```

Once you have created the extension files, navigate to Admin > Repair > Quick Repair and Rebuild. This will remove the menu action item from the existing list of links.

**Note:** You may need to refresh the page to see the module menu items removed.

## Profile Action Links

Profile actions are the links listed under the user's profile menu on the right side of the MegaMenu. Profile action extension files are located in `./custom/Extension/application/Ext/clients/base/views/profileactions/` and are compiled into `./custom/application/Ext/clients/base/views/profileactions/profileactions.ext.php`.

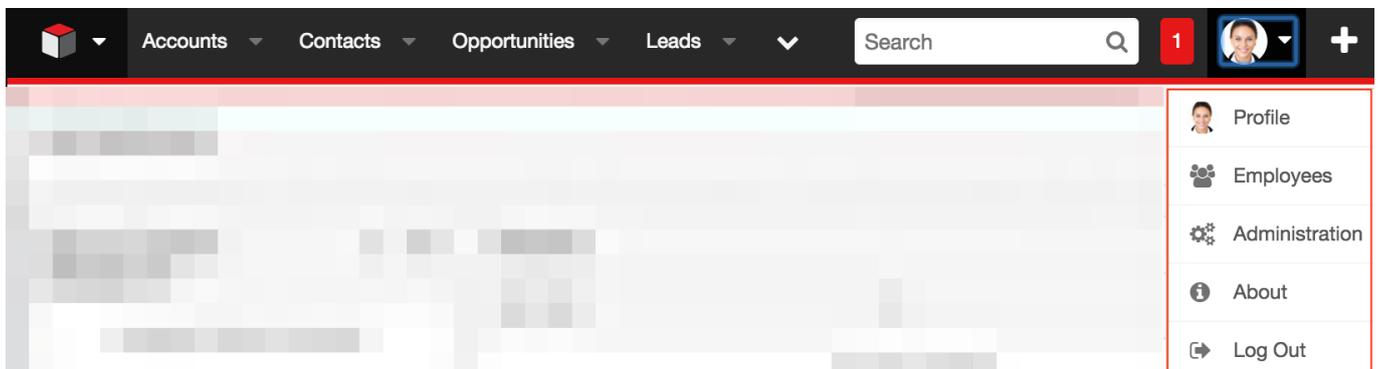

## Adding Profile Action Links

The example below demonstrates how to add a profile action link to the Styleguide. To define your own profile action link, create your own label extension for the link's display label.

```
./custom/Extension/application/Ext/Language/en_us.addProfileActionLink.php
```

```
<?php
```

```
//create the links label
```

---

```
$app_strings['LNK_STYLEGUIDE_C'] = 'Styleguide';
```

Next, create the profile action link extension:

```
./custom/Extension/application/Ext/clients/base/views/profileactions/addProfileActionLink.php
```

```
<?php

$viewdefs['base']['view']['profileactions'][] = array(
    'route' => '#Styleguide',
    'label' => 'LNK_STYLEGUIDE_C',
    'icon' => 'icon-link',
);
```

Once you have created the extension files, navigate to Admin > Repair > Quick Repair and Rebuild. This will append your profile action item to the existing list of links.

**Note:** You may need to refresh the page to see the new profile menu items.

## Removing Profile Action Links

To remove a profile action link, loop through the list of profile actions and remove the item by one of its properties. For your reference, the stock profile actions can be found in `./clients/base/views/profileactions/profileactions.php`.

```
./custom/Extension/application/Ext/clients/base/views/profileactions/removeProfileActionLink.php
```

```
<?php

if (isset($viewdefs['base']['view']['profileactions'])) {
    foreach ($viewdefs['base']['view']['profileactions'] as $key => $profileAction) {
        //remove the link by label key
        if (in_array($profileAction['label'], array('LNK_ABOUT'))) {
            unset($viewdefs['base']['view']['profileactions'][$key]);
        }
    }
}
```

Once you have created the extension files, navigate to Admin > Repair > Quick Repair and Rebuild. This will remove the profile action item from the existing list of links.

---

**Note:** You may need to refresh the page to see the profile menu items removed.

**Last Modified:** 2021-02-17 02:44:13

## Administration Links

### Overview

Administration links are the shortcut URLs found on the Administration page in the Sugar application. Developers can create additional administration links using the extension framework.

The global links extension directory is located at `./custom/Extension/modules/Administration/Ext/Administration/`. After a Quick Repair and Rebuild, the PHP files in this directory are compiled into `./custom/modules/Administration/Ext/Administration/administration.ext.php`. Additional information on this can be found in the extensions [Administration](#) section of the Extension Framework documentation. The current links defined in the administration section can be found in `./modules/Administration/metadata/adminpaneldefs.php`.

### Example

The following example will create a new panel on the Admin page:

```
./custom/Extension/modules/Administration/Ext/Administration/<file>.php
```

```
<?php

    $admin_option_defs = array();
    $admin_option_defs['Administration']['<section key>'] = array(
        //Icon name. Available icons are located in ./themes/default/i
images
        'Administration',

        //Link name label
        'LBL_LINK_NAME',

        //Link description label
        'LBL_LINK_DESCRIPTION',
```

---

```

        //Link URL - For Sidecar modules
        'javascript:parent.SUGAR.App.router.navigate("<module>/<path>"
, {trigger: true});',

        //Alternatively, if you are linking to BWC modules
        //'./index.php?module=<module>&action=<action>',
    );

    $admin_group_header[] = array(
        //Section header label
        'LBL_SECTION_HEADER',

        // $other_text parameter for get_form_header()
        '',

        // $show_help parameter for get_form_header()
        false,

        //Section links
        $admin_option_defs,

        //Section description label
        'LBL_SECTION_DESCRIPTION'
    );

```

To define labels for administration links in the new panel:

`./custom/Extension/modules/Administration/Ext/Language/en_us.<name>.php`

`<?php`

```

    $mod_strings['LBL_LINK_NAME'] = 'Link Name';
    $mod_strings['LBL_LINK_DESCRIPTION'] = 'Link Description';
    $mod_strings['LBL_SECTION_HEADER'] = 'Section Header';
    $mod_strings['LBL_SECTION_DESCRIPTION'] = 'Section Description';

```

Finally, navigate to Admin > Repair > Quick Repair and Rebuild. The system will then rebuild the extensions and the panel will appear on the Admin page.

**Last Modified:** 2021-02-17 02:44:13

---

# Legacy MVC

## Overview

The legacy MVC Architecture.

You should note that the MVC architecture is being deprecated and is being replaced with sidecar. Until the framework is fully deprecated, modules set in backward compatibility mode will still use the MVC framework.


## Model-View-Controller (MVC) Overview

A model-view-controller, or MVC, is a design philosophy that creates a distinct separation between business-logic and display logic.

- **Model** : This is the data object built by the business/application logic needed to present in the user interface. For Sugar, it is represented by the SugarBean and all subclasses of the SugarBean.
- **View** : This is the display layer which is responsible for rendering data from the Model to the end-user.
- **Controller** : This is the layer that handles user events such as "Save" and determines what business logic actions to take to build the model, and which view to load for rendering the data to end users.

## SugarCRM MVC Implementation

The following is a sequence diagram that highlights some of the main components involved within the Sugar MVC framework.

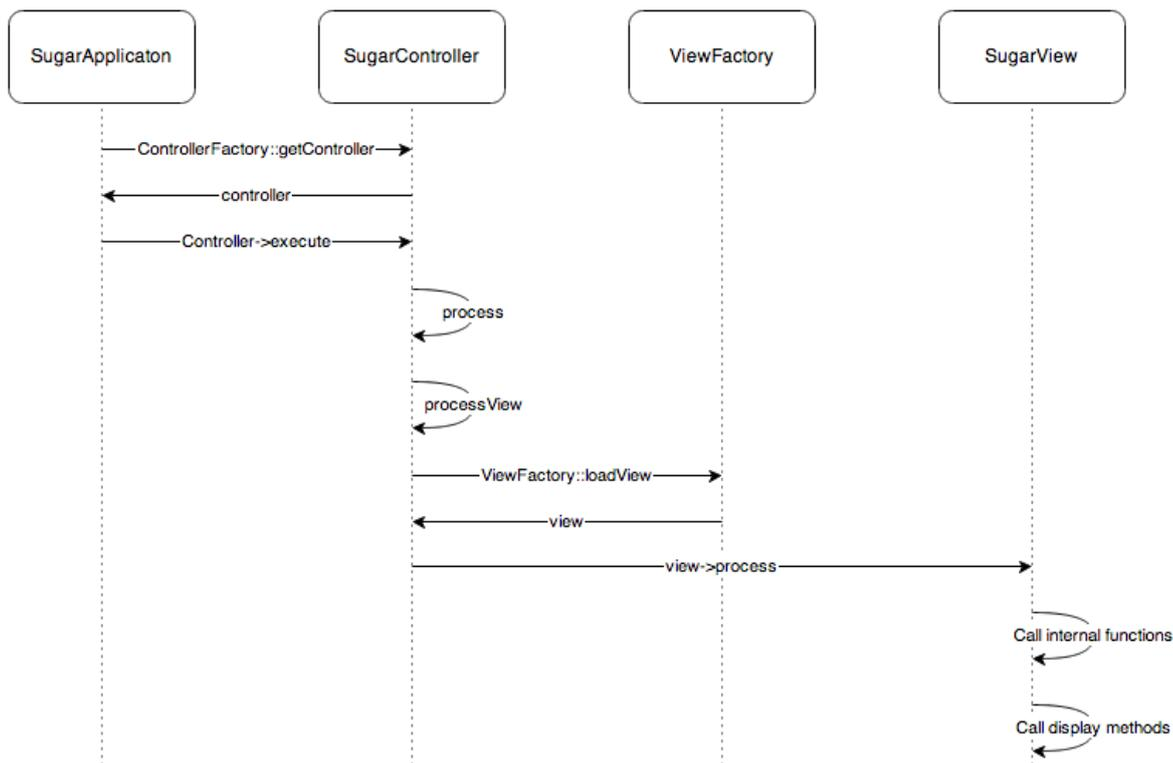

Last Modified: 2021-02-17 02:44:13

# View

## Overview

Displaying information to the browser.

## What are Views?

Views, otherwise known as actions, are typically used to render views or to process logic. Views are not just limited to HTML data. You can send JSON encoded data as part of a view or any other structure you wish. As with the controllers, there is a default class called SugarView which implements much of the basic logic for views, such as handling of headers and footers.

There are five main actions for a module:



- 
- Display Actions
    - **Detail View:** A detail view displays a read-only view of a particular record. Usually, this is accessed via the list view. The detail view displays the details of the object itself and related items (subpanels).  
Subpanels are miniature list views of items that are related to the parent object. For example, Tasks assigned to a Project, or Contacts for an Opportunity will appear in subpanels in the Project or Opportunity detail view. The file `./<module>/metadata/detailviewdefs.php` defines a module's detail view page layout. The file `./<module>/metadata/subpaneldefs.php` defines the subpanels that are displayed in the module's detail view page.
    - **Edit View:** The edit view page is accessed when a user creates a new record or edits details of an existing one. Edit view can also be accessed directly from the list view. The file `./<module>/metadata/editviewdefs.php` defines a module's edit view page layout.
    - **List View:** This Controller action enables the search form and search results for a module. Users can perform actions such as delete, export, update multiple records (mass update), and drill into a specific record to view and edit the details. Users can see this view by default when they click one of the module tabs at the top of the page. Files in each module describe the contents of the list and search view.
  - Process Actions
    - **Save:** This Controller action is processed when the user clicks Save in the record's edit view.
    - **Delete:** This action is processed when the user clicks "Delete" in the detail view of a record or in the detail view of a record listed in a subpanel.

## Implementation

### Class File Structure

- `./include/MVC/Views/SugarView.php`
- `./include/MVC/Views/view.<view>.php`
- `./custom/include/MVC/Views/view.<view>.php`
- `./modules/<module>/views/view.<view>.php`
- `./custom/modules/<module>/views/view.<view>.php`

### Class Loading

---

The ViewFactory class loads the view based off the the following sequence loading the first file it finds:

- ./custom/modules/<module>/views/view.<view>.php
- ./modules/<module>/views/view.<view>.php
- ./custom/include/MVC/View/view.<view>.php
- ./include/MVC/Views/view.<view>.php

## Methods

There are two main methods to override within a view:

- **preDisplay()**: This performs pre-processing within a view. This method is relevant only for extending existing views. For example, the include/MVC/View/views/view.edit.php file uses it, and enables developers who wishes to extend this view to leverage all of the logic done in preDisplay() and either override the display() method completely or within your own display() method call parent::display().
- **display()**: This method displays the data to the screen. Place the logic to display output to the screen here.

## Creating Views

Creating a new/view action consists of a controller action and a view file. The first step is to define your controller action. If the module does not contain a controller.php file in ./modules/<module>/ you will create the following file:

```
./custom/modules/<module>/controller.php
```

```
<?php
```

```
class <module>Controller extends SugarController
{
    function action_MyView()
    {
        $this->view = 'myview';
    }
}
```

More information on controllers can be found in the [Controller](#) section.

The next step is to define your view file. This example extends the ViewDetail class but you can extend any of the classes you choose in ./include/MVC/View/views/.

---

```
./custom/modules/<module>/views/view.newview.php
```

```
<?php
```

```
require_once 'include/MVC/View/views/view.detail.php' ;
```

```
class <module>ViewMyView extends ViewDetail
{
    function display()
    {
        echo 'This is my new view<br>';
    }
}
```

## Overriding Views

The following section will demonstrate how to extend and override a view. When overriding existing actions and views, you won't need to make any changes to the controller. This approach will be very similar for any view you may choose to modify. If the module you are extending the view for does not contain an existing view in its modules views directory ( ./modules/<module>/views/ ), you will need to extend the views base class. Otherwise, you will extend the view class found within the file.

In the case of a detail view, you would check for the file ./modules/<module>/views/view.detail.php. If this file does not exist, you will create ./custom/modules/<module>/views/view.detail.php and extend the base ViewDetail class with the name <module>ViewDetail.

```
./custom/modules/<module>/views/view.detail.php
```

```
<?php
```

```
require_once('include/MVC/View/views/view.detail.php');
```

```
class <module>ViewDetail extends ViewDetail
{
    function display()
    {
        echo 'This is my addition to the DetailView<br>';

        //call parent display method
        parent::display();
    }
}
```

---

If `./modules/<module>/views/view.detail.php` does exist, you would create `./custom/modules/<module>/views/view.detail.php` and extend the base `<module>ViewDetail` class with the name `Custom<module>ViewDetail`.

`./custom/modules/<module>/views/view.detail.php`

```
<?php

require_once('modules/<module>/views/view.detail.php');

class Custom<module>ViewDetail extends <module>ViewDetail
{
    function display()
    {
        echo 'This is my addition to the DetailView<br>';

        //call parent display method
        parent::display();
    }
}
```

## Display Options for Views

The Sugar MVC provides developers with granular control over how the screen looks when a view is rendered. Each view can have a config file associated with it. In the case of an edit view, the developer would create the file `./customs/modules/<module>/views/view.edit.config.php` . When the edit view is rendered, this config file will be picked up. When loading the view, `ViewFactory` class will merge the view config files from the following possible locations with precedence order (high to low):

- `./customs/modules/<module>/views/view.<view>.config.php`
- `./modules/<module>/views/view.<view>.config.php`
- `./custom/include/MVC/View/views/view.<view>.config.php`
- `./include/MVC/View/views/view.<view>.config.php`

## Implementation

The format of these files is as follows:

```
$view_config = array(
    'actions' =>
        array(
```

---

```
        'popup' => array(
            'show_header' => false,
            'show_subpanels' => false,
            'show_search' => false,
            'show_footer' => false,
            'show_JavaScript' => true,
        ),
    ),
    'req_params' => array(
        'to_pdf' => array(
            'param_value' => true,
            'config' => array(
                'show_all' => false
            ),
        ),
    ),
);
```

To illustrate this process, let us take a look at how the 'popup' action is processed. In this case, the system will go to the actions entry within the view\_config and determine the proper configuration. If the request contains the parameter to\_pdf, and is set to be true, then it will automatically cause the show\_all configuration parameter to be set false, which means none of the options will be displayed.

**Last Modified:** 2021-02-17 02:44:13

## Controller

### Overview

The basic actions of a module.

### Controllers

The main controller, named SugarController, addresses the basic actions of a module from EditView and DetailView to saving a record. Each module can override this SugarController by adding a controller.php file into its directory. This file extends the SugarController, and the naming convention for the class is: <module>Controller

---

Inside the controller, you define an action method. The naming convention for the method is: `action_<action name>`

There are more fine-grained control mechanisms that a developer can use to override the controller processing. For example, if a developer wanted to create a new save action, there are three places where they could possibly override.

- **action\_save:** This is the broadest specification and gives the user full control over the save process.
- **pre\_save:** A user could override the population of parameters from the form.
- **post\_save:** This is where the view is being set up. At this point, the developer could set a redirect URL, do some post-save processing, or set a different view.

## Upgrade-Safe Implementation

You can also add a custom Controller that extends the module's Controller if such a Controller already exists. For example, if you want to extend the Controller for a module, you should check if that module already has a module-specific controller. If so, you extend from that controller class. Otherwise, you extend from SugarController class. In both cases, you should place the custom controller class file in `./custom/modules/<module>/Controller.php` instead of the module directory. Doing so makes your customization upgrade-safe.

## File Structure

- `./include/MVC/Controller/SugarController.php`
- `./include/MVC/Controller/ControllerFactory.php`
- `./modules/<module>/Controller.php`
- `./custom/modules/<module>/controller.php`

## Implementation

If the module does not contain a `controller.php` file in `./modules/<module>/`, you will create the following file:

```
./custom/modules/<module>/controller.php
```

```
class <module>Controller extends SugarController
```

---

```
{
    function action_<action>()
    {
        $this->view = '<action lowercase>';
    }
}
```

If the module does contain a controller.php file, you will need to extend it by doing the following:

```
./custom/modules/<module>/controller.php
```

```
require_once 'modules/<module>/controller.php';
```

```
class Custom<module>Controller extends <module>Controller
{
    function action_<action>()
    {
        $this->view = '<action lowercase>';
    }
}
```

**Note:** When creating or moving files you will need to rebuild the file map.

More information on rebuilding the file map can be found in the [SugarAutoLoader](#).

## Mapping Actions to Files

You can choose not to provide a custom action method as defined above, and instead, specify your mappings of actions to files in `$action_file_map`. Take a look at `./include/MVC/Controller/action_file_map.php` as an example:

```
$action_file_map['subpanelviewer'] = 'include/SubPanel/SubPanelViewer.php';
$action_file_map['save2'] = 'include/generic/Save2.php';
$action_file_map['deleterelationship'] = 'include/generic/DeleteRelationship.php';
$action_file_map['import'] = 'modules/Import/index.php';
```

Here the developer has the opportunity to map an action to a file. For example, Sugar uses a generic sub-panel file for handling subpanel actions. You can see above that there is an entry mapping the action 'subpanelviewer' to `./include/SubPanel/SubPanelViewer.php`.

---

The base SugarController class loads the action mappings in the following path sequence:

- ./include/MVC/Controller
- ./modules/<module>
- ./custom/modules/<module>
- ./custom/include/MVC/Controller

Each one loads and overrides the previous definition if in conflict. You can drop a new `action_file_map` in the later path sequence that extends or overrides the mappings defined in the previous one.

## Upgrade-Safe Implementation

If you want to add custom `action_file_map.php` to an existing module that came with the SugarCRM release, you should place the file at `./custom/modules/<module>/action_file_map.php`

### File Structure

- ./include/MVC/Controller/action\_file\_map.php
- ./modules/<module>/action\_file\_map.php
- ./custom/modules/<module>/action\_file\_map.php

### Implementation

```
$action_file_map['soapRetrieve'] = 'custom/SoapRetrieve/soap.php';
```

### Classic Support (Not Recommended)

Classic support allows you to have files that represent actions within your module. Essentially, you can drop in a PHP file into your module and have that be handled as an action. This is not recommended, but is considered acceptable for backward compatibility. The better practice is to take advantage of the `action_<action>` structure.

### File Structure

- ./modules/<module>/<action>.php



---

## Controller Flow Overview

For example, if a request comes in for DetailView the controller will handle the request as follows:

1. Start in index.php and load the SugarApplication instance.
2. SugarApplication instantiates the SugarControllerFactory.
3. SugarControllerFactory loads the appropriate Controller.
4. SugarControllerFactory checks for  
./custom/modules/<module>/Controller.php.
  1. If not found, check for ./modules/<module>/Controller.php.
  2. If not found, load SugarController.php.
5. Calls on the appropriate action.
  1. Look for ./custom/modules/<module>/<action>.php. If found and ./custom/modules/<module>/views/view.<action>.php is not found, use this view.
  2. If not found check for modules/<module>/<action>.php. If found and ./modules/<module>/views/view.<action>.php is not found, then use the ./modules/<module>/<action>.php action.
  3. If not found, check for the method action\_<action> in the controller.
  4. If not found, check for an action\_file\_mapping.
  5. If not found, report error "Action is not defined".

**Last Modified:** 2021-02-17 02:44:13

## Metadata

### Overview

An overview of the legacy MVC metadata framework.

You should note that the MVC architecture is being deprecated and is being replaced with sidecar. Until the framework is fully deprecated, modules set in backward compatibility mode will still use the legacy MVC framework.

### Metadata Framework

---

## Background

Metadata is defined as information about data. In Sugar, metadata refers to the framework of using files to abstract the presentation and business logic found in the system. The metadata framework is described in definition files that are processed using PHP. The processing usually includes the use of Smarty templates for rendering the presentation and JavaScript libraries to handle some business logic that affects conditional displays, input validation, and so on.

## Application Metadata

All application modules are defined in the `modules.php` file. It contains several variables that define which modules are active and usable in the application.

The file is located under the '`<sugar root>/include`' folder. It contains the `$moduleList()` array variable which contains the reference to the array key to look up the string to be used to display the module in the tabs at the top of the application. The coding standard is for the value to be in the plural of the module name; for example, Contacts, Accounts, Widgets, and so on.

The `$beanList()` array stores a list of all active beans (modules) in the application. The `$beanList` entries are stored in a 'name' => 'value' fashion with the 'name' value being in the plural and the 'value' being in the singular of the module name. The 'value' of a `$beanList()` entry is used to lookup values in our next `modules.php` variable, the `$beanFiles()` array.

The `$beanFiles` variable is also stored in a 'name' => 'value' fashion. The 'name', typically in singular, is a reference to the class name of the object, which is looked up from the `$beanList` 'value', and the 'value' is a reference to the class file.

The remaining relevant variables in the `modules.php` file are the `$modInvisList` variable which makes modules invisible in the regular user interface (i.e., no tab appears for these modules), and the `$adminOnlyList` which is an extra level of security for modules that are accessible only by administrators through the Admin page.

## Module Metadata

The following table lists the metadata definition files found in the `modules/[module]/metadata` directory, and a brief description of their purpose within the system.

File	Description
------	-------------

additionalDetails.php	Used to render the popup information displayed when a user hovers the mouse cursor over a row in the List View.
editviewdefs.php	Used to render a record's EditView.
detailviewdefs.php	Used to render a record's DetailView.
listviewdefs.php	Used to render the List View display for a module.
metafiles.php	Used to override the location of the metadata definition file to be used. The EditView, DetailView, List View, and Popup code check for the presence of these files.
popupdefs.php	Used to render and handle the search form and list view in popups.
searchdefs.php	Used to render a module's basic and advanced search form displays.
sidecreateviewdefs.php	Used to render a module's quick create form shown in the side shortcut panel.
subpaneldefs.php	Used to render a module's subpanels shown when viewing a record's DetailView.

## SearchForm Metadata

The search form layout for each module is defined in the module's metadata file searchdefs.php. A sample of the Accounts searchdefs.php appears as:

```
<?php

$searchdefs['Accounts'] = array(
    'templateMeta' => array(
        'maxColumns' => '3',
        'widths' => array(
            'label' => '10',
            'field' => '30'
        )
    ),
    'layout' => array(
        'basic_search' => array(
            'name',
            'billing_address_city',
```

---

```
'phone_office',
array(
  'name' => 'address_street',
  'label' => 'LBL_BILLING_ADDRESS',
  'type' => 'name',
  'group' => 'billing_address_street'
),
array(
  'name' => 'current_user_only',
  'label' => 'LBL_CURRENT_USER_FILTER',
  'type'=>'bool'
),
),
'advanced_search' => array(
  'name',
  array(
    'name' => 'address_street',
    'label' => 'LBL_ANY_ADDRESS',
    'type' => 'name'
  ),
  array(
    'name' => 'phone',
    'label' => 'LBL_ANY_PHONE',
    'type' => 'name'
  ),
  'website',
  array(
    'name' => 'address_city',
    'label' => 'LBL_CITY',
    'type' => 'name'
  ),
  array(
    'name' => 'email',
    'label' =>'LBL_ANY_EMAIL',
    'type' => 'name'
  ),
  'annual_revenue',
  array(
    'name' => 'address_state',
    'label' =>'LBL_STATE',
    'type' => 'name'
  ),
  'employees',
  array(
    'name' => 'address_postalcode',
    'label' =>'LBL_POSTAL_CODE',
```

---

```

        'type' => 'name'
    ),
    array(
        'name' => 'billing_address_country',
        'label' => 'LBL_COUNTRY',
        'type' => 'name'
    ),
    'ticker_symbol',
    'sic_code',
    'rating',
    'ownership',
    array(
        'name' => 'assigned_user_id',
        'type' => 'enum',
        'label' => 'LBL_ASSIGNED_TO',
        'function' => array(
            'name' => 'get_user_array',
            'params' => array(false)
        )
    ),
    'account_type',
    'industry',
),
);

```

?>

The `searchdefs.php` file contains the Array variable `$searchDefs` with one entry. The key is the name of the module as defined in `$moduleList` array defined in `include/modules.php`. The `$searchDefs` array is another array that describes the search form layout and fields.

The `'templateMeta'` key points to another array that controls the maximum number of columns in each row of the search form (`'maxColumns'`), as well as layout spacing attributes as defined by `'widths'`. In the above example, the generated search form files will allocate 10% of the width spacing to the labels and 30% for each field respectively.

The `'layout'` key points to another nested array which defines the fields to display in the basic and advanced search form tabs. Each individual field definition maps to a `SugarField` widget. See the `SugarField` widget section for an explanation about `SugarField` widgets and how they are rendered for the search form, `DetailView`, and `EditView`.

The `searchdefs.php` file is invoked from the MVC framework whenever a module's


---

list view is rendered (see `include/MVC/View/views/view.list.php`). Within `view.list.php`, checks are made to see if the module has defined a `SearchForm.html` file. If this file exists, the MVC will run in classic mode and use the aforementioned `include/SearchForm/SearchForm.php` file to process the search form. Otherwise, the new search form processing is invoked using `include/SearchForm/SearchForm2.php` and the `searchdefs.php` file is scanned for, first under the `custom/modules/[module]/metadata` directory and then in `modules/[module]/metadata`.


The processing flow for the search form using the `metadata subpaneldefs.php` file is similar to that of `EdiView` and `DetailView`.

## DetailView and EditView Metadata

Metadata files are PHP files that declare nested Array values that contain information about the view, such as buttons, hidden values, field layouts, and more. Following is a visual diagram representing how the Array values declared in the Metadata file are nested:

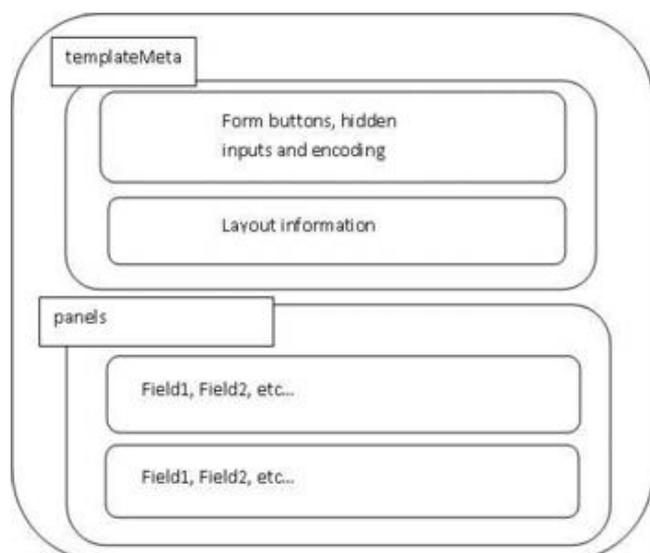

The following diagram highlights the process of how the application determines which Metadata file is to be used when rendering a request for a view:

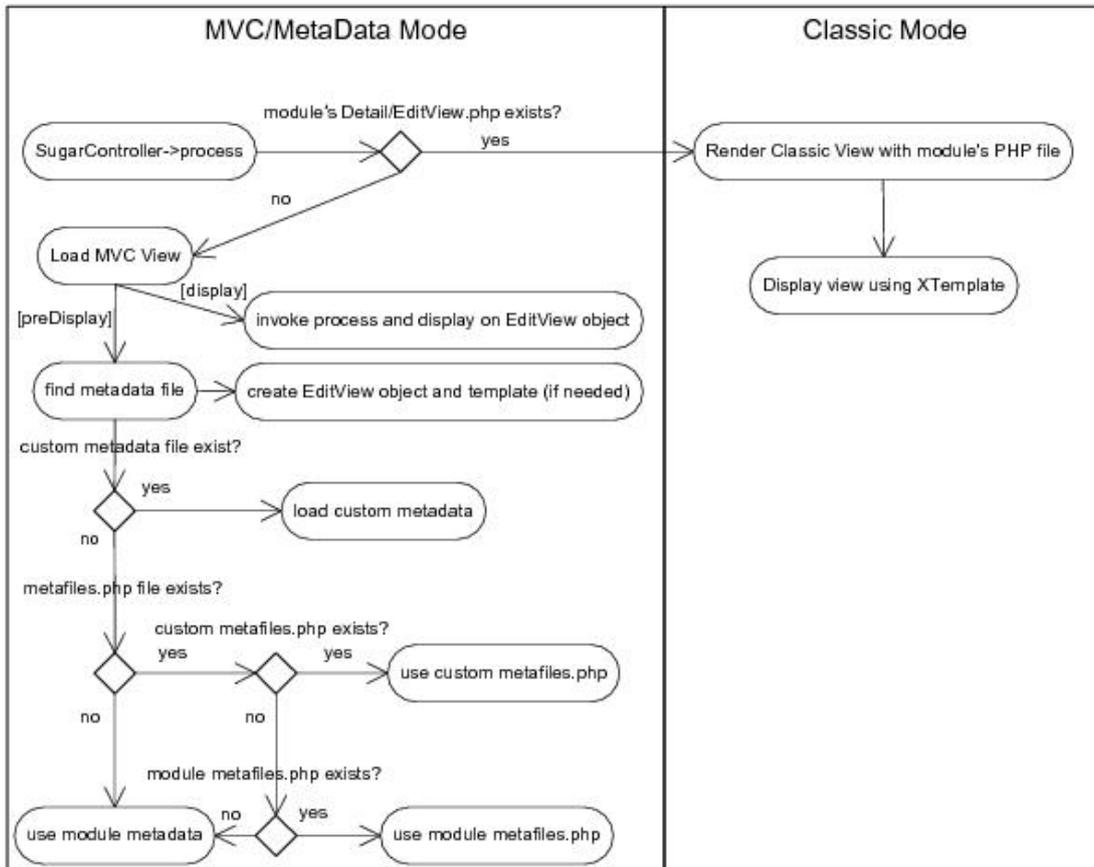

The "Classic Mode" on the right hand side of the diagram represents the SugarCRM pre-5.x rendering of a Detail/Editview. This section will focus on the MVC/Metadata mode.

When the view is first requested, the preDisplay method will attempt to find the correct Metadata file to use. Typically, the Metadata file will exist in the [root level]/modules/[module]/metadata directory, but in the event of edits to a layout through the Studio interface, a new Metadata file will be created and placed in the [root level]/custom/modules/[module]/metadata directory. This is done so that changes to layouts may be restored to their original state through Studio, and also to allow changes made to layouts to be upgrade-safe when new patches and upgrades are applied to the application. The metafiles.php file that may be loaded allows for the loading of Metadata files with alternate naming conventions or locations. An example of the metafiles.php contents can be found for the Accounts module (though it is not used by default in the application).

```

$metafiles['Accounts'] = array(
    'detailviewdefs' => 'modules/Accounts/metadata/detailviewdefs.php'
    ,
    'editviewdefs' => 'modules/Accounts/metadata/editviewdefs.php' ,
    'ListViewdefs' => 'modules/Accounts/metadata/ListViewdefs.php' ,
    'searchdefs' => 'modules/Accounts/metadata/searchdefs.php' ,
    'popupdefs' => 'modules/Accounts/metadata/popupdefs.php' ,
  
```

---

```
'searchfields' => 'modules/Accounts/metadata/SearchFields.php',  
);
```


After the Metadata file is loaded, the `preDisplay` method also creates an `EditView` object and checks if a Smarty template file needs to be built for the given Metadata file. The `EditView` object does the bulk of the processing for a given Metadata file (creating the template, setting values, setting field level ACL controls if applicable, etc.). Please see the `EditView` process diagram for more detailed information about these steps.

After the `preDisplay` method is called in the view code, the `display` method is called, resulting in a call to the `EditView` object's `process` method, as well as the `EditView` object's `display` method.


The `EditView` class is responsible for the bulk of the Metadata file processing and creation of the resulting display. The `EditView` class also checks to see if the resulting Smarty template is already created. It also applies the field level ACL controls for Sugar Sell, Serve, Ultimate, Enterprise, Corporate, and Professional.

The classes responsible for displaying the Detail View and SearchForm also extend and use the `EditView` class. The `ViewEdit`, `ViewDetail` and `ViewSidequickcreate` classes use the `EditView` class to process and display their contents. Even the file that renders the quick create form display (`SubpanelQuickCreate.php`) uses the `EditView` class. `DetailView` (in `DetailView2.php`) and `SearchForm` (in `SearchForm2.php`) extend the `EditView` class while `SubpanelQuickCreate.php` uses an instance of the `EditView` class. The following diagram highlights these relationships.



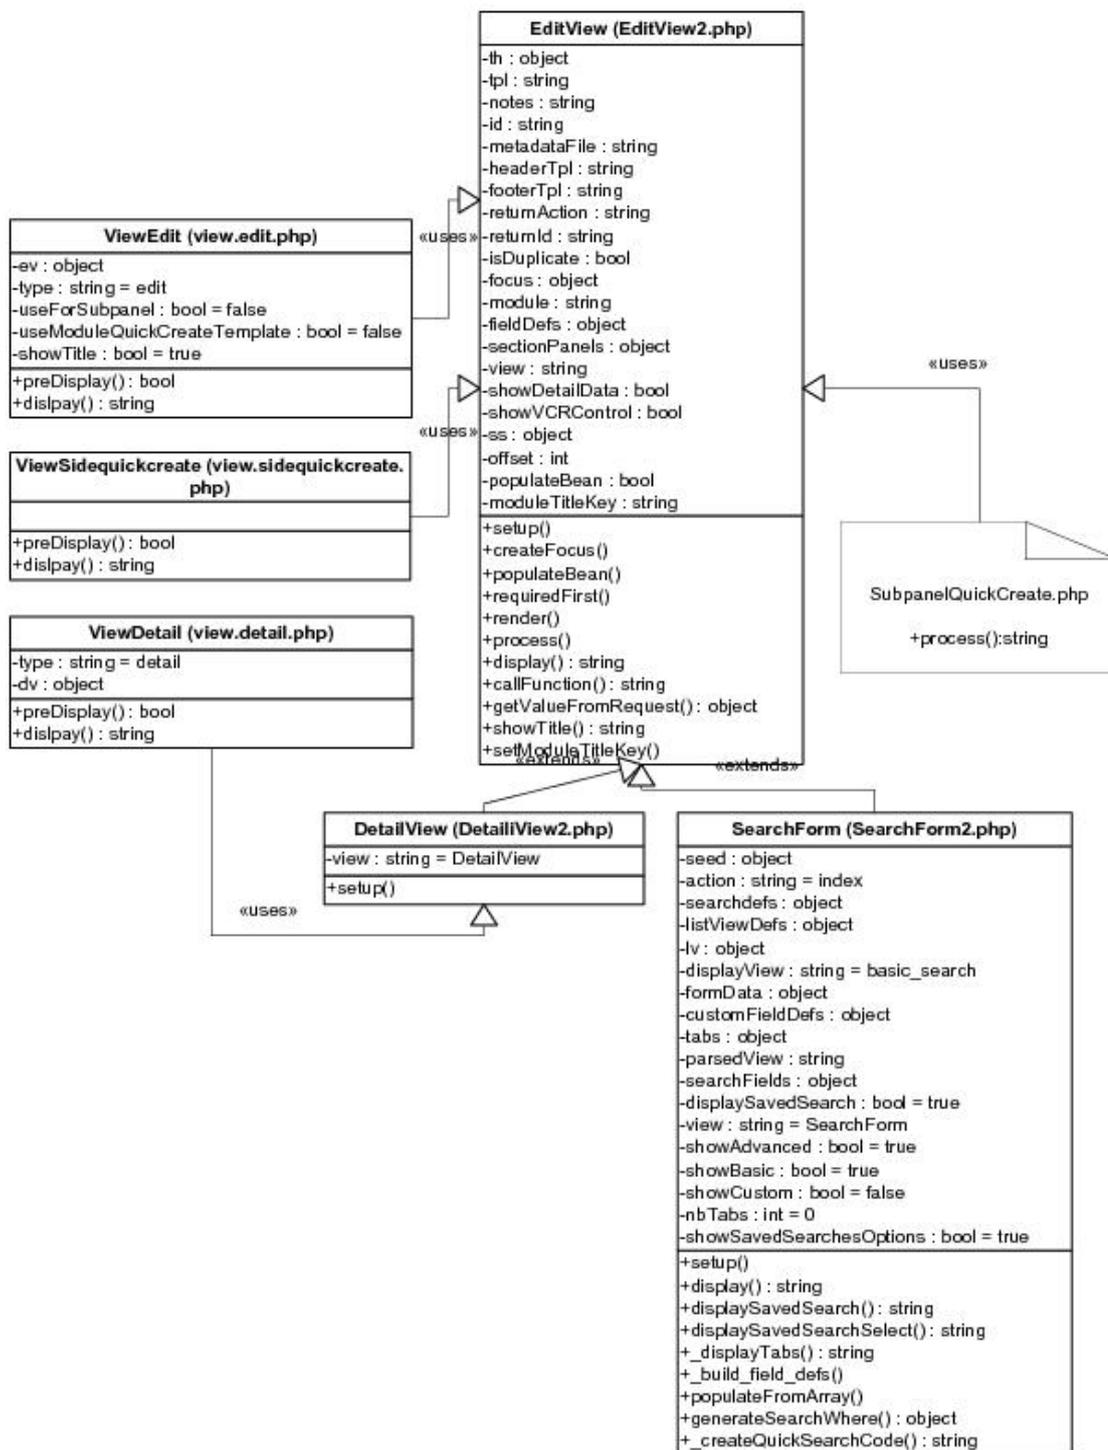


The following diagram highlights the EditView class's main responsibilities and their relationships with other classes in the system. We will use the example of a DetailView request although the sequence will be similar for other views that use the EditView class.

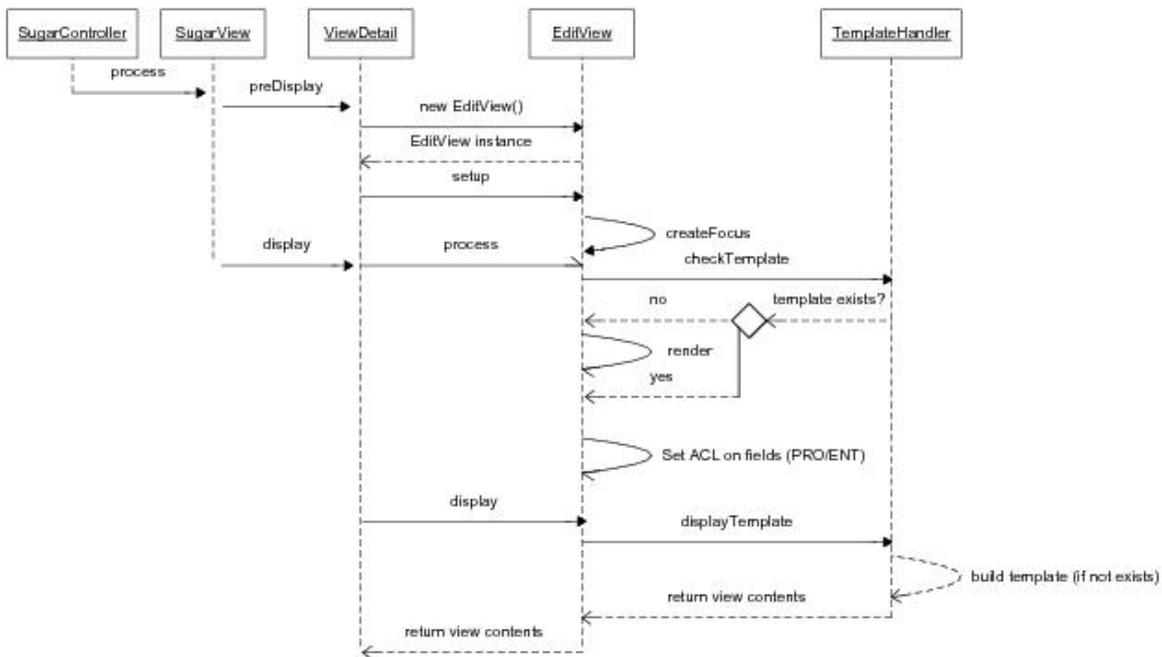

One thing to note is the EditView class's interaction with the TemplateHandler class. The TemplateHandler class is responsible for generating a Smarty template in the cache/modules/<module> directory. For example, for the Accounts module, the TemplateHandler will create the Smarty file, cache/modules/Accounts/DetailView.tpl, based on the Metadata file definition and other supplementary information from the EditView class. The TemplateHandler class actually uses Smarty itself to generate the resulting template that is placed in the aforementioned cache directory.

Some of the modules that are available in the SugarCRM application also extend the ViewDetail class. One example of this is the DetailView for the Projects module. As mentioned in the MVC section, it is possible to extend the view classes by placing a file in the modules/<module>/views directory. In this case, a view.detail.php file exists in the modules/Projects/views folder. This may serve as a useful example in studying how to extend a view and apply additional field/layout settings not provided by the EditView class.

The following diagram shows the files involved with the DetailView example in more detail:

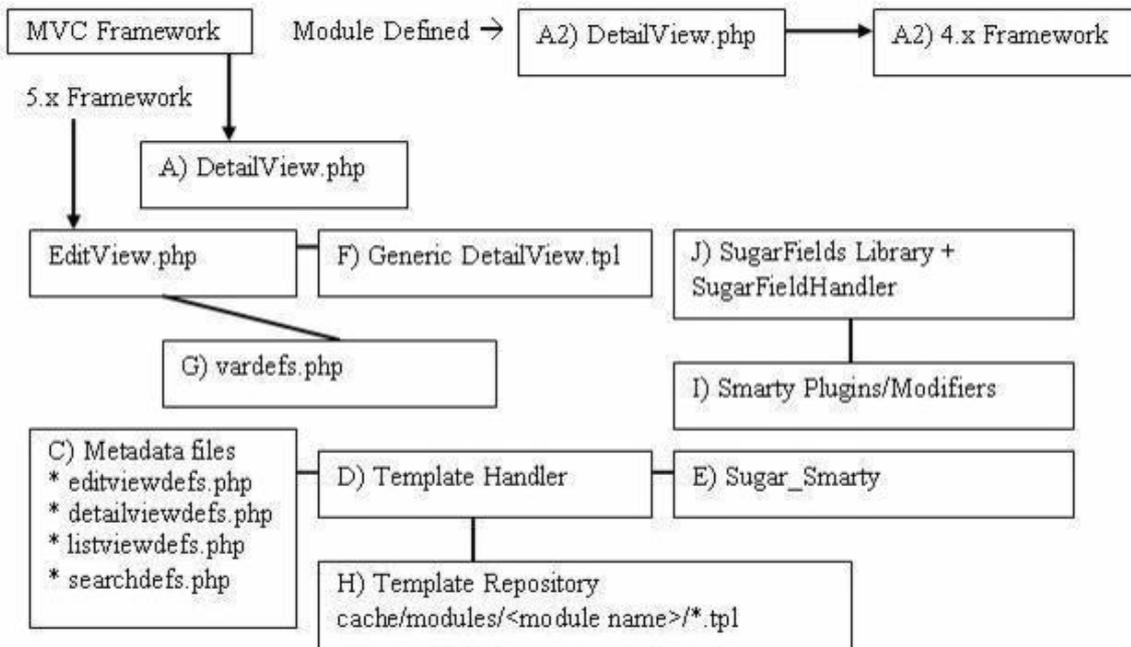

A high level processing summary of the components for DetailViews follows:

The MVC framework receives a request to process the DetailView.php (A) action for a module. For example, a record is selected from the list view shown on the browser with URL:

```
index.php?action=DetailView&module=Opportunities&record=46af9843-ccdf-
f489-8833
```

At this point the new MVC framework checks to see if there is a DetailView.php (A2) file in the modules/Opportunity directory that will override the default DetailView.php implementation. The presence of a DetailView.php file will trigger the "classic" MVC view. If there is no DetailView.php (A2) file in the directory, the MVC will also check if you have defined a custom view to handle the DetailView rendering in MVC (that is, checks if there is a file modules/Opportunity/views/view.detail.php). See the documentation for the MVC architecture for more information. Finally, if neither the DetailView.php (A2) nor the view.detail.php exists, then the MVC will invoke include/DetailView/DetailView.php (A).

The MVC framework (see views.detail.php in include/MVC/View/views folder) creates an instance of the generic DetailView (A)

```
// Call DetailView2 constructor
$dv = new DetailView2();

// Assign by reference the Sugar_Smarty object created from MVC
```

---

```
// We have to explicitly assign by reference to back support PHP 4.x
$dv->ss =& $this->ss;

// Call the setup function
$dv->setup($this->module, $this->bean, $metadataFile, 'include/DetailView/DetailView.tpl');

// Process this view
$dv->process();

// Return contents to the buffer
echo $dv->display();
```

When the setup method is invoked, a TemplateHandler instance (D) is created. A check is performed to determine which detailviewdefs.php metadata file to used in creating the resulting DetailView. The first check is performed to see if a metadata file was passed in as a parameter. The second check is performed against the custom/studio/modules/[Module] directory to see if a metadata file exists. For the final option, the DetailView constructor will use the module's default detailviewdefs.php metadata file located under the modules/[Module]/metadata directory. If there is no detailviewdefs.php file in the modules/[Module]/metadata directory, but a DetailView.html exists, then a "best guess" version is created using the metadata parser file in include/SugarFields/Parsers/DetailViewMetaParser.php (not shown in diagram).

The TemplateHandler also handles creating the quick search (Ajax code to do look ahead typing) as well as generating the JavaScript validation rules for the module. Both the quick search and JavaScript code should remain static based on the definitions of the current definition of the metadata file. When fields are added or removed from the file through Studio, this template and the resulting updated quick search and JavaScript code will be rebuilt.

It should be noted that the generic DetailView (A) defaults to using the generic DetailView.tpl smarty template file (F). This may also be overridden through the constructor parameters. The generic DetailView (A) constructor also retrieves the record according to the record id and populates the \$focus bean variable.

The process() method is invoked on the generic DetailView.php instance:

```
function process()
{
    //Format fields first
    if($this->formatFields)
    {
        $this->focus->format_all_fields();
    }
}
```

```

    parent::process();
}

```

This, in turn, calls the `EditView->process()` method since `DetailView` extends from `EditView`. The `EditView->process()` method will eventually call the `EditView->render()` method to calculate the width spacing for the `DetailView` labels and values. The number of columns and the percentage of width to allocate to each column may be defined in the metadata file. The actual values are rounded as a total percentage of 100%. For example, given the `templateMeta` section's `maxColumns` and `widths` values:

```

'templateMeta' => array(
    'maxColumns' => '2',
    'widths' => array(
        array(
            'label' => '10',
            'field' => '30'
        ),
        array(
            'label' => '10',
            'field' => '30'
        )
    ),
),

```

We can see that the labels and fields are mapped as a 1-to-3 ratio. The sum of the widths only equals a total of 80 (10 + 30 x 2) so the actual resulting values written to the Smarty template will be at a percentage ratio of 12.5-to-37.5. The resulting fields defined in the metadata file will be rendered as a table with the column widths as defined:

100%			
50%			
12.5%	37.5%		
Label 1	Value 1	Label 2	Value 2
Label 3	Value 3	Label 4	Value 4
...		...	
...		...	

The actual metadata layout will allow for variable column lengths throughout the displayed table. For example, the metadata portion defined as:

```

'panels' => array(
    'default' => array(
        array(
            'name',
            array(
                'name' => 'amount',
                'label' => '{ $MOD.LBL_AMOUNT } ( { $CURRENCY} )',
            ),
        ),
        array(
            'account_name',
        ),
        array(
            '',
            'opportunity_type',
        )
    )
)

```

This specifies a default panel under the panels section with three rows. The first row has two fields (name and amount). The amount field has some special formatting using the label override option. The second row contains the account\_name field and the third row contains the opportunity\_type column.

100%		
50%		
12.5%	37.5%	
Name	Fee	Amount \$100,000
Account	Test Account	
...		Type <b>New Business</b>
...		...

Next, the process() method populates the \$fieldDefs array variable with the vardefs.php file (G) definition and the \$focus bean's value. This is done by calling the toArray () method on the \$focus bean instance and combining these values with the field definition specified in the vardefs.php file (G).

The display() method is then invoked on the generic DetailView instance for the final step.

When the display() method is invoked, variables to the DetailView.tpl Smarty template are assigned and the module's HTML code is sent to the output buffer.

Before HTML code is sent back, the TemplateHandler (D) first performs a check to see if an existing DetailView template already exists in the cache repository (H).

---

In this case, it will look for file cache/modules/Opportunity/DetailView.tpl. The operation of creating the Smarty template is expensive so this operation ensures that the work will not have to be redone. As a side note, edits made to the DetailView or EditView through the Studio application will clear the cache file and force the template to be rewritten so that the new changes are reflected.

If the cache file does not exist, the TemplateHandler (D) will create the template file and store it in the cache directory. When the fetch() method is invoked on the Sugar\_Smarty class (E) to create the template, the DetailView.tpl file is parsed.

**Last Modified:** 2021-02-17 02:44:13

## Examples

Legacy MVC metadata examples.



**Last Modified:** 2021-02-17 02:44:13

## Hiding the Quotes Module PDF Buttons

### Overview

How to hide the PDF buttons on a Quote.

The PDF buttons on quotes are rendered differently than the standard buttons on most layouts. Since these buttons can't be removed directly from the DetailView in the detailviewdefs, the best approach is using jQuery to hide the buttons.

**Note:** This customization is only applicable for the quotes module as it is in backward compatibility mode.

### Hidding the PDF Buttons

---

This approach involves modifying the detailviewdefs.php in the custom/modules/Quotes/metadata directory to include a custom JavaScript file. If a custom detailviewdefs.php file doesn't exist, you will need to create it through Studio or by manually coping the detailviewdefs.php from the Quotes stock module metadata directory.

First, we will create a javascript file, say removePdfBtns.js, in the ./custom/modules/Quotes directory. This javascript file will contain the jQuery statements to hide the Quotes "Download PDF" and "Email PDF" buttons on the DetailView of the Quote.

./custom/modules/Quotes/removePdfBtns.js

```
SUGAR.util.doWhen("typeof $ != 'undefined'", function(){
    YAHOO.util.Event.onDOMReady(function(){
        $("#pdfview_button").hide();
        $("#pdfemail_button").hide();
    });
});
```

Next, we will modify the custom detailviewdefs.php file to contain the 'includes' array element in the templateMeta array as follows:

./custom/modules/Quotes/metadata/detailviewdefs.php

```
$viewdefs['Quotes'] = array (
    'DetailView' =>
    array (
        'templateMeta' =>
        array (
            'form' =>
            array (
                'closeFormBeforeCustomButtons' => true,
                'buttons' =>
                array (
                    0 => 'EDIT',
                    1 => 'SHARE',
                    2 => 'DUPLICATE',
                    3 => 'DELETE',
                    4 =>
                    array (
                        'customCode' => '<form action="index.php" method="POST" na
me="Quote2Opp" id="form">
                            <input type="hidden" name="module" value="Quotes">
                            <input type="hidden" name="record" value="{ $fields
.id.value} ">
```



---

```

        <input type="hidden" name="user_id" value="{current_user->id}">
        <input type="hidden" name="team_id" value="{fields.team_id.value}">
        <input type="hidden" name="user_name" value="{current_user->user_name}">
        <input type="hidden" name="action" value="QuoteToOpportunity">
        <input type="hidden" name="opportunity_subject" value="{fields.name.value}">
        <input type="hidden" name="opportunity_name" value="{fields.name.value}">
        <input type="hidden" name="opportunity_id" value="{fields.billing_account_id.value}">
        <input type="hidden" name="amount" value="{fields.total.value}">
        <input type="hidden" name="valid_until" value="{fields.date_quote_expected_closed.value}">
        <input type="hidden" name="currency_id" value="{fields.currency_id.value}">
        <input id="create_opp_from_quote_button" title="{APP.LBL_QUOTE_TO_OPPORTUNITY_TITLE}"
            class="button" type="submit" name="opp_to_quote_button"
            value="{APP.LBL_QUOTE_TO_OPPORTUNITY_LABEL}"
            {$DISABLE_CONVERT}></form>',
    ),
),
'footerTpl' => 'modules/Quotes/tpls/DetailViewFooter.tpl',
),
'maxColumns' => '2',
'widths' =>
array (
    0 =>
    array (
        'label' => '10',
        'field' => '30',
    ),
    1 =>
    array (
        'label' => '10',
        'field' => '30',
    ),
),
),
'includes' =>
array (

```

---

```
0 =>
array (
    'file' => 'custom/modules/Quotes/removePdfBtns.js',
),
),
'useTabs' => false,
'tabDefs' =>
array (
    'LBL_QUOTE_INFORMATION' =>
array (
    'newTab' => false,
    'panelDefault' => 'expanded',
),
    'LBL_PANEL_ASSIGNMENT' =>
array (
    'newTab' => false,
    'panelDefault' => 'expanded',
),
),
),
...
```

Finally, navigate to:

Admin > Repair > Quick Repair and Rebuild

The buttons will then be removed from the DetailView layouts.

**Last Modified:** 2021-02-17 02:44:13

## Manipulating Buttons on Legacy MVC Layouts

### Overview

How to add custom buttons to the EditView and DetailView layouts.

**Note:** This customization is only applicable for modules in backward compatibility mode.

### Metadata

---

Before adding buttons to your layouts, you will need to understand how the metadata framework is used. Detailed information on the metadata framework can be found in the [Legacy Metadata](#) section.

## Custom Layouts

Before you can add a button to your layout, you will first need to make sure you have a custom layout present. The stock layouts are located in `./modules/<module>/metadata/` and must be recreated in `./custom/modules/<module>/metadata/`.

There are two ways to recreate a layout in the custom directory if it does not already exist. The first is to navigate to:

```
Studio > {Module} > Layouts > {View}
```

Once there, you can click the "Save & Deploy" button. This will create the layoutdef for you. Alternatively, you can also manually copy the layoutdef from the stock folder to the custom folder.

## Editing Layouts

When editing layouts you have three options in having your changes reflected in the UI.

## Developer Mode

You can turn on Developer Mode:

```
Admin > System Settings
```

Developer Mode will remove the caching of the metadata framework. This will cause your changes to be reflected when the page is refreshed. Make sure this setting is deactivated when you are finished with your customization.

## Quick Repair and Rebuild

You can run a Quick Repair and Rebuild:

```
Admin > Repair > Quick Repair and Rebuild
```

---

Doing this will rebuild the cache for the metadata.

## Saving & Deploying the Layout in Studio

You may also choose to load the layout in studio and then save & deploy it:

```
Admin > Studio > {Module} > Layouts > {View}
```

This process can be a bit confusing, however, once a layout is changed, you can then choose to load the layout in studio and then click "Save & Deploy" . This will rebuild the cache for that specific layout. Please note that any time you change the layout, you will have to reload the Studio layout view before deploying in order for this to work correctly.

## Adding Custom Buttons

When adding buttons, there are several things to consider when determining how the button should be rendered. The following sections will outline these scenarios when working with the accounts editviewdefs located in `./custom/modules/Accounts/metadata/editviewdefs.php`.

## JavaScript Actions

If you are adding a button solely to execute JavaScript (no form submissions), you can do so by adding the button HTML to:

```
$viewdefs['<Module>']['<View>']['templateMeta']['form']['buttons']
```

### Example

```
<?php
$viewdefs['Accounts'] =
array (
    'DetailView' =>
    array (
        'templateMeta' =>
```

---

```
array (
  'form' =>
    array (
      'buttons' =>
        array (
          0 => 'EDIT',
          1 => 'DUPLICATE',
          2 => 'DELETE',
          3 => 'FIND_DUPLICATES',
          4 => 'CONNECTOR',
          5 =>
            array (
              'customCode' => '<input id="JavaScriptButton" title="JavaScript Button" class="button" type="button" name="JavaScriptButton" value="JavaScript Button" onclick="alert(\'Button JavaScript\')">',
            ),
          ),
        ),
      ),
    ),
  ),
```

## Submitting the Stock View Form

If you intend to submit the stock layout form ('formDetailView' or 'formEditView') to a new action, you can do so by adding a the button HTML with an onclick event as shown below to:

```
$viewdefs['<Module>']['<View>']['templateMeta']['form']['buttons']
```

### Example

---

```
<?php
$viewdefs['Accounts'] =
array (
    'DetailView' =>
array (
    'templateMeta' =>
array (
    'form' =>
array (
    'hidden' =>
array (
    0 => '<input type="hidden" id="customFormField" name="custom
FormField" value="">',
    ),
    'buttons' =>
array (
    0 => 'EDIT',
    1 => 'DUPLICATE',
    2 => 'DELETE',
    3 => 'FIND_DUPLICATES',
    4 => 'CONNECTOR',
    5 =>
array (
```

---

```

        'customCode' => '<input id="SubmitStockFormButton" title="
Submit Stock Form Button" class="button" type="button" name="SubmitSto
ckFormButton" value="Submit Stock Form Button" onclick="var _form = do
cument.getElementById(\'formDetailView\'); _form.customFormField.value
 = \'CustomValue\'; _form.action.value = \'CustomAction\'; SUGAR.ajaxU
I.submitForm(_form);">',

    ),

),

),

```

You should note in this example that there is also a 'hidden' index. This is where you should add any custom hidden inputs:

```

$viewdefs['<Module>'] [
  '<View>'] [
  'templateMeta'] [
  'form'] [
  'hidden']

```

## Submitting Custom Forms

If you intend to submit a custom form, you will first need to set 'closeFormBeforeCustomButtons' to true. This will close out the current views form and allow you to create your own.

```

$viewdefs['<Module>'] [ '<View>'] [ 'templateMeta'] [ 'form'] [ 'closeFormBefo
reCustomButtons']

```

Next, you will add the form and button HTML as shown below to:

```

$viewdefs['<Module>'] [ '<View>'] [ 'templateMeta'] [ 'form'] [ 'buttons']

```

### Example

```

<?php

```

```

$viewdefs['Accounts'] =

```

```

array (

```

---

```
'DetailView' =>
array (
  'templateMeta' =>
array (
  'form' =>
array (
  'closeFormBeforeCustomButtons' => true,
  'buttons' =>
array (
  0 => 'EDIT',
  1 => 'DUPLICATE',
  2 => 'DELETE',
  3 => 'FIND_DUPLICATES',
  4 => 'CONNECTOR',
  5 =>
array (
  'customCode' => '<form action="index.php" method="POST" na
me="CustomForm" id="form"><input type="hidden" name="customFormField"
name="customFormField" value="CustomValue"><input id="SubmitCustomForm
Button" title="Submit Custom Form Button" class="button" type="submit"
name="SubmitCustomFormButton" value="Submit Custom Form Button"></for
m>',
  ),
  ),
  ),
```



---

## Removing Buttons

To remove a button from the detail view will require modifying the `./modules/<module>/metadata/detailviewdefs.php`.

The code is originally defined as:

```
$viewdefs[$module_name] = array (  
    'DetailView' => array (  
        'templateMeta' => array (  
            'form' => array (  
                'buttons' => array (  
                    'EDIT',  
                    'DUPLICATE',  
                    'DELETE',  
                    'FIND_DUPLICATES'  
                ),  
            ),  
        ),  
    ),
```

To remove one or more buttons, simply remove the 'buttons' attribute(s) that you do not want on the view.

```
$viewdefs[$module_name] = array (  
    'DetailView' => array (  
        'templateMeta' => array (  
            'form' => array (  
                'buttons' => array (  
                    'DELETE',
```

---

```
        ),  
    ),
```

**Last Modified:** 2021-02-17 02:44:13

## Manipulating Layouts Programmatically

### Overview

How to manipulate and merge layouts programmatically.

**Note:** This customization is only applicable for modules in backward compatibility mode.

### The ParserFactory

The ParserFactory can be used to manipulate layouts such as editviewdefs or detailviewdefs. This is a handy when creating custom plugins and needing to merge changes into an existing layout. The following example will demonstrate how to add a button to the detail view:

```
<?php  
  
//Instantiate the parser factory for the Accounts DetailView.  
require_once('modules/ModuleBuilder/parsers/ParserFactory.php');  
$parser = ParserFactory::getParser('detailview', 'Accounts');  
  
//Button to add  
$button = array(  
    'customCode'=><input type="button" name="customButton" value="Custom Button">  
)  
);  
  
//Add button into the parsed layout  
array_push($parser->_viewdefs['templateMeta']['form']['buttons'], $button);
```

---

```
//Save the layout
$parser->handleSave(false);
```

**Last Modified:** 2021-02-17 02:44:13

## Modifying Layouts to Display Additional Columns

### Overview

By default, the editview, detailview, and quickcreate layouts for each module display two columns of fields. The number of columns to display can be customized on a per-module basis with the following steps.

**Note:** This customization is only applicable for modules in backward compatibility mode.

### Resolution

#### SugarCloud

First, you will want to ensure your layouts are deployed in the custom directory. If you have not previously customized your layouts via Studio, go to Admin > Studio > {Module Name} > Layouts. From there, select each layout you wish to add additional columns to and click 'Save & Deploy'. This action will create a corresponding layout file under the `./custom/modules/{Module Name}/metadata/` directory. The files will be named `editviewdefs.php`, `detailviewdefs.php`, and `quickcreatedefs.php` depending on the layouts deployed.

To access your custom files, go to Admin > Diagnostic Tool, uncheck all the boxes except for "SugarCRM Custom directory" and then click "Execute Diagnostic". This will generate an archive of your instance's custom directory to download, and you will find the layout files in the above path. Open the custom layout file, locate the 'maxColumns' value, and change it to the number of columns you would like to have on screen:


```
'maxColumns' => '3',
```

Once that is updated, locate the 'widths' array to define the spacing for your new column(s). You should have a label and field entry for each column in your layout:

```
'widths' => array (
  0 => array (
    'label' => '10',
    'field' => '30',
  ),
  1 => array (
    'label' => '10',
    'field' => '30',
  ),
  2 => array (
    'label' => '10',
    'field' => '30',
  ),
),
),
```

After this is completed, you will need to create a module-loadable package to install the changes on your SugarCloud instance. More information on creating this package can be found in [Creating an Installable Package that Creates New Fields](#). To upload and install the package, go to Admin > Module Loader.

Once the installation completes, you can navigate to Studio and add fields to your new column in the layout. For any rows that already contain two fields, the second field will automatically span the second and third column. Simply click the minus (-) icon to contract the field to one column and expose the new column space:

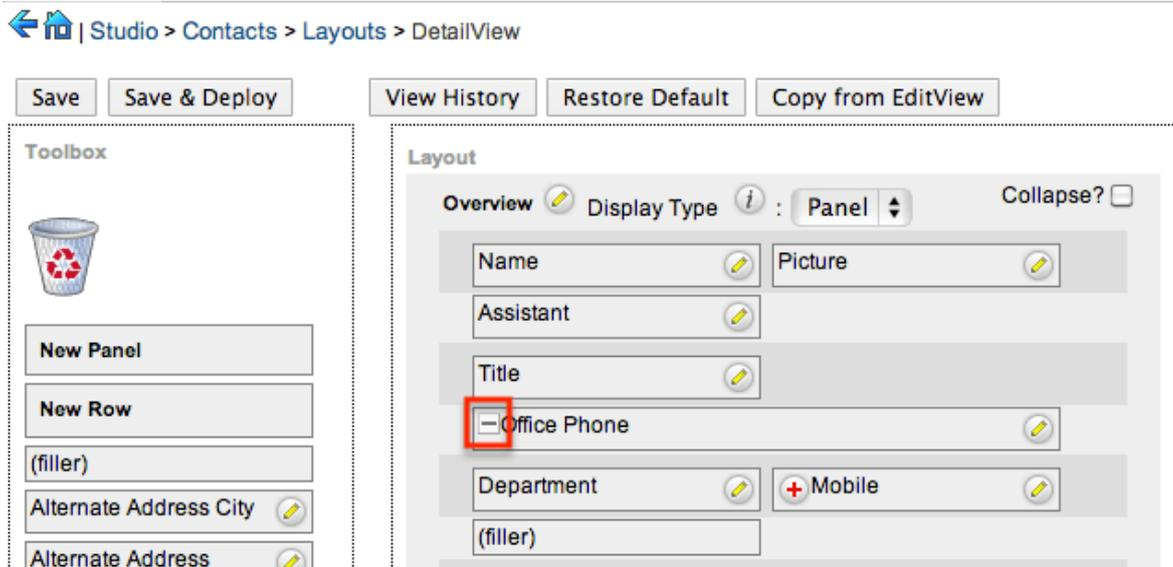

After you have added the desired fields in Studio, click 'Save & Deploy', and you are ready to go!

## On-Site

---

First, you will want to ensure your layouts are deployed in the custom directory. If you have not previously customized your layouts via Studio, go to Admin > Studio > {Module Name} > Layouts. From there, select each layout you wish to add additional columns to and click 'Save & Deploy'. This action will create a corresponding layout file under the `./custom/modules/{Module Name}/metadata/` directory. The files will be named `editviewdefs.php`, `detailviewdefs.php`, and `quickcreatedefs.php` depending on the layouts deployed.


Next, open the custom layout file, locate the 'maxColumns' value, and change it to the number of columns you would like to have on screen:

```
'maxColumns' => '3',
```

Once that is updated, locate the 'widths' array to define the spacing for your new column(s). You should have a label and field entry for each column in your layout:

```
'widths' => array (
    0 => array (
        'label' => '10',
        'field' => '30',
    ),
    1 => array (
        'label' => '10',
        'field' => '30',
    ),
    2 => array (
        'label' => '10',
        'field' => '30',
    ),
),
```

Once this is completed, you can navigate to Studio and add fields to your new column in the layout. For any rows that already contain two fields, the second field will automatically span the second and third column. Simply click the minus (-) icon to contract the field to one column and expose the new column space:

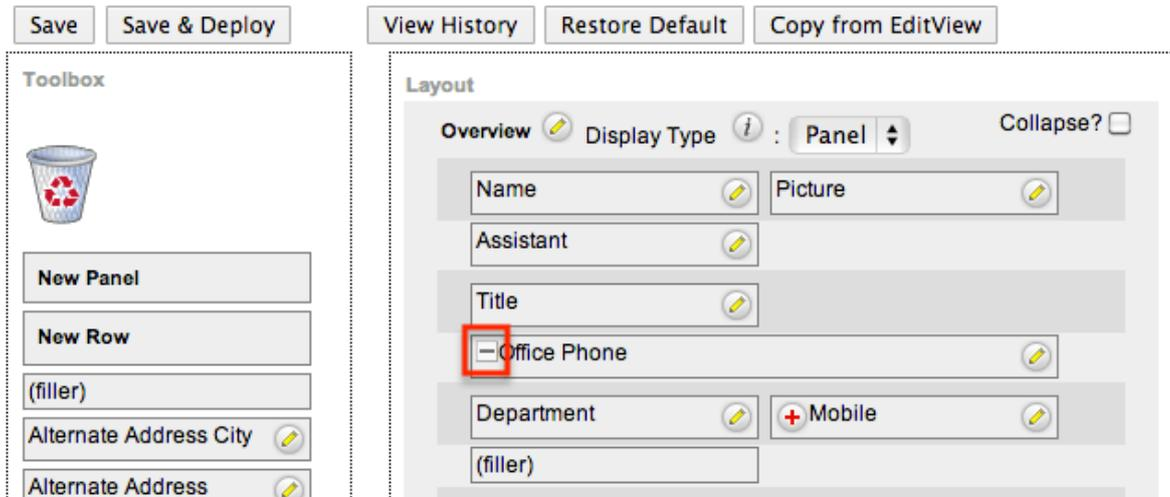

After you have added the desired fields in Studio, click 'Save & Deploy', and you are ready to go!

**Last Modified:** 2021-02-17 02:44:13

## Examples

Provides an overview of example MVC customizations.

**Last Modified:** 2021-02-17 02:44:13

## Changing the ListView Default Sort Order

### Overview

This article addresses the need to customize the advanced search layout options for modules in backward compatibility mode to change the default sort order from ascending to descending.

### Customization Information

---

This customization is only for modules in backward compatibility mode and involves creating custom files that extend stock files. You should note that this customization does not address all scenarios within the view that may assign a sort order.

## Extending the Search Form

First, we will need to extend the SearchForm class. To do this, we will create a CustomSearchForm class that extends the original SearchForm class located in `./include/SearchForm/SearchForm2.php`. We will then override the `_displayTabs` method to check the `$_REQUEST['sortOrder']` and default it to descending if it isn't set.

```
./custom/include/SearchForm/SearchForm2.php
```

```
<?php

require_once 'include/SearchForm/SearchForm2.php';

class CustomSearchForm extends SearchForm
{
    /**
     * displays the tabs (top of the search form)
     *
     * @param string $currentKey key in $this->tabs to show as the current tab
     *
     * @return string html
     */
    function _displayTabs($currentKey)
    {
        //check and set the default sort order
        if (!isset($_REQUEST['sortOrder']))
        {
            $_REQUEST['sortOrder'] = 'DESC';
        }

        return parent::_displayTabs($currentKey);
    }
}

?>
```

---

## Extending the List View

Next, we will need to extend the `ListView`. We will create a `ViewCustomList` class that extends the original `ListView` located in `./include/MVC/View/views/view.list.php`. In the `ViewCustomList` class, we will override the `prepareSearchForm` and `getSearchForm2` methods to call the `CustomSearchForm` class.

```
./custom/include/MVC/View/views/view.customlist.php
```

```
<?php

require_once 'include/MVC/View/views/view.list.php';

class ViewCustomList extends ViewList
{

    function prepareSearchForm()
    {
        $this->searchForm = null;

        //search
        $view = 'basic_search';

        if(!empty($_REQUEST['search_form_view']) && $_REQUEST['search_
form_view'] == 'advanced_search')

            $view = $_REQUEST['search_form_view'];

        $this->headers = true;

        if(!empty($_REQUEST['search_form_only']) && $_REQUEST['search_
form_only'])
            $this->headers = false;
        elseif(!isset($_REQUEST['search_form']) || $_REQUEST['search_f
orm'] != 'false')
        {
            if(isset($_REQUEST['searchFormTab']) && $_REQUEST['searchF
ormTab'] == 'advanced_search')
            {
                $view = 'advanced_search';
            }
            else
            {
                $view = 'basic_search';
            }
        }
    }
}
```



---

```

    }
}

$this->view = $view;

$this->use_old_search = true;

if (SugarAutoLoader::existingCustom('modules/' . $this->module
. '/SearchForm.html') &&

    !SugarAutoLoader::existingCustom('modules/' . $this->modul
e . '/metadata/searchdefs.php')) {
    require_once('include/SearchForm/SearchForm.php');
    $this->searchForm = new SearchForm($this->module, $this->s
eed);

} else {

$this->use_old_search = false;
//Updated to require the extended CustomSearchForm class
require_once('custom/include/SearchForm/SearchForm2.php');

$searchMetaData = SearchForm::retrieveSearchDefs($this->mo
dule);

$this->searchForm = $this->getSearchForm2($this->seed, $th
is->module, $this->action);
$this->searchForm->setup($searchMetaData['searchdefs'], $s
earchMetaData['searchFields'], 'SearchFormGeneric.tpl', $view, $this->
listViewDefs);
$this->searchForm->lv = $this->lv;
}
}

/**
 * Returns the search form object
 *
 * @return SearchForm
 */
protected function getSearchForm2($seed, $module, $action = "index
")
{
    //Updated to use the extended CustomSearchForm class
    return new CustomSearchForm($seed, $module, $action);
}

```

---

```
}
```

```
?>
```

## Extending the Sugar Controller

Finally, we will create a CustomSugarController class that extends the original SugarController located in `./include/MVC/Controller/SugarController.php`. We will then need to override the `do_action` and `post_action` methods to execute their parent methods as well as the `action_listview` method to assign the custom view to the view attribute.

```
./custom/include/MVC/Controller/SugarController.php
```

```
<?php
```

```
/**
```

```
* Custom SugarCRM controller
```

```
* @api
```

```
*/
```

```
class CustomSugarController extends SugarController
```

```
{
```

```
    /**
```

```
     * Perform the specified action.
```

```
     * This can be overridde in a sub-class
```

```
     */
```

```
private function do_action()
```

```
{
```

```
    return parent::do_action();
```

```
}
```

```
    /**
```

```
     * Perform an action after to the specified action has occurred.
```

```
     * This can be overridde in a sub-class
```

```
     */
```

```
private function post_action()
```

```
{
```

```
    return parent::post_action();
```

```
}
```

```
    /**
```

```
     * Perform the listview action
```

```
     */
```

---

```
protected function action_listview()
{
    parent::action_listview();

    //set the new custom view
    $this->view = 'customlist';
}
}

?>
```

**Last Modified:** 2021-02-17 02:44:13

## Data Framework

The Sugar application comprises core elements such as modules, fields, vardefs, and other foundational components. The Data Framework pages document how these core elements are modeled and implemented in Sugar.

**Last Modified:** 2021-02-17 02:44:13

## Modules

### Overview

How modules are defined and used within the system


### Module Definitions

The module definitions, defined in `./include/modules.php`, determine how modules are displayed and used throughout the application. Any custom metadata, whether from a plugin or a custom module, should be loaded through the [Include](#) extension. Prior to 6.3.x, module definitions could be added by creating the file `./include/modules_override.php`. This method of creating module definitions is still compatible but is not recommended from a best practices standpoint.

---

## Hierarchy Diagram

The modules metadata are loaded in the following manner:

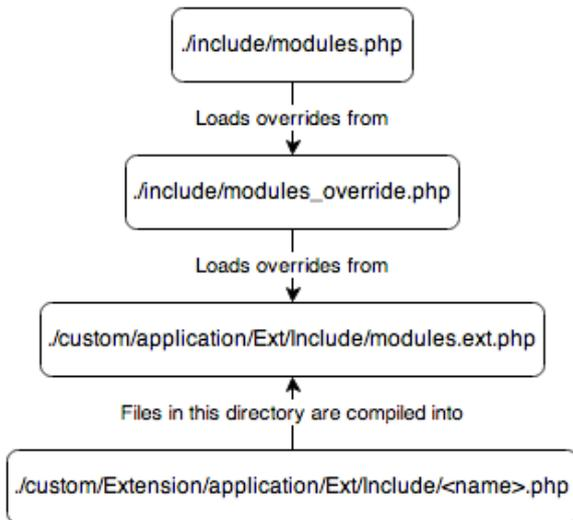

## **\$moduleList**

The `$moduleList` is an array containing a list of modules in the system. The format of the array is to have a numeric index and a value of the modules unique key.

```
$moduleList[] = 'Accounts';
```

## **\$beanList**

The `$beanList` variable is an array that stores a list of all active beans (modules) in the application. The format of the array is `array('<bean plural name>' => '<bean singular name>')`. The `$beanList` key is used to lookup values in the `$beanFiles` variable.

```
$beanList['Accounts'] = 'Account';
```

## **\$beanFiles**

The `$beanFiles` variable is an array used to reference the class files for a bean. The format of the array is `array('<bean singular name>' => '<relative class file>')`. The bean name, stored in singular form, is a reference to the class name of the object, which is looked up from the `$beanList` 'key'.

```
$beanFiles['Account'] = 'modules/Accounts/Account.php';
```

---

## **\$modInvisList**

The `$modInvisList` variable removes a module from the navigation tab in the MegaMenu, reporting, and it's subpanels under related modules. To enable a hidden module for reporting, you can use `$report_include_modules`. To enable a hidden modules subpanels on related modules, you can use `$modules_exempt_from_availability_check`. The

```
$modInvisList[] = 'Prospects';
```

## **\$modules\_exempt\_from\_availability\_check**

The `$modules_exempt_from_availability_check` variable is used in conjunction with `$modInvisList`. When a module has been removed from the MegaMenu view with `$modInvisList`, this will allow for the display of the modules subpanels under related modules.

```
$modules_exempt_from_availability_check['OAuthKeys'] = 'OAuthKeys';
```

## **\$report\_include\_modules**

The `$report_include_modules` variable is used in conjunction with `$modInvisList`. When a module has been hidden with `$modInvisList`, this will allow for the module to be enabled for reporting.

```
$report_include_modules['Prospects'] = 'Prospect';
```

## **\$adminOnlyList**

The `$adminOnlyList` variable is an extra level of security for modules that are can be accessed only by administrators through the Admin page. Specifying all will restrict all actions to be admin only.

```
$adminOnlyList['PdfManager'] = array(
    'all' => 1
);
```

## **\$bwcModules**

The `$bwcModules` variable determines which modules are in backward

---

compatibility mode. More information on backward compatibility can be found in the [Backward Compatibility](#) section.

Last Modified: 2021-02-17 02:44:13

## Models

### Overview

Each module in Sugar is extending the Sugar Model. This model is determined by the [SugarBean](#), which contains methods to create, read/retrieve, update, and delete records in the database and any subclass of the SugarBean. Many of the common Sugar modules also use the SugarObjects class, which is explained in the next section.

### SugarObject Templates

Sugar objects extend the concept of subclassing a step further and allow you to subclass the [vardefs](#). This includes inheriting of fields, relationships, indexes, and language files. However, unlike subclassing, you are not limited to a single inheritance. For example, if there were a Sugar object for fields used in every module (e.g. id, deleted, or date\_modified), you could have the module inherit from both the Basic Sugar object and the Person Sugar object.

To further illustrate this, let's say the Basic object type has a field 'name' with length 10 and the Company object has a field 'name' with length 20. If you inherit from Basic first and then Company, your field will inherit the Company object's length of 20. However, the module-level setting always overrides any values provided by Sugar objects, so, if the field 'name' in your module has been set to length 60, then the field's length will ultimately be 60.

There are six types of SugarObject templates:

- **Basic** : Contains the basic fields required by all Sugar modules
- **Person** : Based on the Contacts, Prospects, and Leads modules
- **Issue** : Based on the Bugs and Cases modules
- **Company** : Based on the Accounts module
- **File** : Based on the Documents module
- **Sale** : Based on the Opportunities module

---

## SugarObject Interfaces

In addition to the object templates above, "assignable" object templates can be used for modules with records that should contain an Assigned To field. Although every module does not use this, most modules allow assignment of records to users. SugarObject interfaces allow us to add the assignable attribute to these modules.

SugarObject interfaces and SugarObject templates are very similar to one another, but the main distinction is that templates have a base class you can subclass while interfaces do not. If you look into the file structure, templates include many additional files, including a full metadata directory. This is used primarily for Module Builder.

## File Structure

- ./include/SugarObjects/interfaces
- ./include/SugarObjects/templates

## Implementation

There are two things you need to do to take advantage of Sugar objects:

1. Subclass the SugarObject class you wish to extend for your class:

```
class MyClass extends Person
{
    function MyClass()
    {
        parent::Person();
    }
}
```

2. Add the following line to the end of the vardefs.php file:

```
VardefManager::createVardef('Contacts', 'Contact', array('default', 'assignable', 'team_security', 'person'));
```

This snippet tells the VardefManager to create a cache of the Contacts vardefs with the addition of all the default fields, assignable fields, team security fields, and all fields from the person class.

---

## Performance Considerations

VardefManager caches the generated vardefs into a single file that is loaded at runtime. If that file is not found, Sugar loads the vardefs.php file, located in your module's directory. The same is true for language files. This caching also includes data for custom fields and any vardef or language extensions that are dropped into the extension framework.

### Cache Files

- ./cache/modules/<module>/<object\_name>vardefs.php
- ./cache/modules/<module>/languages/en\_us.lang.php

**Last Modified:** 2021-02-17 02:44:13

## SugarBean

### Overview

The SugarBean class supports all the model operations to and from the database. Any module that interacts with the database utilizes the SugarBean class, which contains methods to create, read/retrieve, update, and delete records in the database (CRUD), as well as fetch related records.

### CRUD Handling

The SugarBean handles the most basic functions of the Sugar database, allowing you to create, retrieve, update, and delete data.

### Creating and Retrieving Records

The BeanFactory class is used for bean loading. The class should be used whenever you are creating or retrieving bean objects. It will automatically handle any classes required for the bean. More information on this can be found in the [BeanFactory](#) section.



---

## Obtaining the Id of a Recently Saved Bean

For new records, a GUID is generated and assigned to the record id field. Saving new or existing records returns a single value to the calling routine, which is the id attribute of the saved record. The id has the following format:

```
aaaaaaaa-bbbb-cccc-dddd-eeeeeeeeeeee
```

You can retrieve a newly created record's id with the following:

```
//Create bean
$bean = BeanFactory::newBean($module);

//Populate bean fields
$bean->name = 'Example Record';

//Save
$bean->save();

//Retrieve the bean id
$record_id = $bean->id;
```

## Saving a Bean with a Specific ID

Saving a record with a specific id requires the id and new\_with\_id attribute of the bean to be set. When doing so, it is important that you use a globally unique identifier. Failing to do so may result in unexpected behavior in the system. An example setting an id is shown below:

```
//Create bean
$bean = BeanFactory::newBean($module);

//set the new flag
$bean->new_with_id = true;

//Set the record id with a static id
$id = '38c90c70-7788-13a2-668d-513e2b8df5e1';
$bean->id = $id;

//or have the system generate an id for you
//$id = Sugarcrm\Sugarcrm\Util\Uuid::uuid1()
//$bean->id = $id;

//Populate bean fields
$bean->name = 'Example Record';
```

---

```
//Save
$bean->save();
```

Setting `new_with_id` to true prevents the save method from creating a new id value and uses the assigned id attribute. If the id attribute is empty and the `new_with_id` attribute is set to true, the save will fail. If you would like for the system to generate an id for you, you can use `Sugarcrm\Sugarcrm\Util\Uuid::uuid1()`.

## Distinguishing New from Existing Records

To identify whether or not a record is new or existing, you can check the `fetches_rows` property. If the `$bean` has a `fetches_row`, it was loaded from the database. An example is shown below:

```
if (!isset($bean->fetches_row['id'])) {
    //new record
} else {
    //existing record
}
```

If you are working with a logic hook such as [before\\_save](#) or [after\\_save](#), you should check the `arguments.isUpdate` property to determine this as shown below:

```
<?php

if (!defined('sugarEntry') || !sugarEntry) die('Not A Valid Entry Point');

class logic_hooks_class
{
    function hook_method($bean, $event, $arguments)
    {
        if (isset($arguments['isUpdate']) && $arguments['isUpdate'] ==
false) {
            //new record
        } else {
            //existing record
        }
    }
}

?>
```

---

## Retrieving a Bean by Unique Field

Sometimes developers have a need to fetch a record based on a unique field other than the id. In previous versions you were able to use the `retrieve_by_string_fields()` method to accomplish this, however, that has now been deprecated. To search and fetch records, you should use the [SugarQuery](#) builder. An example of this is shown below:

```
require_once('include/SugarQuery/SugarQuery.php');
$sugarQuery = new SugarQuery();

//fetch the bean of the module to query
$bean = BeanFactory::newBean('<modules>');

//create first query
$sql = new SugarQuery();
$sql->select('id');
$sql->from($bean);
$sql->Where()->equals('<field>', '<unique value>');

$result = $sql->execute();

$count = count($result);

if ($count == 0) {
    //no results were found
} elseif ($count == 1) {
    //one result was found
    $bean = BeanFactory::getBean('<module>', $result[0]['id']);
} else {
    //multiple results were found
}
```

## Updating a Bean

You can update a bean by fetching a record and then updating the property:

```
//Retrieve bean
$bean = BeanFactory::retrieveBean($module, $id);

//Fields to update
$bean->name = 'Updated Name';

//Save
$bean->save();
```

---

**Note:** Disabling row-level security when accessing a bean should be set to true only when it is absolutely necessary to bypass security, for example, when updating a Lead record from a custom Entry Point. An example of accessing the bean while bypassing row security is:

```
$bean = BeanFactory::retrieveBean($module, $record_id, array('disable_row_level_security' => true));
```

## Updating a Bean Without Changing the Date Modified

The SugarBean class contains an attribute called `update_date_modified`, which is set to true when the class is instantiated and means that the `date_modified` attribute is updated to the current database date timestamp. Setting `update_date_modified` to false would result in the `date_modified` attribute not being set with the current database date timestamp.

```
//Retrieve bean
$bean = BeanFactory::retrieveBean($module, $id);

//Set modified flag
$bean->update_date_modified = false;

//Fields to update
$bean->name = 'Updated Name';

//Save
$bean->save();
```

**Note:** Disabling row-level security when accessing a bean should be set to true only when it is absolutely necessary to bypass security, for example, when updating a Lead record from a custom Entry Point. An example of accessing the bean while bypassing row security is:

```
$bean = BeanFactory::retrieveBean($module, $record_id, array('disable_row_level_security' => true));
```

## Deleting a Bean

Deleting a bean can be done by fetching it then calling the `mark_deleted()` method which makes sure any relationships with related records are removed as well:

```
//Retrieve bean
$bean = BeanFactory::retrieveBean($module, $id);
```

---

```
//Set deleted to true
$bean->mark_deleted($bean->id);
```

```
//Save
$bean->save();
```

**Note:** Disabling row-level security when accessing a bean should be set to true only when it is absolutely necessary to bypass security, for example, when updating a Lead record from a custom Entry Point. An example of accessing the bean while bypassing row security is:

```
$bean = BeanFactory::retrieveBean($module, $record_id, array('disable_
row_level_security' => true));
```

## Fetching Relationships

This section explains how the SugarBean class can be used to fetch related information from the database.

### Fetching Related Records

To fetch related records, load the relationship using the link:

```
//If relationship is loaded
if ($bean->load_relationship($link)) {
    //Fetch related beans
    $relatedBeans = $bean->$link->getBeans();
}
```

An example of this is to load the contacts related to an account:

```
//Load Account
$bean = BeanFactory::getBean('Accounts', $id);

//If relationship is loaded
if ($bean->load_relationship('contacts')) {
    //Fetch related beans
    $relatedBeans = $bean->contacts->getBeans();
}
```

### Fetching Related Record IDs

---

To fetch **only related record IDs**, load the relationship using the link:

```
//If relationship is loaded
if ($bean->load_relationship($link)) {
    //Fetch related record IDs
    $relatedBeans = $bean->$link->get();
}
```

An example of this is to load the record IDs of contacts related to an account:

```
//Load Account
$bean = BeanFactory::getBean('Accounts', $id);

//If relationship is loaded
if ($bean->load_relationship('contacts')) {
    //Fetch related beans
    $relatedBeans = $bean->contacts->get();
}
```

## Fetching a Parent Record

Fetching a parent record is similar to fetching child records in that you will still need to load the relationship using the link:

```
//If relationship is loaded
if ($bean->load_relationship($link)) {
    //Fetch related beans
    $relatedBeans = $bean->$link->getBeans();

    $parentBean = false;
    if (!empty($relatedBeans)) {
        //order the results
        reset($relatedBeans);

        //first record in the list is the parent
        $parentBean = current($relatedBeans);
    }
}
```

An example of this is to load a contact and fetch its parent account:

```
//Load Contact
$bean = BeanFactory::getBean('Contacts', $id);
```

---

```
//If relationship is loaded
if ($bean->load_relationship('accounts')) {
    //Fetch related beans
    $relatedBeans = $bean->accounts->getBeans();

    $parentBean = false;
    if (!empty($relatedBeans)) {
        //order the results
        reset($relatedBeans);

        //first record in the list is the parent
        $parentBean = current($relatedBeans);
    }
}
```

**Last Modified:** 2022-08-24 16:51:15

## Customizing Core SugarBeans

### Overview

This article covers how to extend core SugarBean objects to implement custom code. This can be used to alter the stock assignment notification message or to add logic to change the default modules behavior.

### Customizing a Core Module

The best approach to customizing a core SugarBean object is to become familiar with how the core Bean operates and only modify the bean logic where absolutely necessary. After understanding where you wish to make your customization in the module Bean class, you can extend the class in the custom directory. In order to avoid duplicating code from the core Bean class, it is always best to extend the class rather than duplicate the class to the custom directory.

### Extending the SugarBean

For this example, we will look at modifying the Leads SugarBean object. To extend the core Leads bean, create the following file:

---

./custom/modules/Leads/CustomLead.php

<?php

require\_once 'modules/Leads/Lead.php';

class CustomLead extends Lead

```
{
    /**
     * Saves the record
     * - You can use this method to implement before save or after save logic
     *
     * @param bool $check_notify
     * @return string
     */
    function save($check_notify = FALSE)
    {
        $id = parent::save($check_notify);
        return $id;
    }

    /**
     * Retrieves a record
     * - You can use this method to set properties when fetching a bean
     *
     * @param string $id
     * @param bool $encode
     * @param bool $deleted
     * @return $this
     */
    function retrieve($id = '-1', $encode = true, $deleted = true)
    {
        return parent::retrieve($id, $encode, $deleted);
    }

    /**
     * Calls custom logic events
     * - You can use this method to watch for specific logic hook events
     *
     * @param $event
     * @param array $arguments
     */
    function call_custom_logic($event, $arguments = array())
```



---

```
{
    parent::call_custom_logic($event, $arguments);
}
```

## Register the Custom Class

Once the custom SugarBean class file has been created, register that class to be used by the module so that the BeanFactory knows which class to use. To register the class you will create the following file in the `./custom/Extension/` directory:

`./custom/Extension/application/Ext/Include/customLead.php`

```
<?php

/**
 * The $objectList array, maps the module name to the Vardef property
 * By default only a few core modules have this defined, since their Cl
ass/Object names differs from their Vardef Property
 **/
$objectList['Leads'] = 'Lead';

// $beanList maps the Bean/Module name to the Class name
$beanList['Leads'] = 'CustomLead';

// $beanFiles maps the Class name to the PHP Class file
$beanFiles['CustomLead'] = 'custom/modules/Leads/CustomLead.php';
```

**Note:** The `$objectList` array only needs to be set on those modules that do not have it set already. You can view `./include/modules.php` to see the core modules that have it defined already.

Once the registration file is in place, go to Admin > Repairs, and run a Quick Repair and Rebuild so that the system starts using the custom class.

## Things to Note

Overriding a core SugarBean class comes with some caveats:

1. The custom class is only used when the product core code uses the BeanFactory.

- 
- For most circumstances, Sugar is set up to use BeanFactory, however, legacy code or specific logic that pairs core modules together may use direct calls to a core SugarBean class, which would then cause the custom class to not be used. In those scenarios, it is recommended to use a logic look instead.
2. Extending the Cases module doesn't affect the email Import process.
  3. If the \$objectList property is not defined for the module, the custom object will be used, however, things like Studio will no longer work correctly.
    - For the example above, we defined the \$objectList property for the Leads module to make sure that Studio continued working as expected. Without this definition, if you navigate to Admin > Studio, fields and relationships will not render properly.

**Last Modified:** 2022-08-15 17:38:27

## Implementing Custom SugarBean Templates

### Overview

This article covers how to implement custom SugarBean templates, which can then be extended by custom modules. It also covers vardef templates, which can more portable and used by multiple modules. By default, Sugar comes with a few templates such as Company, Person, Issue, and File templates.

### Creating a Custom SugarBean Template

The following example will create a custom Bean template that can be used by custom modules to shrink down the overall size of the Bean model, by only implementing the two fields required by all modules, the id field and the deleted field. In order to do this, we will have to override some core SugarBean methods, as the base SugarBean is statically configured to do things like Save/Delete the model with the date\_entered, date\_modified, modified\_user\_id and created\_user\_id fields. In order to accommodate custom Beans that wish to use those fields, this template will also have properties for configuring those types of fields so that they are populated using the default SugarBean logic.

---

To create a template for use by custom modules, you create a class that extends from SugarBean in

`./custom/include/SugarObjects/templates/<template_name>/<class_name>.php`.

For this example, we will create the "bare" template with the following file:

`./custom/include/SugarObjects/templates/bare/BareBean.php`

```
<?php
```

```
class BareBean extends SugarBean
{
    /**
     * The configured modified date field
     * @var string|false
     */
    protected $_modified_date_field = false;

    /**
     * The configured modified user field
     * @var string|false
     */
    protected $_modified_user_field = false;

    /**
     * The configured created date field
     * @var string|false
     */
    protected $_created_date_field = false;

    /**
     * The configured created user field
     * @var string|false
     */
    protected $_created_user_field = false;

    /**
     * Get the field name where modified date is stored, if in use by
Module
     * @return string|false
     */
    public function getModifiedDateField()
    {
        if ($this->_modified_date_field !== FALSE){
            $field = $this->_modified_date_field;
            if (isset($this->field_defs[$field]) && $this->field_defs[
$field]['type'] == 'datetime'){
```

---

```

        return $field;
    }
}
return FALSE;
}

/**
 * Override the stock setModifiedDate method
 * - Check that field is in use by this Module
 * - If in use, set the configured field to current time
 * @inheritdoc
 */
public function setModifiedDate($date = '')
{
    global $timedate;

    $field = $this->getModifiedDateField();
    if ($field !== FALSE){
        // This code was duplicated from the stock SugarBean::setM
odifiedDate
        if ($this->update_date_modified || empty($this->$field)) {
            // This only needs to be calculated if it is going to
be used
            if (empty($date)) {
                $date = $timedate->nowDb();
            }

            $this->$field = $date;
        }
    }
}

/**
 * Get the field name where modified user ID is stored, if in use
by Module
 * @return string|false
 */
public function getModifiedUserField()
{
    if ($this->_modified_user_field !== FALSE){
        $field = $this->_modified_user_field;
        if (isset($this->field_defs[$field]) && $this->field_defs[
$field]['type'] == 'assigned_user_name'){
            return $field;
        }
    }
}

```

---

---

```

        return FALSE;
    }

/**
 * Override the stock setModifiedUser Method
 * - Check that field is in use by this Module
 * - If in use, set the configured field to user_id
 * @inheritdoc
 * @param User|null $user [description]
 */
public function setModifiedUser(User $user = null)
{
    global $current_user;
    $field = $this->getModifiedUserField();
    if ($field !== FALSE){
        // If the update date modified by flag is set then carry o
ut this directive
        if ($this->update_modified_by) {
            // Default the modified user id to the default
            $this->$field = 1;

            // If a user was not presented, default to the current
user
            if (empty($user)) {
                $user = $current_user;
            }

            // If the user is set, use it
            if (!empty($user)) {
                $this->$field = $user->id;
            }
        }
    }
}

/**
 * Get the field name where created date is stored, if in use by M
odule
 * @return string|false
 */
public function getCreatedDateField()
{
    if ($this->_created_date_field !== FALSE){
        $field = $this->_created_date_field;
        if (isset($this->field_defs[$field]) && $this->field_defs[
$field]['type'] == 'datetime'){

```

---

```

        return $field;
    }
}
return FALSE;
}

/**
 * Get the field name where created user ID is stored, if in use by
 * Module
 * @return string|false
 */
public function getCreatedUserField()
{
    if ($this->_created_user_field !== FALSE){
        $field = $this->_created_user_field;
        if (isset($this->field_defs[$field]) && $this->field_defs[
$field]['type'] == 'assigned_user_name'){
            return $field;
        }
    }
    return FALSE;
}

/**
 * Override the stock setCreateData method
 * - Code was duplicated from stock, to accommodate not having cre
 * ated date or created user fields
 * @inheritdoc
 */
public function setCreateData($isUpdate, User $user = null)
{
    if (!$isUpdate) {
        global $current_user;

        $field = $this->getCreatedDateField();
        if ($field !== FALSE){
            //Duplicated from SugarBean::setCreateData with modifi
            cations for dynamic field name
            if (empty($this->$field)) {
                $this->$field = $this->getDateModified();
            }

            if (empty($this->$field)){
                global $timedate;
                $this->$field = $timedate->nowDb();
            }
        }
    }
}

```

---

```

    }

    $field = $this->getCreatedUserField();
    if ($field !== FALSE){
        //Duplicated from SugarBean::setCreateData with modifications for dynamic field name
        if ($this->set_created_by == true) {
            // created by should always be this user
            // unless it was set outside of the bean
            if ($user) {
                $this->$field = $user->id;
            } else {
                $this->$field = isset($current_user) ? $current_user->id : "";
            }
        }
    }

    if ($this->new_with_id == false) {
        $this->id = Sugarcrm\Sugarcrm\Util\Uuid::uuid1();
    }
}

/**
 * Get the Date Modified fields value
 * @return mixed|false
 */
public function getDateModified()
{
    if ($this->_modified_date_field !== FALSE){
        $field = $this->_modified_date_field;
        return $this->$field;
    }
    return FALSE;
}

/**
 * Get the Date Created Fields value
 * @return mixed|false
 */
public function getDateCreated()
{
    if ($this->_created_date_field !== FALSE){
        $field = $this->_created_date_field;
        return $this->$field;
    }
}

```

---

```

    }
    return FALSE;
}

/**
 * @inheritdoc
 */
public function mark_deleted($id)
{
    $date_modified = $GLOBALS['timedate']->nowDb();
    if (isset($_SESSION['show_deleted'])) {
        $this->mark_undeleted($id);
    } else {
        // Ensure that Activity Messages do not occur in the conte
xt of a Delete action (e.g. unlink)
        // and do so for all nested calls within the Top Level Del
ete Context
        $opflag = static::enterOperation('delete');
        $aflag = Activity::isEnabled();
        Activity::disable();
        // call the custom business logic
        $custom_logic_arguments['id'] = $id;
        $this->call_custom_logic("before_delete", $custom_logic_ar
guments);
        $this->deleted = 1;

        if (isset($this->field_defs['team_id'])) {
            if (empty($this->teams)) {
                $this->load_relationship('teams');
            }

            if (!empty($this->teams)) {
                $this->teams->removeTeamSetModule();
            }
        }

        $this->mark_relationships_deleted($id);

        $updateFields = array('deleted' => 1);

        $field = $this->getModifiedDateField();
        if ($field !== FALSE){
            $this->setModifiedDate();
            $updateFields[$field] = $this->{$field};
        }
    }
}

```



---

```

$field = $this->getModifiedUserField();
if ($field !== FALSE){
    $this->setModifiedUser();
    $updateFields[$field] = $this->$field;
}

$this->db->updateParams(
    $this->table_name,
    $this->field_defs,
    $updateFields,
    array('id' => $id)
);

if ($this->isFavoritesEnabled()) {
    SugarFavorites::markRecordDeletedInFavorites($id, $date_modified);
}

// Take the item off the recently viewed lists
$tracker = BeanFactory::newBean('Trackers');
$tracker->makeInvisibleForAll($id);

SugarRelationship::resaveRelatedBeans();

// call the custom business logic
$this->call_custom_logic("after_delete", $custom_logic_arguments);

if(static::leaveOperation('delete', $opflag) && $aflag) {
    Activity::enable();
}
}

/**
 * @inheritdoc
 */
public function mark_undeleted($id)
{
    // call the custom business logic
    $custom_logic_arguments['id'] = $id;
    $this->call_custom_logic("before_restore", $custom_logic_arguments);

    $this->deleted = 0;
    $modified_date_field = $this->getModifiedDateField();
    if ($modified_date_field !== FALSE){

```

---

```

        $this->setModifiedDate();
    }

    $query = "UPDATE {$this->table_name} SET deleted = ?".(!$modified_date_field?"":",$modified_date_field = ?")." WHERE id = ?";
    $conn = $this->db->getConnection();
    $params = array($this->deleted);
    if ($modified_date_field){
        $params[] = $this->$modified_date_field;
    }
    $params[] = $id;
    $conn->executeQuery($query, $params);

    // call the custom business logic
    $this->call_custom_logic("after_restore", $custom_logic_arguments);
}
}

```

With the Bean template in place, we can define the default vardefs for the template by creating the following file:

`./custom/include/SugarObjects/templates/bare/vardefs.php`

```

<?php

$vardefs = array(
    'audited' => false,
    'favorites' => false,
    'activity_enabled' => false,
    'fields' => array(
        'id' => array(
            'name' => 'id',
            'vname' => 'LBL_ID',
            'type' => 'id',
            'required' => true,
            'reportable' => true,
            'duplicate_on_record_copy' => 'no',
            'comment' => 'Unique identifier',
            'mandatory_fetch' => true,
        ),
        'deleted' => array(
            'name' => 'deleted',
            'vname' => 'LBL_DELETED',
            'type' => 'bool',
            'default' => '0',
        ),
    ),
);

```

---

```

        'reportable' => false,
        'duplicate_on_record_copy' => 'no',
        'comment' => 'Record deletion indicator'
    )
),
'indices' => array(
    'id' => array(
        'name' => 'idx_' . preg_replace('/[^a-z0-9_\-]/i', '', strtolower($module)) . '_pk',
        'type' => 'primary',
        'fields' => array('id')
    ),
    'deleted' => array(
        'name' => 'idx_' . strtolower($table_name) . '_id_del',
        'type' => 'index',
        'fields' => array('id', 'deleted')
    )
),
'duplicate_check' => array(
    'enabled' => false
)
);

```

**Note:** This vardef template also shrinks the SugarBean template down even further, by defaulting auditing, favorites, and activity stream to false.

## Using a Custom Bean Template

With the custom SugarBean template in place, we can now implement the template on a custom module. Typically if you deployed a module from Module Builder, there would be two classes generated by Sugar, "custom\_Module\_sugar" and "custom\_Module". The "\_sugar" generated class extends from the Bean template that was selected in Module Builder, and the primary Bean class is what is utilized in the system and where your development would take place. For the above example template that is created, the assumption is that you are writing the Bean class, rather than using the generated classes by Module Builder, or at the very least removing the intermediary "\_sugar" class generated by Module Builder and extending from the desired template. If you deployed a module via Module Builder, and are going to switch to a custom template, please note that some of the stock templates contain internal logic for the setup of fields for that template and that would need to be duplicated if you intend to continue using those fields. The stock templates, located in `./include/SugarObjects/templates/`, are available for your reference to copy over any of the required logic to your custom Bean class. With all that being said, let us take a look at a custom Bean class that extends from our custom template.

---

This example will use the "custom\_Module" module which is a module that will be used for Tagging records. Since the module is just storing tags, a slimmed down Bean works well as we only need a "name" field to store those tags. The following class would implement the custom Bean template created above.

```
./modules/custom_Module/custom_Module.php
```

```
<?php

require_once 'custom/include/SugarObjects/templates/bare/BareBean.php'
;

class custom_Module extends BareBean {

    public $new_schema = true;
    public $module_dir = 'custom_Module';
    public $object_name = 'custom_Module';
    public $table_name = 'custom_Module';
    public $importable = true;

    public $id;
    public $name;
    public $deleted;

    public function __construct(){
        parent::__construct();
    }

    public function bean_implements($interface){
        switch($interface){
            case 'ACL': return true;
        }
        return false;
    }

}
```

With the modules SugarBean class created, the other thing that needs to be implemented is the vardefs.php file:

```
./modules/custom_Module/vardefs.php
```

```
<?php

$module = 'custom_Module';
$table_name = strtolower($module);
```

---

```

$dictionary[$module] = array(
    'table' => $table_name,
    'fields' => array(
        'name' => array(
            'name' => 'name',
            'vname' => 'LBL_NAME',
            'type' => 'username',
            'link' => true,
            'dbType' => 'varchar',
            'len' => 255,
            'unified_search' => true,
            'full_text_search' => array(),
            'required' => true,
            'importable' => 'required',
            'duplicate_merge' => 'enabled',
            //'duplicate_merge_dom_value' => '3',
            'merge_filter' => 'selected',
            'duplicate_on_record_copy' => 'always',
        ),
    ),
    'relationships' => array (
    ),
    'optimistic_locking' => false,
    'unified_search' => false,
);

```

```

VardefManager::createVardef(
    $module,
    $module,
    //Specify the bare template to be used to create the vardefs
    array('bare')
);

```

With these files implemented, the "custom\_Module" module would implement the "bare" template we created.

## Creating Custom Vardef Templates

For some customizations, you might not need a SugarBean template as you may not be implementing logic that needs to be shared across multiple module's Bean classes. However, you may have field definitions that are common across multiple modules that would be beneficial for implementing as Vardef Templates. To create a vardef template, a file as follows,

---

`./custom/include/SugarObjects/implements/<template_name>/vardefs.php.`

Continuing on with our example `custom_Module` module from above, we might want to have a creation date on this custom tags module since our 'bare' SugarBean template does not come with one by default. We could easily just add one in the modules vardef file, but for our example purposes, we know that we will use our 'bare' SugarBean template on other customizations, and on some of those we might also want to include a creation date. To implement the vardef template for the creation date field, we create the following:

`./custom/include/SugarObjects/implements/date_entered/vardefs.php`

```
<?php
```

```
$vardefs = array(
    'fields' => array(
        'date_entered' => array(
            'name' => 'date_entered',
            'vname' => 'LBL_DATE_ENTERED',
            'type' => 'datetime',
            'group' => 'created_by_name',
            'comment' => 'Date record created',
            'enable_range_search' => true,
            'options' => 'date_range_search_dom',
            'studio' => array(
                'portaleditview' => false,
            ),
            'duplicate_on_record_copy' => 'no',
            'readonly' => true,
            'massupdate' => false,
            'full_text_search' => array(
                'enabled' => true,
                'searchable' => false
            ),
        ),
    ),
    'indices' => array(
        'date_entered' => array(
            'name' => 'idx_' . strtolower($stable_name) . '_date_entered',
            'type' => 'index',
            'fields' => array('date_entered')
        )
    )
);
```

---

## Using a Custom Vardef Template

Once the vardef template is in place, you can use the template by adding it to the 'uses' array property of your module vardefs. Continuing with our example module `custom_Module`, we can update the vardefs file as follows:

```
./modules/custom_Module/vardefs.php
```

```
<?php

$module = 'custom_Module';
$table_name = strtolower($module);

$dictionary[$module] = array(
    'table' => $table_name,
    'fields' => array(
        'name' => array(
            'name' => 'name',
            'vname' => 'LBL_NAME',
            'type' => 'username',
            'link' => true,
            'dbType' => 'varchar',
            'len' => 255,
            'unified_search' => true,
            'full_text_search' => array(),
            'required' => true,
            'importable' => 'required',
            'duplicate_merge' => 'enabled',
            //'duplicate_merge_dom_value' => '3',
            'merge_filter' => 'selected',
            'duplicate_on_record_copy' => 'always',
        ),
    ),
    'relationships' => array (
    ),
    //Add the desired vardef templates to this list
    'uses' => array(
        'date_entered'
    ),
    'optimistic_locking' => false,
    'unified_search' => false,
);

VardefManager::createVardef(
    $module,
    $module,
```

---

```
//Specify the bare template to be used to create the vardefs
array( 'bare' )
);
```

After a Quick Repair and Rebuild, a SQL statement should be generated to update the table of the module with the new date\_entered field that was added to the vardefs using the vardef template.

**Last Modified:** 2021-02-17 02:44:13

## BeanFactory

### Overview

The BeanFactory class, located in ./data/BeanFactory.php, is used for loading an instance of a [SugarBean](#). This class should be used any time you are creating or retrieving bean objects. It will automatically handle any classes required for the bean.

### Creating a SugarBean Object

#### newBean()

To create a new, empty SugarBean, use the newBean() method. This method is typically used when creating a new record for a module or to call properties of the module's bean object.

```
$bean = BeanFactory::newBean($module);
```

#### newBeanByName()

Used to fetch a bean by its beanList name.

```
$bean = BeanFactory::newBeanByName($name);
```

### Retrieving a SugarBean Object

#### getBean()



---

The `getBean()` method can be used to retrieve a specific record from the database. If a record id is not passed, a new bean object will be created.

```
$bean = BeanFactory::getBean($module, $record_id);
```

**Note:** Disabling row-level security when accessing a bean should be set to true only when it is absolutely necessary to bypass security, for example when updating a Lead record from a custom Entry Point. An example of accessing the bean while bypassing row security is:

```
$bean = BeanFactory::getBean($module, $record_id, array('disable_row_level_security' => true));
```

### **retrieveBean()**

The `retrieveBean()` method can also be used to retrieve a specific record from the database. The difference between this method and `getBean()` is that null will be returned instead of an empty bean object if the retrieve fails.

```
$bean = BeanFactory::retrieveBean($module, $record_id);
```

**Note:** Disabling row-level security when accessing a bean should be set to true only when it is absolutely necessary to bypass security, for example, when updating a Lead record from a custom Entry Point. An example of accessing the bean while bypassing row security is:

```
$bean = BeanFactory::retrieveBean($module, $record_id, array('disable_row_level_security' => true));
```

## **Retrieving Module Keys**

### **getObjectName()**

The `getObjectName()` method will return the object name / dictionary key for a given module. This is normally the same as the bean name, but may not be for some modules such as Cases which has a key of 'aCase' and a name of 'Case'.

```
$moduleKey = BeanFactory::getObjectName($moduleName);
```

### **getBeanName()**

The `getBeanName()` method will retrieve the bean class name given a module name.

---

```
$moduleClass = BeanFactory::getBeanName($module);
```

**Last Modified:** 2021-02-17 02:44:13

## Vardefs

### Overview

Vardefs (Variable Definitions) provide the Sugar application with information about [SugarBeans](#). Vardefs specify information on the individual fields, relationships between beans, and the indexes for a given bean.

Each module that contains a SugarBean file has a vardefs.php file located in it, which specifies the fields for that SugarBean. For example, the vardefs for the Contact bean are located in `./modules/Contacts/vardefs.php`.

### Dictionary Array

Vardef files create an array called `$dictionary`, which contains several entries including tables, fields, indices, and relationships.

- **table** : The name of the database table (usually, the name of the module) for this bean that contains the fields
- **audited** : Specifies whether the module has field-level auditing enabled
- **duplicate\_check** : Determines if [duplicate checking](#) is enabled on the module, and what duplicate check strategy will be used if enabled.
- **fields** : A list of fields and their [attributes](#)
- **indices** : A list of [indexes](#) that should be created in the database
- **optimistic\_locking** : Determines whether the module has optimistic locking enabled
  - Optimistic locking prevents loss of data by using the bean's modified date to ensure that it is not being modified simultaneously by more than one person or process.
- **unified\_search** : Determines whether the module can be searched via Global Search
  - This setting defaults to false and has no effect if all of the fields in the fields array have the 'unified\_search' field attribute set to false.
- **unified\_search\_default\_enabled** : Determines whether the module should

---

be searched by default for new users via Global Search

- This setting defaults to true but has no effect if `unified_search` is set to false.
- **visibility** : A list of [visibility](#) classes enabled on the module

## Duplicate Check Array

The `duplicate_check` array contains two properties, that control if duplicate checking is enabled on the module, and which duplicate check strategy will be used to check for duplicates.

The two properties for the array are as follows:

| Name                            | Type    | Description  |
|---------------------------------|---------|--|
| <code>enabled</code>            | Boolean | Specifies whether or not the Bean is utilizing the duplicate check framework   |
| <code>&lt;class_name&gt;</code> | Array   | <code>&lt;class_name&gt;</code> is the name of the duplicate check strategy class that is handling the duplicate checking. It is set to an array of Metadata, specific to the strategy defined in the key. Review the <a href="#">Duplicate Check Framework</a> for further information. |

## Fields Array

The `fields` array contains one array for each field in the SugarBean. At the top level of this array, the key is the name of the field, and the value is an array of attributes about that field.

The list of possible attributes are as follows:

- **name** : The name of the field
- **vname** : The language pack ID for the label of this field
- **type** : The type of the attribute

- 
- **assigned\_user\_name** : A linked user name
  - **bool** : A boolean value
  - **char** : A character array
  - **date** : A date value with no time
  - **datetime** : A date and time
  - **email** : An email address field
  - **enum** : An enumeration (dropdown list from the language pack)
  - **id** : A database GUID
  - **image** : A photo-type field
  - **link** : A link through an explicit relationship. This attribute should only be used when working with related fields. It does not make the field render as a link.
  - **name** : A non-database field type that concatenates other field values
  - **phone** : A phone number field to utilize with callto:// links
  - **relate** : Related bean
  - **team\_list** : A team-based ID
  - **text** : A text area field
  - **url** : A hyperlinked field on the detail view
  - **varchar** : A variable-sized string
  - **table** : The database table the field comes from.
    - The table attribute is only needed to join fields from another table outside of the module in focus.
  - **isnull** : Whether the field can contain a null value
  - **len** : The length of the field (number of characters if a string)
  - **options** : The name of the enumeration (dropdown list) in the language pack for the field
  - **dbtype** : The database type of the field (if different than the type)
  - **reportable** : Determines whether the field will be available in the Reports and Workflow modules
  - **default** : The default value for this field. Default values for the record are populated by default on create for the record view (for Sidecar modules) and edit view (for Legacy modules) layout but can be modified by users. The Default Value option is available for all data type fields except HTML, Image, Flex Relate, and Relate.
  - **massupdate** : Determines whether the field will show up in the mass-update panel on its module's list view
    - Some field types are restricted from mass update regardless of this setting.
  - **rname** : For relate-type fields, the field from the related variable that contains the text
  - **id\_name** : For relate-type fields, the field from the bean that stores the ID for the related bean
  - **source** : Set to 'non-db' if the field value does not come from the database
    - The source attribute can be used for calculated values or values retrieved in some other way.

- 
- **sort\_on** : The field to sort by if multiple fields are used in the presentation of field's information
  - **fields** : For concatenated values, an array containing the fields that are concatenated
  - **db\_concat\_fields** : For concatenated values, an array containing the fields to concatenate in the database
  - **unified\_search** : Determines whether the field can be searched via Global Search
    - This has no effect if the [dictionary array](#) setting 'unified\_search' is not set to true.
  - **enable\_range\_search** : For date, datetime, and numeric fields, determines if this field should be searchable by range in module searches
  - **dependency** : Allows a field to have a predefined formula to control the field's visibility
  - **studio** : Controls the visibility of the field in the Studio editor
    - If set to false, then the field will not appear in any studio screens for the module. Otherwise, you may specify an Array of view keys from which the field's visibility should be removed (e.g. array('listview'=>false) will hide the field in the listview layout screen).

The following example illustrates a standard ID field for a bean:

```
'id' => array (
  'name' => 'id',
  'vname' => 'LBL_ID',
  'type' => 'id',
  'required' => true,
),
```

## Indices Array

This array contains a list of arrays that are used to create indices in the database. The fields in this array are:

- **name** : The unique name of the index
- **type** : The type of index (primary, unique, or index)
- **fields** : An ordered array of the fields to index
- **source** : Set to 'non-db' if you are creating an index for added application functionality such as duplication checking on imports

The following example creates a primary index called 'userspk' on the 'id' column:

---

```
array(  
    'name' => 'userspk',  
    'type' => 'primary',  
    'fields'=> array('id')  
),
```

## Relationships Array

The relationships array specifies relationships between beans. Like the indices array entries, it is a list of names with array values.

- **lhs\_module** : The module on the left-hand side of the relationship
- **lhs\_table** : The table on the left-hand side of the relationship
- **lhs\_key** : The primary key column of the left-hand side of the relationship
- **rhs\_module** : The module on the right-hand side of the relationship
- **rhs\_table** : The table on the right-hand side of the relationship
- **rhs\_key** : The primary key column of the right-hand side of the relationship
- **relationship\_type** : The type of relationship (e.g. one-to-many, many-to-many)
- **relationship\_role\_column** : The type of relationship role
- **relationship\_role\_column\_value** : Defines the unique identifier for the relationship role

The following example creates a relationship between a contact and the contact that they report to. The `reports_to_id` field maps to the id of the record that belongs to the higher-ranked contact. This is a one-to-many relationship in that a contact may only report to one person, but many people may report to the same contact.

```
'contact_direct_reports' => array(  
    'lhs_module' => 'Contacts',  
    'lhs_table' => 'contacts',  
    'lhs_key' => 'id',  
    'rhs_module' => 'Contacts',  
    'rhs_table' => 'contacts',  
    'rhs_key' => 'reports_to_id',  
    'relationship_type' => 'one-to-many'  
),
```

## Visibility Array

The visibility array specifies the row level visibility classes that are enabled on the

---

bean. Each entry in the array, is a key-value pair, where the key is the name of the Visibility class and the value is set to boolean True. More information on configuring custom Visibility strategies can be found in the Architecture section under [Visibility Framework](#).

## Extending Vardefs

More information about extending and overriding vardefs can be found in the Extensions Framework documentation under [Vardefs](#).

**Last Modified:** 2021-02-17 02:44:13

## Manually Creating Custom Fields

### Overview

The most common way to create custom fields in Sugar is via Studio inside the application. This page describes how to use the ModuleInstaller class or vardef extensions as alternative methods of creating custom fields.

### Using ModuleInstaller to Create Custom Fields

There are two ways to create a field using the ModuleInstaller class: via installer package or programmatically. An example of creating a field from a module-loadable package is explained in the Module Loader documentation,, [Creating an Installable Package that Creates New Fields](#). The following example shows how to programmatically add custom fields using the ModuleInstaller class with the `install_custom_fields()` method:

```
<?php
```

```
$fields = array (  
    //Text  
    array(  
        'name' => 'text_field_example',  
        'label' => 'LBL_TEXT_FIELD_EXAMPLE',  
        'type' => 'varchar',  
        'module' => 'Accounts',
```

---

```

    'help' => 'Text Field Help Text',
    'comment' => 'Text Field Comment Text',
    'default_value' => '',
    'max_size' => 255,
    'required' => false, // true or false
    'reportable' => true, // true or false
    'audited' => false, // true or false
    'importable' => 'true', // 'true', 'false', 'required'
    'duplicate_merge' => false, // true or false
),
//DropDown
array(
    'name' => 'dropdown_field_example',
    'label' => 'LBL_DROPDOWN_FIELD_EXAMPLE',
    'type' => 'enum',
    'module' => 'Accounts',
    'help' => 'Enum Field Help Text',
    'comment' => 'Enum Field Comment Text',
    'ext1' => 'account_type_dom', //maps to options - specify
list name
    'default_value' => 'Analyst', //key of entry in specified
list
    'mass_update' => false, // true or false
    'required' => false, // true or false
    'reportable' => true, // true or false
    'audited' => false, // true or false
    'importable' => 'true', // 'true', 'false' or 'required'
    'duplicate_merge' => false, // true or false
),
//MultiSelect
array(
    'name' => 'multiselect_field_example',
    'label' => 'LBL_MULTISELECT_FIELD_EXAMPLE',
    'type' => 'multienum',
    'module' => 'Accounts',
    'help' => 'Multi-Enum Field Help Text',
    'comment' => 'Multi-Enum Field Comment Text',
    'ext1' => 'account_type_dom', //maps to options - specify
list name
    'default_value' => 'Analyst', //key of entry in specified
list
    'mass_update' => false, // true or false
    'required' => false, // true or false
    'reportable' => true, // true or false
    'audited' => false, // true or false
    'importable' => 'true', // 'true', 'false' or 'required'

```



---

```
        'duplicate_merge' => false, // true or false
    ),
    //Checkbox
    array(
        'name' => 'checkbox_field_example',
        'label' => 'LBL_CHECKBOX_FIELD_EXAMPLE',
        'type' => 'bool',
        'module' => 'Accounts',
        'default_value' => true, // true or false
        'help' => 'Bool Field Help Text',
        'comment' => 'Bool Field Comment',
        'audited' => false, // true or false
        'mass_update' => false, // true or false
        'duplicate_merge' => false, // true or false
        'reportable' => true, // true or false
        'importable' => 'true', // 'true', 'false' or 'required'
    ),
    //Date
    array(
        'name' => 'date_field_example',
        'label' => 'LBL_DATE_FIELD_EXAMPLE',
        'type' => 'date',
        'module' => 'Accounts',
        'default_value' => '',
        'help' => 'Date Field Help Text',
        'comment' => 'Date Field Comment',
        'mass_update' => false, // true or false
        'required' => false, // true or false
        'reportable' => true, // true or false
        'audited' => false, // true or false
        'duplicate_merge' => false, // true or false
        'importable' => 'true', // 'true', 'false' or 'required'
    ),
    //DateTime
    array(
        'name' => 'datetime_field_example',
        'label' => 'LBL_DATETIME_FIELD_EXAMPLE',
        'type' => 'datetime',
        'module' => 'Accounts',
        'default_value' => '',
        'help' => 'DateTime Field Help Text',
        'comment' => 'DateTime Field Comment',
        'mass_update' => false, // true or false
        'enable_range_search' => false, // true or false
        'required' => false, // true or false
        'reportable' => true, // true or false
    )
),
```

---

```

        'audited' => false, // true or false
        'duplicate_merge' => false, // true or false
        'importable' => 'true', // 'true', 'false' or 'required'
    ),
    //Encrypt
    array(
        'name' => 'encrypt_field_example',
        'label' => 'LBL_ENCRYPT_FIELD_EXAMPLE',
        'type' => 'encrypt',
        'module' => 'Accounts',
        'default_value' => '',
        'help' => 'Encrypt Field Help Text',
        'comment' => 'Encrypt Field Comment',
        'reportable' => true, // true or false
        'audited' => false, // true or false
        'duplicate_merge' => false, // true or false
        'importable' => 'true', // 'true', 'false' or 'required'
    ),
);

require_once('ModuleInstall/ModuleInstaller.php');
$moduleInstaller = new ModuleInstaller();
$moduleInstaller->install_custom_fields($fields);

```

Add labels for custom fields by creating a corresponding language extension file:

`./custom/Extension/modules/Accounts/Ext/Language/en_us.<name>.php`

```
<?php
```

```

    $mod_strings['LBL_TEXT_FIELD_EXAMPLE'] = 'Text Field Example';
    $mod_strings['LBL_DROPDOWN_FIELD_EXAMPLE'] = 'DropDown Field Example';
    $mod_strings['LBL_CHECKBOX_FIELD_EXAMPLE'] = 'Checkbox Field Example';
    $mod_strings['LBL_MULTISELECT_FIELD_EXAMPLE'] = 'Multi-Select Field Example';
    $mod_strings['LBL_DATE_FIELD_EXAMPLE'] = 'Date Field Example';
    $mod_strings['LBL_DATETIME_FIELD_EXAMPLE'] = 'DateTime Field Example';
    $mod_strings['LBL_ENCRYPT_FIELD_EXAMPLE'] = 'Encrypt Field Example';

```

Finally, navigate to **Admin > Repair > Quick Repair and Rebuild** to make the new field available for users.

---

## Using the Vardef Extensions

You should try to avoid creating your own custom fields using the vardefs as there are several caveats:

- If your installation does not already contain custom fields, you must manually create the custom table. Otherwise, the system will not recognize your field's custom vardef. This situation is outlined in the following section.
- You must run a Quick Repair and Rebuild and then execute the generated SQL after the vardef is installed.
- You must correctly define the properties of a vardef. If you miss any, the field may not work properly.
- Your field name must end with "\_c" and have the property 'source' set to 'custom\_fields'. This is required as you should not modify core tables in Sugar and it is not permitted on Sugar's cloud service.
- Your vardef must specify the exact indexes of the properties you want to set. For example, use: `$dictionary['<module singular>']['fields']['example_c']['name'] = 'myfield_c';` instead of `$dictionary['<module singular>']['fields']['example_c'] = array(['name' => 'myfield_c']);`. This will help prevent the system from losing any properties when loading from the extension framework.

The initial challenge when creating your own custom vardef is getting the system to recognize the vardef and generate the database field. This issue is illustrated with the example below:

```
./custom/Extension/modules/<module>/Ext/Vardefs/<file>.php
```

```
<?php
```

```
$dictionary['<module singular>']['fields']['example_c']['name'] = 'example_c';
$dictionary['<module singular>']['fields']['example_c']['vname'] = 'LBL_EXAMPLE_C';
$dictionary['<module singular>']['fields']['example_c']['type'] = 'varchar';
$dictionary['<module singular>']['fields']['example_c']['enforced'] = '';
$dictionary['<module singular>']['fields']['example_c']['dependency'] = '';
$dictionary['<module singular>']['fields']['example_c']['required'] = false;
$dictionary['<module singular>']['fields']['example_c']['massupdate'] = '0';
```

---

```

$dictionary['<module singular>']['fields']['example_c']['default'] = '
';
$dictionary['<module singular>']['fields']['example_c']['no_default']
= false;
$dictionary['<module singular>']['fields']['example_c']['comments'] =
'Example Varchar Vardef';
$dictionary['<module singular>']['fields']['example_c']['help'] = '';
$dictionary['<module singular>']['fields']['example_c']['importable']
= 'true';
$dictionary['<module singular>']['fields']['example_c']['duplicate_mer
ge'] = 'disabled';
$dictionary['<module singular>']['fields']['example_c']['duplicate_mer
ge_dom_value'] = '0';
$dictionary['<module singular>']['fields']['example_c']['audited'] = f
alse;
$dictionary['<module singular>']['fields']['example_c']['reportable']
= true;
$dictionary['<module singular>']['fields']['example_c']['unified_searc
h'] = false;
$dictionary['<module singular>']['fields']['example_c']['merge_filter']
= 'disabled';
$dictionary['<module singular>']['fields']['example_c']['calculated']
= false;
$dictionary['<module singular>']['fields']['example_c']['len'] = '255'
;
$dictionary['<module singular>']['fields']['example_c']['size'] = '20'
;
$dictionary['<module singular>']['fields']['example_c']['id'] = 'examp
le_c';
$dictionary['<module singular>']['fields']['example_c']['custom_module
'] = '';
//required to create the field in the _cstm table
$dictionary['<module singular>']['fields']['example_c']['source'] = 'c
ustom_fields';

```

Once the vardef is in place, determine whether the custom field's module already contains any other custom fields. If there are not any existing custom fields, create a corresponding record in `fields_meta_data` that will trigger the comparison process.

```

INSERT INTO fields_meta_data (id, name, vname, comments, custom_module
, type, len, required, deleted, audited, massupdate, duplicate_merge,
reportable, importable) VALUES ('<module>example_c', 'example_c', 'LBL
_EXAMPLE_C', 'Example Varchar Vardef', '<module>', 'varchar', 255, 0,
0, 0, 0, 0, 1, 'true');

```

---

Finally, navigate to Admin > Repair > Quick Repair and Rebuild. The system will then rebuild the extensions. After the repair, you will notice a section at the bottom stating that there are differences between the database and vardefs. Execute the scripts generated to create the [Save](#) custom field:

Missing <module>\_cstm Table:

```
/*Checking Custom Fields for module : <module>&;*/
```

```
CREATE TABLE <module>_cstm (id_c char(36) NOT NULL , PRIMARY KEY (id_c)) CHARACTER SET utf8 COLLATE utf8_general_ci;
```

Missing Columns:

```
/*MISSING IN DATABASE - example_c - ROW*/
```


```
ALTER TABLE <module>_cstm add COLUMN example_c varchar(255) NULL ;
```

**Last Modified:** 2021-02-17 02:44:13

## Specifying Custom Indexes for Import Duplicate Checking

### Overview

When importing records to Sugar via the Import Wizard, users can select which of the mapped fields they would like to use to perform a duplicate check and thereby avoid creating duplicate records. This article explains how to enable an additional field or set of fields for selection in this step.

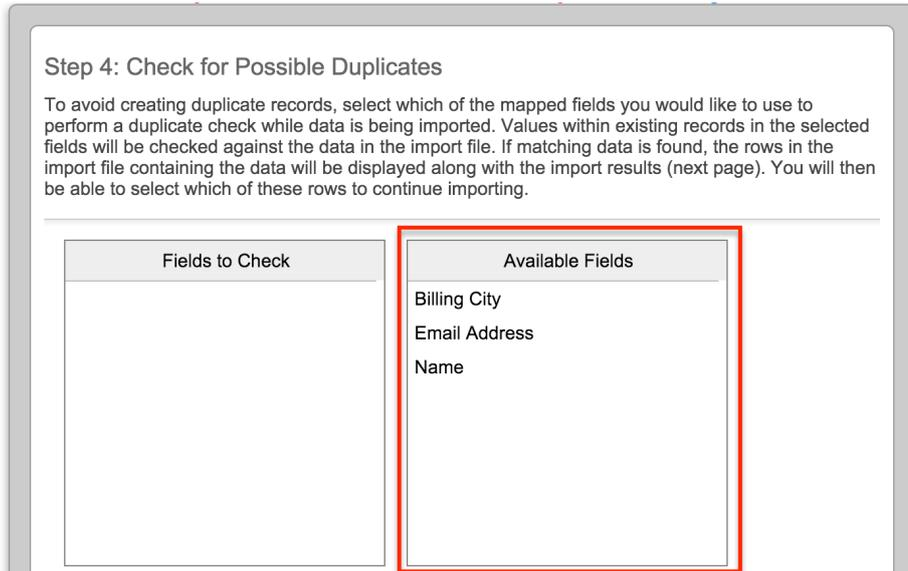

## Resolution

The import wizard's duplicate check operates based on indices defined for that module. You can create a non-database index to check for a field. It is important that it is non-database as single column indices on your database can hamper overall performance. The following is an example to add the home phone field to the Contact module's duplicate check.

First, create the following file from the root directory of your Sugar installation on the web server:

```
./custom/Extension/modules/Contacts/Ext/Vardefs/custom_import_index.php
```

When creating the file, keep in mind the following requirements:

- The name of the file is not important, as long as it ends with a .php extension.
- The rest of the directory path is case sensitive so be sure to create the directories as shown.
- If you are creating the import index for a module other than Contacts, then substitute the corresponding directory name with that module.
- Ensure that the entire directory path and file have the correct ownership and sufficient permissions for the web server to access the file.

The contents of the file should look similar to the following code:

```
<?php
```

---

```
$dictionary['Contact']['indices'][] = array(
    'name' => 'idx_home_phone_cstm',
    'type' => 'index',
    'fields' => array(
        0 => 'phone_home',
    ),
    'source' => 'non-db',
);
```

Please note that the module name in line 2 of the code is singular (i.e. Contact, not Contacts). If you are unsure of what to enter for the module name, you can verify the name by opening the `./cache/modules/<module_name>/<module_name>vardefs.php` file. The second line of that file will have text like the following:

```
$GLOBALS["dictionary"]["Contact"] = array (
```

The parameter following "dictionary" is the same parameter you should use in the file defining the custom index. To verify duplicates against a combination of fields (i.e. duplicates will only be flagged if the values of multiple fields match those of an existing record), then simply add the desired fields to the 'fields' array in the code example.

Finally, navigate to Admin > Repair > Quick Repair and Rebuild to enable the custom index for duplicate verification when importing records in the module.

**Last Modified:** 2021-02-17 02:44:13

## Working With Indexes

### Overview

Sugar provides a simple method for creating custom indexes through the vardef framework. Indexes can be built on one or more fields within a module. Indexes can be saved down to the database level or made available only in the application for functions such as [Import Duplicate Checking](#).

### Index Metadata

---

Indexes have the following metadata options that can be configured per index:

| Key    | Value  | Description   |
|--------|--------|---|
| name   | string | A Unique identifier to define the index. Best practices recommend indexes start with idx and contain the suffix cstm to avoid conflicting with a stock index.<br><br><b>Note</b> : Some databases have restrictions on the length of index names. Please check with your database vendor to avoid any issues. |
| type   | string | All indexes should use the type of "index"  |
| fields | array  | A PHP array of the fields for the index to utilize  |
| source | string | Specify as "non-db" to avoid creating the index in the database   |

## Creating Indexes

Stock indexes are initially defined in the module's vardefs file under the indices array. For reference, you can find them using the vardef path of your module. The path will be `./modules/<module>/vardefs.php`.

Custom indexes should be created using the Extension Framework. First, create a PHP file in the extension directory of your desired module. The path should be similar to `./custom/Extension/modules/<module>/Ext/Vardefs/<name>.php`.

In the new file, add the appropriate `$dictionary` reference to define the custom index:

```
<?php  
  
$dictionary['<module>']['indices'][] = array(  
    'name' => '<index name>',
```



---

```
'type' => 'index',
'fields' => array(
    'field1',
    'field2',
)
);
```

**Note :** For performance reasons, it is not recommended to create an index on a single field unless the source is set to non-db.

Once installed, you will need to navigate to Admin > Repair > Quick Repair and Rebuild to enable the custom index. You will need to execute any scripts generated by the rebuild process.

## Removing Indexes

Stock indexes are initially defined in the module's vardefs file under the indices array. For reference, you can find them using the vardef path of your module. The path will be `./modules/<module>/vardefs.php`.

Stock indexes should be removed using the Extension Framework. First, create a PHP file in the extension directory of your desired module. The path should be similar to `./custom/Extension/modules/<module>/Ext/Vardefs/<name>.php`.

In the new file, loop through the existing 'indices' sub-array of the \$dictionary to locate the stock index to remove, and use `unset()` to remove it from the array.

## Example

The following is an example to remove the `idx_calls_date_start` index from the Call module's vardefs.

First, create `./custom/Extension/modules/Calls/Ext/Vardefs/remove_idx_calls_date_start.php` from the root directory of your Sugar installation on the web server. When creating the file, keep in mind the following requirements:

- The name of the file is not important, as long as it ends with a `.php` extension.
- The rest of the directory path is case sensitive so be sure to create the directories as shown.
- If you are removing the index for a module other than Calls, then substitute the corresponding directory name with that module.

- 
- Ensure that the entire directory path and file have the correct ownership and sufficient permissions for the web server to access the file.

The contents of the file should look similar to the following code:

```
<?php

$call_indexes = $dictionary['Call']['indices'];
$remove_index = "idx_calls_date_start";

foreach($call_indexes as $index_key => $index_item) {
    if( $index_item['name'] == $remove_index ) {
        unset($dictionary['Call']['indices'][$index_key]);
    }
}
```

**Note :** Removing the reference to the index from the module's indices array does not actually remove the index from the module's database table. Removing the reference from the indices array ensures that the index is not added back to the module's database table when performing any future Quick Repair and Rebuilds. The database index must be removed directly at the database level. On MySQL, with the current example, this could be done with a query like:

```
ALTER TABLE calls DROP INDEX idx_calls_date_start;
```

Once installed, you will need to navigate to Admin > Repair > Quick Repair and Rebuild to remove the index from the \$dictionary array. You will need to execute any scripts generated by the rebuilding process.

## Creating Indexes for Import Duplicate Checking

When importing records to Sugar via the Import Wizard, users can select which of the mapped fields they would like to use to perform a duplicate check and thereby avoid creating duplicate records. The following instructions explain how to enable an additional field or set of fields for selection in this step.

**Step 4: Check for Possible Duplicates**

To avoid creating duplicate records, select which of the mapped fields you would like to use to perform a duplicate check while data is being imported. Values within existing records in the selected fields will be checked against the data in the import file. If matching data is found, the rows in the import file containing the data will be displayed along with the import results (next page). You will then be able to select which of these rows to continue importing.

| Fields to Check | Available Fields                      |
|-----------------|---------------------------------------|
|                 | Billing City<br>Email Address<br>Name |

## Example

The following is an example to add the home phone field to the Contact module's duplicate check.

First, create

`./custom/Extension/modules/Contacts/Ext/Vardefs/custom_import_index.php` from the root directory of your Sugar installation on the web server. When creating the file, keep in mind the following requirements:

- The name of the file is not important, as long as it ends with a `.php` extension.
- The rest of the directory path is case sensitive so be sure to create the directories as shown.
- If you are creating the import index for a module other than Contacts, then substitute the corresponding directory name with that module.
- Ensure that the entire directory path and file have the correct ownership and sufficient permissions for the web server to access the file.

The contents of the file should look similar to the following code:

```
<?php

$dictionary['Contact']['indices'][] = array(
    'name' => 'idx_home_phone_cstm',
    'type' => 'index',
    'fields' => array(
        0 => 'phone_home',
```

---

```
    ),  
    'source' => 'non-db',  
);
```

Please note that the module name in line 2 of the code is singular (i.e. Contact, not Contacts). If you are unsure of what to enter for the module name, you can verify the name by opening the `./cache/modules/<module_name>/<module_name>vardefs.php` file. The second line of that file will have text like the following:

```
$GLOBALS["dictionary"]["Contact"] = array (...);
```

The parameter following "dictionary" is the same parameter you should use in the file defining the custom index. To verify duplicates against a combination of fields (i.e. duplicates will only be flagged if the values of multiple fields match those of an existing record), then simply add the desired fields to the 'fields' array in the code example.

Finally, navigate to Admin > Repair > Quick Repair and Rebuild to enable the custom index for duplicate verification when importing records in the module.

**Last Modified:** 2021-02-17 02:44:13

## Fields

### Overview

How fields interact with the various aspects of Sugar.

### SugarField Widgets

The SugarField widgets, located in `./include/SugarFields/Fields/`, define the data formatting and search query structure for the various field types. They also define the rendering of fields for modules running in backward compatibility mode. When creating or overriding field widgets, developers should place their customization in `./custom/include/SugarFields/Fields/`. For information on how Sidecar renders fields, please refer to the [fields](#) section in our user interface documentation.

[Creating Custom Fields](#)

---

## Implementation

All fields for a module are defined within [vardefs](#). Within this definition, the type attribute will determine all of the logic applied to the field. For example, the Contacts module has a 'Do Not Call' field. In the vardefs, this field is defined as follows:

```
'do_not_call' => array (  
  'name' => 'do_not_call', // the name of the field  
  'vname' => 'LBL_DO_NOT_CALL', // the label for the field name  
  'type' => 'bool', // the fields type  
  'default' => '0', // the fields default value  
  'audited'=>true, // whether the field is audited  
  'duplicate_on_record_copy' => 'always', // whether to duplicate the  
  e fields value when being copied  
  'comment' => 'An indicator of whether contact can be called' // ad  
  min context of the field  
) ,
```

The bool type field is rendered in the UI from the `./clients/base/fields/bool/bool.js` [field](#) controller which renders the appropriate [handlebars](#) template as defined by the users current view for sidecar enabled modules. When the user saves data, the controller formats the data for the API and passes it to an endpoint. Once the data is received by the server, The SugarField definition calls any additional logic in the `apiSave` function to format the data for saving to the database. The same concept is applied in the `apiFormatField` function when retrieving data from the database to be passed back to the user interface through the API. For modules running in backward compatibility mode, the bool field is rendered using the Smarty `.tpl` templates located in `./include/SugarFields/Fields/Bool/`.

While the vardefs define the default type for a field, this value can be overridden in the metadata of the view rendering the field. The example being that in `./custom/modules/Contacts/clients/base/views/record/record.php`, you can modify the `do_not_call` field array to point to a custom field type you have created. For more information on creating custom field types, please refer to [Creating Custom Fields](#) documentation.

**Last Modified:** 2021-02-17 02:44:13

---

# Relationships

## Overview

Relationships are the basis for linking information within the system. This page explains the various aspects of relationships. For information on custom relationships, please refer to the [Custom Relationships](#) documentation.

## Definitions

Relationships are initially defined in the module's vardefs file under the relationships array. For reference, you can find them using the vardef path `./modules/<module>/vardefs.php`.

## Database Structure

In Sugar, most relationships are stored using a joining table. This applies to both one-to-many (1:M) relationships as well as many-to-many (M:M) relationships. An example of this is the relationship between Accounts and Opportunities where there are three tables: accounts, accounts\_opportunities, and opportunities. You will find that the joining table, accounts\_opportunities, will contain the fields needed in order to establish the relationship link.

The fields on the accounts\_opportunities table are listed below:

| Fields         | Description   |
|----------------|---|
| id             | A unique identifier for the relationship row (not typically used)                           |
| opportunity_id | The ID for the related opportunity record. This is named uniquely based on the relationship |
| account_id     | The ID for the related account record. This is named uniquely based on the relationship     |
| date_modified  | The date the row was last modified  |
| deleted        | Whether or not the relationship still exists  |

---

## Relationship Cache

All relationships in Sugar are compiled into the cache directory `./cache/Relationships/relationships.cache.php`. If needed, the relationships cache can be rebuilt by navigating to Admin > Repair > Rebuild Relationships.

**Last Modified:** 2022-11-29 19:48:23

## Custom Relationships

### Overview

This page needs an overview

### Creating Custom Relationships

Relationships are initially defined in the module's `vardefs` file under the `relationships` array. For reference, you can find them using the `vardef` path as follows:

```
./modules/<module>/vardefs.php
```

Custom relationships are created in a different way using the Extension Framework. The process requires two steps which are explained in the following sections:

1. [Defining the Relationship MetaData](#)
2. [Defining the Relationship in the TableDictionary](#)

### Defining the Relationship MetaData

The definitions for custom relationships will be found in a path similar to:

```
./custom/metadata/<relationship name>MetaData.php
```

This file will contain the `$dictionary` information needed for the system to generate the relationship. The `$dictionary` array will contain the following:

|  |  |  |
|--|--|--|
|  |  |  |
|--|--|--|

| <b>Index</b>                          | <b>Type</b> | <b>Description</b>  |
|---------------------------------------|-------------|---|
| true_relationship_type                | String      | The relationship's structure (possible values: 'one-to-many' or 'many-to-many') |
| from_studio                           | Boolean     | Whether the relationship was created in Studio                                  |
| table                                 | String      | The name of the table that is created in the database to contain the link ids   |
| fields                                | Array       | An array of fields to be created on the relationship join table                 |
| indices                               | Array       | The list of indexes to be created   |
| relationships                         | Array       | An array defining relationships   |
| relationships.<rel>                   | Array       | The array defining the relationship   |
| relationships.<rel>.lhs_module        | String      | Left-hand module (should match \$beanList index)                                |
| relationships.<rel>.lhs_table         | String      | Left-hand table name  |
| relationships.<rel>.lhs_key           | String      | The key to use from the table on the left                                       |
| relationships.<rel>.rhs_module        | String      | Right-hand module (should match \$beanList index)                               |
| relationships.<rel>.rhs_table         | String      | Right-hand table name   |
| relationships.<rel>.rhs_key           | String      | The key to use from the table on the right                                      |
| relationships.<rel>.relationship_type | String      | The relationship type, typically stored as 'many-to-many'                       |
| relationships.<rel>.join_table        | String      | The join table  |
| relationships.<rel>.join_key_lhs      | String      | Left table key, should exist in table field definitions above                   |



|                                  |        |  |
|----------------------------------|--------|--|
| relationships.<rel>.join_key_rhs | String | Right table key, should exist in table field definitions above |
|----------------------------------|--------|--|

## MetaData Example

Creating a custom 1:M relationship between Accounts and Contacts will yield the following metadata file:

./custom/metadata/accounts\_contacts\_1MetaData.php

```
<?php
```

```
// created: 2013-09-20 15:15:47
```

```
$dictionary["accounts_contacts_1"] = array (
  'true_relationship_type' => 'one-to-many',
  'from_studio' => true,
  'relationships' =>
  array (
    'accounts_contacts_1' =>
    array (
      'lhs_module' => 'Accounts',
      'lhs_table' => 'accounts',
      'lhs_key' => 'id',
      'rhs_module' => 'Contacts',
      'rhs_table' => 'contacts',
      'rhs_key' => 'id',
      'relationship_type' => 'many-to-many',
      'join_table' => 'accounts_contacts_1_c',
      'join_key_lhs' => 'accounts_contacts_1accounts_ida',
      'join_key_rhs' => 'accounts_contacts_1contacts_idb',
    ),
  ),
  'table' => 'accounts_contacts_1_c',
  'fields' =>
  array (
    0 =>
    array (
      'name' => 'id',
      'type' => 'varchar',
      'len' => 36,
    ),
    1 =>
```

---

```

array (
  'name' => 'date_modified',
  'type' => 'datetime',
),
2 =>
array (
  'name' => 'deleted',
  'type' => 'bool',
  'len' => '1',
  'default' => '0',
  'required' => true,
),
3 =>
array (
  'name' => 'accounts_contacts_laccounts_ida',
  'type' => 'varchar',
  'len' => 36,
),
4 =>
array (
  'name' => 'accounts_contacts_lcontacts_idb',
  'type' => 'varchar',
  'len' => 36,
),
),
'indices' =>
array (
  0 =>
array (
  'name' => 'accounts_contacts_lspk',
  'type' => 'primary',
  'fields' =>
array (
  0 => 'id',
),
),
1 =>
array (
  'name' => 'accounts_contacts_l_ida1',
  'type' => 'index',
  'fields' =>
array (
  0 => 'accounts_contacts_laccounts_ida',
),
),
2 =>

```

---

```
array (
  'name' => 'accounts_contacts_1_alt',
  'type' => 'alternate_key',
  'fields' =>
  array (
    0 => 'accounts_contacts_1contacts_idb',
  ),
),
);
```

## Defining the Relationship in the TableDictionary

Once a relationship's metadata has been created, the metadata file will have a reference placed in the TableDictionary:

```
./custom/Extension/application/Ext/TableDictionary/<relationship name>
.php
```

This file will contain an 'include' reference to the metadata file:

```
<?php
    include('custom/metadata/<relationship name>MetaData.php');
?>
```

## TableDictionary Example

The custom 1:M relationship between Accounts and Contacts will yield the following TableDictionary file:

```
./custom/Extension/application/Ext/TableDictionary/accounts_contacts_1.php
<?php
    //WARNING: The contents of this file are auto-generated
    include('custom/metadata/accounts_contacts_1MetaData.php');
?>
```

If you have created the relationship through Studio, the files above will be automatically created. If you are manually creating the files, run a Quick Repair

---

and Rebuild and run any SQL scripts generated. The Quick Repair and Rebuild will rebuild the file map and relationship cache as well as populate the relationship in the relationships table.

**Last Modified:** 2021-02-17 02:44:13

## Subpanels

### Overview


For Sidecar, Sugar's subpanel layouts have been modified to work as simplified metadata. This page is an overview of the metadata framework for subpanels.

The reason for this change is that previous versions of Sugar generated the metadata from various sources such as the SubPanelLayout and MetaDataManager classes. This eliminates the need for generating and processing the layouts and allows the metadata to be easily loaded to Sidecar.

**Note:** Modules running in backward compatibility mode do not use the Sidecar subpanel layouts as they use the legacy MVC framework.

### Hierarchy Diagram

When loading the Sidecar subpanel layouts, the system processes the layout in the following manner:

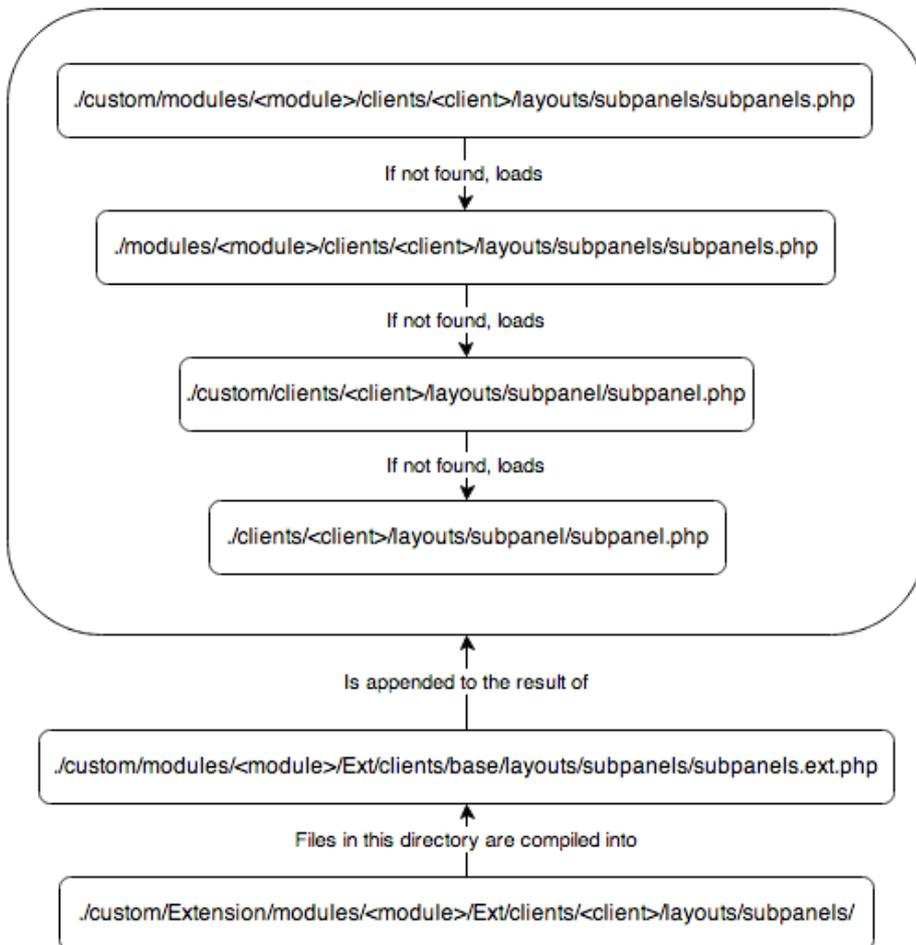

**Note:** The Sugar application's client type is "base". For more information on the various client types, please refer to the [User Interface](#) page.

## Subpanels and Subpanel Layouts

Sugar contains both a subpanels (plural) layout and a subpanel (singular) layout. The subpanels layout contains the collection of subpanels, whereas the subpanel layout renders the actual subpanel widget.

An example of a stock module's subpanels layout is:

```
./modules/Bugs/clients/base/layouts/subpanels/subpanels.php
```

```
<?php
```

```
$viewdefs['Bugs']['base']['layout']['subpanels'] = array (
  'components' => array (
    array (
      'layout' => 'subpanel',
```

---

```

        'label' => 'LBL_DOCUMENTS_SUBPANEL_TITLE',
        'context' => array (
            'link' => 'documents',
        ),
    ),
    array (
        'layout' => 'subpanel',
        'label' => 'LBL_CONTACTS_SUBPANEL_TITLE',
        'context' => array (
            'link' => 'contacts',
        ),
    ),
    array (
        'layout' => 'subpanel',
        'label' => 'LBL_ACCOUNTS_SUBPANEL_TITLE',
        'context' => array (
            'link' => 'accounts',
        ),
    ),
    array (
        'layout' => 'subpanel',
        'label' => 'LBL_CASES_SUBPANEL_TITLE',
        'context' => array (
            'link' => 'cases',
        ),
    ),
),
'type' => 'subpanels',
'span' => 12,
);

```

You can see that the layout incorporates the use of the subpanel layout for each module. As most of the subpanel data is similar, this approach allows us to use less duplicate code. The subpanel layout, shown below, shows the three views that make up the subpanel widgets users see.

`./clients/base/layouts/subpanel/subpanel.php`

```

<?php

$viewdefs['base']['layout']['subpanel'] = array (
    'components' => array (
        array (
            'view' => 'panel-top',
        )
        array (

```

---

```

        'view' => 'subpanel-list',
    ),
    array (
        'view' => 'list-bottom',
    ),
),
'span' => 12,
'last_state' => array(
    'id' => 'subpanel'
),
);

```

## Adding Subpanel Layouts

When a new relationship is deployed from Studio, the relationship creation process will generate the layouts using the extension framework. You should note that for stock relationships and custom deployed relationships, layouts are generated for both Sidecar and Legacy MVC Subpanel formats. This is done to ensure that any related modules, whether in Sidecar or Backward Compatibility mode, display a related subpanel as expected.

### Sidecar Layouts

Custom Sidecar layouts, located in `./custom/Extension/modules/<module>/Ext/clients/<client>/layouts/subpanels/`, are compiled into `./custom/modules/<module>/Ext/clients/<client>/layouts/subpanels/subpanels.ext.php` using the extension framework. When a relationship is saved, layout files are created for both the "base" and "mobile" client types.

For example, deploying a 1:M relationship from Bugs to Leads will generate the following Sidecar files:

```
./custom/Extension/modules/Bugs/Ext/clients/base/layouts/subpanels/bugs_leads_1_Bugs.php
```

```
<?php
```

```

$viewdefs['Bugs']['base']['layout']['subpanels']['components'][] = array (
    'layout' => 'subpanel',
    'label' => 'LBL_BUGS_LEADS_1_FROM_LEADS_TITLE',
    'context' =>
    array (

```

---

```
        'link' => 'bugs_leads_1',
    ),
);
```

```
./custom/Extension/modules/Bugs/Ext/clients/mobile/layouts/subpanels/bugs_leads_1_Bugs.php
```

```
<?php
```

```
$viewdefs['Bugs']['mobile']['layout']['subpanels']['components'][] = array (
    'layout' => 'subpanel',
    'label' => 'LBL_BUGS_LEADS_1_FROM_LEADS_TITLE',
    'context' =>
    array (
        'link' => 'bugs_leads_1',
    ),
);
```

**Note:** The additional legacy MVC layouts generated by a relationships deployment are described below.

## Legacy MVC Subpanel Layouts

Custom Legacy MVC Subpanel layouts, located in `./custom/Extension/modules/<module>/Ext/Layoutdefs/`, are compiled into `./custom/modules/<module>/Ext/Layoutdefs/layoutdefs.ext.php` using the extension framework. You should also note that when a relationship is saved, wireless layouts, located in `./custom/Extension/modules/<module>/Ext/WirelessLayoutdefs/`, are created and compiled into `./custom/modules/<module>/Ext/Layoutdefs/layoutdefs.ext.php`.

An example of this is when deploying a 1-M relationship from Bugs to Leads, the following layoutdef files are generated:

```
./custom/Extension/modules/Bugs/Ext/Layoutdefs/bugs_leads_1_Bugs.php
```

```
<?php
```

```
$layout_defs["Bugs"]["subpanel_setup"]["bugs_leads_1"] = array (
    'order' => 100,
    'module' => 'Leads',
    'subpanel_name' => 'default',
    'sort_order' => 'asc',
    'sort_by' => 'id',
```



---

```
'title_key' => 'LBL_BUGS_LEADS_1_FROM_LEADS_TITLE',
'get_subpanel_data' => 'bugs_leads_1',
'top_buttons' =>
array (
  0 =>
  array (
    'widget_class' => 'SubPanelTopButtonQuickCreate',
  ),
  1 =>
  array (
    'widget_class' => 'SubPanelTopSelectButton',
    'mode' => 'MultiSelect',
  ),
),
);
```

./custom/Extension/modules/Bugs/Ext/WirelessLayoutdefs/bugs\_leads\_1\_Bugs.php

```
<?php
```


```
$layout_defs["Bugs"]["subpanel_setup"]["bugs_leads_1"] = array (
  'order' => 100,
  'module' => 'Leads',
  'subpanel_name' => 'default',
  'title_key' => 'LBL_BUGS_LEADS_1_FROM_LEADS_TITLE',
  'get_subpanel_data' => 'bugs_leads_1',
);
```

## Fields Metadata

Sidecar's subpanel field layouts are initially defined by the subpanel list-view metadata.

## Hierarchy Diagram

The subpanel list metadata is loaded in the following manner:

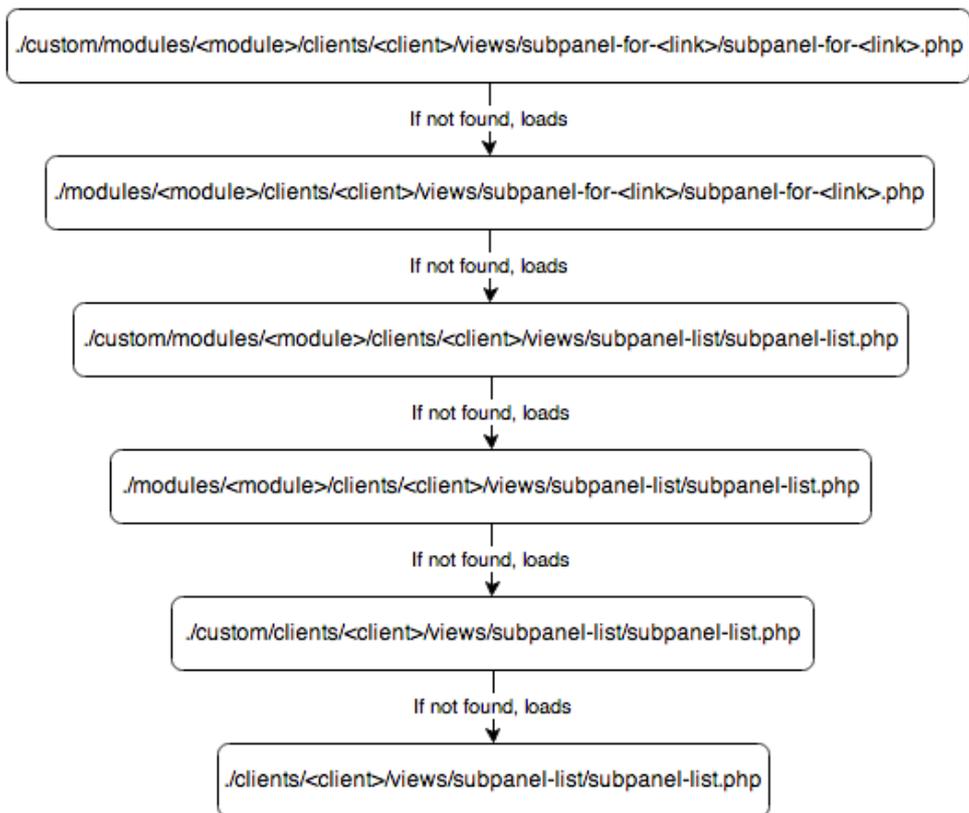

**Note:** The Sugar application's client type is "base". For more information on the various client types, please refer to the [User Interface](#) page.

## Subpanel List Views

By default, all modules come with a default set of subpanel fields for when they are rendered as a subpanel. An example of this is can be found in the Bugs module:

```
./modules/Bugs/clients/base/views/subpanel-list/subpanel-list.php
```

```
<?php
```

```

$subpanel_layout['list_fields'] = array (
  'full_name' =>
  array (
    'type' => 'fullname',
    'link' => true,
    'studio' =>
    array (
      'listview' => false,
    ),
    'vname' => 'LBL_NAME',
    'width' => '10%',
  )
);

```

---

```

    'default' => true,
  ),
  'date_entered' =>
array (
  'type' => 'datetime',
  'studio' =>
array (
  'portaleditview' => false,
),
  'readonly' => true,
  'vname' => 'LBL_DATE_ENTERED',
  'width' => '10%',
  'default' => true,
),
  'referred_by' =>
array (
  'vname' => 'LBL_LIST_REFERED_BY',
  'width' => '10%',
  'default' => true,
),
  'lead_source' =>
array (
  'vname' => 'LBL_LIST_LEAD_SOURCE',
  'width' => '10%',
  'default' => true,
),
  'phone_work' =>
array (
  'vname' => 'LBL_LIST_PHONE',
  'width' => '10%',
  'default' => true,
),
  'lead_source_description' =>
array (
  'name' => 'lead_source_description',
  'vname' => 'LBL_LIST_LEAD_SOURCE_DESCRIPTION',
  'width' => '10%',
  'sortable' => false,
  'default' => true,
),
  'assigned_user_name' =>
array (
  'name' => 'assigned_user_name',
  'vname' => 'LBL_LIST_ASSIGNED_TO_NAME',
  'widget_class' => 'SubPanelDetailViewLink',
  'target_record_key' => 'assigned_user_id',

```

---

```
'target_module' => 'Employees',
'width' => '10%',
'default' => true,
),
'first_name' =>
array (
    'usage' => 'query_only',
),
'last_name' =>
array (
    'usage' => 'query_only',
),
'salutation' =>
array (
    'name' => 'salutation',
    'usage' => 'query_only',
),
);
```

To modify this layout, navigate to Admin > Studio > {Parent Module} > Subpanels > Bugs and make your changes. Once saved, Sugar will generate `./custom/modules/Bugs/clients/<client>/views/subpanel-for-<link>/subpanel-for-<link>.php` which will be used for rendering the fields you selected.

You should note that, just as Sugar mimics the Sidecar layouts in the legacy MVC framework for modules in backward compatibility, it also mimics the field list in `./modules/<module>/metadata/subpanels/default.php` and `./custom/modules/<module>/metadata/subpanels/default.php`. This is done to ensure that any related modules, whether in Sidecar or Backward Compatibility mode, display the same field list as expected.

**Last Modified:** 2021-02-17 02:44:13

## Database

### Overview

All Sugar products support the MySQL and Microsoft SQL Server databases. Sugar Enterprise and Sugar Ultimate also support the DB2 and Oracle databases. In general, Sugar uses only common database functionality, and the application logic is embedded in the PHP code. Sugar does not use or recommend database triggers

---

or stored procedures. This design simplifies coding and testing across different database vendors. The only implementation difference across the various supported databases is column types.

## Primary Keys, Foreign Keys, and GUIDs

By default, Sugar uses globally unique identification values (GUIDs) for primary keys for all database records. Sugar provides a `Sugarcrm\Sugarcrm\Util\Uuid::uuid1()` utility function for creating these GUIDs in the following format: `aaaaaaaa-bbbb-cccc-dddd-eeeeeeeeeeee`. The primary key's column length is 36 characters.

The GUID format and value has no special meaning (relevance) in Sugar other than the ability to match records in the database. Sugar links two records (such as an Accounts record with a Contacts record) with a specified ID in the record type relationship table (e.g. `accounts_contacts`).

Primary keys in Sugar may contain any unique string such as a GUID algorithm, a key that has some meaning (e.g. `bean type first`, followed by `info`), an external key, or auto-incrementing numbers converted to strings. Sugar chose GUIDs over auto-incrementing keys to enable easier data synchronization across databases and avoid primary-key collisions.

You can also import data from a previous system with one primary key format and make all new records in Sugar use the GUID primary key format. All keys must be stored as globally unique strings with no more than 36 characters.

**Notice** If multiple records between modules contain matching ids, you may experience undesired behaviors within the system.

To implement a new primary key method or to import data with a different primary key format (based on the existing GUID mechanism for new records), keep in mind the following rules of primary key behavior:

- **Quote characters** : Sugar expects primary keys to be string types and will format the SQL with quotes. If you change the primary key types to an integer type, SQL errors may occur since Sugar stores all ID values in quotes in the generated SQL. The database may be able to ignore this issue. MySQL running in Safe mode experiences issues, for instance.
- **Case sensitivity** : The ID values `abc` and `ABC` are treated the same in MySQL but represent different values in Oracle. When migrating data to Sugar, some CRM systems may use case-sensitive strings as their IDs on export. If this is the case, and you are running MySQL, you must run an

---

algorithm on the data to make sure all of the IDs are unique. One simple algorithm is to MD5 the ID values that they provide. A quick check will let you know if there is a problem. If you imported 80,000 leads and there are only 60,000 in the system, some may have been lost due to non-unique primary keys caused by case insensitivity.

- **Key size** : Sugar only tracks the first 36 characters in the primary key. Any replacement primary key will either require changing all of the ID columns with one of an appropriate size or to make sure you do not run into any truncation or padding issues. MySQL in some versions has had issues with Sugar where the IDs were not matching because it was adding spaces to pad the row out to the full size. MySQL's handling of char and varchar padding has changed in later versions. To protect against this, make sure the GUIDs are not padded with blanks in the database by removing any leading or trailing space characters.

## Indexes

Indexes can be defined in the main or custom vardefs.php for a module in an array under the key indices. See below for an example of defining several indices:


```
'indices' => array(
    array(
        'name' => 'idx_modulename_name',
        'type' => 'index',
        'fields' => array('name'),
    ),
    array(
        'name' => 'idx_modulename_assigned_deleted',
        'type' => 'index',
        'fields' => array('assigned_user_id', 'deleted'),
    ),
),
```

The name of the index must start with `idx_` and must be unique across the database. Possible values for type include `primary` for a primary key or `index` for a normal index. The fields list matches the column names used in the database.

## Doctrine

In order to provide robust support for [Prepared Statements](#), which provide more security and better database access performance, Sugar 7.9 has adopted parts of [Doctrine's Database Abstraction Layer](#), especially the [QueryBuilder](#) class, for working with prepared statements. The picture below shows how Sugar objects

like DBManager and SugarQuery utilize Doctrine to provide this functionality, while still using the same toolset that has existed in Sugar 7.

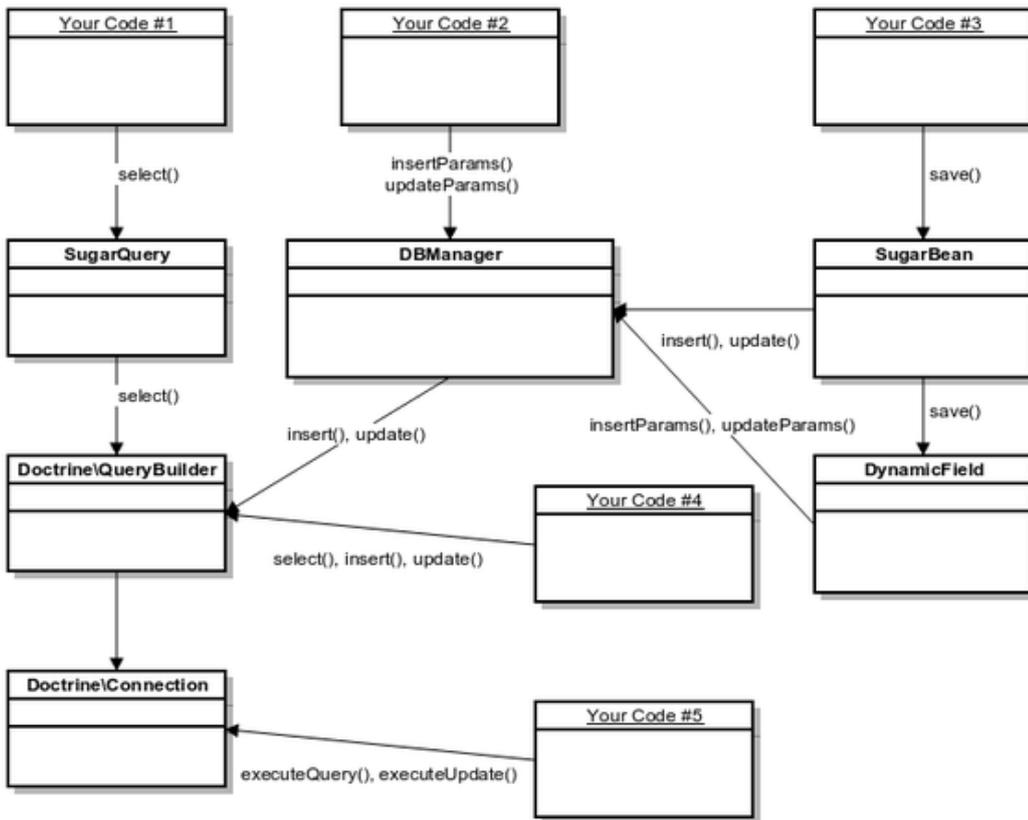

## DBManager

The DBManager class will use Doctrine QueryBuilder for building INSERT and UPDATE queries.

## SugarQuery

The SugarQuery class will use Doctrine QueryBuilder for building SELECT queries.

## SugarBean

The SugarBean class will continue to use DBManager class for saving all fields.

**Last Modified:** 2021-02-17 02:44:13

---

# DBManager

## Overview

The DBManager Object provides an interface for working with the database. As of Sugar 7.9, there are some deprecated methods that have been removed from the system that are outlined in the Release Notes.

## Instantiating the DBManager Object

The DBManagerFactory class, located in `./include/database/DBManagerFactory.php`, can help instantiate a DBManager object using the `getInstance()` method.

```
$db = \DBManagerFactory::getInstance();
```

For best practices, we recommend using the global DBManager Object:

```
$GLOBALS['db']
```

## Querying The Database

As of Sugar 7.9, there is support for prepared statements. The following sections outline the legacy usage and the new prepared statement usage.

### SELECT queries

For select queries that do not have a dynamic portion of the where clause, you can use the `query()` method on the DBManager object. For queries that are accepting data passed into the system in the where clause, the following examples demonstrate how best utilize the new Prepared Statement functionality.

#### Legacy:

```
$id = '1234-abcde-fgh45-6789';  
$query = 'SELECT * FROM accounts WHERE id = ' . $GLOBALS['db']->quoted($id);  
$results = $GLOBALS['db']->query($query);
```



---

## Best Practice:

Use the `getConnection()` method to retrieve a Doctrine Connection Object which handles prepared statements.

```
$id = '1234-abcde-fgh45-6789';
$query = 'SELECT * FROM accounts WHERE id = ?';
$conn = $GLOBALS['db']->getConnection();
$stmt = $conn->executeQuery($query, array($id));
```

In the case that query logic is variable or conditionally built then it makes sense to use Doctrine QueryBuilder directly.

## Legacy:

```
$query = 'SELECT * FROM accounts';
if ($status !== null) {
    $query .= ' WHERE status = ' . $GLOBALS['db']->quoted($status);
}
$results = $GLOBALS['db']->query($query);
```

## Best Practice:

Use the `getConnection()` method to retrieve the Doctrine Connection Object, and then use the `createQueryBuilder()` method on the Connection Object to retrieve the QueryBuilder Object.

```
$builder = $GLOBALS['db']->getConnection()->createQueryBuilder();
$builder->select('*')->from('accounts');
if ($status !== null) {
    $builder->where('status = ' . $builder->createPositionalParameter($status));
}
$stmt = $builder->execute();
```

## Retrieving Results

### Legacy:

After using the `query()` method, such as in the Legacy code examples above, you can use the `fetchByAssoc()` method to retrieve results. The `query()` method will submit the query and retrieve the results while the `fetchByAssoc()` method will iterate through the results:

---

```
$sql = "SELECT id FROM accounts WHERE deleted = 0";
$result = $GLOBALS['db']->query($sql);

while($row = $GLOBALS['db']->fetchByAssoc($result) )
{
    //Use $row['id'] to grab the id fields value
    $id = $row['id'];
}
```

### **Best Practice:**

When using Prepared Statements, both the Doctrine Query Builder and the Doctrine Connection Object will return a Doctrine\DBAL\Portability\Statement Object to allow iterating through the results of the query. You can use the `fetch()` or `fetchAll()` methods to retrieve results.

#### **fetchAll() Example**

The `fetchAll()` method will return the entire result set as an array, with each index containing a row of data.

```
$id = '1234-abcde-fgh45-6789';
$query = 'SELECT * FROM accounts WHERE id = ?';
$conn = $GLOBALS['db']->getConnection();
$stmt = $conn->executeQuery($query, array($id));
foreach($stmt->fetchAll() as $row){
    $id = $row['id']
    //do other stuff...
}
```

#### **fetch() Example**

The `fetch()` method will return the next index in the result set.

```
$id = '1234-abcde-fgh45-6789';
$query = 'SELECT * FROM accounts WHERE id = ?';
$conn = $GLOBALS['db']->getConnection();
$stmt = $conn->executeQuery($query, array($id));
while($row = $stmt->fetch()){
    $id = $row['id']
    //do other stuff...
}
```

---

## Retrieving a Single Result

To retrieve a single result from the database, such as a specific record field, you can use the `getOne()` method for Legacy query usage.

```
$sql = "SELECT name FROM accounts WHERE id = '{$id}'";
$name = $GLOBALS['db']->getOne($sql);
```

## Limiting Results

To limit the results of a query, you can add a limit to the SQL string or for legacy query usage you can use the `limitQuery()` method on the DBManager Object:

### Legacy:

```
$sql = "SELECT id FROM accounts WHERE deleted = 0";
$offset = 0;
$limit = 1;

$result = $GLOBALS['db']->limitQuery($sql, $offset, $limit);

while($row = $GLOBALS['db']->fetchByAssoc($result) )
{
    //Use $row['id'] to grab the id fields value
    $id = $row['id'];
}
```

### Prepared Statements:

When using the Doctrine Query Builder, you can limit the results of the query by using the `setMaxResults()` method.

```
$builder = $GLOBALS['db']->getConnection()->createQueryBuilder();
$builder->select('*')->from('accounts');
if ($status !== null) {
    $builder->where('status = ' . $builder->createPositionalParameter($status));
}
$builder->setMaxResults(2);
$stmt = $builder->execute();
```

## INSERT queries

---

INSERT queries can be easily performed using DBManager class.

**Legacy:**

```
$query = 'INSERT INTO table (foo, bar) VALUES ("foo", "bar")';
$GLOBALS['db']->query($query);
```

**Best Practice:**

```
$fieldDefs = $GLOBALS['dictionary']['table']['fields'];
$GLOBALS['db']->insertParams('table', $fieldDefs, array('foo' => 'foo'
, 'bar' => 'bar'));
```

## UPDATE queries

When updating records with known IDs or a set of records with simple filtering criteria, then DBManager can be used:

**Legacy:**

```
$query = 'UPDATE table SET foo = "bar" WHERE id = ' . $GLOBALS['db']->
quoted($id);
$GLOBALS['db']->query($query);
```

**Best Practice:**

```
$fieldDefs = $GLOBALS['dictionary']['table']['fields'];
$GLOBALS['db']->updateParams('table', $fieldDefs, array('foo' => 'bar'
, ), array('id' => $id) );
```

For more complex criteria or when column values contain expressions or references to other fields in the table then Doctrine QueryBuilder can be used.

**Legacy:**

```
$query = 'UPDATE table SET foo = "bar" WHERE foo = "foo" OR foo IS NUL
L';
$GLOBALS['db']->execute($query);
```

---

## Best Practice:

```
$query = 'UPDATE table SET foo = ? WHERE foo = ? OR foo IS NULL';
$conn = $GLOBALS['db']->getConnection();
$stmt = $conn->executeQuery($query, array('bar', 'foo'));
```

## Generating SQL Queries from SugarBean

To have Sugar automatically generate SQL queries, you can use the following methods from the bean class.

### Select Queries

To create a select query you can use the `create_new_list_query()` method:

```
$bean = BeanFactory::newBean($module);

$order_by = '';
$where = '';
$fields = array(
    'id',
    'name',
);

$sql = $bean->create_new_list_query($order_by, $where, $fields);
```

### Count Queries

You can also run the generated SQL through the `create_list_count_query()` method to generate a count query:

```
$bean = BeanFactory::newBean('Accounts');

$sql = "SELECT * FROM accounts WHERE deleted = 0";

$count_sql = $bean->create_list_count_query($sql);
```

**Last Modified:** 2021-02-17 02:44:13

---

# SugarQuery

## Overview

SugarQuery, located in `./include/SugarQuery/SugarQuery.php`, provides an object-oriented approach to working with the database. This allows developers to generate the applicable SQL for a Sugar system without having to know which database backend the instance is using. SugarQuery supports all databases supported by Sugar.

**Note:** SugarQuery only supports reading data from the database at this time (i.e. SELECT statements).

## Setup

To use SugarQuery, simply create a new SugarQuery object.

```
$sugarQuery = new SugarQuery();
```

## Basic Usage

Using the SugarQuery object to retrieve records or generate SQL queries is very simple. At a minimum you need to set the Module you are working with, using the `from()` method, however, there are helper methods for just about any operation you would need in a SQL query. The methods listed below will outline the major methods you should consider utilizing on the SugarQuery object in order to achieve your development goals.

### **from()**

The `from()` method is used to set the primary module the SugarQuery object will be querying from. It is also used to set some crucial options for the query, such as whether Team Security should be used or if only non-deleted records should be queried. The following example will set the SugarQuery object to query from the Accounts module.

```
$sugarQuery->from(BeanFactory::newBean('Accounts'));
```

### **Arguments**

---

| Name      | Type             | Required | Description   |
|-----------|------------------|----------|---|
| \$bean    | SugarBean Object | true     | <p>The SugarBean object for a specified module. The SugarBean object does not have to be a blank or new Bean as seen in the example above, but can be a previously instantiated SugarBean object.</p>   |
| \$options | Array            | false    | <p>An associative array that can specify any of the following options:</p> <ul style="list-style-type: none"> <li>• <b>alias</b> - <i>string</i> - The alias for the module table in the generated SQL query</li> <li>• <b>team_security</b> - <i>boolean</i> - Whether or not Team Security should be added to the generated SQL query</li> <li>• <b>add_deleted</b> - <i>boolean</i> - Whether or not 'deleted' = 0 should be added to Where clause of generated</li> </ul> |

## Returns

*SugarQuery Object*

Allows for method chaining on the SugarQuery object.

## select()

The example above demonstrates the most basic example of retrieving records from a module. The select() method can be used on the SugarQuery object to specify the specific fields you wish to retrieve from the query.

```
//Alter the Selected Fields
$sugarQuery->select(array('id', 'name'));
```

## Arguments

| Name     | Type  | Required | Description   |
|----------|-------|----------|---|
| \$fields | Array | false    | Sets the fields that should be added to the SELECT portion of the SQL query |

## Returns

*SugarQuery\_Builder\_Select Object*

You cannot chain SugarQuery methods off of the select() method, however, you can use the returned Select object to modify the SELECT portion of the statement. Review the SugarQuery\_Builder\_Select object in `./include/SugarQuery/Builder/Select.php` for additional information on usage.

## where()

To add a WHERE clause to the query, use the where() method to generate the



---

Where object, and then use method chaining with the various helper methods to add conditions. To add a WHERE clause for records with the name field containing the letter "I", you could add the following code.

```
//add the where clause
$sugarQuery->where()->contains('name', 'I');
```

## Arguments

*None*

## Returns

*SugarQuery\_Builder\_Where Object*

Allows for method chaining on the Where object as shown above. Review the [SugarQuery Conditions](#) documentation for a full spectrum of where() method usage.

## Relationships

### join()

To add data from a related module to the SugarQuery, use the join() method. Adding to the same SugarQuery code example in this page, the following code would add the JOIN from Accounts module tables to Contacts table:

```
//add join
$sugarQuery->join('contacts');
```

## Arguments

| Name        | Type   | Required | Description  |
|-------------|--------|----------|--|
| \$link_name | String | true     | The name of the relationship   |
| \$options   | Array  | false    | An associative array that can specify any of the following options: <ul style="list-style-type: none"><li>• <b>alias</b> -</li></ul> |

|  |  |  |   |
|--|--|--|---|
|  |  |  | <p><i>string</i> - The alias for the module table in the generated SQL query</p> <ul style="list-style-type: none"> <li>• <b>relatedJoin</b> - <i>string</i> - If joining to a secondary table (related to a related module), such as joining on Opportunities related to Contacts, when querying from Accounts, you can specify either the name of the relationship or the alias you specified for that relationship table.</li> </ul> |
|--|--|--|---|

**Returns**

*SugarQuery\_Builder\_Join Object*

Allows for method chaining on the *SugarQuery\_Builder\_Join Object*, to add additional conditions to the WHERE clause of the SQL condition.

---

## joinTable()

If you were using the `joinRaw()` method in previous versions of Sugar, this is the replacement method which allows for joining to a related table in `SugarQuery`. Adding to the same `SugarQuery` code example in this page, the following code would add the JOIN from Accounts module tables to the `accounts_contacts` table:

```
//add join
$sugarQuery->joinTable('accounts_contacts', array('alias' => 'ac'))->on(
    =>equalsField('accounts.id', 'ac.account_id')
    =>equals('ac.primary_account', 1);
```

### Arguments

| Name                      | Type   | Required | Description  |
|---------------------------|--------|----------|--|
| <code>\$table_name</code> | String | true     | The name of the database table to join.  |
| <code>\$options</code>    | Array  | false    | An associative array that can specify any of the following options: <ul style="list-style-type: none"><li>• <b>alias</b> - <i>string</i> - The alias for the module table in the generated SQL query</li></ul> |

### Returns

*SugarQuery\_Builder\_Join Object*

Allows for method chaining on the `SugarQuery_Builder_Join` Object, to add additional conditions to the ON clause using the `on()` method.

## Altering Results

---

Altering the result set of a query can help the performance, as well as be crucial to finding the correct data. The following methods provide ways to limit the result set and change the order.

## distinct()

To group the query on a field, you can use the corresponding distinct() method.

```
//add group by
$sugarQuery->distinct(true);
```

### Arguments

| Name    | Type    | Required | Description  |
|---------|---------|----------|--|
| \$value | Boolean | true     | Set whether or not the DISTINCT statement should be added to the query |

### Returns

Current *SugarQuery Object*

Allows for method chaining on the SugarQuery Object.

## limit()

To limit the results of the query, you can use the limit() method.

```
//set the limit
$sugarQuery->limit(10);
```

### Arguments

| Name     | Type    | Required | Description   |
|----------|---------|----------|---|
| \$number | Integer | true     | The max amount of rows that should be returned by the |

---

|  |  |  |       |
|--|--|--|-------|
|  |  |  | query |
|--|--|--|-------|

## Returns

Current *SugarQuery Object*

Allows for method chaining on the SugarQuery Object.

## offset()

Adding a limit to the query limits the rows returned, however when doing so, you may need to alter the offset of the query to account for pagination or access other portions of the result set. To set an offset, you can use the `offset()` method.

```
//set the offset
$sugarQuery->offset(5);
```

## Arguments

| Name     | Type    | Required | Description   |
|----------|---------|----------|---|
| \$number | Integer | true     | The offset amount of rows, or starting point, of the result |

## Returns

Current *SugarQuery Object*

Allows for method chaining on the SugarQuery Object.

## orderBy()

To order the query on a field, you can use the corresponding `orderBy()` method. This method can be called multiple times, to add multiple fields to the order by clause of the query.

```
//add group by
$sugarQuery->orderBy('account_type');
```

---

## Arguments

| Name        | Type   | Required | Description  |
|-------------|--------|----------|--|
| \$column    | String | true     | The field you want the query to be grouped on                                  |
| \$direction | String | false    | Sets the direction of sorting. Must be 'ASC' or 'DESC'. The default is 'DESC'. |

## Returns

Current *SugarQuery* Object

Allows for method chaining on the SugarQuery Object.

## Execution

Once you have the SugarQuery object setup and configured for your statement, you will want to retrieve the results of the query, or simply get the generated query for the object. The following methods are used for executing the SugarQuery object.

### execute()

To query the database for a result set, you will use the execute() method. The execute() method will retrieve the results and return them as a raw string, db object, json, or an array depending on the \$type parameter. By default, results are returned as an array. An example of fetching records from an account is below:

```
//fetch the result
$result = $sugarQuery->execute();
```

The execute() function will return an array of results that you can iterate through as shown below:

```
Array
(
```

```

[0] => Array
(
    [id] => f39593da-3f88-3059-4f18-524b4d23d07b
    [name] => International Art Inc
)
)

```

**Note:** An empty resultset will return an empty array.

## Arguments

| Name   | Type   | Required | Description  |
|--------|--------|----------|--|
| \$type | String | false    | <p>How you want the results of the Query returned. Can be one of the following options:</p> <ul style="list-style-type: none"> <li>• <b>db</b> - Returns the result directly from the DatabaseManager resource</li> <li>• <b>array</b> - <i>Default</i> - Returns the results as a formatted array</li> <li>• <b>json</b> - Returns the results encoded as JSON</li> </ul> |

## Returns

Default: *Array*. See above argument details for details on other Return options.

---

## compile()

If you want to log the query being generated or want to output the query without running it during development, the `compile()` method is what should be used to retrieve the Prepared Statement. You can then retrieve the Prepared Statement Object to retrieve the Parameterized SQL and the Parameters. For further information on Prepared Statement usage, see our Database documentation.

```
//get the compiled prepared statement
$preparedStmt = $sugarQuery->compile();

//Retrieve the Parameterized SQL
$sql = $preparedStmt->getSQL();

//Retrieve the parameters as an array
$parameters = $preparedStmt->getParameters();
```

### Arguments

*No arguments*

### Returns

*Object*

The compiled SQL Query built by the SugarQuery object.

**Last Modified:** 2021-02-17 02:44:13

## SugarQuery Conditions

### Overview

Learn about the various methods that can be utilized with SugarQuery to add conditional statements to a query.

### Where Clause



---

Manipulating, the WHERE clause of a SugarQuery object is crucial for getting the correct results. To create a WHERE clause on the query, use the where() method on the SugarQuery object, as outlined in the [SugarQuery documentation](#). Once you have the Where object, you can utilize the following methods on the Where object to add conditional statements.

## **equals() | notEquals()**

Used to equate a field to a given value. Wildcards will not work with this function, as it is looking for an exact match.

```
//add equals
$SugarQuery->where()->equals('name','Test');

//add Not Equals
$SugarQuery->where()->notEquals('name','Tester');
```

### **Arguments**

| <b>Name</b> | <b>Type</b>   | <b>Required</b> | <b>Description</b>                     |
|-------------|---------------|-----------------|--|
| \$field     | <i>String</i> | true            | The field you are checking against     |
| \$value     | <i>String</i> | true            | The value the field should be equal to |

### **Returns**

*SugarQuery\_Builder\_Where Object*

Allows for method chaining on the Where object to add additional conditions.

## **equalsField() | notEqualsField()**

Used to equate a field to another field in the result set.

```
//add an Equals Field statement
$SugarQuery->where()->equalsField('industry','account_type');

//add a Not Equals Field statement
$SugarQuery->where()->notEqualsField('name','account_type');
```

---

## Arguments

| Name    | Type          | Required | Description   |
|---------|---------------|----------|---|
| \$field | <i>String</i> | true     | The field you are checking against                      |
| \$field | <i>String</i> | true     | The other field you want the first field to be equal to |

## Returns

*SugarQuery\_Builder\_Where Object*

Allows for method chaining on the Where object to add additional conditions.

## isEmpty() | isEmpty()

Used to check if a field is or isn't empty.

```
//add an isEmpty statement  
$SugarQuery->where()->isEmpty('industry');
```

```
//add an isEmpty statement  
$SugarQuery->where()->isEmpty('name');
```

## Arguments

| Name    | Type          | Required | Description                        |
|---------|---------------|----------|------------------------------------|
| \$field | <i>String</i> | true     | The field you are checking against |

## Returns

*SugarQuery\_Builder\_Where Object*

Allows for method chaining on the Where object to add additional conditions.

---

## isNull() | notNull()

Used to check if a field is or isn't equal to NULL.

```
//add an isNull statement
$SugarQuery->where()->isNull('industry');

//add a notNull statement
$SugarQuery->where()->notNull('name');
```

### Arguments

| Name    | Type          | Required | Description                        |
|---------|---------------|----------|------------------------------------|
| \$field | <i>String</i> | true     | The field you are checking against |

### Returns

*SugarQuery\_Builder\_Where Object*

Allows for method chaining on the Where object to add additional conditions.

## contains() | notContains()

Used to check if a field has or doesn't have a specified string in its value. Utilizes the LIKE statement, and wildcards on both sides of the provided string.

```
//add an isNull statement
$SugarQuery->where()->contains('name','Test');

//add a notNull statement
$SugarQuery->where()->notContains('industry','Test');
```

### Arguments

| Name    | Type          | Required | Description                          |
|---------|---------------|----------|--------------------------------------|
| \$field | <i>String</i> | true     | The field you are checking against   |
| \$value | <i>String</i> | true     | The string being searched for in the |

---

|  |  |  |                    |
|--|--|--|--------------------|
|  |  |  | value of the field |
|--|--|--|--------------------|

**Returns**

*SugarQuery\_Builder\_Where Object*

Allows for method chaining on the Where Object to add additional conditions.

**starts() | ends()**

Similar to the above contains() method, these methods use the LIKE statement in the SQL query and wildcards for searching for a specified string in the field's value. However, the starts() and ends() methods only wildcard the right side and the left side, respectively. The following example demonstrates searching for records where the Name field starts with A, and ends with E.

```
//add an starts and ends statement
$SugarQuery->where()->starts('name','A')->ends('name','e');
```

**Arguments**

| Name    | Type          | Required | Description   |
|---------|---------------|----------|---|
| \$field | <i>String</i> | true     | The field you are checking against                      |
| \$value | <i>String</i> | true     | The string being searched for in the value of the field |

**Returns**

*SugarQuery\_Builder\_Where Object*

Allows for method chaining on the Where object to add additional conditions.

**in() | notIn()**

Used to check if a field's value is or isn't one of a set of specified values. The following examples look for records where the industry field is in a list of values,

---

and not in a separate list of values.

```
$values = array(
    'Support',
    'Sales',
    'Engineering'
);

//add in statement
$SugarQuery->where()->in('industry', $values);

$values = array(
    'Marketing',
    'Accounting'
);

//add NotIn Statement
$SugarQuery->where()->notIn('industry', $values);
```

## Arguments

| Name     | Type          | Required | Description  |
|----------|---------------|----------|--|
| \$field  | <i>String</i> | true     | The field you are checking                                   |
| \$values | <i>Array</i>  | true     | The array of values which the field is being checked against |

## Returns

*SugarQuery\_Builder\_Where Object*

Allows for method chaining on the Where object to add additional conditions.

## between()

Used primarily for numeric type fields, to check if the value is greater than the minimum number specified and less than the maximum number specified. The following code would check for records where the employees field is between 50 and 1000.

---

```
//add Between statement
$SugarQuery->where()->between('employees',50,1000);
```

## Arguments

| Name    | Type          | Required | Description                                    |
|---------|---------------|----------|--|
| \$field | <i>String</i> | true     | The field you are checking against             |
| \$min   | <i>Number</i> | true     | The lowest number the field's value should be  |
| \$max   | <i>Number</i> | true     | The highest number the field's value should be |

## Returns

*SugarQuery\_Builder\_Where Object*

Allows for method chaining on the Where object to add additional conditions.

## lt() | lte() | gt() | gte()

These methods are primarily for numeric fields, to check if a field's value is less than (<), less than or equal (<=), greater than (>), or greater than or equal (>=) to a specified value.

```
//Add Less Than Statement
$SugarQuery->where()->lt('gross_revenue',1000000);
```

```
//Add Less Than or Equal to Statement
$SugarQuery->where()->lte('net_revenue','500000');
```

```
//Add Greater Than Statement
$SugarQuery->where()->gt('gross_revenue',500000);
```

```
//Add Greater Than or Equal to Statement
$SugarQuery->where()->gte('net_revenue',100000);
```

## Arguments

| Name    | Type          | Required | Description                        |
|---------|---------------|----------|------------------------------------|
| \$field | <i>String</i> | true     | The field you are checking against |
| \$value | <i>Number</i> | true     | The numeric value for comparison   |

## Returns

*SugarQuery\_Builder\_Where Object*

Allows for method chaining on the Where object to add additional conditions.

## dateRange()

Used to check if a field's value is between a preset date range from the current time. See the [TimeDate documentation](#) on the available date range keys.

```
//add DateRange statement
$SugarQuery->where()->dateRange('date_modified','last_30_days');
```

## Arguments

| Name    | Type          | Required | Description  |
|---------|---------------|----------|--|
| \$field | <i>String</i> | true     | The field you are checking against   |
| \$value | <i>String</i> | true     | The string specifying the date range key that will be used for comparison.<br>Example<br>'next_7_days' |

## Returns

*SugarQuery\_Builder\_Where Object*

Allows for method chaining on the Where object to add additional conditions.

---

## dateBetween()

To group the query on a field, you can use the corresponding `groupBy()` method. This method can be called multiple times, to add multiple fields to the grouping of the query.

```
//add group by
$SugarQuery->where()->dateBetween('date_created',array('2016-01-01','2016-03-01'));
```

### Arguments

| Name    | Type          | Required | Description  |
|---------|---------------|----------|--|
| \$field | <i>String</i> | true     | The field you are checking against   |
| \$value | <i>Array</i>  | true     | An array containing the minimum date in the first key, and the maximum date in the second. |

### Returns

*SugarQuery\_Builder\_Where Object*

Allows for method chaining on the Where Object to add additional conditions.

## Combinations

Now that you have reviewed all of the available conditional statements for `SugarQuery`, you may want to combine them using AND and OR all within the same query. By default when the `where()` method is called, chained conditional methods will be added with AND to the where clause. You can specify an OR where clause on the main `SugarQuery` object by using the `orWhere()` method, which works the same as the `where()` method, just adds conditional statements with OR instead. The following methods allow for adding internal AND and OR logic to conditional statements on the Where object.



---

## queryAnd()

To start a group of conditional statements that should all evaluate to True, use the `queryAnd()` method. For example, if you want to query for Accounts, where the name contains 'Test' AND description contains 'Test', you might use the following code:

```
$SugarQuery = new SugarQuery();
$SugarQuery->select(array('name'));
$SugarQuery->from(BeanFactory::newBean('Accounts'));

//Using queryAnd
$SugarQuery->where()->queryAnd()->contains('name','Test')->contains('description','Test');
```

The above use of `queryAnd()` method isn't entirely needed, as the main Where object would be using AND for all conditions anyway, but it does group the two conditions inside of their own parenthesis in the compiled query, as shown below, to demonstrate how it can be used for altering query logic.

```
SELECT accounts.name name FROM accounts WHERE accounts.deleted = 0 AND
(accounts.name LIKE '%Test%' AND accounts.description LIKE '%Test%')
```

## queryOr()

To start a group of conditional statements that should evaluate to true, if any condition is true, you can use the `queryOr()` method. For example, if you want to query for Accounts, where the name contains 'Test' or where the description contains 'Test', you might use the following code:

```
$SugarQuery = new SugarQuery();
$SugarQuery->select(array('name'));
$SugarQuery->from(BeanFactory::newBean('Accounts'));

//Using queryOr
$SugarQuery->where()->queryOr()->contains('name','Test')->contains('description','Test');
```

This will group the two conditions inside of their own parenthesis in the compiled query. If either of the conditions is True, it will return a record. An example is shown below.

```
SELECT accounts.name name FROM accounts WHERE accounts.deleted = 0 AND
(accounts.name LIKE '%Test%' OR accounts.description LIKE '%Test%')
```

## Advanced Techniques

### Overview

Learn about some of the advanced methods that SugarQuery has to offer, that are not as commonly used.

### Get First Record

Getting the first record in a result set, can be accomplished by using the `limit()` method. The `getOne()` method is similar in that it gets the first record, but it also returns the first piece of data for that record.

#### `getOne()`

Get the first piece of data on the first record returned by the generated query. In this example, we want the 'name' from the Account with a given ID.

```
$SugarQuery = new SugarQuery();
$SugarQuery->select(array('name'));
$SugarQuery->from(BeanFactory::newBean('Accounts'));
$SugarQuery->where()->equals('id',$id);

//Get the Name of the account
$accountName = $SugarQuery->getOne();
```

### Aggregates

#### `setCountQuery()`

Currently, the only method available for creating an aggregate column, is the `setCountQuery()` method on the `SugarQuery_Builder_Select` Object. You can add this method to your `select()` method chain, to add `count(0)` as `record_count` to the SQL SELECT statement.

---

```
$SugarQuery = new SugarQuery();
$SugarQuery->select(array('name'))->setCountQuery();
$SugarQuery->from(BeanFactory::newBean('Accounts'));
$SugarQuery->groupByRaw('accounts.name');
```

The above example will output the following prepared statement when using [compile\(\)](#):

```
SELECT accounts.name, COUNT(0) AS record_count FROM accounts WHERE acc
ounts.deleted = ? GROUP BY accounts.name, accounts.name
```

## Parameters

```
array (
    [1] => 0
)
```

## Arguments

*No arguments*

## Returns

*SugarQuery\_Builder\_Select Object*

Allows for method chaining on the Select Object.

## Joins

Joining to tables and joining via SugarBean relationships is outlined in the [SugarQuery documentation](#), however the SugarQuery\_Builder\_Join Object has a few helpful methods not mentioned there.

## joinName()

If you are not using a custom alias for the relationship or table, you may want to retrieve the generated name used by SugarQuery to add a conditions or join to.

```
$SugarQuery = new SugarQuery();
$SugarQuery->from(BeanFactory::getBean('Accounts'));
$contacts = $SugarQuery->join('contacts')->joinName();
```

---

```
$SugarQuery->select(array("$contacts.full_name"));
$SugarQuery->where()->equals('industry', 'Media');
```

The above example will output the following prepared statement when using [compile\(\)](#):

```
SELECT jt0_contacts.salutation rel_full_name_salutation, jt0_contacts.
first_name rel_full_name_first_name, jt0_contacts.last_name rel_full_n
ame_last_name FROM accounts INNER JOIN accounts_contacts jt1_accounts_
contacts ON (accounts.id = jt1_accounts_contacts.account_id) AND (jt1_
accounts_contacts.deleted = ?) INNER JOIN contacts jt0_contacts ON (jt
0_contacts.id = jt1_accounts_contacts.contact_id) AND (jt0_contacts.de
leted = ?) WHERE (accounts.industry = ?) AND (accounts.deleted = ?)
```

### Parameters:

```
array (
    [1] => 0
    [2] => 0
    [3] => Media
    [4] => 0
)
```

### Arguments

*No arguments*

### Returns

*string*

The name used in Query to identify the joined table

## Unions

Unions allow joining multiple queries with the same selected fields to be combined during output. You can use Unions in SugarQuery by using the `union()` method.

### union()

---

To add a union, you can use the corresponding `union()` method. The example below will join two SQL queries:

```
//Fetch the bean of the module to query
$bean = BeanFactory::newBean('Accounts');

//Specify fields to fetch
$fields = array(
    'id',
    'name'
);

//Create first query
$sql1 = new SugarQuery();
$sql1->select($fields);
$sql1->from($bean, array('team_security' => false));
$sql1->Where()->in('account_type', array('Customer'));

//Create second query
$sql2 = new SugarQuery();
$sql2->select($fields);
$sql2->from($bean, array('team_security' => false));
$sql2->Where()->in('account_type', array('Investor'));

//Create union
$sqlUnion = new SugarQuery();
$sqlUnion->union($sql1);
$sqlUnion->union($sql2);
$sqlUnion->limit(5);
```

The above example will output the following prepared statement when using [compile\(\)](#):

```
SELECT accounts.id, accounts.name FROM accounts WHERE (accounts.account_type IN (??)) AND (accounts.deleted = ?) UNION ALL SELECT accounts.id , accounts.name FROM accounts WHERE (accounts.account_type IN (??)) AND (accounts.deleted = ?) LIMIT 5
```

Parameters:

```
array (
    [1] => Customer
    [2] => 0
    [3] => Investor
    [4] => 0
)
```

---

## Arguments

| Name     | Type              | Required | Description   |
|----------|-------------------|----------|---|
| \$select | <i>SugarQuery</i> | true     | The SugarQuery Object you wish to add to the UNION query                        |
| \$all    | <i>Boolean</i>    | false    | Whether to use UNION ALL or just UNION in the query. The default value is TRUE. |

## Returns

*SugarQuery\_Builder\_Union Object*

Allows for method chaining on the Union Object.

## Having

When using aggregates in a query, you might want to filter out values based on a condition. SugarQuery provides the `having()` method for adding HAVING clause to the query.

### having()

To use the `having()` method, you have to build a `SugarQuery_Builder_Condition` Object and set the field, operator, and value that condition is based on.

```
$SugarQuery = new SugarQuery();
$SugarQuery->from(BeanFactory::getBean('Accounts'));
$SugarQuery->join('contacts', array('alias' => 'industryContacts'));
$SugarQuery->join('opportunities', array('relatedJoin' => 'industryContacts', 'alias' => 'contactsOpportunities'));
$SugarQuery->select()->setCountQuery();
$SugarQuery->where()->equals('contactsOpportunities.sales_stage', 'closed');
$havingCondition = new SugarQuery_Builder_Condition($SugarQuery);
$havingCondition->setField('contactsOpportunities.amount')->setOperato
```

---

```
r('>')->setValues('1000');  
$SugarQuery->having($havingCondition);
```

The above example will output the following prepared statement when using [compile\(\)](#):

```
SELECT COUNT(0) AS record_count FROM accounts INNER JOIN accounts_contacts jt0_accounts_contacts ON (accounts.id = jt0_accounts_contacts.account_id) AND (jt0_accounts_contacts.deleted = ?) INNER JOIN contacts_industryContacts ON (industryContacts.id = jt0_accounts_contacts.contact_id) AND (industryContacts.deleted = ?) INNER JOIN opportunities_contacts jt1_opportunities_contacts ON jt1_opportunities_contacts.deleted = ? INNER JOIN opportunities_contactsOpportunities ON (contactsOpportunities.id = jt1_opportunities_contacts.opportunity_id) AND (contactsOpportunities.deleted = ?) WHERE (contactsOpportunities.sales_stage = ?) AND (accounts.deleted = ?) HAVING contactsOpportunities.amount > ?
```

#### Parameters:

```
array (  
    [1] => 0  
    [2] => 0  
    [3] => 0  
    [4] => 0  
    [5] => closed  
    [6] => 0  
    [7] => 1000  
)
```

#### Arguments

| Name        | Type                                | Required | Description   |
|-------------|-------------------------------------|----------|---|
| \$condition | <i>SugarQuery_Builder_Condition</i> | true     | The conditional object used to generate the HAVING clause |

#### Returns

*SugarQuery\_Builder\_Having Object*

Allows for method chaining on the Having Object to add additional conditions.

---

## Raw Methods

The SugarQuery Object has a few helper methods that allow raw SQL statement parts to be passed into. This allows for more complex statements or edge case scenarios where a helper function may not have met the requirements for the query.

### whereRaw()

To add to the WHERE clause of SugarQuery Object with raw SQL syntax, you can utilize the whereRaw() method. This method will append the specified statement, to the WHERE clause using an AND operator, and will wrap the entire statement in parenthesis. The following is an example use with the output:

```
$SugarQuery = new SugarQuery();
$SugarQuery->select(array('name'));
$SugarQuery->from(BeanFactory::newBean('Accounts'));
$SugarQuery->whereRaw("name LIKE '%T%'");
```

The above example will output the following prepared statement when using [compile\(\)](#):

```
SELECT accounts.name FROM accounts WHERE (name LIKE '%T%') AND (accounts.deleted = ?)
```

Parameters:

```
array (
    [1] => 0
)
```

### Arguments

| Name  | Type          | Required | Description   |
|-------|---------------|----------|---|
| \$sql | <i>String</i> | true     | The WHERE clause SQL to be appended to the where clause on the SugarQuery object. All conditions passed in are wrapped in |



|  |  |   |
|--|--|---|
|  |  | parenthesis and appended using AND (if other conditions exist on where clause). |
|--|--|---|

## Returns

*SugarQuery\_Builder\_Where Object*

Allows for method chaining on the Where object.

## groupByRaw()

To add multiple fields to the GROUP BY statement on the SugarQuery Object, it may be easiest to use the groupByRaw() method.

```
$SugarQuery = new SugarQuery();
$SugarQuery->select(array('account_type', 'industry'));
$SugarQuery->from(BeanFactory::newBean('Accounts'));
$SugarQuery->groupByRaw("accounts.account_type,accounts.industry");
```

The above example will output the following prepared statement when using [compile\(\)](#):

```
SELECT accounts.account_type, accounts.industry FROM accounts WHERE ac
counts.deleted = ? GROUP BY accounts.account_type,accounts.industry
```

Parameters:

```
array (
    [1] => 0
)
```

## Arguments

| Name  | Type          | Required | Description   |
|-------|---------------|----------|---|
| \$sql | <i>String</i> | true     | The GROUP BY statement, without the GROUP BY keyword. |

---

## Returns

*SugarQuery Object*

Allows for method chaining on the SugarQuery Object.

## orderByRaw()

Using the `orderBy()` method only allows for adding a single field to the SugarQuery object at a time. In some cases, you might consider using the `orderByRaw()` method to add multiple fields or the entire ORDER BY statement to the SugarQuery object.

```
$SugarQuery = new SugarQuery();
$SugarQuery->select(array('name'));
$SugarQuery->from(BeanFactory::newBean('Accounts'));
$SugarQuery->orderByRaw("accounts.name DESC, accounts.date_modified");
```

The above example will output the following prepared statement when using [compile\(\)](#):

```
SELECT accounts.name FROM accounts WHERE accounts.deleted = ? ORDER BY
  accounts.name DESC, accounts.date_modified DESC, accounts.id DESC
```

Parameters:

```
array (
    [1] => 0
)
```

## Arguments

| Name               | Type   | Required | Description   |
|--------------------|--------|----------|---|
| <code>\$sql</code> | String | true     | The ORDER BY statement, without the ORDER BY keyword. |

---

## Returns

*SugarQuery Object*

Allows for method chaining on the SugarQuery Object.

## havingRaw()

Using the havingRaw() method allows for adding a having statement to the SugarQuery object.

```
$SugarQuery = new SugarQuery();
$SugarQuery->from(BeanFactory::getBean('Accounts'));
$SugarQuery->join('contacts', array('alias' => 'industryContacts'));
$SugarQuery->join('opportunities', array('relatedJoin' => 'industryContacts', 'alias' => 'contactsOpportunities'));
$SugarQuery->select()->setCountQuery();
$SugarQuery->where()->equals('contactsOpportunities.sales_stage', 'closed');
$SugarQuery->havingRaw("contactsOpportunities.amount > 1000");
```

The above example will output the following prepared statement when using [compile\(\)](#):

```
SELECT COUNT(0) AS record_count FROM accounts INNER JOIN accounts_contacts jt0_accounts_contacts ON (accounts.id = jt0_accounts_contacts.account_id) AND (jt0_accounts_contacts.deleted = ?) INNER JOIN contacts_industryContacts ON (industryContacts.id = jt0_accounts_contacts.contact_id) AND (industryContacts.deleted = ?) INNER JOIN opportunities_contacts jt1_opportunities_contacts ON jt1_opportunities_contacts.deleted = ? INNER JOIN opportunities_contactsOpportunities ON (contactsOpportunities.id = jt1_opportunities_contacts.opportunity_id) AND (contactsOpportunities.deleted = ?) WHERE (contactsOpportunities.sales_stage = ?) AND (accounts.deleted = ?) HAVING contactsOpportunities.amount > 1000
```

## Parameters:

```
array (
    [1] => 0
    [2] => 0
    [3] => 0
    [4] => 0
    [5] => closed
    [6] => 0
)
```

---

## Arguments

| Name  | Type   | Required | Description                                       |
|-------|--------|----------|---|
| \$sql | String | true     | The HAVING statement, without the HAVING keyword. |

## Returns

*SugarQuery Object*

Allows for method chaining on the SugarQuery Object.

**Last Modified:** 2021-02-17 02:44:13

## Architecture


### Overview

This section of Sugar's Developer Guide begins with a high-level overview of the Sugar platform's architecture and contains documentation on granular concepts in Sugar such as logic hooks, caching, logging, extensions, job queue, and more.

Please continue to the bottom of this page or use the navigation on the left to explore the related content.


### Platform

Sugar is built on open standards and technology such as HTML5, PHP, and JavaScript, and runs on a variety of free and open-source technology like Linux, MySQL, and Elasticsearch. The Sugar platform also supports common proprietary databases such as Oracle, IBM DB2, and Microsoft SQL Server.

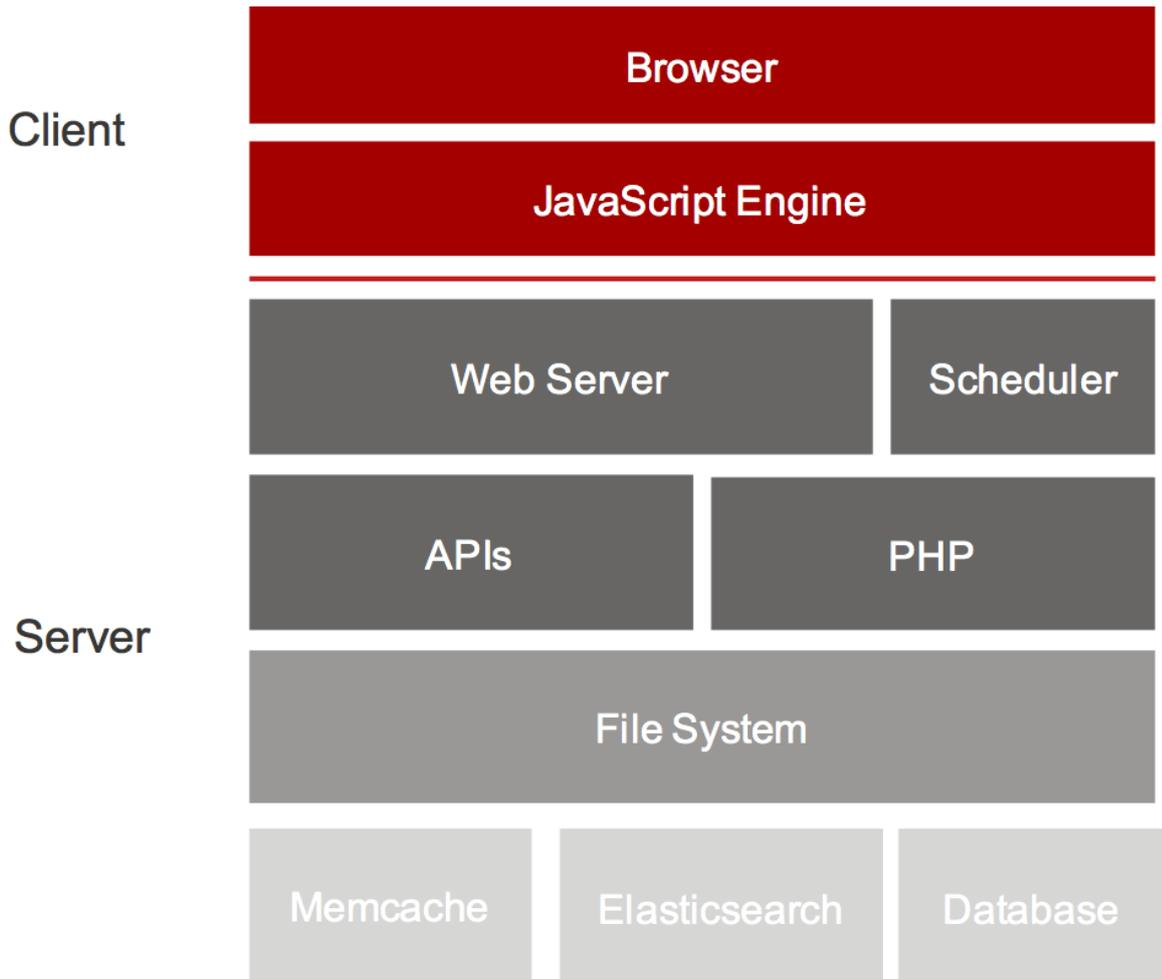

All of Sugar's customers and partners have access to source code that they can choose to deploy on-premise or utilize Sugar's cloud service for a SaaS deployment.

Out of the box, Sugar uses a consistent platform across all clients and devices (e.g. mobile, web, plug-ins, etc.).

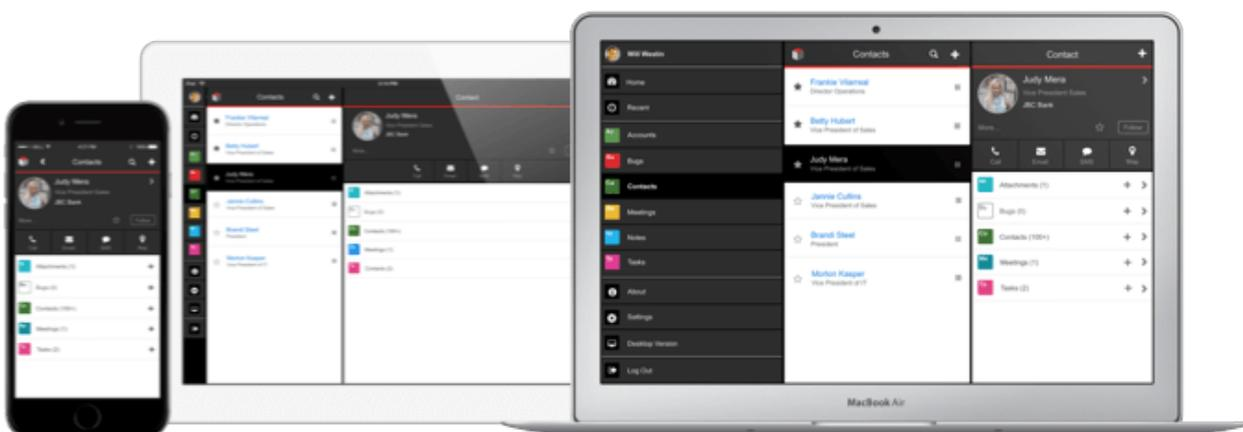


---

## Front-End Framework

Our clients are based on a front-end framework called Sidecar. Sidecar is built on open source technology: [Backbone.js](#), [jQuery](#), [Handlebars.js](#), and [Bootstrap](#). The Sidecar framework provides a responsive UI (to support a variety of form factors) and uses modern, single-page client architecture. Sugar clients connect to Sugar server application via our client REST API. The REST API is implemented in PHP and drives server-side business logic and interacts with a database. If it can be accomplished via one of our clients, then its equivalent functionality can be accomplished using our REST API.

The Sugar platform uses modules. Modules are a vertically integrated application component that is traditionally organized around a single feature or record type (or underlying database table). For example, contact records are managed via a Contacts module that contains all the business logic, front-end interface definitions, REST APIs, data schema, and relationships with other modules.

Custom modules can be created and deployed as needed in order to add new features to a Sugar application instance.

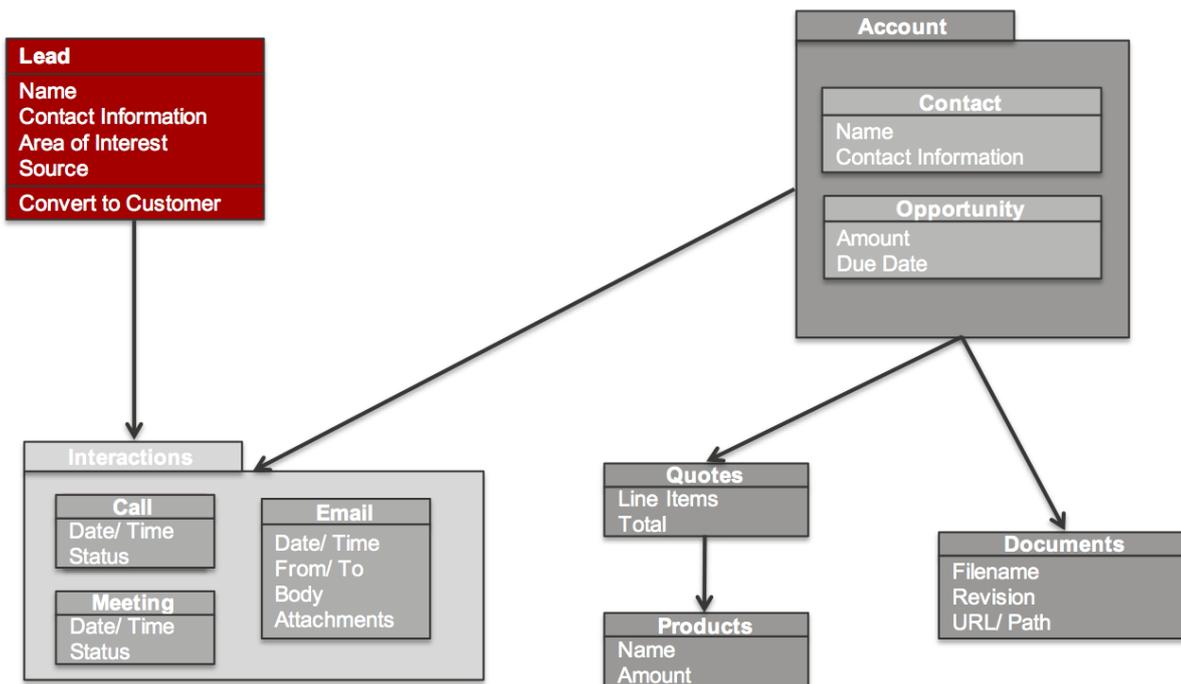

## Metadata

Sugar's modules are defined primarily using Metadata. There are two types of metadata definitions within Sugar: [Vardefs](#), which define the data model for Sugar

---

modules; and [Viewdefs](#), which define the user interface components that are used with a module.

Sugar Metadata is implemented as PHP files that can be modified directly by a Sugar Developer making filesystem changes, or indirectly through the use of [Sugar Studio and Module Builder](#) by a Sugar Administrator.

Metadata allows you to configure solutions instead of having to write countless lines of custom code in order to implement common customizations such as adding custom fields, calculated values, and changing user interface layouts.

## Extensions

Beyond metadata, Sugar is highly customizable and includes an extensive [Extensions Framework](#) that provides Sugar Developers the capability to contribute to pre-defined extension points within the application in a way that is upgrade-safe and will not conflict with other customizations that exist in the system.

**Last Modified:** 2021-02-17 02:44:13

## Autoloader

### Overview

The autoloader is an API that allows the unified handling of customizations and customizable metadata while reducing the number of filesystem accesses and improving performance.

### SugarAutoLoader

The SugarAutoLoader class, located in `./include/utils/autoloader.php`, keeps a map of files within the Sugar directory that may be loaded.

### Included File Extensions

The autoloader will only map files with the following extensions:

- 
- bmp
  - css
  - gif
  - hbs
  - html
  - ico
  - jpg
  - js
  - less
  - override
  - php
  - png
  - tif
  - tpl
  - xml

\*All other file extensions are excluded from the mapping.

## **Class Loading Directories**

The autoloader will scan and autoload classes in the following directories:

- ./clients/base/api/
- ./data/duplicatecheck/
- ./data/Relationships/
- ./data/visibility/
- ./include/
- ./include/api/
- ./include/CalendarEvents/
- ./include/SugarSearchEngine/
- ./modules/Calendar/
- ./modules/Mailer/

## **Ignored Directories**

The following directories in Sugar are ignored by the autoloader mapping:

- ./idea/
- ./cache/
- ./custom/backup/
- ./custom/blowfish/
- ./custom/Extension/
- ./custom/history/



- 
- ./custom/modulebuilder/
  - ./docs/
  - ./examples/
  - ./portal/
  - ./tests/
  - ./upload/
  - ./vendor/bin/
  - ./vendor/HTMLPurifier/
  - ./vendor/log4php/
  - ./vendor/nusoap/
  - ./vendor/pclzip/
  - ./vendor/reCaptcha/
  - ./vendor/ytree/

**Last Modified:** 2021-02-17 02:44:13

## Configuration API

### Overview

Methods to configure loading paths for the AutoLoader API.

### **addDirectory(\$dir)**

Adds a directory to the directory map for loading classes. Directories added should include a trailing "/".

```
SugarAutoloader::addDirectory('relative/file/path/');
```

### **addPrefixDirectory(\$prefix, \$dir)**

Adds a prefix and directory to the \$prefixMap for loading classes by prefix.

```
SugarAutoloader::addPrefixDirectory('myPrefix', 'relative/file/path/');
```

**Last Modified:** 2021-02-17 02:44:13

---

# File Check API

## Overview

File check methods for use with the AutoLoader API.

### **existing(...)**

Returns an array of filenames that exist in the file map. Accepts any number of arguments of which can be filename or array of filenames. If no files exist, empty array is returned.

```
$files = SugarAutoloader::existing('include/utils.php', 'include/TimeDate.php');
```

### **existingCustom(...)**

This method accepts any number of arguments, each of which can be filename or array of filenames. It will return an array of filenames that exist in the file map, adding also files that exist when custom/ is prepended to them. If the original filename already had custom/ prefix, it is not prepended again. custom/ files are added to the list after the root directory files so that if included in order, they will override the data of the root file. If no files exist, empty array is returned.

```
$files = SugarAutoloader::existingCustom('include/utils.php', 'include/TimeDate.php');
```

### **existingCustomOne(...)**

Returns the last file of the result returned by existingCustom(), or null if none exist. Accepts any number of arguments of which can be filename or array of filenames. Since customized files are placed after the root files, it will return customized file if exists, otherwise root file.

```
$files = SugarAutoloader::existingCustomOne('include/utils.php');
```

You should note that the existingCustomOne() method can be used for loading inline PHP files. An example is shown below:

---

```
foreach(SugarAutoLoader::existingCustomOne('custom/myFile.php') as $file)
{
    include $file;
}
```

Alternative to including inline PHP files, loading class files should be done using [requireWithCustom\(\)](#) .

## **fileExists(\$filename)**

Checks if a file exists in the file map. You should note that "." is **not** supported by this function and any paths including "." will return false. The path components should be separated by /. You should also note that multiple slashes are compressed and treated as single slash.

```
$file = 'include/utils.php';

if (SugarAutoloader::fileExists($file))
{
    require_once($file);
}
```

## **getDirFiles(\$dir, \$get\_dirs = false, \$extension = null)**

Retrieves the list of files existing in the file map under the specified directory. If no files are found, the method will return an empty array. By default, the method will return file paths, however, If \$get\_dirs is set to true, the method will return only directories. If \$extension is set, it would return only files having that specific extension.

```
$files = SugarAutoloader::getDirFiles('include');
```

## **getFilesCustom(\$dir, \$get\_dirs = false, \$extension = null)**

Retrieves the list of files existing in the file map under the specified directory and under it's custom/ path. If no files are found it will return empty array. By default, the method will return file paths, however, If \$get\_dirs is set to true, the method will return only directories. If \$extension is set, it would return only files having that specific extension.

---

```
$files = SugarAutoloader::getFilesCustom('include');
```

## lookupFile(\$paths, \$file)

Looks up a file in the list of given paths, including with and without custom/ prefix, and return the first match found. The custom/ directory is checked before root files. If no file is found, the method will return false.

```
$paths = array(  
    'include',  
    'modules',  
);
```

```
$files = SugarAutoloader::lookupFile($paths, 'utils.php');
```

## requireWithCustom(\$file, \$both = false)

If a custom/ override of the file or the file exist, `require_once` it and return true, otherwise return false. If `$both` is set to true, both files are required with the root file being first and custom/ file being second. Unlike other functions, this function will actually include the file.

```
$file = SugarAutoloader::requireWithCustom('include/utils.php');
```

You should note that the `requireWithCustom()` method should be used for loading class files and not inline PHP files. Inline PHP files should be loaded using the [existingCustomOne\(\)](#) method.

**Last Modified:** 2021-02-17 02:44:13

# File Map Modification API

## Overview

Methods to modify files in the AutoLoader API. All the functions below return true on success and false on failure.

---

## **addToMap(\$filename, \$save = true)**

Adds an existing file to the file map. If `$save` is true, the new map will be saved to the disk file map, otherwise, it will persist only until the end of the request. This method does not create the file on the filesystem.

```
SugarAutoloader::addToMap('custom/myFile.php');
```

## **delFromMap(\$filename, \$save = true)**

Removes a file from the file map. If `$filename` points to a directory, this directory and all files under it are removed from the map. If `$save` is true, the new map will be saved to the disk file map, otherwise, it will persist only until the end of the request. This method does not delete the file from the filesystem.

```
SugarAutoloader::delFromMap('custom/myFile.php');
```

## **put(\$filename, \$data, \$save = false)**

Saves data to a file on the filesystem and adds it to the file map. If `$save` is true, the new map will be saved to the disk file map, otherwise, it will persist only until the end of the request.

```
$file = 'custom/myFile.php';
```

```
SugarAutoloader::touch($file, true);
```

```
SugarAutoloader::put($file, '<?php /*file content*/ ?>', true);
```

## **touch(\$filename, \$save = false)**

Creates the specified file on the filesystem and adds it to the file map. If `$save` is true, the new map will be saved to the disk file map, otherwise, it will persist only until the end of the request.

```
SugarAutoloader::touch('custom/myFile.php', true);
```

## **unlink(\$filename, \$save = false)**

Removes the specified file from the filesystem and from the current file map. If

---

\$save is true, the new map will be saved to the disk file map, otherwise, it will persist only until the end of the request.

```
SugarAutoloader::unlink('custom/myFile.php', true);
```

**Last Modified:** 2022-01-13 12:55:02

## Metadata API

### Overview

Methods to load metadata for the AutoLoader API.

### Metadata Loading

For the specific sets of metadata, such as detailviewdefs, editviewdefs, listviewdefs, searchdefs, popupdefs, and searchfields, a special process is used to load the correct metadata file. You should note that the variable name for the defs, e.g. "detailviewdefs", is usually the same as variable name, except in the case of "searchfields" where it is "SearchFields".

The process is described below:

1. If ./custom/modules/{ \$module }/metadata/{ \$varname }.php exists, it is used as the data file.
2. If ./modules/{ \$module }/metadata/metafiles.php or ./custom/modules/{ \$module }/metadata/metafiles.php exists, it is loaded with the custom file being preferred. If the variable name exists in the data specified by the metafile, the corresponding filename is assumed to be the defs file name.
3. If the defs file name or its custom/ override exists, it is used as the data file (custom one is preferred).
4. If no file has been found yet, ./modules/{ \$module }/metadata/{ \$varname }.php is checked and if existing, it is used as the data file.
5. Otherwise, no metadata file is used.

### **loadWithMetafiles(\$module, \$varname)**

---

Returns the specified metadata file for a specific module. You should note that due to the scope nature of `include()`, this function does not load the actual metadata file but will return the file name that should be loaded by the caller.

```
$metadataPath = SugarAutoloader::loadWithMetafiles('Accounts', 'editviewdefs');
```

## **loadPopupMeta(\$module, \$metadata = null)**

Loads popup metadata for either specified `$metadata` variable or "popupdefs" variable via `loadWithMetafiles()` and returns it. If no metadata found returns empty array.

```
$popupMetadata = SugarAutoloader::loadPopupMeta('Accounts');
```

## **loadExtension(\$extname, \$module = "application")**

Returns the extension path given the extension name and module. For global extensions, the module should be "application" and may be omitted. If the extension has its own module, such as schedulers, it will be used instead of the `$module` parameter. You should note that due to the scope nature of `include()`, this function does not load the actual metadata file but return the file name that should be loaded by the caller. If no extension file exists it will return false.

```
//The list of extensions can be found in ./ModuleInstall/extensions.php
$extensionPath = SugarAutoloader::loadExtension('logichooks');
```

**Last Modified:** 2021-02-17 02:44:13

# **Caching**

## **Overview**

Much of Sugar's user interface is built dynamically using a combination of [templates](#), [metadata](#) and [language files](#). A file caching mechanism improves the performance of the system by reducing the number of static metadata and language files that need to be resolved at runtime. This cache directory stores the

---

compiled files for JavaScript files, [Handlebars](#) templates, and language files.

In a stock instance, the cache is located in the `./cache/` directory. If you would like to move this directory to a new location, you can update the config parameter [cache\\_dir](#) in `config.php` or `config_override.php` to meet your needs. It is not advisable to move the cache to another network server as it may impact system performance.

## Developer Mode

To prevent caching while developing, a developer may opt to turn on Developer Mode by navigating to Admin > System Settings > Advanced > Developer Mode. This will disable caching so that developers can test code-level customizations without the need to manually rebuild the cache, which is especially helpful when developing templates, metadata, or language files. The system automatically refreshes the file cache. Make sure to deactivate Developer Mode after completing customizations because this mode degrades system performance.

**Last Modified:** 2021-02-17 02:44:13

## Uploads

### Overview

The upload directory is used to store files uploaded for imports, attachments, documents, and module loadable packages.

### Uploads

The upload directory is used to store any files uploaded to Sugar. By default, anything uploaded to Sugar is stored in the `./upload/` directory. You can change this directory by updating the [upload\\_dir](#) configuration variable. Once uploaded, the file will be stored in this directory with a GUID name.

There are several file-size limits that affect uploads to Sugar:

| Setting Name                     | Location             | Description     | Default |
|----------------------------------|----------------------|-----------------|---------|
| <code>upload_max_filesize</code> | <code>php.ini</code> | Maximum allowed | 2 MB    |



|                                       |            | size for uploaded files  |       |
|---------------------------------------|------------|--|-------|
| post_max_size                         | php.ini    | Maximum size of POST data that PHP will accept   | 8 MB  |
| upload_maxsize                        | config.php | The maximum individual file size that users can upload to modules that support file uploads    | 30 MB |
| max_aggregate_email_attachments_bytes | config.php | The maximum allowed size of all uploaded attachments added together for a single email message | 10 MB |

The lowest of the first three values above will be respected when an oversized file is uploaded to Sugar. The first two settings are the PHP server's `upload_max_filesize` and `post_max_size`, which are configured in your system's `php.ini` file. The third setting is the Sugar configuration for [upload\\_maxsize](#), which will restrict the upload limit from within Sugar without affecting any other applications that may be running on your server. This limit can be easily adjusted in Sugar via Admin > System Settings but is only useful if it is set to a size smaller than the `php.ini` limits.

Finally, the [max\\_aggregate\\_email\\_attachments\\_bytes](#) setting will permit users to upload files as email attachments according to the previous size limits but restrict users from uploading more files to a single message than its configuration permits.

**Note:** PHP-defined file size settings and the upload directory cannot be modified for instances hosted on Sugar's cloud service.

## Upload Extensions

By default, several extension types are restricted due to security issues. Any files uploaded with these extensions will have '.txt' appended to it. The restricted extensions are listed below:

- php

- 
- php3
  - php4
  - php5
  - pl
  - cgi
  - py
  - asp
  - cfm
  - js
  - vbs
  - html
  - htm

You can add or remove extensions to this list by modifying sugar configuration setting for [upload\\_badext](#). You should note that this setting cannot be modified for instances hosted on Sugar's cloud service.

## How Files Are Stored

### Note Attachments

When a file is uploaded to Sugar attached to a note, the file will be moved to the upload directory with a GUID name matching that of the notes id. The attributes of the file, such as filename and file\_mime\_type, will be stored in the note record.

The SQL to fetch information about a notes attachment is shown below:

```
SELECT filename, file_mime_type FROM notes;
```

### Email Attachments

Email attachments are stored the same way as note attachments. When an email is imported to Sugar, the file will be moved to the upload directory with a GUID file name matching that of the notes id. The attributes of the file, such as filename and file\_mime\_type, will be stored in the note record and the note will have a parent\_type of 'Emails'. This relates the attachment to the content of the email.

The SQL to fetch information about an emails attachment is shown below:

```
SELECT filename, file_mime_type FROM notes INNER JOIN emails ON notes.  
parent_type = 'Emails' AND notes.parent_id = emails.id INNER JOIN email  
s_text ON emails.id = emails_text.email_id;
```

---

## Picture Fields

Picture fields will upload the image to the upload directory with a GUID name and store the GUID in the database field on the record. An example of picture field can be found on the Contacts module.

For a contact, the id of the picture attachment can be found with the SQL below:

```
SELECT picture FROM contacts;
```

## Knowledge Base Attachments

When working with the Knowledge Base, files and images attached to the form will be created as a record in the /#EmbeddedFiles module. These files will be stored as <GUID> of EmbeddedFiles record in the upload folder.

All other file enclosed to attachments field of KBContents will be also saved as Notes record in the upload folder.

The SQL to fetch information about a knowledge base attachment is shown below:

```
select kb.id, kb.name, kb.revision, n.filename, n.file_mime_type, n.file_ext from notes n, kbcontents kb where n.parent_type = "KBContents" and n.parent_id = kb.id order by kb.name, kb.revision;
```

## Module Loadable Packages

Module Loader packages are stored in the system differently than other uploads. They are uploaded to the ./upgrades/module directory with their original file name. The details of the package, such as installation status and description, are stored in the upgrade\_history table.

The SQL to fetch information about an installed package is shown below:

```
SELECT * FROM upgrade_history;
```

## CSV Imports

When importing records into Sugar, the most recent uploaded CSV file is stored in the upload directory as IMPORT\_<module>\_<user id>. Once the import has been run, the results of the import are stored in ./upload/import/ directory using a predefined format using the current user's id. The files created will be as follows:

- **dupes\_<user id>.csv** : The list of duplicate records found during the

---

import

- **dupesdisplay\_<user\_id>.csv** : The HTML formatted CSV for display to the user after import
- **error\_<user id>.csv** : The list of errors encountered during the import
- **errorrecords\_<user\_id>.csv** : The HTML formatted CSV for display to the user after import
- **errorrecordonly\_<user id>.csv** : The list of records that encountered an error
- **status\_<user id>.csv** : Determines the status of the users import

**Last Modified:** 2021-07-29 18:58:15

## Working with File Uploads

### Overview

The UploadFile class handles the various tasks when uploading a file.

### Retrieving a Files Upload Location

To retrieve a files upload path, you can use the `get_upload_path` method and pass in the file's GUID id.

```
require_once 'include/upload_file.php';  
UploadFile::get_upload_path($file_id);
```

This method will normally return the path as:

```
upload://1d0fd9cc-02e5-f6cd-1426-51a509a63334
```

### Retrieving a Files Full File System Location

To retrieve a files full system path, you can use the `get_upload_path` and `real_path` methods as shown below:

```
require_once 'include/upload_file.php';  
UploadFile::realpath(UploadFile::get_upload_path($file_id));
```

---

This method will normally return the path as:

```
/Library/WebServer/htdocs/sugarcrm/upload/1d0fd9cc-02e5-f6cd-1426-51a509a63334
```

## Retrieving a Files Contents

As an alternative to using `file_get_contents` or `sugar_file_get_contents`, you can retrieve the contents of a file using the `get_file_contents` method as shown below:

```
require_once 'include/upload_file.php';

$file = new UploadFile();

//get the file location
$file->temp_file_location = UploadFile::get_upload_path($file_id);
$file_contents = $file->get_file_contents();
```

## Duplicating a File

To duplicate an uploaded file, you can use the `duplicate_file` method by passing in the files current id and the id you would like it copied to as shown below:

```
require_once 'include/upload_file.php';

$uploadFile = new UploadFile();
$result = $uploadFile->duplicate_file($oldFileId, $newFileId);
```

**Last Modified:** 2021-02-17 02:44:13

## Email

### Overview


Outlines the relationships between emails, email addresses, and bean records.

### Email Tables

| Table Name            | Description  |
|-----------------------|--|
| email_addresses       | Each record in this table represents an email address in the system. Note that the invalid_email column and opt_out column are stored on this table, meaning that they are treated as properties of the email address itself, not a relationship attribute between a given email address and related record. This means if a Lead opts-out of a campaign, this email address will be considered opted-out in all contexts, not just with further correspondence with that specific Lead.   |
| email_addr_bean_rel   | The email_addr_bean_rel table maintains the relationship between the email address and its parent module record (Contacts, Accounts, Leads, Users, etc) to determine which record of the given module the email address belongs to. Note that this relationship table also has the primary_address and reply_to_address columns to indicate whether a given email address for a given record is the primary email address, the reply to email address, or some other address for the contact. A contact can have one address flagged as primary, and one flagged as "Reply To". This can be the same email address or two different email addresses. |
| emails_email_addr_rel | The emails_email_addr_rel table maintains the relationships between the email address and email records. Note that this relationship table also has the address_type column to indicate if the email address is related to the email as a "To", "From", "CC", or "BCC" address. The valid values at the database level for this column are: from, to, cc, bcc.   |
| emails                | Each record in this table represents an email in the system. Note that emails fall outside the scope of this document, but are mentioned here for clarity, as  |

|              |  |
|--------------|--|
|              | the two modules are closely related.   |
| emails_beans | Similar to the email_addr Bean Rel table, the emails_beans table maintains the relationship between an email record and any related records (Contacts, Accounts, Cases, etc.).     |
| <module>     | This is used to show how an email address record relates to a record in any module is set on bean_module. If bean_module is set to Contacts, <module> would be the contacts table. |

The following diagram illustrates table relationships between email addresses and other modules, email addresses and email records, and email records and other modules.

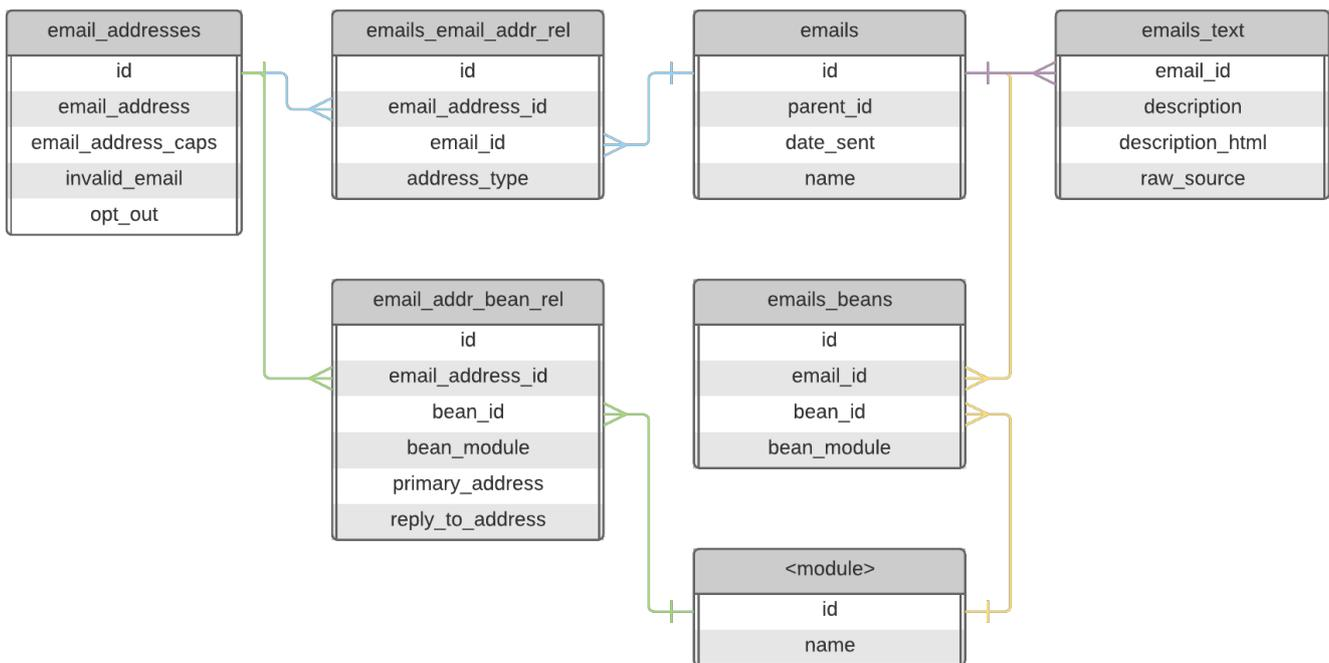

## Helper Queries

### Retrieve the Primary Email Address of a Contact

The following query will fetch the email address given a specific contacts id:

```
SELECT
    email_address
FROM email_addresses
```

---

```
JOIN email_addr_bean_rel eabr
  ON eabr.email_address_id = email_addresses.id
WHERE eabr.bean_module = "Contacts"
AND eabr.bean_id = "<contact id>"
AND email_addresses.invalid_email = 0
AND eabr.deleted = 0
AND eabr.primary_address = 1;
```

## Retrieve All Records Related to an Email Address

The following query will fetch the id and module name of all records related to the specified email address:

```
SELECT
  bean_module,
  bean_id
FROM email_addr_bean_rel eabr
JOIN email_addresses
  ON eabr.email_address_id = email_addresses.id
WHERE email_addresses.email_address = "<email address>"
AND eabr.deleted = 0;
```

## Retrieve All Emails Sent From An Email Address

The following query will fetch all emails sent from a specified email address:

```
SELECT
  emails.name,
  emails.date_sent
FROM emails
JOIN emails_email_addr_rel eear
  ON eear.email_id = emails.id
JOIN email_addresses
  ON eear.email_address_id = email_addresses.id
WHERE email_addresses.email_address = "<email address>"
AND eear.address_type = "from"
AND eear.deleted = 0
```

## Cleanup Duplicate Email Addresses

The following queries will remove any duplicate email addresses.



---

First, create a temporary table with distinct records from the email\_addr\_bean\_rel table:

```
create table email_addr_bean_rel_tmp_full
SELECT
    *
FROM email_addr_bean_rel
WHERE deleted = '0'
GROUP BY email_address_id,
         bean_module,
         bean_id
ORDER BY primary_address DESC;
```

Next, clear out the email\_addr\_bean\_rel table:

```
truncate email_addr_bean_rel;
```

Move the records from the temporary table back to email\_addr\_bean\_rel:

```
INSERT INTO email_addr_bean_rel
SELECT
    *
FROM email_addr_bean_rel_tmp;
```

Validate that all of the duplicates have been removed:

```
SELECT
    COUNT(*) AS repetitions,
    date_modified,
    bean_id,
    bean_module
FROM email_addr_bean_rel
WHERE deleted = '0'
GROUP BY bean_id,
         bean_module,
         email_address_id
HAVING repetitions > 1;
```

Finally, remove the temporary table:

```
drop table email_addr_bean_rel_tmp;
```

## Email Address Validation

---

Sugar validates emails addresses according to the [RFC 5321](#) and [RFC 5322](#) standards. The following sections will detail how a developer can validate email addresses both server and client side.

## Server Side

To validate an email address in a server-side context, the `EmailAddress::isValidEmail()` static method should be used. For example:

```
$emailAddress = "test@example.com";  
$isValid = EmailAddress::isValidEmail($emailAddress);
```

The `EmailAddress::isValidEmail` method leverages the PHPMailer library bundled with Sugar, specifically the `PHPMailer::validateAddress` method, which validates the address according to the [RFC 5321](#) and [RFC 5322](#) standards.

## Client Side

To validate an email address client-side context, the `app.utils.isValidEmailAddress()` function can be used.

```
var emailAddress = "test@example.com";  
var isValid = app.utils.isValidEmailAddress(emailAddress);
```

**Note:** This function is more permissive and does not conform exactly to the RFC standards used on the server. As such, the email address will be validated again on the server when the record is saved, which could still fail validation.

**Last Modified:** 2021-02-17 02:44:13

# Mailer Factory

## Overview

The Mailer Factory, located in `./modules/Mailer/MailerFactory.php`, helps developers generate outbound mailers for the system account as well as individual user accounts. The Mailer Factory is a replacement for SugarPHPMailer which is now deprecated.

---

## Mailers

There are two types of outbound mailers: System and User. The follow sections will outline how to use each.

### System Mailer

The system outbound mailer can be set using the `getSystemDefaultMailer` method. This will set the mailer to use the system outbound email account.

#### Example

```
$mailer = MailerFactory::getSystemDefaultMailer();
```

### User Mailer

The user outbound mailer can be set using the `getMailerForUser` method. This will set the mailer to use the outbound email account for a specific user.

#### Example

```
$user = BeanFactory::getBean("Users", 1);  
$mailer = MailerFactory::getMailerForUser($user);
```

## Populating the Mailer

### Setting the Subject

To set the email subject, use the `setSubject` method. It accepts a plain text string.

#### Example

```
$mailer->setSubject("Test Mail Subject");
```

### Setting the Body

Depending on your email type, you can use the `setTextBody` and/or `setHtmlBody` methods respectively to populate the content of the email body.

---

## Example

```
// Text Body
$mailer->setTextBody("This is a text body message");

// HTML Body
$mailer->setHtmlBody("This is an <b>HTML</b> body message. <br> You can use html tags.");
```

**Note:** The email HTML body is not necessary if you have populated the text body.

## Adding Recipients

To add recipients to your email, you can use the `addRecipientsTo`, `addRecipientsCc`, or `addRecipientsBcc` methods. These methods require an `EmailIdentity` object as a parameter.

## Example

```
$mailer->addRecipientsTo(new EmailIdentity('user1@yourcompany.crm', 'User 1'));
$mailer->addRecipientsCc(new EmailIdentity('user2@yourcompany.crm', 'User 2'));
$mailer->addRecipientsBcc(new EmailIdentity('user3@yourcompany.crm', 'User 3'));
```

## Clearing Recipients

You can clear the current recipients specified in the mailer by using the `clearRecipients` method.

## Example

```
$to = true;
$cc = true;
$bcc = true;

$mailer->clearRecipients($to, $cc, $bcc);
```

---

## Adding Attachments

To add attachments, use the `addAttachment` method.

### Example

```
$path = "/path/to/your/document";
$mailer->addAttachment(new Attachment($path));
```

## Sending Emails

Once your email is populated, you can send it using the `send` method. The `send` method will return the content of the mail. If the Mailer Factory experiences an error, it will throw an exception. It is highly recommended to use a try and catch when sending emails.

### Example

```
$mailSubject = "Test Mail Subject";
$mailHTML = "<h1>SugarCRM</h1><br> Test body message";
$mailTo = array(
    0 => array(
        'name' => 'Test User',
        'email' => 'test@yourcompany.crm',
    ),
    1 => array(
        'name' => 'Other Recipient',
        'email' => 'email@address'
    )
);

$mailAttachment = "/path/to/pdf/files/document.pdf";

try {
    $mailer = MailerFactory::getSystemDefaultMailer();
    $mailTransmissionProtocol = $mailer->getMailTransmissionProtocol();
    ;
    $mailer->setSubject($mailSubject);
    $body = trim($mailHTML);
    $textOnly = EmailFormatter::isTextOnly($body);
    if ($textOnly) {
        $mailer->setTextBody($body);
    }
}
```

---

```

    } else {
        $textBody = strip_tags(br2nl($body)); // need to create the plain-text part
        $mailer->setTextBody($textBody);
        $mailer->setHtmlBody($body);
    }
    $mailer->clearRecipients();
    foreach ($mailTo as $mailTo) {
        $mailer->addRecipientsTo(new \EmailIdentity($mailTo['email'], $mailTo['name']));
    }
    $mailer->addAttachment(new \Attachment($mailAttachment));
    $result = $mailer->send();
    if ($result) {
        // $result will be the body of the sent email
    } else {
        // an exception will have been thrown
    }
} catch (MailerException $me) {
    $message = $me->getMessage();
    switch ($me->getCode()) {
        case \MailerException::FailedToConnectToRemoteServer:
            $GLOBALS["log"]->fatal("BeanUpdatesMailer :: error sending email, system smtp server is not set");
            break;
        default:
            $GLOBALS["log"]->fatal("BeanUpdatesMailer :: error sending e-mail (method: {$mailTransmissionProtocol}), (error: {$message})");
            break;
    }
}

```

**Last Modified:** 2021-02-17 02:44:13

## Email Addresses

### Overview

Recommended approaches when working with email addresses in Sugar.

---

## Client Side

Recommended approaches when accessing email addresses in Sugar from a client.

### Sidecar

Sidecar is the JavaScript UI framework that users interact within their browsers.

#### Fetching Email Addresses in Sidecar

In Sidecar, the email field will return an array of email addresses and their properties for the record. Given the model, you can fetch it using:

```
var emailAddresses = model.get('email');
```

**Note:** In the past, developers could use `model.get("email1")` to fetch the primary email address. While this currently does work, these legacy email fields are deprecated and may be subject to removal in an upcoming Sugar release.

#### Fetching a Primary Email Address in Sidecar

To fetch the primary email address for a bean, you can use `app.utils.getPrimaryEmailAddress()`:

```
var primaryEmailAddress = app.utils.getPrimaryEmailAddress(model);
```

#### Fetching an Email Address by Properties in Sidecar

To fetch an email address based on properties such as `invalid_email`, you can use `app.utils.getEmailAddress()`. This function will return the first email address that matches the options or an empty string if not found. An example is shown below:

```
var emailAddress = app.utils.getEmailAddress(model, {invalid_email: true});
```

If you have complex filtering rules, you can use `_.find()` to fetch an email address:

```
var emailAddress = _.find(model.get('email'), function(emailAddress){
    if (emailAddress.invalid_email == true) {
        return emailAddress;
    }
});
```

---

## Validating Email Addresses in Sidecar

To validate an email address, you can use `app.utils.isValidEmailAddress()`:

```
var isValid = app.utils.isValidEmailAddress(emailAddress);
```

**Note:** This function is more permissive and does not conform exactly to the RFC standards used on the server. As such, the email address will be validated again on the server when the record is saved, which could still fail validation. More information can be found in the [email address validation](#) section.

## Iterating Email Address in Sidecar

To iterate through email addresses on a model, you can use `_.each()`:

```
_.each(model.get('email'), function(emailAddress) {  
    console.log(emailAddress.email_address);  
});
```

## Updating Email Addresses in Sidecar

This section covers how to manipulate the email addresses for a model.

### Adding Email Addresses in Sidecar

In Sidecar, you can add email addresses to a model using the custom function below:

```
function addAddress(model, email) {  
    var existingAddresses = model.get('email') ? app.utils.deepCopy(model.get('email')) : [],  
        dupeAddress = _.find(existingAddresses, function(address){  
            return (address.email_address === email);  
        }),  
        success = false;  
  
    if (_.isUndefined(dupeAddress)) {  
        existingAddresses.push({  
            email_address: email,  
            primary_address: (existingAddresses.length === 0),  
            opt_out: app.config.newEmailAddressesOptedOut || false  
        });  
    }  
}
```



---

```
    model.set('email', existingAddresses);
    success = true;
  }

  return success;
}
```

### Removing Email Addresses in Sidecar

In Sidecar, you can remove email addresses from a model using the custom function below:

```
function removeAddress(model, email) {
  var existingAddresses = app.utils.deepCopy(model.get('email'));
  var index = false;
  _.find(existingAddresses, function(emailAddress, idx){
    if (emailAddress.email_address === email) {
      index = idx;
      return true;
    }
  });
  var primaryAddressRemoved = false;

  if (index !== false) {
    primaryAddressRemoved = !!existingAddresses[index]['primary_address'];
  }

  //Reject this index from existing addresses
  existingAddresses = _.reject(existingAddresses, function (emailInfo, i) { return i == index; });

  // If a removed address was the primary email, we still need at least one address to be set as the primary email
  if (primaryAddressRemoved) {
    //Let's pick the first one
    var address = _.first(existingAddresses);
    if (address) {
      address.primary_address = true;
    }
  }

  model.set('email', existingAddresses);
  return primaryAddressRemoved;
}
```

---

## Server Side

Recommended approaches when accessing email addresses in Sugar from the server.

### SugarBean

The SugarBean is Sugars PHP core object model.

#### Fetching Email Addresses Using the SugarBean

Using the SugarBean, the `$bean->emailAddress->addresses` property will return an array of email addresses and its properties. The `$bean->emailAddress` property makes use of the `EmailAddress` class which is located in `./modules/EmailAddresses/EmailAddress.php`. An example is shown below:

```
$emailAddresses = $bean->emailAddress->addresses;
```

#### Fetching a Primary Email Address Using the SugarBean

To fetch the primary email address for a bean, you can use `$bean->emailAddress->getPrimaryAddress()`:

```
$primaryEmailAddress = $bean->emailAddress->getPrimaryAddress($bean);
```

Another alternative is to use the `email_addresses_primary` relationship:

```
$primaryEmailAddress = false;
if ($this->load_relationship('email_addresses_primary')) {
    $relatedBeans = $this->email_addresses_primary->getBeans();
    if (!empty($relatedBeans)) {
        $primaryEmailAddress = current($relatedBeans);
    }
}
```

You may also choose to iterate the email address list with a `foreach()`. An example function is shown below:

```
function getPrimaryEmailAddress($bean)
{
    foreach ($bean->emailAddress->addresses as $emailAddress) {
```

---

```
        if ($emailAddress['primary_address'] == true) {
            return $emailAddress;
        }
    }

    return false;
}
```

### Fetching an Email Address by Properties Using the SugarBean

To fetch an email address based on properties such as `invalid_email`, you can use a `foreach()`:

```
$result = false;
foreach ($bean->emailAddress->addresses as $emailAddress) {
    if ($emailAddress['invalid_email']) {
        $result = $emailAddress;
        break;
    }
}
```

### Validating Email Addresses Using the SugarBean

To validate an email address, you can use `$bean->emailAddress->isValidEmail()`:

```
$isValid = $bean->emailAddress->isValidEmail($emailAddress);
```

**Note:** The `EmailAddress::isValidEmail` method leverages the `PHPMailer` library bundled with Sugar, specifically the `PHPMailer::validateAddress` method, which validates the address according to the [RFC 5321](#) and [RFC 5322](#) standards. More information can be found in the [email address validation](#) section.

### Iterating Email Addresses Using the SugarBean

To iterate through email addresses on a bean, you can use `foreach()`:

```
foreach ($bean->emailAddress->addresses as $emailAddress) {
    $GLOBALS['log']->info($emailAddress['email_address']);
}
```

### Fetching Beans by Email Address Using the SugarBean

---

To fetch all beans related to an email address you can use `getBeansByEmailAddress()`:

```
$beans = $bean->emailAddress->getBeansByEmailAddress($emailAddress);
```

If you don't have a bean available, you may choose to create a new `EmailAddress` object:

```
$sea = BeanFactory::newBean('EmailAddresses');  
$sea->getBeansByEmailAddress($emailAddress);
```

## Updating Email Addresses Using the SugarBean

This section covers how to manipulate the email addresses for a bean.

### Adding Email Addresses Using the SugarBean

To add an email address to the bean, you can use `$bean->emailAddress->addAddress()`:

```
$bean->emailAddress->addAddress('address@sugar.crm');
```

**Note:** The `addAddress()` function has additional parameters that are defaulted for determining if the email address is a primary, reply to, invalid, or opted out email address. You can also specify an id for the email address and whether or not the email address should be validated.

```
function addAddress($addr, $primary=false, $replyTo=false, $invalid=false,  
$optOut=false, $email_id = null, $validate = true)
```

### Removing Email Addresses Using the SugarBean

To remove an email address you can use `$bean->emailAddress->removeAddress()`:

```
$bean->emailAddress->removeAddress('address@sugar.crm');
```

## PDF Templates

Using the Sugar PDF templates, you can reference the primary email address of the bean using:

```
{fields.email_addresses_primary.email_address}
```

---

## REST API

Sugar comes out of the box with an API that can be called from custom applications utilizing the REST interface. The API can be used to mass create and update records in Sugar with external data. For more information on the REST API in Sugar, please refer to the [Web Services](#) documentation.

### Creating Email Addresses Using the REST API

When creating records in Sugar through the API, modules with relationships to email addresses can utilize the email link field to specify email addresses for a record. Using the email link field, you can specify multiple email addresses to assign to the record. You may specify the following additional information regarding each email address being added:

| Property        | Description   |
|-----------------|---|
| invalid_email   | Specify this email address as being invalid   |
| opt_out         | Specify this email address as being opted out. More information on opt-outs can be found in the <a href="#">Emails</a> documentation. |
| primary_address | Specify this email address as the primary   |

Using the **/<module> POST** endpoint, you can send the following JSON payload to create a contact record with multiple email addresses using the email link field:  
POST URL: `http://<site url>/rest/v<version>/Contacts`

```
{
  "first_name": "Rob",
  "last_name": "Robertson",
  "email": [
    {
      "email_address": "rob.robertson@sugar.crm",
      "primary_address": "1",
      "invalid_email": "0",
      "opt_out": "0"
    },
    {
      "email_address": "rob@sugar.crm",
      "primary_address": "0",

```

---

```
        "invalid_email": "0",
        "opt_out": "1"
    }
]
}
```

For more information on the `/<module>/:record POST` endpoint, you can refer to your instance's help documentation found at:

`http://<site url>/rest/v<version>/help`

Or you can reference the [<module> POST](#) PHP example.

## Updating Email Addresses Using the REST API

When updating existing records in Sugar through the API, modules with relationships to email addresses can use the email link field to specify email addresses for a record. Using the email link field, you can specify multiple email addresses to update the record with. You may specify the following additional information regarding each email address being added:

- **invalid\_email** : Specify this email address as being invalid
- **opt\_out** : Specify this email address as being opted out
- **primary\_address** : Specify this email address as the primary

Using the `/<module>/:record PUT` endpoint, you can send the following JSON payload to update a contact record with multiple email addresses:

PUT URL: `http://<site url>/rest/v<version>/Contacts/<record id>`

```
{
  "email": [
    {
      "email_address": "rob.robertson@sugar.crm",
      "primary_address": "1",
      "invalid_email": "0",
      "opt_out": "0"
    },
    {
      "email_address": "rob@sugar.crm",
      "primary_address": "0",
      "invalid_email": "0",
      "opt_out": "1"
    }
  ]
}
```

---

For more information on the `/<module>/:record PUT` endpoint, you can refer to your instance's help documentation found at:

`http://<site url>/rest/v<version>/help`

You want to reference the [<module>/:record PUT](#) PHP example.

## Legacy Email Fields


The legacy email fields in Sugar are deprecated and may be subject to removal in an upcoming Sugar release. When using the `email1` field, the default functionality is to import the email address specified as the primary address.

| Legacy Email Field  | Description  |
|---------------------|--|
| <code>email1</code> | The text value of primary email address. Does not indicate if the email address is valid or opted-out.           |
| <code>email2</code> | The text value of first non-primary email address. Does not indicate if the email address is valid or opted-out. |

**Note:** For importing multiple email addresses with properties, you will need to use the `email link` field.

## Creating Email Addresses Using Direct SQL

When importing records into Sugar directly via the database, it is important that you understand the data structure involved before loading data. Email addresses are not stored directly on the table for the module being imported in but are related via the `email_addr_bean_rel` table.

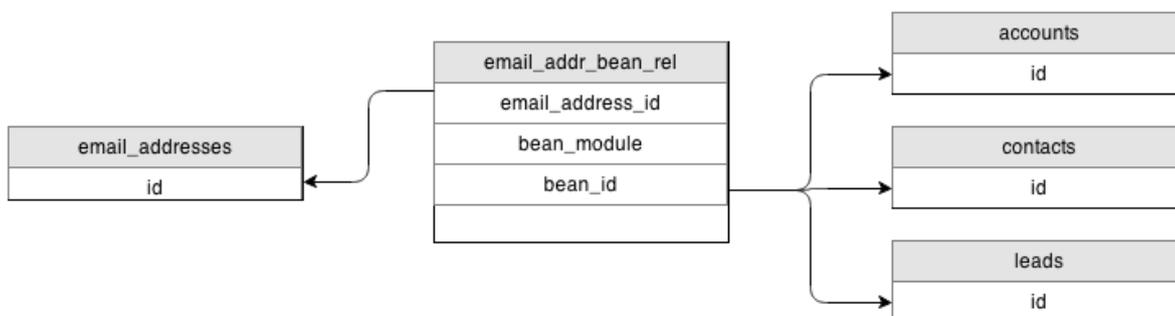

The table structure for email addresses can be seen from the database via the following SQL statement:

---

```
SELECT
  email_addr_bean_rel.bean_id,
  email_addr_bean_rel.bean_module,
  email_addresses.email_address
FROM email_addr_bean_rel
INNER JOIN email_addresses
  ON email_addresses.id = email_addr_bean_rel.email_address_id
  AND email_addr_bean_rel.deleted = 0
WHERE email_addresses.deleted = 0;
```

## Checking for Duplicates

Email addresses can become duplicated in Sugar from a variety of sources including API calls, imports, and from data entry. There are a few ways to have the system check for duplicate contact records, but not many of those methods work for checking email addresses for duplicates. The following section will demonstrate how to find and clean up duplicate email addresses using SQL.

The following SQL query can be used to locate if any email addresses are being used against more than one bean record within Sugar:

```
SELECT
  email_addresses.email_address,
  COUNT(*) AS email_address_count
FROM email_addr_bean_rel
INNER JOIN email_addresses
  ON email_addresses.id = email_addr_bean_rel.email_address_id
  AND email_addr_bean_rel.deleted = 0
WHERE email_addresses.deleted = 0
GROUP BY email_addresses.email_address
HAVING COUNT(*) > 1;
```

**Note:** If you convert a Lead record to a Contact record, both the Lead and the Contact will be related to the same Email Address and will return as having duplicates in this query. You can add the following line to the WHERE clause to filter the duplicate check down to only one bean type:

```
AND email_addr_bean_rel.bean_module = 'Contacts'
```

Email addresses can not only be duplicated in the system but can occasionally be missing critical data. Each bean record with an email address assigned to it should have an email address designated the primary. The following query will locate any bean records that have at least one email address, where there is not an email address designated as the primary:



---

```
SELECT
  email_addr_bean_rel.bean_module,
  email_addr_bean_rel.bean_id,
  COUNT(*) AS email_count,
  COUNT(primary_email_addr_bean_rel.id) AS primary_email_count
FROM email_addr_bean_rel
LEFT JOIN email_addr_bean_rel primary_email_addr_bean_rel
  ON primary_email_addr_bean_rel.bean_module = email_addr_bean_rel.bean_module
  AND primary_email_addr_bean_rel.bean_id = email_addr_bean_rel.bean_id
  AND primary_email_addr_bean_rel.primary_address = '1'
  AND primary_email_addr_bean_rel.deleted = '0'
WHERE email_addr_bean_rel.deleted = '0'
GROUP BY email_addr_bean_rel.bean_module,
  email_addr_bean_rel.bean_id
HAVING primary_email_count < 1;
```

**Note:** If you are a SugarCloud customer, you can open up a case with [Sugar Support](#) to have this query run for you.

## Removing Duplicates

If it is determined you have duplicate email addresses being used in your system, you can use the following query to clean up the records:

```
START TRANSACTION;
CREATE
  TABLE email_addr_bean_rel_tmp
SELECT
  *
FROM email_addr_bean_rel
WHERE deleted = '0'
GROUP BY email_address_id,
  bean_module,
  bean_id
ORDER BY primary_address DESC;
TRUNCATE TABLE email_addr_bean_rel;
INSERT INTO email_addr_bean_rel
  SELECT
  *
  FROM email_addr_bean_rel_tmp;
SELECT
  COUNT(*) AS repetitions,
  date_modified,
  bean_id,
```

---

```
bean_module
FROM email_addr_bean_rel
WHERE deleted = '0'
GROUP BY bean_id,
    bean_module,
    email_address_id
HAVING repetitions > 1;
COMMIT;
```

**Note:** If you are a SugarCloud customer, you can open up a case with [Sugar Support](#) to have this query run for you.

**Last Modified:** 2021-02-17 02:44:13

## Logging

### Overview

There are two logging systems implemented in the Sugar application: SugarLogger and PSR-3. SugarLogger is the default logger that Sugar uses while codebase is migrated to [PSR-3](#).

### SugarLogger

The SugarLogger class, located in `./include/SugarLogger/SugarLogger.php`, allows for developers and system administrators to log system events to a log file. Sugar then determines which events to write to the log based on the system's Log Level. This can be set in Admin > System Settings.

### Log Levels

| Log Level | Description  |
|-----------|--|
| Debug     | Logs events that help in debugging the application |
| Info      | Logs informational messages and database queries   |
| Warn      | Logs potentially harmful events                    |
|           |  |

|            |  |
|------------|--|
| Deprecated | Logs messages for deprecated methods that are still in use.  |
| Error      | Logs error events in the application   |
| Fatal      | Logs severe error events that may cause the application to abort. This is the default and recommended level. |
| Security   | Logs events that may compromise the security of the application  |
| Off        | Logging is turned off  |

When you specify a logging level, the system will record messages for the specified level as well as all higher levels. For example, if you specify "Error", the system records all Error, Fatal, and Security messages. More information on logging levels can be found in the [logger level](#) documentation.

## Considerations

- When you are not troubleshooting Sugar, the log level should be set to Fatal in Admin > System Settings > Logger Settings to ensure that your environment is not wasting unnecessary resources to write to the Sugar log.

## Logging Messages

### Using \$GLOBALS['log']

How to log messages using \$GLOBALS['log'] in the system.

```

$GLOBALS['log']->debug('Debug level message');
$GLOBALS['log']->info('Info level message');
$GLOBALS['log']->warn('Warn level message');
$GLOBALS['log']->deprecated('Deprecated level message');
$GLOBALS['log']->error('Error level message');
$GLOBALS['log']->fatal('Fatal level message');
$GLOBALS['log']->security('Security level message');

```

For more information on the implementation, please refer to the [SugarLogger](#) documentation.

### Using LoggerManager

---

How to log messages using the LoggerManager.

```
$Logger = \LoggerManager::getLogger();
$Logger->debug('Debug level message');
$Logger->info('Info level message');
$Logger->warn('Warn level message');
$Logger->deprecated('Deprecated level message');
$Logger->error('Error level message');
$Logger->fatal('Fatal level message');
$Logger->security('Security level message');
```

For more information on the implementation, please refer to the [SugarLogger](#) documentation.

## Log Rotation

The SugarLogger will automatically rotate the logs when the [logger.file.maxSize](#) configuration setting has been met or exceeded. When this happens, the Sugar log will be renamed with an integer. For example, if the Sugar log was named "sugarcrm.log, it will then be renamed "sugarcrm\_1.log". The next log rotation after that would create "sugarcrm\_2.log". This will occur until the [logger.file.maxLogs](#) configuration setting has been met. Once met, the log rollover will start over.

## Debugging Messages with \_ppl()

When developing, it may be beneficial for a developer to use `_ppl()` method to log a message to the Sugar log. The `_ppl()` method handles converting Objects, so you can quickly dump an entire object to the log while testing during development.

```
_ppl('Debugging message');
```

This will write a message to the Sugar log that defines the message and file location. An example is shown below:

```
----- _ppLogger() output start -----
-----
Debugging message
----- _ppLogger() output end -----
-----
----- _ppLogger() file: myFile.php line#: 5--
```

---

**Note:** It is important that you remove `_ppl()` from your code for production use as it will affect system performance.

## PSR-3

As of Sugar 7.9, a [PSR-3 compliant](#) logging solution has been implemented based on PHP Monolog.

## Log Levels

| Log Level | Description  |
|-----------|--|
| Debug     | Logs events that help in debugging the application   |
| Info      | Logs informational messages and database queries   |
| Warning   | Logs potentially harmful events  |
| Notice    | Logs messages for deprecated methods that are still in use.  |
| Error     | Logs error events in the application   |
| Alert     | Logs severe error events that may cause the application to abort. This is the default and recommended level. |
| Critical  | Logs events that may compromise the security of the application  |
| Off       | Turns off all logging  |

When you specify a logging level, the system will record messages for the specified level as well as all higher levels. For example, if you specify "Error", the system records all Error, Fatal, and Security messages. More information on logging levels can be found in the [logger level](#) configuration documentation.

## Considerations

- When you are not troubleshooting Sugar, the log level should be set to Fatal in Admin > System Settings > Logger Settings to ensure that your environment is not wasting unnecessary resources to write to the Sugar log.

---

## Logging Messages

The PSR-3 implementation in Sugar can also be used to log messages to the Sugar Log file. You can utilize the implementation to log to the Sugar log file using the default channel or you can specify your own custom channel if you want further control over when your custom logs should be displayed.

```
use \Sugarcrm\Sugarcrm\Logger\Factory;

//Get the default Logger
$Logger = Factory::getLogger('default');
$Logger->debug('Debug level message');
$Logger->info('Info level message');
$Logger->notice('Notice level message');
$Logger->warning('Warning level message');
$Logger->error('Error level message');
$Logger->critical('Critical level message');
$Logger->alert('Alert level message');
$Logger->emergency('Emergency level message');

//Get a custom Log Channel
$Logger = Factory::getLogger('my_logger');
```

**Note:** For more information on using custom channels, adding custom log handlers and processors see the [PSR-3 Logger](#) documentation.

**Last Modified:** 2021-02-17 02:44:13

## Creating Custom Loggers

### Custom Loggers

Custom loggers, defined in `./custom/include/SugarLogger/`, can be used to write log entries to a centralized application management tool or to write messages to a developer tool such as FirePHP.

To do this, you can create a new instance class that implements the `LoggerTemplate` interface. The following is an example of how to create a FirePHP logger.

---

./custom/include/SugarLogger/FirePHPLogger.php.

<?php

```
// change the path below to the path to your FirePHP install
require_once('/path/to/fb.php');
```

```
class FirePHPLogger implements LoggerTemplate
```

```
{
    /** Constructor */
    public function __construct()
    {
        if (
            isset($GLOBALS['sugar_config']['logger']['default'])
            && $GLOBALS['sugar_config']['logger']['default'] == 'FireP
HP'
        )
        {
            LogManager::setLogger('default','FirePHPLogger');
        }
    }
}
```

```
/** see LoggerTemplate::log() */
```

```
public function log($level, $message)
```

```
{
    // change to a string if there is just one entry
    if ( is_array($message) && count($message) == 1 )
    {
        $message = array_shift($message);
    }
}
```

```
switch ($level)
```

```
{
    case 'debug':
        FB::log($message);
        break;
    case 'info':
        FB::info($message);
        break;
    case 'deprecated':
    case 'warn':
        FB::warn($message);
        break;
    case 'error':
    case 'fatal':
    case 'security':
```

---

```
        FB::error($message);
        break;
    }
}
```

The only method that needs to be implemented by default is the `log()` method, which writes the log message to the backend. You can specify which log levels this backend can use in the constructor by calling the `LoggerManager::setLogger()` method and specifying the level to use for this logger in the first parameter; passing 'default' makes it the logger for all logging levels.

You will then specify your default logger as 'FirePHP' in your `./config_override.php` file.

```
$sugar_config['logger']['default'] = 'FirePHP';
```

**Last Modified:** 2021-02-17 02:44:13

## PSR-3 Logger

Monolog\Handler\HandlerInterface

### Overview

As of Sugar 7.9, a [PSR-3](#) compliant logging solution has been implemented based on PHP Monolog. Accessing the PSR-3 Logger Objects can be done by via the `\Sugarcrm\Sugarcrm\Logger` namespace. Currently, this logging implementation is only used in a few areas of the system to allow for more in-depth logging in those areas, see the Usage section for more details.

### Architecture

The PSR-3 Logging solution is found in `./src/Logger` directory, which is mapped to the `\Sugarcrm\Sugarcrm\Logger` namespace in the application. The following outlines the architecture and current implementations of those core objects.

### Factory



---

The Logger Factory Object, namespaced as `\Sugarcrm\Sugarcrm\Logger\Factory`, is a singleton factory that creates and manages all Loggers currently being used by the system. The Logger Factory uses 'channels' to allow for multiple Loggers to be utilized and configured independently of default log level set for the system. It also allows for each channel to use different handlers, formatters, and processors. Check out the Usage section below for further details on configuration and usage.

## Methods

### **getLogger(\$channel)**

Returns the requested channels `\Psr\Log\LoggerInterface` implementation

### Arguments

| Name      | Type   | Description                                   |
|-----------|--------|---|
| \$channel | String | The channel for which you are logging against |

### Example

```
use \Sugarcrm\Sugarcrm\Logger\Factory;

$Logger = Factory::getLogger('default');
```

## Handlers

Handlers are the primary object used to manage the logs. They control how logs are submitted and where the logs will go. Since the PSR-3 Logging solution is based on Monolog, there are a number of default Handlers included in Sugar, however, they are not set up in the Sugar architecture to be utilized right off the bat. Sugar utilizes a Factory implementation for the handlers so that the Logger Factory Object can build out specific Handlers for each channel based on the Sugar Config.

## Factory Interface

The Factory Interface for Handlers is used to implement a Logging Handler, so that the Logger Factory can build out the configured handler for a channel, without a lot of work from external developers. The Handler Factory Interface is

---

located in `./src/Logger/Handlers/Factory.php` or in code at the `\Sugarcrm\Sugarcrm\Logger\Handler\Factory` namespace.

## Methods

There is only one method to implement for a Handler Factory, which is the `create()` method. This will contain the necessary Logic to set up the Logger Handler

`create($level, $config)`

### Arguments

| Name                  | Type   | Description  |
|-----------------------|--------|--|
| <code>\$level</code>  | String | The log level the Logger Handler will operate at                   |
| <code>\$config</code> | Array  | The config parameters set for the handler in the Sugar config file |

### Returns

The `Monolog\Handler\HandlerInterface` implementation

## Implementations

By default, Sugar only comes with a single Handler implementation, which is the File Handler implementation. This is used to log directly to the `./sugarcrm.log` file to mirror the functionality of the previous logging framework. For information on adding custom handlers, or implementing the built-in Monolog handlers inside of Sugar PSR-3 Logging framework, see the [Customization](#) section below.

### Configuration

To configure the default logging handler for Sugar the following configuration setting is used:

```
$sugar_config['logger']['handler'] = '<handler>';
```

You can also configure a different Logging Handler or Handlers for a specific channel:

---

```
//Single Handler
$sugar_config['logger']['channels']['test_channel']['handlers'] = '<handler>';

//Multiple Channels
$sugar_config['logger']['channels']['test_channel']['handlers'] = array(
    '<handler1>', '<handler2>' );
```

To pass configuration properties to a Handler your configuration will need to look as follows:

```
//For system handler
$sugar_config['logger']['handlers']['<handler>']['host'] = '127.0.0.1';
;
$sugar_config['logger']['handlers']['<handler>']['port'] = 12201;

//For channel handlers
$sugar_config['logger']['channels']['test_channel']['handlers']['<handler>']['host'] = '127.0.0.1';
$sugar_config['logger']['channels']['test_channel']['handlers']['<handler>']['port'] = 12201;
$sugar_config['logger']['channels']['test_channel']['handlers']['<handler>']['level'] = 'debug';
```

**Note:** For more information, please refer to the [logger.channels.channel.handlers](#) documentation.

## Formatters

Formatters are a component of the Handler Object. By default Sugar only comes with a single Formatter, which is the `BackwardCompatibleFormatter` used by the File Handler, which simply assures that Log messages are consistent with the legacy Logging functionality. Formatters are used and built out in accordance with the Monolog framework, and under the majority of circumstances, building out a custom formatter is not necessary. For more information on Formatters, you can review the [Monolog repository](#).

## Processors

Processors provide a way to add more information to Log messages, without having to hard code this information inside the Handler, so that it can be used only when necessary. For example, Sugar's PSR-3 Logging implementation provides two default Processors that can be enabled for a given channel or handler via

---

configuration. These Processors provide functionality such as adding a stack trace or the web request information to the log message to provide further debugging context.

## Factory Interface

The Factory Interface for processors is used to implement a Logging Processor, so that the Logger Factory can build out the configured handler for a channel, without a lot of work from external developers. The Processor Factory Interface is located in `./src/Logger/Processor/Factory.php` or in code at `\Sugarcrm\Sugarcrm\Logger\Handler\Factory` namespace.

### Methods

There is only one method to implement for a Processor Factory, which is the `create()` method. This method will contain the necessary Logic to set up the Processor object.

`create($config)`

### Arguments

| Name                  | Type  | Description  |
|-----------------------|-------|--|
| <code>\$config</code> | Array | The config parameters set for the processor in the Sugar config file |

### Returns

Callable - See Customization section for an example of implementation, otherwise review the included Processor Factory implementations in code in `./src/Logger/Processor/Factory/`.

## Implementations

By default, Sugar comes with two Processor implementations, `\Sugarcrm\Sugarcrm\Logger\Processor\BacktraceProcessor` and `\Sugarcrm\Sugarcrm\Logger\Processor\RequestProcessor`.

### BacktraceProcessor

---

As the name implies, the `BacktraceProcessor` appends a backtrace or stack trace to the log message output, to easily trace where and how the log message came from. The Factory implementation for this Processor lives in `./src/Logger/Processor/Factory/Backtrace.php`, and is referenced in the sugar config as `backtrace`.

The following shows an example of the output that occurs when utilizing this processor:

```
Fri Mar 23 09:24:19 2018 [90627][1][FATAL] <log message>; Call Trace:
\n0: /var/www/Ent/71110/custom/SugarQueryLogger.php:43 - Sugarcrm\Suga
rcrm\Logger\BackwardCompatibleAdapter::fatal()\n2: /var/www/Ent/71110/
include/utils/LogicHook.php:270\n3: /var/www/Ent/71110/include/utils/L
ogicHook.php:160 - LogicHook::process_hooks()\n4: /var/www/Ent/71110/d
ata/SugarBean.php:6684 - LogicHook::call_custom_logic()\n5: /var/www/E
nt/71110/data/SugarBean.php:3317 - SugarBean::call_custom_logic()\n6:
/var/www/Ent/71110/clients/base/api/FilterApi.php:632 - SugarBean::fet
chFromQuery()\n7: /var/www/Ent/71110/clients/base/api/FilterApi.php:39
7 - FilterApi::runQuery()\n8: /var/www/Ent/71110/include/api/RestServi
ce.php:257 - FilterApi::filterList()\n9: /var/www/Ent/71110/api/rest.p
hp:23 - RestService::execute()
```

**Note:** when viewing complex logs, you can use the following to print log entries in a more human readable format:

```
cat sugarcrm.log | sed s/\\n/\\n/g
```

## RequestProcessor

The `RequestProcessor` appends Session properties to the Log message that would help identify the request that caused the log message. The Factory implementation for this Processor lives in `./src/Logger/Processor/Factory/Request.php`, and is referenced in the sugar config as `request`.

The following list of session properties are appended to the log:

- User ID
- Client ID (OAuth2 Client)
- Platform

The following shows an example of the output that occurs when utilizing this processor:

```
Mon Mar 26 09:48:58 2018 [5930][1][FATAL] <log message>; User ID=1; Cl
ient ID=sugar; Platform=base
```

---

## Configuration

To configure the default Logging Handler for Sugar to utilize the built-in processors:

```
//Configure a single Processor
$sugar_config['logger']['channels']['default']['processors'] = 'backtrace';

//Configure multiple Processors
$sugar_config['logger']['channels']['default']['processors'] = array('backtrace', 'request');
```

You can also configure different channels to utilize the processors:

```
//Single Processors
$sugar_config['logger']['channels']['<channel>']['processors'] = 'backtrace';

//Multiple Channels
$sugar_config['logger']['channels']['<channel>']['processors'] = array('backtrace', 'request');
```

To pass configuration properties to a Processor your configuration will need to look as follows:

```
$sugar_config['logger']['channels']['<channel>']['processors']['<processor>']['config_key'] = 'test_value';
```

**Note:** For more information, please refer to the [logger.channels.channel.processors](#) documentation.

## Usage

As previously mentioned the Logger Factory allows for multiple channels to be configured independently of each other. The following examples will showcase how to use the Logger Factory to get a channel's Logger and use it in code, as well as how to configure the system to use multiple channels with different configurations.

### Basic Usage

```
use \Sugarcrm\Sugarcrm\Logger\Factory;
```

---

```
//Retrieve the default Logger
$DefaultLogger = Factory::getLogger('default');
$DefaultLogger->alert('This is a log message');
```

## Configuring Channels

The following is an example of the `./config_override.php` file that would configure two different channels at different log levels, using the [logger.channel.channel.level](#) configuration setting. These two channels would allow for portions of the code to Log messages at Debug (and higher) levels, and other portions to only log Info (and higher) levels.

```
$config['logger']['channels']['default'] = array(
    'level' => 'alert'
);
$config['logger']['channels']['channel1'] = array(
    'level' => 'debug'
);
```

The following code example shows how to retrieve the above-configured channels and use the Logger for each channel.

```
use \Sugarcrm\Sugarcrm\Logger\Factory;

//Retrieve the default Logger
$DefaultLogger = Factory::getLogger('default');
$DefaultLogger->info("This message will not display");

//Channel1 Logger
$Channel1Logger = Factory::getLogger('channel1');
$Channel1Logger->info("This message will display");
```

In the example above, assuming a stock system with the previously mentioned config values set in `config_override.php`, the default channel logger would be set to Alert level logging, and therefore would not add the info level log to the Log file, however, the channel1 Logger would add the log message to the Sugar log file, since it is configured at the info log level.

## Default Channels

By default, Sugar has a few areas of the system that utilize a different channel than the default. The usage of these channels means that you can configure the log level and processors differently for those areas, without inundating the log file

---

with lower level logs from other areas of the system.

| Channel          | Description   |
|------------------|---|
| authentication   | This logger channel is utilized by the AuthenticationController, and can show useful information about failed login attempts. |
| input_validation | This logger channel is utilized by the Input Validation framework and can display information regarding failed validations.   |
| metadata         | This logger channel is utilized by the MetadataManager and mainly provides information on when rebuilds occur.                |
| rest             | This channel is utilized by the RestService object.   |
| db               | This channel is utilized by the database for query logging.   |

## Customization

You can use custom channels where ever you would like in your customizations, and configure them as outlined above, but if you need to send logs somewhere other than the Sugar log file, you will need to build out your own Handler. The following will walk through adding a custom Logging Handler that utilizes Monologs built-in [Chrome Logger](#).

### Adding a Custom Handler

Create the following file in ./custom/src/Logger/Handler/Factory/ folder.

```
./custom/src/Logger/Handler/Factory/Chrome.php
```

```
<?php
```

```
namespace Sugarcrm\Sugarcrm\custom\Logger\Handler\Factory;
```

```
use Monolog\Handler\ChromePHPHandler;
```

```
use Sugarcrm\Sugarcrm\Logger\Handler\Factory;
```



---

```
class Chrome implements Factory
{
    public function create($level, array $config)
    {
        return new ChromePHPHandler($level);
    }
}
```

Once you have the new class in place, you will need to run a Quick Repair and Rebuild so that the new class is auto-loaded correctly. Then you can configure the handler for use in the Sugar config:

```
$sugar_config['logger']['channels']['<channel>']['handlers'] = 'Chrome';
```

**Note:** For more information, please refer to the [logger.channels.channel.handlers](#) documentation.

**Last Modified:** 2021-02-17 02:44:13

## SugarLogger

### Overview

The SugarLogger is used for log reporting by the application. The following article outlines the LoggerTemplate interface as well as the LoggerManager object and explains how to programmatically use the SugarLogger.

### LoggerTemplate

The LoggerManager manages those objects that implement the LoggerTemplate interface found in `./include/SugarLogger/LoggerTemplate.php`.

### Methods

#### **log(\$method, \$message)**

The LoggerTemplate has a single method that should be implemented, which is the

---

log() method.

### Arguments

| Name      | Type   | Description   |
|-----------|--------|---|
| \$method  | String | The method or level which the Logger should handle the provided message |
| \$message | String | The logged message  |

## Implementations

Sugar comes with two stock LoggerTemplate implementations that can be utilized for different scenarios depending on your needs. You can extend from these implementations or create your own class that implements the template as outlined in [Creating Custom Loggers](#) section.

### SugarLogger

The SugarLogger class, found in `./include/SugarLogger/SugarLogger.php`, is the default system logging class utilized throughout the majority of Sugar.

### SugarPsrLogger

The SugarPsrLogger was added in Sugar 7.9 to accommodate the [PSR-3](#) compliant logging implementation. This logger works just like the SugarLogger object, however it uses the Monolog implementation of Logger.

To configure the SugarPsrLogger as the default system logger, you can add the following to your configuration:

```
$sugar_config['logger']['default'] = 'SugarPsrLogger';
```

### Log Level Mappings

PSR-3 defines the set of log levels that should be implemented for all PHP Applications, however, these are different from the log levels defined by the SugarLogger. Below is the list of SugarLogger log levels and their SugarPsrLogger compatible mapping. All calls to the SugarLogger log levels are mapped according

---

to the table below. For example, when using the SugarPsrLogger class, all calls to the fatal() method will map to the Alert log level.

| <b>SugarLogger Level</b> | <b>SugarPsrLogger Level (PSR-3)</b> |
|--------------------------|-------------------------------------|
| Debug                    | Debug                               |
| Info                     | Info                                |
| Warn                     | Warning                             |
| Deprecated               | Notice                              |
| Error                    | Error                               |
| Fatal                    | Alert                               |
| Security                 | Critical                            |

## LoggerManager

The LoggerManager Object acts as a singleton factory that sets up the configured logging object for use throughout the system. This is the object stored in \$GLOBALS['log'] in the majority of use cases in the system.

### Methods

#### getLogger()

This method is used to get the currently configured Logger class.

#### setLevel(\$level)

You may find that you want to define the log level while testing your code without modifying the configuration. This can be done by using the setLevel() method.

#### Arguments

| <b>Name</b> | <b>Type</b> | <b>Description</b>  |
|-------------|-------------|---|
| \$level     | String      | The method or level which the Logger should handle the provided message |

---

## Example

```
\LoggerManager::getLogger()->setLevel('debug');
```

**Note:** The use of `setLevel` should be removed from your code for production and it is important to note that it is restricted by package scanner as defined by the Module Loader Restrictions.

## **assert(\$message, \$condition)**

In your custom code you may want to submit a debug level log, should a condition not meet your expectations. You could do this with an if statement, otherwise you could just use the `assert()` method as it allows you to pass the debug message, and the condition to check, and if that condition is `FALSE` a debug level message is logged.

### Arguments

| Name        | Type    | Description            |
|-------------|---------|------------------------|
| \$message   | String  | The log message        |
| \$condition | Boolean | The condition to check |

## Example

```
$x = 1;  
\LoggerManager::getLogger()->assert('X was not equal to 0!', $x==0)
```

## **wouldLog(\$level)**

If in your customization you find that extra debugging is needed for particular area of code, and that extra work might have performance impacts on standard log levels, you can use the `wouldLog()` method to check the current log level before doing the extra work.

### Arguments

| Name    | Type   | Description                |
|---------|--------|----------------------------|
| \$level | String | The level to check against |

---

## Example

```
if (\LoggerManager::getLogger()->wouldLog('debug')) {  
    //Do extra debugging  
}
```

## setLogger(\$level, \$logger)

This method allows you to setup a second logger for a specific log level, rather than just using the same logger for all levels. Passing default as the level, will set the default Logger used by all levels in the system.

## Arguments

| Name     | Type   | Description                           |
|----------|--------|---------------------------------------|
| \$level  | String | The level to check against            |
| \$logger | String | The class name of an installed Logger |

## Example

```
//Set the debug level to a custom Logger  
\LoggerManager::getLogger()->setLogger('debug', 'CustomLogger');  
  
//Set all other levels to SugarPsrLogger  
\LoggerManager::getLogger()->setLogger('default', 'SugarPsrLogger');
```

## getAvailableLoggers()

Returns a list of the names of Loggers found/installed in the system.

## Arguments

*None*

## Example

```
$loggers = \LoggerManager::getLogger()->getAvailableLoggers();
```

---

## getLoggerLevels()

Returns a list of the names of Loggers found/installed in the system.

### Arguments

*None*

### Example

```
$levels = \LoggerManager::getLogger()->getLoggerLevels();
```

## Adding a Custom SugarLogger

Custom loggers are defined in `./custom/include/SugarLogger/`, and can be used to write log entries to a centralized application management tool, to a developer tool such as FirePHP or even to a secondary log file inside the Sugar application.

The following is an example of how to create a FirePHP logger.

`./custom/include/SugarLogger/FirePHPLogger.php.`

```
<?php

// change the path below to the path to your FirePHP install
require_once('/path/to/fb.php');

class FirePHPLogger implements LoggerTemplate
{
    /** Constructor */
    public function __construct()
    {
        if (
            isset($GLOBALS['sugar_config']['logger']['default'])
            && $GLOBALS['sugar_config']['logger']['default'] == 'FireP
HP'
        )
        {
            LoggerManager::setLogger('default', 'FirePHPLogger');
        }
    }

    /** see LoggerTemplate::log() */
```

---

```
public function log($level, $message)
{
    // change to a string if there is just one entry
    if ( is_array($message) && count($message) == 1 ) {
        $message = array_shift($message);
    }

    switch ($level) {
        case 'debug':
            FB::log($message);
            break;
        case 'info':
            FB::info($message);
            break;
        case 'deprecated':
        case 'warn':
            FB::warn($message);
            break;
        case 'error':
        case 'fatal':
        case 'security':
            FB::error($message);
            break;
    }
}
```

You will then specify your default logger as 'FirePHP' in your `./config_override.php` file.

```
$sugar_config['logger']['default'] = 'FirePHP';
```

**Last Modified:** 2021-02-17 02:44:13

## Logic Hooks

### Overview

The Logic Hook framework allows you to append actions to system events such as when creating, editing, and deleting records.

---

## Hook Definitions

A logic hook definition file defines the various actions to execute when an event is triggered. It is important to note that there are various ways to implement a logic hook. The following sections describe the different ways to implement a logic hook and when to use each.

## Methodologies

Logic hook definitions can pertain to a specific module or to the entire application. Either way, you must decide if the logic hook definition will be implemented as an extension of or directly to the module or application. The following sections explain the difference between these methodologies.

### Module Extension Hooks

Module extension hooks are located in `./custom/Extension/modules/<module>/Ext/LogicHooks/` and allow a developer to define hook actions that will be executed for the specified events in a given module. Extensions are best used when creating customizations that may be installed in various environments. They help prevent conflicting edits that occur when modifying `./custom/modules/<module>/logic_hooks.php`. More information can be found in the [Logic Hooks](#) extension section.

### Module Hooks

Module hooks are located in `./custom/modules/<module>/logic_hooks.php` and allow a developer to define hook actions that will be executed for the specified events in a given module. This path can be used for private development, however, it is not recommended for use with distributed modules and plugins. For distributed code, please refer to using [module extensions](#).

### Application Extension Hooks

Application extension hooks are located in `./custom/Extension/application/Ext/LogicHooks/` and allow a developer to define hook actions that will be executed for all specified application-level events using the extension framework. More information can be found in the [Logic Hooks](#) extension section.



---

## Application Hooks

Application hooks are located in `./custom/modules/logic_hooks.php` and allow a developer to define hook actions that will be executed for the specified events in all modules. This path can be used for private development, however, it is not recommended for use with distributed modules and plugins. For distributed code, please refer to using [application extensions](#).

## Definition Properties

All logic hooks must have a `$hook_version` and `$hook_array` variable defined. The following sections cover each required variable.

### hook\_version

All logic hook definitions will define a `$hook_version`. This determines the version of the logic hook framework. Currently, the only supported hook version is 1.

```
$hook_version = 1;
```

### hook\_array

The logic hook definition will also contain a `$hook_array`. This defines the specific action to execute. The hook array will be defined as follows:

| Name                       | Type    | Description  |
|----------------------------|---------|--|
| <code>event_name</code>    | String  | The name of the event to append the action to  |
| <code>process_index</code> | Integer | The order of action execution  |
| <code>description</code>   | String  | A short description of the hook action   |
| <code>file_path</code>     | String  | The path to the logic hook file in the <code>./custom/</code> directory, or null if using namespaces |
| <code>class_name</code>    | String  | The name of the logic hook action class including any namespaces                                     |
| <code>method_name</code>   | String  | The name of the logic  |

Your definition should resemble the code block below:

```
<?php

$hook_version = 1;

$hook_array['<event_name>'][] = array(
    <process_index>, //Integer
    '<description>', //String
    '<file_path>', //String or null if using namespaces
    '<class_name>', //String
    '<method_name>', //String
);
```

## Hook Method

The hook action class can be located anywhere you choose. We recommended grouping the hooks with the module they are associated with in the `./custom/` directory. You can create a hook action method either with a namespace or without.

## Namespaced Hooks

As of 7.7, developers can create namespaced logic hooks. When using namespaces, the file path in `./custom/` will be automatically built out when using the corresponding namespace. The filename defining the class must match the class name exactly to allow the autoloader to find the class definition.

| Namespace                         | File Path              |
|-----------------------------------|------------------------|
| Sugarcrm\Sugarcrm\custom          | ./custom/              |
| Sugarcrm\Sugarcrm\custom          | ./custom/src/          |
| Sugarcrm\Sugarcrm\custom\any\path | ./custom/any/path/     |
| Sugarcrm\Sugarcrm\custom\any\path | ./custom/src/any/path/ |

`./custom/Extension/modules/Accounts/Ext/LogicHooks/<file>.php`

```
<?php

$hook_array['before_save'][] = array(
```

---

```
        1,
        'Hook description',
        null,
        'Sugarcrm\\Sugarcrm\\custom\\modules\\Accounts\\className',
        'methodName'
    );
?>
```

`./custom/modules/Accounts/className.php`

```
<?php
```

```
namespace Sugarcrm\Sugarcrm\custom\modules\Accounts;
```

```
class className
{
    function methodName($bean, $event, $arguments)
    {
        //logic
    }
}
?>
```

The logic hook method signature may contain different arguments depending on the hook event you have selected.

## Hooks without Namespaces

`./custom/Extension/modules/Accounts/Ext/LogicHooks/<file>.php`

```
<?php
```

```
    $hook_array['before_save'][] = array(
        1,
        'Hook description',
        'custom/modules/Accounts/customLogicHook.php',
        'className',
        'methodName'
    );
?>
```

`./custom/modules/Accounts/customLogicHook.php`

```
<?php
```

---

```
class className
{
    function methodName($bean, $event, $arguments)
    {
        //logic
    }
}
?>
```

The logic hook method signature may contain different arguments depending on the hook event you have selected.

## Considerations

When using logic hooks, keep in mind the following best practices:

- As of PHP 5.3, objects are automatically passed by reference. When creating logic hook signatures, do not append the ampersand (&) to the `$bean` variable. Doing this will cause unexpected behavior.
- There is no hook that fires specifically for the `ListView`, `DetailView` or `EditView` events. Instead, use either the `process_record` or `after_retrieve` logic hooks.
- In order to compare new values with previous values, use `fetches_row` to determine whether a change has occurred:

```
if ($bean->fetches_row['{field}'] != $bean->{field})
{
    //logic
}
```

- Make sure that the permissions on the `logic_hooks.php` file and the class file that it references are readable by the web server. Otherwise, Sugar will not read the files and your business logic extensions will not work. For example, \*nix developers who are extending the `Tasks` logic should use the following command for the `logic_hooks` file and the same command for the class file that will be called:

```
chmod +r ./custom/modules/Tasks/logic_hooks.php
```

- Make sure that the entire `./custom/` directory is writable by the web server or else the logic hooks code will not work properly.

**Last Modified:** 2021-02-17 02:44:13

---

# Application Hooks

Application hooks execute logic when working with the global application.

**Last Modified:** 2021-02-17 02:44:13

## after\_entry\_point

### Overview

The `after_entry_point` application hook executes at the start of every request.

### Definition

```
function after_entry_point($event, $arguments){}
```

### Arguments

| Name      | Type   | Description   |
|-----------|--------|---|
| event     | String | The current event   |
| arguments | Array  | Additional information related to the event (typically empty) |

### Considerations

- The `after_entry_point` hook is a global logic hook where the logic hook reference must be placed in `./custom/modules/logic_hooks.php`.
- This hook is executed at the start of every request at the end of `./include/entryPoint.php`.
- This hook should not be used for any type of display output.
- The `after_entry_point` hook is ideally used for logging or loading libraries.
- Application hooks do not make use of the `$bean` argument.

---

## Change Log

| Version | Note                         |
|---------|------------------------------|
| 6.4.3   | Added after_entry_point hook |

## Example

./custom/modules/logic\_hooks.php

```
<?php
```

```
$hook_version = 1;
$hook_array = Array();

$hook_array['after_entry_point'] = Array();
$hook_array['after_entry_point'][] = Array(
    //Processing index. For sorting the array.
    1,

    //Label. A string value to identify the hook.
    'after_entry_point example',

    //The PHP file where your class is located.
    'custom/modules/application_hooks_class.php',

    //The class the method is in.
    'application_hooks_class',

    //The method to call.
    'after_entry_point_method'
);
```

```
?>
```

./custom/modules/application\_hooks\_class.php

```
<?php
```

```
if (!defined('sugarEntry') || !sugarEntry) die('Not A Valid Entry
Point');

class application_hooks_class
```

---

```
{
    function after_entry_point_method($event, $arguments)
    {
        //logic
    }
}
```

?>

**Last Modified:** 2021-02-17 02:44:13

## after\_load\_user

### Overview

The `after_load_user` hook executes after the current user is set for the current request. It handles actions that are dependent on the current user, such as setting ACLs or configuring user-dependent parameters.

### Definition

```
function after_load_user($event, $arguments){}
```

### Arguments

Name	Type	Description
event	String	The current event
arguments	Array	Additional information related to the event (typically empty)

### Change Log

Version	Note
6.6.0	Added <code>after_load_user</code> hook

---

## Example

`./custom/modules/logic_hooks.php`

```
<?php

$hook_version = 1;
$hook_array = Array();

$hook_array['after_load_user'] = Array();
$hook_array['after_load_user'][] = Array(
    //Processing index. For sorting the array.
    1,

    //Label. A string value to identify the hook.
    'after_load_user example',

    //tde PHP file where your class is located.
    'custom/modules/application_hooks_class.php',

    //tde class the method is in.
    'application_hooks_class',

    //tde method to call.
    'after_load_user_method'
);

?>
```

`./custom/modules/application_hooks_class.php`

```
<?php

if (!defined('sugarEntry') || !sugarEntry) die('Not A Valid Entry Point');

class application_hooks_class
{
    function after_load_user_method($event, $arguments)
    {
        //logic
    }
}
```



---

```
}
```

```
?>
```

**Last Modified:** 2022-03-14 16:22:48

## after\_session\_start

### Overview

The `after_session_start` hook executes before the user's session starts, but after the user's visibility rules have been set up and the `after_load_user` logic hook has executed.

### Definition

```
function after_session_start($event, $arguments){}
```

### Arguments

Name	Type	Description
event	String	The current event
arguments	Array	Additional information related to the event (typically empty)

### Change Log

Version	Note
6.4.3	Added <code>after_session_start</code> hook

### Example

---

## ./custom/modules/logic\_hooks.php

```
<?php

$hook_version = 1;
$hook_array = Array();

$hook_array['after_session_start'] = Array();
$hook_array['after_session_start'][] = Array(
    //Processing index. For sorting the array.
    1,

    //Label. A string value to identify the hook.
    'after_session_start example',

    //The PHP file where your class is located.
    'custom/modules/application_hooks_class.php',

    //The class the method is in.
    'application_hooks_class',

    //The method to call.
    'after_session_start_method'
);

?>
```

## ./custom/modules/application\_hooks\_class.php

```
<?php

if (!defined('sugarEntry') || !sugarEntry) die('Not A Valid Entry Point');

class application_hooks_class
{
    function after_session_start_method($event, $arguments)
    {
        //logic
    }
}

?>
```

**Last Modified:** 2022-03-14 15:45:07

---

# after\_ui\_footer

## Overview

The `after_ui_footer` hook executes after the footer has been invoked for modules in backward compatibility mode. This logic hook has been deprecated and will be removed in a future release. For information on modifying the footer, please refer to [Adding Buttons to the Application Footer](#).

## Definition

```
function after_ui_footer($event, $arguments){}
```

## Arguments

Name	Type	Description
event	String	The current event
arguments	Array	Additional information related to the event (typically empty)

## Considerations

- The `after_ui_footer` hook is only applicable for modules in backward compatibility mode.
- This is a global logic hook where the logic hook reference must be placed in `./custom/modules/logic_hooks.php`.
- If you intend to write display logic to the screen in a module running in backward compatibility, you must first wrap the display logic in an IF condition to prevent the text breaking the Ajax page loads. This logic may vary and it is best to only run your code on specific pages rather than all pages.

```
if (!isset($_REQUEST["to_pdf"]) || $_REQUEST["to_pdf"] == false)
{
```

---

```
        //display logic
    }
```

- This hook is executed on all page loads.
- Application hooks do not make use of the \$bean argument.

## Change Log

Version	Note
7.10.0.0	Deprecated after_ui_footer hook
5.0.0a	Added after_ui_footer hook

## Example

./custom/modules/logic\_hooks.php

```
<?php
```

```
$hook_version = 1;
$hook_array = Array();

$hook_array['after_ui_footer'] = Array();
$hook_array['after_ui_footer'][] = Array(
    //Processing index. For sorting the array.
    1,

    //Label. A string value to identify the hook.
    'after_ui_footer example',

    //The PHP file where your class is located.
    'custom/modules/application_hooks_class.php',

    //The class the method is in.
    'application_hooks_class',

    //The method to call.
    'after_ui_footer_method'
);
```

```
?>
```

---

./custom/modules/application\_hooks\_class.php

```
<?php

    if (!defined('sugarEntry') || !sugarEntry) die('Not A Valid Entry
Point');

    class application_hooks_class
    {
        function after_ui_footer_method($event, $arguments)
        {
            //display logic should check for $_REQUEST["to_pdf"]
        }
    }

?>
```

**Last Modified:** 2021-02-17 02:44:13

## after\_ui\_frame

### Overview

The after\_ui\_frame hook executes after the frame has been invoked and before the footer has been invoked for modules in backward compatibility mode. This logic hook has been deprecated and will be removed in a future release. For information on modifying the footer, please refer to [Adding Buttons to the Application Footer](#).

### Definition

```
function after_ui_frame($event, $arguments){}
```

### Arguments

Name	Type	Description
event	String	The current event
arguments	Array	Additional information related to the event

---

	(typically empty)
--	-------------------

## Considerations

- This hook is only applicable for modules in backward compatibility mode.
- This hook is executed on most views such as the DetailView, EditView, and ListView.
- Application hooks do not make use of the \$bean argument.
- This is logic hook can be used as a global reference (./custom/modules/logic\_hooks.php) or as a module reference (./custom/modules/<module>/logic\_hooks.php).

## Change Log

Version	Note
7.10.0.0	Deprecated after_ui_frame hook
5.0.0a	Added after_ui_frame hook

## Example

### Module-Specific Hook

This hook can be used at the application level for all modules or limited to specific modules. An example limiting the hook for specific modules is shown below:

./custom/modules/<module>/logic\_hooks.php

```
<?php
```

```
$hook_version = 1;
$hook_array = Array();

$hook_array['after_ui_frame'] = Array();
$hook_array['after_ui_frame'][] = Array(
    //Processing index. For sorting the array.
    1,

    //Label. A string value to identify the hook.
    'after_ui_frame example',
```

---

```

        //The PHP file where your class is located.
        'custom/modules/{module}/logic_hooks_class.php',

        //The class the method is in.
        'logic_hooks_class',

        //The method to call.
        'after_ui_frame_method'
    );

?>

./custom/modules/<module>/logic_hooks_class.php

<?php

    if (!defined('sugarEntry') || !sugarEntry) die('Not A Valid Entry
Point');

class logic_hooks_class
{
    function after_ui_frame_method($event, $arguments)
    {
        //display logic
    }
}

?>

```

## Application Hook

This hook can be used at the application level for all modules or limited to specific modules. An example of executing the hook for all modules is shown below:

```

./custom/modules/logic_hooks.php

<?php

$hook_version = 1;
$hook_array = Array();

$hook_array['after_ui_frame'] = Array();
$hook_array['after_ui_frame'][] = Array(
    //Processing index. For sorting the array.

```

---

```
1,

//Label. A string value to identify the hook.
'after_ui_frame example',

//The PHP file where your class is located.
'custom/modules/application_hooks_class.php',

//The class the method is in.
'application_hooks_class',

//The method to call.
'after_ui_frame_method'
);

?>

./custom/modules/application_hooks_class.php

<?php

    if (!defined('sugarEntry') || !sugarEntry) die('Not A Valid Entry
Point');

class application_hooks_class
{
    function after_ui_frame_method($event, $arguments)
    {
        //display logic
    }
}

?>
```

**Last Modified:** 2021-02-17 02:44:13

## entry\_point\_variables\_setting

### Overview

The entry\_point\_variables\_setting application hook executes at the start of every



---

entry point.

## Definition

```
function entry_point_variables_setting($event, $arguments){}
```

## Arguments

Name	Type	Description
event	String	The current event
arguments	Array	Additional information related to the event (typically empty)

## Considerations

- The `entry_point_variables_setting` hook is a global logic hook where the logic hook reference must be placed in `./custom/modules/logic_hooks.php`.
- This hook is executed at the start of every request at the end of `./include/entryPoint.php`.
- This hook does not make use of the `$bean` argument.

## Change Log

Version	Note
6.4.3	Added <code>entry_point_variables_setting</code> hook

## Example

```
./custom/modules/logic_hooks.php
```

```
<?php
```

```
$hook_version = 1;  
$hook_array = Array();
```

---

```
$hook_array['entry_point_variables_setting'] = Array();
$hook_array['entry_point_variables_setting'][] = Array(
    //Processing index. For sorting the array.
    1,

    //Label. A string value to identify the hook.
    'entry_point_variables_setting example',

    //The PHP file where your class is located.
    'custom/modules/application_hooks_class.php',

    //The class the method is in.
    'application_hooks_class',

    //The method to call.
    'entry_point_variables_setting_method'
);

?>

./custom/modules/application_hooks_class.php

<?php

    if (!defined('sugarEntry') || !sugarEntry) die('Not A Valid Entry
Point');

    class application_hooks_class
    {
        function entry_point_variables_setting_method($event, $argumen
ts)
        {
            //logic
        }
    }

?>
```

**Last Modified:** 2021-02-17 02:44:13

## handle\_exception

---

## Overview

The `handle_exception` logic hook executes when an exception is thrown.

## Definition

```
function handle_exception($event, $exception){}
```

## Arguments

Name	Type	Description
event	String	The current event
exception	Object	The exception object

## Considerations

- This hook should not be used for any type of display output.
- You can retrieve the exception message by using `$exception->getMessage()`. All exception classes extend the PHP [Exceptions](#) class.

## Change Log

Version	Note
6.4.4	Added <code>handle_exception</code> hook

## Example

```
./custom/modules/logic_hooks.php
```

```
<?php
```

```
    $hook_version = 1;  
    $hook_array = Array();
```

---

```
$hook_array['handle_exception'] = Array();
$hook_array['handle_exception'][] = Array(
    //Processing index. For sorting the array.
    1,

    //Label. A string value to identify the hook.
    'handle_exception example',

    //The PHP file where your class is located.
    'custom/modules/handle_exception_class.php',

    //The class the method is in.
    'handle_exception_class',

    //The method to call.
    'handle_exception_method'
);

?>

./custom/modules/handle_exception_class.php

<?php

    if (!defined('sugarEntry') || !sugarEntry) die('Not A Valid Entry
Point');

class handle_exception_class
{
    function handle_exception_method($event, $exception)
    {
        //logic with $exception->getMessage()
    }
}

?>
```

**Last Modified:** 2021-02-17 02:44:13

## server\_round\_trip

---

## Overview

Executes at the end of every page.

## Definition

```
function server_round_trip($event, $arguments){}
```

## Arguments

Name	Type	Description
event	String	The current event
arguments	Array	Additional information related to the event (typically empty)

## Considerations

- This is a global logic hook where the logic hook reference must be placed in `./custom/modules/logic_hooks.php`.
- If you are intending to write display logic to the screen, you must first wrap the display logic in an if condition to prevent breaking the Ajax page loads:

```
if (!isset($_REQUEST["to_pdf"]) || $_REQUEST["to_pdf"] == false)
{
    //display logic
}
```

- This hook is executed on all page loads.
- Application hooks do not make use of the `$bean` argument.

## Change Log

Version	Note
5.0.0a	Added <code>server_round_trip</code> hook.

---

## Example

./custom/modules/logic\_hooks.php

```
<?php

$hook_version = 1;
$hook_array = Array();

$hook_array['server_round_trip'] = Array();
$hook_array['server_round_trip'][] = Array(
    //Processing index. For sorting the array.
    1,

    //Label. A string value to identify the hook.
    'server_round_trip example',

    //The PHP file where your class is located.
    'custom/modules/application_hooks_class.php',

    //The class the method is in.
    'application_hooks_class',

    //The method to call.
    'server_round_trip_method'
);

?>
```

./custom/modules/application\_hooks\_class.php

```
<?php

if (!defined('sugarEntry') || !sugarEntry) die('Not A Valid Entry
Point');

class application_hooks_class
{
    function server_round_trip_method($event, $arguments)
    {
        //display logic should check for $_REQUEST["to_pdf"]
    }
}

?>
```

---

**Last Modified:** 2021-02-17 02:44:13

## Module Hooks

Module hooks execute logic when working with Sugar modules (e.g. Accounts, Cases, etc.).

**Last Modified:** 2021-02-17 02:44:13

## after\_delete

### Overview

The after\_delete hook executes after a record is deleted.

### Definition

```
function after_delete($bean, $event, $arguments){}
```

### Arguments

Name	Type	Description
bean	Object	The bean object
event	String	The current event
arguments	Array	Additional information related to the event
arguments.id	String	ID of the deleted record

### Examples

#### Creating a Logic Hook using the Extension Framework

---

./custom/Extension/modules/<module>/Ext/LogicHooks/<file>.php

```
<?php

    $hook_array['after_delete'][] = Array(
        //Processing index. For sorting the array.
        1,

        //Label. A string value to identify the hook.
        'after_delete example',

        //The PHP file where your class is located.
        'custom/modules/<module>/logic_hooks_class.php',

        //The class the method is in.
        'logic_hooks_class',

        //The method to call.
        'after_delete_method'
    );

?>
```

./custom/modules/<module>/logic\_hooks\_class.php

```
<?php

    if (!defined('sugarEntry') || !sugarEntry) die('Not A Valid Entry
Point');

    class logic_hooks_class
    {
        function after_delete_method($bean, $event, $arguments)
        {
            //logic
        }
    }

?>
```

## Creating a Core Logic Hook

Prior to Sugar 6.3.x, logic hooks could only be created using the following method. Please note that this approach is still valid but is not recommended when building



---

plugins as it may conflict with existing customizations.

`./custom/modules/<module>/logic_hooks.php`

```
<?php

$hook_version = 1;
$hook_array = Array();

$hook_array['after_delete'] = Array();
$hook_array['after_delete'][] = Array(
    //Processing index. For sorting the array.
    1,

    //Label. A string value to identify the hook.
    'after_delete example',

    //The PHP file where your class is located.
    'custom/modules/<module>/after_delete_class.php',

    //The class the method is in.
    'after_delete_class',

    //The method to call.
    'after_delete_method'
);

?>
```

`./custom/modules/<module>/after_delete_class.php`

```
<?php

if (!defined('sugarEntry') || !sugarEntry) die('Not A Valid Entry Point');

class after_delete_class
{
    function after_delete_method($bean, $event, $arguments)
    {
        //logic
    }
}

?>
```

## after\_fetch\_query

### Overview

The after\_fetch\_query logic hook executes after a sugar query has been executed.

### Definition

```
function after_fetch_query($bean, $event, $arguments){}
```

### Arguments

Name	Type	Description
bean	Object	The bean object
event	String	The current event
arguments	Array	Additional information related to the event
arguments.beans	Array	An array of bean objects resulting from the query
arguments.fields	Array	An array of selected fields
arguments.rows	Array	An array representation of the selected beans

### Change Log

Version	Note
7.7.0.0	Added after_fetch_query logic hook

### Examples

---

## Creating a Logic Hook using Extension Framework

./custom/Extension/modules/<module>/Ext/LogicHooks/<file>.php

```
<?php

$hook_array['after_fetch_query'][] = Array(
    //Processing index. For sorting the array.
    1,

    //Label. A string value to identify the hook.
    'after_fetch_query example',

    //The PHP file where your class is located.
    'custom/modules/<module>/after_fetch_query_class.php',

    //The class the method is in.
    'after_fetch_query_class',

    //The method to call.
    'after_fetch_query_method'
);

?>
```

./custom/modules/<module>/after\_fetch\_query\_class.php

```
<?php

if (!defined('sugarEntry') || !sugarEntry) die('Not A Valid Entry Point');

class after_fetch_query_class
{
    function after_fetch_query_method($bean, $event, $arguments)
    {
        //logic
    }
}

?>
```

## Creating a Core Logic Hook

---

Prior to Sugar 6.3.x, logic hooks could only be created using the following method. Please note that this approach is still valid but is not recommended when building plugins as it may conflict with existing customizations.

`./custom/modules/<module>/logic_hooks.php`

```
<?php

$hook_version = 1;
$hook_array = Array();

$hook_array['after_fetch_query'] = Array();
$hook_array['after_fetch_query'][] = Array(
    //Processing index. For sorting the array.
    1,

    //Label. A string value to identify the hook.
    'after_fetch_query example',

    //The PHP file where your class is located.
    'custom/modules/<module>/after_fetch_query_class.php',

    //The class the method is in.
    'logic_hooks_class',

    //The method to call.
    'after_fetch_query_method'
);

?>
```

`./custom/modules/<module>/after_fetch_query_class.php`

```
<?php

if (!defined('sugarEntry') || !sugarEntry) die('Not A Valid Entry Point');

class after_fetch_query_class
{
    function after_fetch_query_method($bean, $event, $arguments)
    {
        //logic
    }
}
```

---

?>

Last Modified: 2021-02-17 02:44:13

## after\_relationship\_add

### Overview

The `after_relationship_add` hook executes after a relationship has been added between two records.

### Definition

```
function after_relationship_add($bean, $event, $arguments){}
```

### Arguments

Name	Type	Description
bean	Object	The bean object
event	String	The current event
arguments	Array	Additional information related to the event
arguments.id	String	Module ID
arguments.module	String	Module name
arguments.related_id	String	Related module ID
arguments.related_module	String	Related module name
arguments.link	String	Link field name
arguments.relationship	String	Relationship name

### Considerations

- This hook will be executed for each side of the relationship. An example is

---

that if you add an association between an Account and Contact, the hook will be run for both.

- The arguments parameter will have additional information regarding the records being modified. The \$bean variable will not contain this information.

## Change Log

Version	Note
6.0.0	Added after_relationship_add hook.

## Examples

### Creating a Logic Hook using the Extension Framework

./custom/Extension/modules/<module>/Ext/LogicHooks/<file>.php

```
<?php
```

```
$hook_array['after_relationship_add'][] = Array(
    //Processing index. For sorting the array.
    1,

    //Label. A string value to identify the hook.
    'after_relationship_add example',

    //The PHP file where your class is located.
    'custom/modules/{module}/after_relationship_add_class.php',

    //The class the method is in.
    'after_relationship_add_class',

    //The method to call.
    'after_relationship_add_method'
);
```

```
?>
```

./custom/modules/<module>/after\_relationship\_add\_class.php

```
<?php
```

---

```
if (!defined('sugarEntry') || !sugarEntry) die('Not A Valid Entry Point');

class after_relationship_add_class
{
    function after_relationship_add_method($bean, $event, $arguments)
    {
        //logic
    }
}

?>
```

## Creating a Core Logic Hook

Prior to Sugar 6.3.x, logic hooks could only be created using the following method. Please note that this approach is still valid but is not recommended when building plugins as it may conflict with existing customizations.

```
./custom/modules/<module>/logic_hooks.php
```

```
<?php
```

```
$hook_version = 1;
$hook_array = Array();

$hook_array['after_relationship_add'] = Array();
$hook_array['after_relationship_add'][] = Array(
    //Processing index. For sorting the array.
    1,

    //Label. A string value to identify the hook.
    'after_relationship_add example',

    //The PHP file where your class is located.
    'custom/modules/<module>/after_relationship_add_class.php',

    //The class the method is in.
    'after_relationship_add_class',

    //The method to call.
    'after_relationship_add_method'
);
```

---

```
?>

./custom/modules/<module>/after_relationship_add_class.php

<?php

    if (!defined('sugarEntry') || !sugarEntry) die('Not A Valid Entry P
oint');

    class after_relationship_add_class
    {
        function after_relationship_add_method($bean, $event, $arguments
)
        {
            //logic
        }
    }

?>
```

**Last Modified:** 2021-02-17 02:44:13

## after\_relationship\_delete

### Overview

The `after_relationship_delete` hook executes after a relationship between two records has been deleted.

### Definition

```
function after_relationship_delete($bean, $event, $arguments){}
```

### Arguments

Name	Type	Description
bean	Object	The bean object
event	String	The current event



arguments	Array	Additional information related to the event
arguments.id	String	Module ID
arguments.module	String	Module name
arguments.related_id	String	Related module ID
arguments.related_module	String	Related module name
arguments.link	String	Link field name
arguments.relationship	String	Relationship name

## Considerations

- This hook will be executed for each side of the relationship. For example, if you delete an association between an account and contact, the hook will run for both.
- The 'arguments' parameter will have additional information regarding the records being modified. The \$bean variable will not contain this information.

## Change Log

Version	Note
6.0.0	Added after_relationship_delete hook

## Examples

### Creating a Logic Hook using the Extension Framework

./custom/Extension/modules/<module>/Ext/LogicHooks/<file>.php

```
<?php
```

```
$hook_array['after_relationship_delete'][] = Array(
    //Processing index. For sorting the array.
    1,

    //Label. A string value to identify the hook.
    'after_relationship_delete example',
```

---

```
//The PHP file where your class is located.
'custom/modules/<module>/after_relationship_delete_class.php',

//The class the method is in.
'after_relationship_delete_class',

//The method to call.
'after_relationship_delete_method'
);
```

```
?>
```

```
./custom/modules/<module>/after_relationship_delete_class.php
```

```
<?php
```

```
if (!defined('sugarEntry') || !sugarEntry) die('Not A Valid Entry
Point');
```

```
class after_relationship_delete_class
{
    function after_relationship_delete_method($bean, $event, $argu
ments)
    {
        //logic
    }
}
```

```
?>
```

## Creating a Core Logic Hook

Prior to Sugar 6.3.x, logic hooks could only be created using the following method. Please note that this approach is still valid but is not recommended when building plugins as it may conflict with existing customizations.

```
./custom/modules/<module>/logic_hooks.php
```

```
<?php
```

```
$hook_version = 1;
$hook_array = Array();
```

```
$hook_array['after_relationship_delete'] = Array();
```

---

```
$hook_array['after_relationship_delete'][] = Array(
    //Processing index. For sorting the array.
    1,

    //Label. A string value to identify the hook.
    'after_relationship_delete example',

    //The PHP file where your class is located.
    'custom/modules/<module>/after_relationship_delete_class.php',

    //The class the method is in.
    'after_relationship_delete_class',

    //The method to call.
    'after_relationship_delete_method'
);

?>

./custom/modules/<module>/after_relationship_delete_class.php

<?php

    if (!defined('sugarEntry') || !sugarEntry) die('Not A Valid Entry P
oint');

    class after_relationship_delete_class
    {
        function after_relationship_delete_method($bean, $event, $argume
nts)
        {
            //logic
        }
    }

?>
```

**Last Modified:** 2021-02-17 02:44:13

## after\_restore

---

## Overview

The `after_restore` hook executes after a record gets undeleted (i.e. the deleted field's value changes from 1 to 0).

## Definition

```
function after_restore($bean, $event, $arguments){}
```

## Arguments

Name	Type	Description
bean	Object	The bean object
event	String	The current event
arguments	Array	Additional information related to the event (typically empty)

## Examples

### Creating a Logic Hook using the Extension Framework

```
./custom/Extension/modules/<module>/Ext/LogicHooks/<file>.php
```

```
<?php
```

```
    $hook_array['after_restore'][] = Array(
        //Processing index. For sorting the array.
        1,

        //Label. A string value to identify the hook.
        'after_restore example',

        //The PHP file where your class is located.
        'custom/modules/<module>/after_restore_class.php',

        //The class the method is in.
        'after_restore_class',
```

---

```
        //The method to call.
        'after_restore_method'
    );
?>

./custom/modules/<module>/after_restore_class.php

<?php

    if (!defined('sugarEntry') || !sugarEntry) die('Not A Valid Entry
Point');

    class after_restore_class
    {
        function after_restore_method($bean, $event, $arguments)
        {
            //logic
        }
    }
?>
```

## Creating a Core Logic Hook

Prior to Sugar 6.3.x, logic hooks could only be created using the following method. Please note that this approach is still valid but is not recommended when building plugins as it may conflict with existing customizations.

```
./custom/modules/<module>/logic_hooks.php

<?php

$hook_version = 1;
$hook_array = Array();

$hook_array['after_restore'] = Array();
$hook_array['after_restore'][] = Array(
    //Processing index. For sorting the array.
    1,

    //Label. A string value to identify the hook.
    'after_restore example',

    //The PHP file where your class is located.
```

---

```
'custom/modules/<module>/after_restore_class.php',

//The class the method is in.
'after_restore_class',

//The method to call.
'after_restore_method'
);

?>

./custom/modules/<module>/after_restore_class.php

<?php

    if (!defined('sugarEntry') || !sugarEntry) die('Not A Valid Entry P
oint');

class after_restore_class
{
    function after_restore_method($bean, $event, $arguments)
    {
        //logic
    }
}

?>
```

**Last Modified:** 2021-02-17 02:44:13

## after\_retrieve

### Overview

The `after_retrieve` hook executes after a record has been retrieved from the database.

### Definition

```
function after_retrieve($bean, $event, $arguments){}
```

---

## Arguments

Name	Type	Description
bean	Object	The bean object
event	String	The current event
arguments	Array	Additional information related to the event
arguments.id	String	ID of the record
arguments.encode	Boolean	Whether or not to encode

## Considerations

- The `after_retrieve` hook does not fire when a new record is being created.
- Calling `save` on the bean in this hook can cause adverse side effects if not handled correctly and should be avoided. (i.e. `$bean->save()`)

## Examples

### Creating a Logic Hook using the Extension Framework

`./custom/Extension/modules/<module>/Ext/LogicHooks/<file>.php`

```
<?php
```

```
$hook_array['after_retrieve'][] = Array(  
    //Processing index. For sorting the array.  
    1,  
  
    //Label. A string value to identify the hook.  
    'after_retrieve example',  
  
    //The PHP file where your class is located.  
    'custom/modules/<module>/after_retrieve_class.php',  
  
    //The class the method is in.  
    'after_retrieve_class',  
  
    //The method to call.  
    'after_retrieve_method'
```

---

```
);  
  
?>  
  
./custom/modules/{module}/{module}_hook.php  
  
<?php  
  
    if (!defined('sugarEntry') || !sugarEntry) die('Not A Valid Entry  
Point');  
  
    class after_retrieve_class  
    {  
        function after_retrieve_method($bean, $event, $arguments)  
        {  
            //logic  
        }  
    }  
  
?>
```

## Creating a Core Logic Hook

Prior to Sugar 6.3.x, logic hooks could only be created using the following method. Please note that this approach is still valid but is not recommended when building plugins as it may conflict with existing customizations.

```
./custom/modules/<module>/logic_hooks.php  
  
<?php  
  
$hook_version = 1;  
$hook_array = Array();  
  
$hook_array['after_retrieve'] = Array();  
$hook_array['after_retrieve'][] = Array(  
    //Processing index. For sorting the array.  
    1,  
  
    //Label. A string value to identify the hook.  
    'after_retrieve example',  
  
    //The PHP file where your class is located.  
    'custom/modules/<module>/after_retrieve_class.php',
```



---

```
//The class the method is in.
'after_retrieve_class',

//The method to call.
'after_retrieve_method'
);

?>

./custom/modules/<module>/after_retrieve_class.php

<?php

    if (!defined('sugarEntry') || !sugarEntry) die('Not A Valid Entry P
oint');

class after_retrieve_class
{
    function after_retrieve_method($bean, $event, $arguments)
    {
        //logic
    }
}

?>
```

**Last Modified:** 2021-02-17 02:44:13

## after\_save

### Overview

The after\_save hook executes after a record is saved.

### Definition

```
function after_save($bean, $event, $arguments){}
```

---

## Arguments

Name	Type	Description
bean	Object	The bean object
event	String	The current event
arguments	Array	Additional information related to the event (typically empty)
arguments.isUpdate	Boolean	Whether or not the record is newly created or not. True is an existing record being saved. False is a new record being created
arguments.dataChanges	Array	A list of the fields in the auditable fields on the bean, including the ones that changed and the ones that did not. <b>Note:</b> This argument is deprecated and it is recommended to use arguments.stateChanges instead.
arguments.stateChanges	Array	A list of only the fields in the auditable fields on the bean that changed

## Considerations

- Calling save on the bean in this hook will cause an infinite loop if not handled correctly. (i.e: \$bean->save())

## Examples

### Creating a Logic Hook using the Extension Framework

```
./custom/Extension/modules/<module>/Ext/LogicHooks/<file>.php
```

```
<?php
```

---

```

$hook_array['after_save'][] = Array(
    //Processing index. For sorting the array.
    1,

    //Label. A string value to identify the hook.
    'after_save example',

    //The PHP file where your class is located.
    'custom/modules/<module>/after_save_class.php',

    //The class the method is in.
    'after_save_class',

    //The method to call.
    'after_save_method'
);
?>

./custom/modules/<module>/after_save_class.php

<?php

    if (!defined('sugarEntry') || !sugarEntry) die('Not A Valid Entry
Point');

class after_save_class
{
    function after_save_method($bean, $event, $arguments)
    {
        //logic
    }
}

?>

```

## Creating a Core Logic Hook

Prior to Sugar 6.3.x, logic hooks could only be created using the following method. Please note that this approach is still valid but is not recommended when building plugins as it may conflict with existing customizations.

```
./custom/modules/<module>/logic_hooks.php
```

---

```
<?php
```

```
$hook_version = 1;
$hook_array = Array();

$hook_array['after_save'] = Array();
$hook_array['after_save'][] = Array(
    //Processing index. For sorting the array.
    1,

    //Label. A string value to identify the hook.
    'after_save example',

    //The PHP file where your class is located.
    'custom/modules/<module>/after_save_class.php',

    //The class the method is in.
    'after_save_class',

    //The method to call.
    'after_save_method'
);
```

```
?>
```

```
./custom/modules/<module>/after_save_class.php
```

```
<?php
```

```
if (!defined('sugarEntry') || !sugarEntry) die('Not A Valid Entry Point');
```

```
class after_save_class
{
    function after_save_method($bean, $event, $arguments)
    {
        //logic
    }
}
```

```
?>
```

**Last Modified:** 2022-02-02 22:08:13

---

# before\_delete

## Overview

The before\_delete logic hook executes before a record is deleted.

## Definition

```
function before_delete($bean, $event, $arguments){}
```

## Arguments

Name	Type	Description
bean	Object	The bean object
event	String	The current event
arguments	Array	Additional information related to the event
arguments.id	String	ID of the record to delete

## Examples

### Creating a Logic Hook using the Extension Framework

```
./custom/Extension/modules/<module>/Ext/LogicHooks/<file>.php
```

```
<?php
```

```
$hook_array['before_delete'][] = Array(  
    //Processing index. For sorting the array.  
    1,  
  
    //Label. A string value to identify the hook.  
    'before_delete example',  
  
    //The PHP file where your class is located.  
    'custom/modules/<module>/before_delete_class.php',
```

---

```
        //The class the method is in.
        'before_delete_class',

        //The method to call.
        'before_delete_method'
    );

?>

./custom/modules/<module>/before_delete_class.php

<?php

    if (!defined('sugarEntry') || !sugarEntry) die('Not A Valid Entry
Point');

    class before_delete_class
    {
        function before_delete_method($bean, $event, $arguments)
        {
            //logic
        }
    }

?>
```

## Creating a Core Logic Hook

Prior to Sugar 6.3.x, logic hooks could only be created using the following method. Please note that this approach is still valid but is not recommended when building plugins as it may conflict with existing customizations.

```
./custom/modules/<module>/logic_hooks.php

<?php

$hook_version = 1;
$hook_array = Array();

$hook_array['before_delete'] = Array();
$hook_array['before_delete'][] = Array(
    //Processing index. For sorting the array.
    1,

    //Label. A string value to identify the hook.
```

---

```
'before_delete example',

//The PHP file where your class is located.
'custom/modules/<module>/before_delete_class.php',

//The class the method is in.
'before_delete_class',

//The method to call.
'before_delete_method'
);

?>

./custom/modules/<module>/before_delete_class.php

<?php

    if (!defined('sugarEntry') || !sugarEntry) die('Not A Valid Entry P
oint');

    class before_delete_class
    {
        function before_delete_method($bean, $event, $arguments)
        {
            //logic
        }
    }

?>
```

**Last Modified:** 2021-02-17 02:44:13

## before\_fetch\_query

### Overview

The `before_fetch_query` logic hook executes before a sugar query has been executed.

---

## Definition

```
function before_fetch_query($bean, $event, $arguments){}
```

## Arguments

Name	Type	Description
bean	Object	The bean object
event	String	The current event
arguments	Array	Additional information related to the event
arguments.query	Object	The query to be executed
arguments.fields	Array	An array of selected fields

## Change Log

Version	Note
7.7.0.0	Added before_fetch_query logic hook

## Examples

### Creating a Logic Hook using Extension Framework

```
./custom/Extension/modules/<module>/Ext/LogicHooks/<file>.php
```

```
<?php
```

```
$hook_array['before_fetch_query'][] = Array(  
    //Processing index. For sorting the array.  
    1,  
  
    //Label. A string value to identify the hook.  
    'before_fetch_query example',  
  
    //The PHP file where your class is located.  
    'custom/modules/<module>/before_fetch_query_class.php',
```



---

```

        //The class the method is in.
        'before_fetch_query_class',

        //The method to call.
        'before_fetch_query_method'
    );

?>

./custom/modules/<module>/before_fetch_query_class.php

<?php

    if (!defined('sugarEntry') || !sugarEntry) die('Not A Valid Entry
Point');

class before_fetch_query_class
{
    function before_fetch_query_method($bean, $event, $arguments)
    {
        //logic
    }
}

?>

```

## Creating a Core Logic Hook

Prior to Sugar 6.3.x, logic hooks could only be created using the following method. Please note that this approach is still valid but is not recommended when building plugins as it may conflict with existing customizations.

```

./custom/modules/<module>/logic_hooks.php

<?php

$hook_version = 1;
$hook_array = Array();

$hook_array['before_fetch_query'] = Array();
$hook_array['before_fetch_query'][] = Array(
    //Processing index. For sorting the array.
    1,

    //Label. A string value to identify the hook.

```

---

```
'before_fetch_query example',

//The PHP file where your class is located.
'custom/modules/<module>/before_fetch_query_class.php',

//The class the method is in.
'logic_hooks_class',

//The method to call.
'before_fetch_query_method'
);

?>

./custom/modules/<module>/before_fetch_query_class.php

<?php

    if (!defined('sugarEntry') || !sugarEntry) die('Not A Valid Entry P
oint');

class before_fetch_query_class
{
    function before_fetch_query_method($bean, $event, $arguments)
    {
        //logic
    }
}

?>
```

**Last Modified:** 2021-02-17 02:44:13

## before\_relationship\_add

### Overview

The `before_relationship_add` logic hook executes before a relationship has been added between two records.

---

## Definition

```
function before_relationship_add($bean, $event, $arguments){}
```

## Arguments

Name	Type	Description
bean	Object	The bean object
event	String	The current event
arguments	Array	Additional information related to the event
arguments.id	String	Module ID
arguments.module	String	Module name
arguments.related_id	String	Related module ID
arguments.related_module	String	Related module name
arguments.link	String	Link field name
arguments.relationship	String	Relationship name

## Considerations

- This hook will be executed for each side of the relationship. For example, if you add an association between an account and a contact, the hook will run for both records.
- The arguments parameter will have additional information regarding the records being modified. The \$bean variable will not contain this information.

## Change Log

Version	Note
6.4.5	Added before_relationship_add hook

## Creating a Logic Hook using the Extension Framework

---

./custom/Extension/modules/<module>/Ext/LogicHooks/<file>.php

```
<?php
```

```
$hook_array['before_relationship_add'][] = Array(
    //Processing index. For sorting the array.
    1,

    //Label. A string value to identify the hook.
    'before_relationship_add example',

    //The PHP file where your class is located.
    'custom/modules/<module>/before_relationship_add_class.php',

    //The class the method is in.
    'before_relationship_add_class',

    //The method to call.
    'before_relationship_add_method'
);
```

```
?>
```

./custom/modules/<module>/before\_relationship\_add\_class.php

```
<?php
```

```
if (!defined('sugarEntry') || !sugarEntry) die('Not A Valid Entry Point');
```

```
class before_relationship_add_class
{
    function before_relationship_add($bean, $event, $arguments)
    {
        //logic
    }
}
```

```
?>
```

**Last Modified:** 2021-02-17 02:44:13

---

# before\_relationship\_delete

## Overview

The `before_relationship_delete` logic hook executes before a relationship between two records is deleted.

## Definition

```
function before_relationship_delete($bean, $event, $arguments){}
```

## Arguments

Name	Type	Description
bean	Object	The bean object
event	String	The current event
arguments	Array	Additional information related to the event
arguments.id	String	Module id
arguments.module	String	Module name
arguments.related_id	String	Related module id
arguments.related_module	String	Related module name
arguments.link	String	Link field name
arguments.relationship	String	Relationship name

## Considerations

- This hook will be executed for each side of the relationship. For example, if you delete an association between an account and a contact, the hook will run for both records.
- The `arguments` parameter will have additional information regarding the records being modified. The `$bean` variable will not contain this information.

---

## Change Log

Version	Note
6.4.5	Added before_relationship_delete hook.

## Creating a Logic Hook using the Extension Framework

./custom/Extension/modules/<module>/Ext/LogicHooks/<file>.php

```
<?php
```

```
$hook_array['before_relationship_delete'][] = Array(
    //Processing index. For sorting the array.
    1,

    //Label. A string value to identify the hook.
    'before_relationship_delete example',

    //The PHP file where your class is located.
    'custom/modules/<module>/before_relationship_delete_class.php'
,

    //The class the method is in.
    'before_relationship_delete_class',

    //The method to call.
    'before_relationship_delete_method'
);
```

```
?>
```

./custom/modules/<module>/before\_relationship\_delete\_class.php

```
<?php
```

```
if (!defined('sugarEntry') || !sugarEntry) die('Not A Valid Entry Point');

class before_relationship_delete_class
{
    function before_relationship_delete_method($bean, $event, $arguments)
    {
```

---

```
        //logic
    }
}
```

```
?>
```

**Last Modified:** 2021-02-17 02:44:13

## before\_restore

### Overview

The before\_restore logic hook executes before a record gets undeleted (i.e. the deleted field's value changes from 1 to 0).

### Definition

```
function before_restore($bean, $event, $arguments){}
```

### Arguments

Name	Type	Description
bean	Object	The bean object
event	String	The current event
arguments	Array	Additional information related to the event (typically empty)

### Examples

#### Creating a Logic Hook using the Extension Framework

```
./custom/Extension/modules/<module>/Ext/LogicHooks/<file>.php
```

```
<?php
```

---

```

        //Processing index. For sorting the array.
        1,

        //Label. A string value to identify the hook.
        'before_restore example',

        //The PHP file where your class is located.
        'custom/modules/<module>/before_restore_class.php',

        //The class the method is in.
        'before_restore_class',

        //The method to call.
        'before_restore_method'
    );
?>

./custom/modules/<module>/before_restore_class.php

<?php

    if (!defined('sugarEntry') || !sugarEntry) die('Not A Valid Entry
Point');

    class before_restore_class
    {
        function before_restore_method($bean, $event, $arguments)
        {
            //logic
        }
    }
?>

```

## Creating a Core Logic Hook

Prior to Sugar 6.3.x, logic hooks could only be created using the following method. Please note that this approach is still valid but is not recommended when building plugins as it may conflict with existing customizations.

```

./custom/modules/<module>/logic_hooks.php

<?php

```



---

```
$hook_version = 1;
$hook_array = Array();

$hook_array['before_restore'] = Array();
$hook_array['before_restore'][] = Array(
//Processing index. For sorting the array.
1,

//Label. A string value to identify the hook.
'before_restore example',

//The PHP file where your class is located.
'custom/modules/<module>/before_restore_class.php',

//The class the method is in.
'before_restore_class',

//The method to call.
'before_restore_method'
);

?>

./custom/modules/<module>/before_restore_class.php

<?php

if (!defined('sugarEntry') || !sugarEntry) die('Not A Valid Entry Point');

class before_restore_class
{
function before_restore_method($bean, $event, $arguments)
{
//logic
}
}

?>
```

**Last Modified:** 2021-02-17 02:44:13

---

# before\_save

## Overview

The before\_save logic hook executes before a record is saved.

## Definition

```
function before_save($bean, $event, $arguments){}
```

## Arguments

Name	Type	Description
bean	Object	The bean object
event	String	The current event
arguments	Array	Additional information related to the event
arguments.check_notify	Boolean	Whether or not to send notifications
arguments.isUpdate	Boolean	Whether or not the record is newly created <ul style="list-style-type: none"><li>• true = this is an update to an existing record</li><li>• false = a newly created record</li></ul>

## Considerations

- For modules that contain a user-friendly record ID (e.g. the case\_number field for the Cases module), the value of that field is not available for a before\_save call. This is because this business logic has yet to be executed.
- Calling save on the bean in this hook will cause an infinite loop if not handled correctly. (i.e: \$bean->save())

---

## Examples

### Creating a Logic Hook using Extension Framework

`./custom/Extension/modules/<module>/Ext/LogicHooks/<file>.php`

```
<?php
```

```
$hook_array['before_save'][] = Array(
    //Processing index. For sorting the array.
    1,

    //Label. A string value to identify the hook.
    'before_save example',

    //The PHP file where your class is located.
    'custom/modules/<module>/before_save_class.php',

    //The class the method is in.
    'before_save_class',

    //The method to call.
    'before_save_method'
);
```

```
?>
```

`./custom/modules/<module>/before_save_class.php`

```
<?php
```

```
if (!defined('sugarEntry') || !sugarEntry) die('Not A Valid Entry Point');
```

```
class before_save_class
{
    function before_save_method($bean, $event, $arguments)
    {
        //logic
    }
}
```

```
?>
```

---

## Creating a Core Logic Hook

Prior to Sugar 6.3.x, logic hooks could only be created using the following method. Please note that this approach is still valid but is not recommended when building plugins as it may conflict with existing customizations.

```
./custom/modules/<module>/logic_hooks.php
```

```
<?php

$hook_version = 1;
$hook_array = Array();

$hook_array['before_save'] = Array();
$hook_array['before_save'][] = Array(
    //Processing index. For sorting the array.
    1,

    //Label. A string value to identify the hook.
    'before_save example',

    //The PHP file where your class is located.
    'custom/modules/<module>/before_save_class.php',

    //The class the method is in.
    'before_save_class',

    //The method to call.
    'before_save_method'
);

?>
```

```
./custom/modules/<module>/before_save_class.php
```

```
<?php

if (!defined('sugarEntry') || !sugarEntry) die('Not A Valid Entry Point');

class before_save_class
{
    function before_save_method($bean, $event, $arguments)
    {
        //logic
    }
}
```

---

```
}
```

```
?>
```

**Last Modified:** 2021-02-17 02:44:13

## process\_record

### Overview

The process\_record logic hook executes when the record is being processed as a part of the ListView or subpanel list.

### Definition

```
function process_record($bean, $event, $arguments){}
```

### Arguments

Name	Type	Description
bean	Object	The bean object
event	String	The current event
arguments	Array	Additional information related to the event (typically empty)

### Considerations

- This can be used to set values in a record's fields prior to display in the ListView or in the subpanel of a DetailView.
- This event is not fired in the EditView.
- You should not call save on the referenced bean. The bean is only populated for list fields and will result in a loss of information.

---

## Change Log

Version	Note
5.0.0a	Added process_record hook

## Examples

### Creating a Logic Hook using the Extension Framework

./custom/Extension/modules/<module>/Ext/LogicHooks/<file>.php

```
<?php
```

```
$hook_array['process_record'][] = Array(
    //Processing index. For sorting the array.
    1,

    //Label. A string value to identify the hook.
    'process_record example',

    //The PHP file where your class is located.
    'custom/modules/<module>/process_record_class.php',

    //The class the method is in.
    'process_record_class',

    //The method to call.
    'process_record_method'
);
```

```
?>
```

./custom/modules/<module>/process\_record\_class.php

```
<?php
```

```
if (!defined('sugarEntry') || !sugarEntry) die('Not A Valid Entry Point');
```

```
class process_record_class
{
    function process_record_method($bean, $event, $arguments)
    {
```

---

```
        //logic
    }
}
```

?>

## Creating a Core Logic Hook

Prior to Sugar 6.3.x, logic hooks could only be created using the following method. Please note that this approach is still valid but is not recommended when building plugins as it may conflict with existing customizations.

`./custom/modules/<module>/logic_hooks.php`

```
<?php

$hook_version = 1;
$hook_array = Array();

$hook_array['process_record'] = Array();
$hook_array['process_record'][] = Array(
    //Processing index. For sorting the array.
    1,

    //Label. A string value to identify the hook.
    'process_record example',

    //The PHP file where your class is located.
    'custom/modules/<module>/process_record_class.php',

    //The class the method is in.
    'process_record_class',

    //The method to call.
    'process_record_method'
);

?>
```

`./custom/modules/<module>/process_record_class.php`

```
<?php

if (!defined('sugarEntry') || !sugarEntry) die('Not A Valid Entry P
oint');
```

---

```
class process_record_class
{
    function process_record_method($bean, $event, $arguments)
    {
        //logic
    }
}

?>
```

**Last Modified:** 2021-02-17 02:44:13

## User Hooks

User hooks execute logic around user actions such as logging in and logging out.

**Last Modified:** 2021-02-17 02:44:13

## after\_login

### Overview

The after\_login hook executes after a user logs into the system.

### Definition

```
function after_login($bean, $event, $arguments){}
```

### Arguments

Name	Type	Description
bean	Object	The bean object



---

Name	Type	Description
event	String	The current event
arguments	Array	Additional information related to the event (typically empty)

## Change Log

Version	Note
5.0.0a	Added after_login hook

## Example

./custom/modules/Users/logic\_hooks.php

```
<?php

$hook_version = 1;
$hook_array = Array();

$hook_array['after_login'] = Array();
$hook_array['after_login'][] = Array(
    //Processing index. For sorting the array.
    1,

    //Label. A string value to identify the hook.
    'after_login example',

    //The PHP file where your class is located.
    'custom/modules/Users/logic_hooks_class.php',

    //The class the method is in.
    'logic_hooks_class',

    //The method to call.
    'after_login_method'
);

?>
```

---

./custom/modules/Users/logic\_hooks\_class.php

```
<?php

    if (!defined('sugarEntry') || !sugarEntry) die('Not A Valid Entry
Point');

class logic_hooks_class
{
    function after_login_method($bean, $event, $arguments)
    {
        //logic
    }
}

?>
```

**Last Modified:** 2021-02-17 02:44:13

## after\_logout

### Overview

The after\_logout hook executes after a user logs out of the system.

### Definition

```
function after_logout($bean, $event, $arguments){}
```

### Arguments

Name	Type	Description
bean	Object	The bean object
event	String	The current event
arguments	Array	Additional information related to the event (typically empty)

---

## Change Log

Version	Note
5.0.0a	Added after_logout hook

## Example

./custom/modules/Users/logic\_hooks.php

```
<?php

$hook_version = 1;
$hook_array = Array();

$hook_array['after_logout'] = Array();
$hook_array['after_logout'][] = Array(
    //Processing index. For sorting the array.
    1,

    //Label. A string value to identify the hook.
    'after_logout example',

    //The PHP file where your class is located.
    'custom/modules/Users/logic_hooks_class.php',

    //The class the method is in.
    'logic_hooks_class',

    //The method to call.
    'after_logout_method'
);

?>
```

./custom/modules/Users/logic\_hooks\_class.php

```
<?php

if (!defined('sugarEntry') || !sugarEntry) die('Not A Valid Entry Point');
```

---

```
class logic_hooks_class
{
    function after_logout_method($bean, $event, $arguments)
    {
        //logic
    }
}
```

?>

**Last Modified:** 2021-02-17 02:44:13

## before\_logout

### Overview

The before\_logout hook executes before a user logs out of the system.

### Definition

```
function before_logout($bean, $event, $arguments){}
```

### Arguments

Name	Type	Description
bean	Object	The bean object
event	String	The current event
arguments	Array	Additional information related to the event (typically empty)

### Change Log

---

Version	Note
5.0.0a	Added before_logout hook

## Example

./custom/modules/Users/logic\_hooks.php

```
<?php

$hook_version = 1;
$hook_array = Array();

$hook_array['before_logout'] = Array();
$hook_array['before_logout'][] = Array(
    //Processing index. For sorting the array.
    1,

    //Label. A string value to identify the hook.
    'before_logout example',

    //The PHP file where your class is located.
    'custom/modules/Users/logic_hooks_class.php',

    //The class the method is in.
    'logic_hooks_class',

    //The method to call.
    'before_logout_method'
);

?>
```

./custom/modules/Users/logic\_hooks\_class.php

```
<?php

if (!defined('sugarEntry') || !sugarEntry) die('Not A Valid Entry
Point');

class logic_hooks_class
{
    function before_logout_method($bean, $event, $arguments)
    {
```

---

```
        //logic
    }
}
```

```
?>
```

**Last Modified:** 2021-02-17 02:44:13

## login\_failed

### Overview

The login\_failed hook executes on a failed login attempt.

### Definition

```
function login_failed($bean, $event, $arguments){}
```

### Arguments

Name	Type	Description
bean	Object	The bean object
event	String	The current event
arguments	Array	Additional information related to the event (typically empty)

### Change Log

Version	Note
5.0.0a	Added login_failed hook

---

## Example

`./custom/modules/Users/logic_hooks.php`

```
<?php

$hook_version = 1;
$hook_array = Array();

$hook_array['login_failed'] = Array();
$hook_array['login_failed'][] = Array(
    //Processing index. For sorting the array.
    1,

    //Label. A string value to identify the hook.
    'login_failed example',

    //The PHP file where your class is located.
    'custom/modules/Users/logic_hooks_class.php',

    //The class the method is in.
    'logic_hooks_class',

    //The method to call.
    'login_failed_method'
);

?>
```

`./custom/modules/Users/logic_hooks_class.php`

```
<?php

if (!defined('sugarEntry') || !sugarEntry) die('Not A Valid Entry
Point');

class logic_hooks_class
{
    function login_failed_method($bean, $event, $arguments)
    {
        //logic
    }
}

?>
```

---

**Last Modified:** 2021-02-17 02:44:13

## Job Queue Hooks

Job Queue hooks execute logic when working with the Job Queue module.

**Last Modified:** 2021-02-17 02:44:13

### job\_failure

#### Overview

The job\_failure hook executes when a job's final failure occurs.

#### Definition

```
function job_failure($bean, $event, $arguments){}
```

#### Arguments

Name	Type	Description
bean	Object	The SchedulersJob object
event	String	The current event
arguments	Array	Additional information related to the event (typically empty)

#### Change Log



---

Version	Note
6.5.0RC1	Added job_failure hook

## Example

`./custom/modules/SchedulersJobs/logic_hooks.php`

```
<?php

$hook_version = 1;
$hook_array = Array();

$hook_array['job_failure'] = Array();
$hook_array['job_failure'][] = Array(
    //Processing index. For sorting the array.
    1,

    //Label. A string value to identify the hook.
    'job_failure example',

    //The PHP file where your class is located.
    'custom/modules/SchedulersJobs/logic_hooks_class.php',

    //The class the method is in.
    'logic_hooks_class',

    //The method to call.
    'job_failure_method'
);

?>
```

`./custom/modules/SchedulersJobs/logic_hooks_class.php`

```
<?php

if (!defined('sugarEntry') || !sugarEntry) die('Not A Valid Entry
Point');

class logic_hooks_class
{
    function job_failure_method($bean, $event, $arguments)
    {
```

---

```
        //logic
    }
}
```

```
?>
```

**Last Modified:** 2021-02-17 02:44:13

## job\_failure\_retry

### Overview

The `job_failure_retry` hook executes each time a job fails before its final failure. If you only want action on the final failure, use the [job\\_failure](#) logic hook.

### Definition

```
function job_failure_retry($bean, $event, $arguments){}
```

### Arguments

Name	Type	Description
bean	Object	The Scheduler's Job object
event	String	The current event
arguments	Array	Additional information related to the event (typically empty)

### Change Log

Version	Note
6.5.0RC1	Added <code>job_failure_retry</code> hook

---

## Example

./custom/modules/SchedulersJobs/logic\_hooks.php

```
<?php

$hook_version = 1;
$hook_array = Array();

$hook_array['job_failure_retry'] = Array();
$hook_array['job_failure_retry'][] = Array(
    //Processing index. For sorting the array.
    1,

    //Label. A string value to identify the hook.
    'job_failure_retry example',

    //The PHP file where your class is located.
    'custom/modules/SchedulersJobs/logic_hooks_class.php',

    //The class the method is in.
    'logic_hooks_class',

    //The method to call.
    'job_failure_retry_method'
);
?>
```

./custom/modules/SchedulersJobs/logic\_hooks\_class.php

```
<?php

if (!defined('sugarEntry') || !sugarEntry) die('Not A Valid Entry
Point');

class logic_hooks_class
{
    function job_failure_retry_method($bean, $event, $arguments)
    {
        //logic
    }
}

?>
```

---

**Last Modified:** 2021-02-17 02:44:13

## SNIP Hooks

SNIP hooks execute logic when working with the SNIP email-archiving service.

**Last Modified:** 2021-02-17 02:44:13

### after\_email\_import

#### Overview

The after\_email\_import hook executes after a SNIP email has been imported.

#### Definition

```
function after_email_import($bean, $event, $arguments){}
```

#### Arguments

Name	Type	Description
bean	Object	The Email object
event	String	The current event
arguments	Array	Additional information related to the event (typically empty)

#### Considerations

- This is a global logic hook where the logic hook reference must be placed in `./custom/modules/logic_hooks.php`.

---

## Change Log

Version	Note
6.5.0RC1	Added after_email_import hook

## Example

./custom/modules/logic\_hooks.php

```
<?php
```

```
    $hook_version = 1;
    $hook_array = Array();

    $hook_array['after_email_import'] = Array();
    $hook_array['after_email_import'][] = Array(
        //Processing index. For sorting the array.
        1,

        //Label. A string value to identify the hook.
        'after_email_import example',

        //The PHP file where your class is located.
        'custom/modules/SNIP/logic_hooks_class.php',

        //The class the method is in.
        'logic_hooks_class',

        //The method to call.
        'after_email_import_method'
    );
```

```
?>
```

./custom/modules/SNIP/logic\_hooks\_class.php

```
<?php
```

```
    if (!defined('sugarEntry') || !sugarEntry) die('Not A Valid Entry
Point');

    class logic_hooks_class
```

---

```
{
    function after_email_import_method($bean, $event, $arguments)
    {
        //logic
    }
}
```

?>

**Last Modified:** 2021-02-17 02:44:13

## before\_email\_import

### Overview

The before\_email\_import hook executes before a SNIP email has been imported.

### Definition

```
function before_email_import($bean, $event, $arguments){}
```

### Arguments

Name	Type	Description
bean	Object	The Email object
event	String	The current event
arguments	Array	Additional information related to the event (typically empty)

### Considerations

- This is a global logic hook where the logic hook reference must be placed in ./custom/modules/logic\_hooks.php.

---

## Change Log

Version	Note
6.5.0RC1	Added before_email_import hook

## Example

./custom/modules/logic\_hooks.php

```
<?php
```

```
    $hook_version = 1;
    $hook_array = Array();

    $hook_array['before_email_import'] = Array();
    $hook_array['before_email_import'][] = Array(
        //Processing index. For sorting the array.
        1,

        //Label. A string value to identify the hook.
        'before_email_import example',

        //The PHP file where your class is located.
        'custom/modules/SNIP/logic_hooks_class.php',

        //The class the method is in.
        'logic_hooks_class',

        //The method to call.
        'before_email_import_method'
    );
```

```
?>
```

./custom/modules/SNIP/logic\_hooks\_class.php

```
<?php
```

```
    if (!defined('sugarEntry') || !sugarEntry) die('Not A Valid Entry
Point');

    class logic_hooks_class
```

---

```
{
  function before_email_import_method($bean, $event, $arguments)
  {
    //logic
  }
}
```

?>

**Last Modified:** 2021-02-17 02:44:13

## API Hooks

API hooks execute logic when working with the REST API and routing.

**Last Modified:** 2021-02-17 02:44:13

## after\_routing

### Overview

The after\_routing hook executes when the v10+ REST Service has found the route for the request.

### Definition

```
function after_routing($event, $arguments){}
```

### Arguments

Name	Type	Description
event	String	The name of the logic hook event



---

Name	Type	Description
arguments	Array	Additional information related to the event
arguments.api	Object	The RestService Object
arguments.request	Object	The RestResponse Object

## Considerations

- This is a global logic hook where the logic hook reference must be placed in `./custom/modules/logic_hooks.php`.
- This hook can change request object parameters that influence routing.
- This hook should not be used for any type of display output.

## Change Log

Version	Note
7.0.0RC1	Added <code>after_routing</code> hook

## Example

`./custom/modules/logic_hooks.php`

```
<?php
```

```
$hook_version = 1;
$hook_array = Array();

$hook_array['after_routing'] = Array();
$hook_array['after_routing'][] = Array(
    //Processing index. For sorting the array.
    1,

    //Label. A string value to identify the hook.
    'after_routing example',

    //The PHP file where your class is located.
    'custom/modules/logic_hooks_class.php',
```

---

```
        //The class the method is in.
        'logic_hooks_class',

        //The method to call.
        'after_routing_method'
    );

?>

./custom/modules/logic_hooks_class.php

<?php

    if (!defined('sugarEntry') || !sugarEntry) die('Not A Valid Entry
Point');

class logic_hooks_class
{
    function after_routing_method($event, $arguments)
    {
        //logic
    }
}

?>
```

**Last Modified:** 2021-02-17 02:44:13

## before\_api\_call

### Overview

The `before_api_call` hook executes when the v10+ REST Service is about to call the API implementation.

### Definition

```
function before_api_call($event, $arguments){}
```

---

## Arguments

Name	Type	Description
event	String	The name of the logic hook event
arguments	Array	Additional information related to the event
arguments.api	Object	The RestService Object
arguments.request	Object	The RestResponse Object

## Considerations

- This is a global logic hook where the logic hook reference must be placed in `./custom/modules/logic_hooks.php`.
- This hook can change the method being called and the parameters.
- This hook should not be used for any type of display output.

## Change Log

Version	Note
7.0.0RC1	Added <code>before_api_call</code> hook

## Example

`./custom/modules/logic_hooks.php`

```
<?php
```

```
$hook_version = 1;  
$hook_array = Array();
```

```
$hook_array['before_api_call'] = Array();  
$hook_array['before_api_call'][] = Array(  
    //Processing index. For sorting the array.  
    1,  
  
    //Label. A string value to identify the hook.
```

---

```
'before_api_call example',

//The PHP file where your class is located.
'custom/modules/logic_hooks_class.php',

//The class the method is in.
'logic_hooks_class',

//The method to call.
'before_api_call_method'
);

?>

./custom/modules/logic_hooks_class.php

<?php

    if (!defined('sugarEntry') || !sugarEntry) die('Not A Valid Entry
Point');

class logic_hooks_class
{
    function before_api_call_method($event, $arguments)
    {
        //logic
    }
}

?>
```

**Last Modified:** 2021-02-17 02:44:13

## before\_filter

### Overview

The `before_filter` hook executes when the v10+ REST Service is about to route the request.

---

## Definition

```
function before_filter($bean, $event, $arguments){}
```

## Arguments

Name	Type	Description
bean	Object	An empty bean object of the module being queried.
event	String	The name of the logic hook event.
arguments	Array	Additional information related to the event.
arguments[0]	Object	The SugarQuery Object
arguments[1]	Array	The query options

## Considerations

- This hook can be executed for a specific module in `./custom/modules/<module>/logic_hooks.php` or globally in `./custom/modules/logic_hooks.php`.
- This hook can change request object parameters that influence routing.
- This hook should not be used for any type of display output.

## Change Log

Version	Note
7.0.0RC1	Added before_filter hook

## Example

```
./custom/modules/{module}/logic_hooks.php
```

```
<?php
```

```
    $hook_version = 1;
```

---

```
$hook_array = Array();

$hook_array['before_filter'] = Array();
$hook_array['before_filter'][] = Array(
    //Processing index. For sorting the array.
    1,

    //Label. A string value to identify the hook.
    'before_filter example',

    //The PHP file where your class is located.
    'custom/modules/{module}/logic_hooks_class.php',

    //The class the method is in.
    'logic_hooks_class',

    //The method to call.
    'before_filter_method'
);

?>

./custom/modules/{module}/logic_hooks_class.php

<?php

    if (!defined('sugarEntry') || !sugarEntry) die('Not A Valid Entry
Point');

class logic_hooks_class
{
    function before_filter_method($bean, $event, $arguments)
    {
        //logic
    }
}

?>
```

**Last Modified:** 2021-02-17 02:44:13

---

# before\_respond

## Overview

The before\_respond hook executes before the v10+ REST Service call returns data to the user.

## Definition

```
function before_respond($event, $response){}
```

## Arguments

Name	Type	Description
event	String	The name of the logic hook event
response	Object	The RestResponse Object

## Considerations

- This is a global logic hook where the logic hook reference must be placed in ./custom/modules/logic\_hooks.php.
- It is not advised to remove or unset any data. Sugar may be using this data and it can adversely affect your instance.
- This hook should not be used for any type of display output.
- This hook should be used when you want to add data to all API responses. If you are looking to modify data received from one specific endpoint, It is a much better approach to override that specific endpoint rather than to use this logic hook.

## Change Log

Version	Note
7.0.0RC1	Added before_respond hook

---

## Example

./custom/modules/logic\_hooks.php

```
<?php

$hook_version = 1;
$hook_array = Array();

$hook_array['before_respond'] = Array();
$hook_array['before_respond'][] = Array(
    //Processing index. For sorting the array.
    1,

    //Label. A string value to identify the hook.
    'after_routing example',

    //The PHP file where your class is located.
    'custom/modules/logic_hooks_class.php',

    //The class the method is in.
    'logic_hooks_class',

    //The method to call.
    'before_respond_method'
);

?>
```

./custom/modules/logic\_hooks\_class.php

```
<?php

if (!defined('sugarEntry') || !sugarEntry) die('Not A Valid Entry
Point');

class logic_hooks_class
{
    function before_respond_method($event, $response)
    {
        //logic
    }
}

?>
```



## before\_routing

### Overview

The before\_routing hook executes when the v10+ REST Service is about to route the request.

### Definition

```
function before_routing($event, $arguments){}
```

### Arguments

Name	Type	Description
event	String	The name of the logic hook event
arguments	Array	Additional information related to the event
arguments.api	Object	The RestService Object
arguments.request	Object	The RestResponse Object

### Considerations

- This is a global logic hook where the logic hook reference must be placed in `./custom/modules/logic_hooks.php`.
- This hook can change request object parameters that influence routing.
- This hook should not be used for any type of display output.

### Change Log

---

Version	Note
7.0.0RC1	Added before_routing hook

## Example

./custom/modules/logic\_hooks.php

```
<?php

$hook_version = 1;
$hook_array = Array();

$hook_array['before_routing'] = Array();
$hook_array['before_routing'][] = Array(
    //Processing index. For sorting the array.
    1,

    //Label. A string value to identify the hook.
    'before_routing example',

    //The PHP file where your class is located.
    'custom/modules/logic_hooks_class.php',

    //The class the method is in.
    'logic_hooks_class',

    //The method to call.
    'before_routing_method'
);

?>
```

./custom/modules/logic\_hooks\_class.php

```
<?php

if (!defined('sugarEntry') || !sugarEntry) die('Not A Valid Entry
Point');

class logic_hooks_class
{
    function before_routing_method($event, $arguments)
    {
```

---

```
        //logic
    }
}
```

?>

**Last Modified:** 2021-02-17 02:44:13

## Web Logic Hooks

### Overview

Web logic hooks let administrators post record and event information to a specified URL when certain sugar events take place.

The administration panel for web logic hooks can be found by navigating to Admin > Web Logic Hooks in the Sugar application. When a web logic hook is triggered, Sugar creates a record in the [job queue](#).

**Note:** You must have the cron set up and running in order to process the job queue for web logic hooks. The POST of the information to the external URL will happen when the cron runs and not when the actual event occurs.

### Arguments

Name	Description
URL	The URL to post JSON-encoded information
Module Name	The name of the module to which the web logic hook will apply
Trigger Event	The event that will trigger the web logic hook  The following events are applicable to a web logic hook: <ul style="list-style-type: none"><li>• <a href="#">after_save</a></li><li>• <a href="#">after_delete</a></li><li>• <a href="#">after_relationship_add</a></li></ul>

	<ul style="list-style-type: none"> <li>• <a href="#">after_relationship_delete</a></li> <li>• <a href="#">after_login</a></li> <li>• <a href="#">after_logout</a></li> <li>• after_login_failed</li> </ul>
Request Method	<p>The request method to use when sending the information</p> <p>The following methods may be used:</p> <ul style="list-style-type: none"> <li>• POST</li> <li>• GET</li> <li>• PUT</li> <li>• DELETE</li> </ul>

## Example

The following example shows how to receive the information posted to the web logic hook URL parameter.

`http://{url}/receive.php`

```
<?php

//get the posted JSON data
$data = file_get_contents('php://input');
//decode the data
$decoded_data = json_decode(trim($data));

//use the data
$file = 'receivedData-'.time().'.txt';
file_put_contents($file, print_r($decoded_data, true));

?>
```

## Result

receivedData-1380158171.txt

```
stdClass Object
(
    [isUpdate] => 1
    [dataChanges] => Array
```

---

```
(
)

[bean] => Account
[data] => stdClass Object
(
  [id] => e0623cdb-ac4b-e7ff-f681-5242e9116892
  [name] => Super Star Holdings Inc
  [date_modified] => 2013-09-25T21:16:06-04:00
  [modified_user_id] => 1
  [modified_by_name] => admin
  [created_by] => 1
  [created_by_name] => Administrator
  [description] =>
  [deleted] =>
  [assigned_user_id] => seed_will_id
  [assigned_user_name] => Will Westin
  [team_count] =>
  [team_name] => Array
  (
    [0] => stdClass Object
      (
        [id] => East
        [name] => East
        [name_2] =>
        [primary] => 1
      )

    [1] => stdClass Object
      (
        [id] => West
        [name] => West
        [name_2] =>
        [primary] =>
      )
  )

  [linkedin] =>
  [facebook] =>
  [twitter] =>
  [googleplus] =>
  [account_type] => Customer
  [industry] => Energy
  [annual_revenue] =>
  [phone_fax] =>
  [billing_address_street] => 111 Silicon Valley Road
)
```

---

```
[billing_address_city] => Los Angeles
[billing_address_state] => NY
[billing_address_postalcode] => 84028
[billing_address_country] => USA
[rating] =>
[phone_office] => (374) 791-2199
[phone_alternate] =>
[website] =>
[ownership] =>
[employees] =>
[ticker_symbol] =>
[shipping_address_street] => 111 Silicon Valley Road
[shipping_address_city] => Los Angeles
[shipping_address_state] => NY
[shipping_address_postalcode] => 84028
[shipping_address_country] => USA
[email] => Array
(
  [0] => stdClass Object
    (
      [email_address] => example@example.tw
      [invalid_email] =>
      [opt_out] =>
      [primary_address] => 1
      [reply_to_address] =>
    )

  [1] => stdClass Object
    (
      [email_address] => the.example@example.name
      [invalid_email] =>
      [opt_out] =>
      [primary_address] =>
      [reply_to_address] =>
    )

)
[email1] => example@example.tw
[parent_id] =>
[sic_code] =>
[parent_name] =>
[email_opt_out] =>
[invalid_email] =>
[campaign_id] =>
[campaign_name] =>
)
```

---

```
[event] => after_save
)
```

**Last Modified:** 2021-02-17 02:44:13

## Logic Hook Release Notes

This page documents historical changes to Sugar's [logic hook](#) libraries.

### 10.2.0

The following parameter was added in the 10.2.0 release:

- [after\\_save arguments.stateChanges](#)

### 7.0.0RC1

- [Web Logic Hooks](#) were introduced in this release.
- The following hooks were also added in the 7.0.0RC1 release:
  - [after\\_routing](#)
  - [before\\_api\\_call](#)
  - [before\\_filter](#)
  - [before\\_respond](#)
  - [before\\_routing](#)
- The following parameters were added in the 7.0.0RC1 release:
  - [after\\_save arguments.isUpdate](#)
  - [after\\_save arguments.dataChanges](#)
  - [before\\_save arguments.isUpdate](#)

### 6.6.0

The [after\\_load\\_user](#) hook was added in the 6.6.0 release.

### 6.5.0RC1

The following hooks were added in the 6.5.0RC1 release:

- 
- [after\\_email\\_import](#)
  - [before\\_email\\_import](#)
  - [job\\_failure](#)
  - [job\\_failure\\_retry](#)

## 6.4.5

The following hooks were added in the 6.4.5 release:

- [before\\_relationship\\_add](#)
- [before\\_relationship\\_delete](#)

## 6.4.4

The [handle\\_exception](#) hook was added in the 6.4.4 release.

## 6.4.3

The [after\\_entry\\_point](#) hook was added in the 6.4.3 release.

## 6.0.0RC1

The following hooks were added in the 6.0.0RC1 release:

- [after\\_relationship\\_add](#)
- [after\\_relationship\\_delete](#)

## 5.0.0a

The following hooks were added in the 5.0.0a release:

- [after\\_login](#)
- [after\\_logout](#)
- [after\\_ui\\_footer](#)
- [after\\_ui\\_frame](#)
- [before\\_logout](#)
- [login\\_failed](#)
- [process\\_record](#)
- [server\\_round\\_trip](#)



---

## 4.5.0c

The [after\\_save](#) hook was added in the 4.5.0c release.

**Last Modified:** 2021-02-17 02:44:13

# Languages

## Overview

Sugar as an application platform is internationalized and localizable. Data is stored and presented in the UTF-8 codepage, allowing for all character sets to be used. Sugar provides a language-pack framework that allows developers to build support for any language in the display of user interface labels. Each language pack has its own set of display strings which is the basis of language localization. You can add or modify languages using the information in this guide.

Please scroll to the bottom of this page for additional language topics.

## Language Keys

Sugar differentiates languages with unique language keys. These keys prefix the files that correspond with particular languages. For example, the default language for the application is English (US), which is represented by the language key `en_us`. Any file that contains data specific to the English (US) language begins with the characters `en_us`. Language label keys that are not recognized will default to the English (US) version.

The following table displays the list of current languages and their corresponding keys:

Language	Language Key
Albanian (Shqip)	<code>sq_AL</code>
Arabic (العربية)	<code>ar_SA</code>
Bulgarian (Български)	<code>bg_BG</code>
Catalan (Català)	<code>ca_ES</code>

<b>Language</b>	<b>Language Key</b>
Chinese (中文)	zh_CN
Croatian (Hrvatski)	hr_HR
Czech (Česky)	cs_CZ
Danish (Dansk)	da_DK
Dutch (Nederlands)	nl_NL
English (UK)	en_UK
English (US)	en_us
Estonian (Eesti)	et_EE
Finnish (Suomi)	fi_FI
French (Français)	fr_FR
German (Deutsch)	de_DE
Greek (Ελληνικά)	el_EL
Hebrew (עברית)	he_IL
Hungarian (Magyar)	hu_HU
Italian (Italiano)	it_it
Japanese (日本語)	ja_JP
Korean (한국어)	ko_KR
Latvian (Latviešu)	lv_LV
Lithuanian (Lietuvių)	lt_LT
Norwegian (Bokmål)	nb_NO
Polish (Polski)	pl_PL
Portuguese (Português)	pt_PT
Portuguese Brazilian (Português Brasileiro)	pt_BR
Romanian (Română)	ro_RO
Russian (Русский)	ru_RU
Serbian (Српски)	sr_RS
Slovak (Slovenčina)	sk_SK
Spanish (Español)	es_ES
Spanish (Latin America) (Español Latinoamérica)	es_LA
Swedish (Svenska)	sv_SE
Thai (ไทย)	th_TH

Language	Language Key
Traditional Chinese (繁體中文)	zh_TW
Turkish (Türkçe)	tr_TR
Ukrainian (Українська)	uk_UA

## Change Log

The following table documents historical changes to Sugar's available languages.

Version	Change
7.8.0.0	Added <b>Thai</b> language pack.
7.8.0.0	Added <b>Croatian</b> language pack.
7.7.0.0	Added <b>Traditional Chinese</b> language pack.
7.6.0.0	Added <b>Ukrainian</b> language pack.
7.6.0.0	Added <b>Arabic</b> language pack.
7.2.0	Added <b>Finnish</b> language pack.
7.2.0	Added <b>Spanish (Latin America)</b> language pack.
6.6.0	Added <b>Albanian</b> language pack.
6.6.0	Added <b>Slovak</b> language pack.
6.6.0	Added <b>Korean</b> language pack.
6.6.0	Added <b>Greek</b> language pack.
6.5.1	Added <b>Latvian</b> language pack.
6.4.0	Added <b>Serbian</b> language pack.
6.4.0	Added <b>Portuguese Brazilian</b> language pack.
6.4.0	Added <b>English (UK)</b> language pack.
6.4.0	Added <b>Catalan</b> language pack.
6.2.0	Added <b>Polish</b> language pack.
6.2.0	Added <b>Hebrew</b> language pack.
6.2.0	Added <b>Estonian</b> language pack.
6.2.0	Added <b>Czech</b> language pack.
6.1.2	Added <b>Turkish</b> language pack.

<b>Version</b>	<b>Change</b>
6.1.2	Added <b>Swedish</b> language pack.
6.1.2	Added <b>Norwegian</b> language pack.
6.1.2	Added <b>Lithuanian</b> language pack.
6.1.0	Added <b>Chinese</b> language pack.
6.1.0	Added <b>Russian</b> language pack.
6.1.0	Added <b>Romanian</b> language pack.
6.1.0	Added <b>Portuguese</b> language pack.
6.1.0	Added <b>Dutch</b> language pack.
6.1.0	Added <b>Japanese</b> language pack.
6.1.0	Added <b>Italian</b> language pack.
6.1.0	Added <b>Hungarian</b> language pack.
6.1.0	Added <b>French</b> language pack.
6.1.0	Added <b>Spanish</b> language pack.
6.1.0	Added <b>German</b> language pack.
6.1.0	Added <b>Danish</b> language pack.
6.1.0	Added <b>Bulgarian</b> language pack.

Last Modified: 2021-02-17 02:44:13

## Application Labels and Lists

### Overview

Sugar, which is fully internationalized and localizable, differentiates languages with unique language keys. These keys prefix the files that correspond with particular languages. For example, the default language for the application is English (US), which is represented by the language key en\_us. Any file that contains data specific to the English (US) language begins with the characters en\_us. Language label keys that are not recognized will default to the English (US) version.

---

For more information on language keys, please refer to the [Languages](#) page.

## Application Labels and Lists

### `$app_list_strings` and `$app_strings`

The `$app_list_strings` array contains the various dropdown lists for the system while `$app_strings` contains the system application labels. The initial set of definitions can be found in `./include/language/<language key>.lang.php`. As you work within the system and deploy modules and lists through Studio, any changes to these lists will be reflected in the language's extension directory:  
`./custom/Extension/application/Ext/Language/<language key>.<list name>.php`.

### Customizing Application Labels and Lists

If you are developing a customization and want to be able to create or edit existing label or list values, you will need to work within the extension application directory. To do this, create


`./custom/Extension/application/Ext/Language/<language key>.<unique name>.php`.

The file should contain your override values with each label index set individually. An example of this is:

```
<?php  
  
$app_strings['LBL_KEY'] = 'My Display Label';  
$app_list_strings['LIST_NAME']['Key_Value'] = 'My Display Value';
```

Once the file is created with your adjustments, navigate to Admin > Repair > Quick Rebuild & Repair. This will compile all of the Extension files from `./custom/Extension/application/Ext/Language/` to `./custom/application/Ext/Language/<language key>.lang.ext.php`.

### Hierarchy Diagram

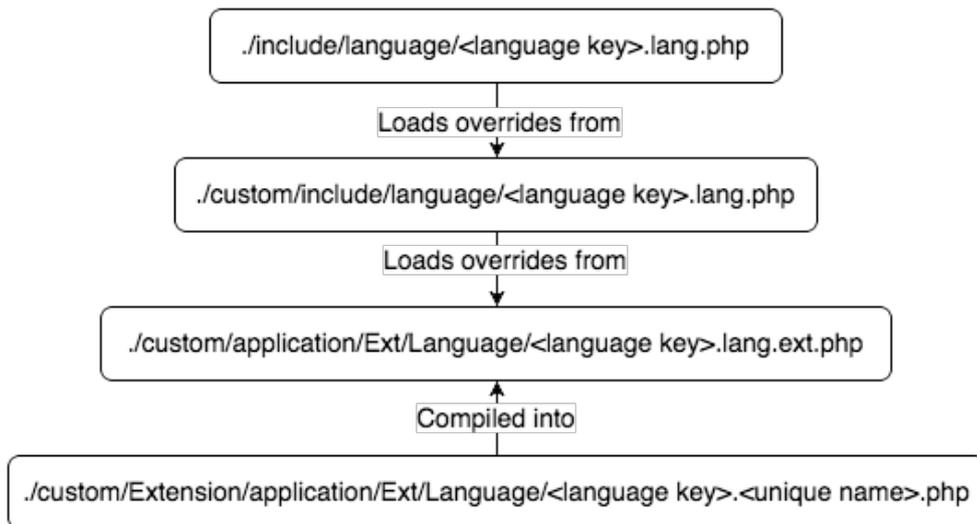

## Retrieving Labels

There are two ways to retrieve a label. The first is to use the `translate()` function found in `./include/utils.php`. This function will retrieve the label for the current user's language and can also be used to retrieve labels from `$mod_strings`, `$app_strings`, or `app_list_strings`.

An example of this is:

```
require_once 'include/utils.php';  
$label = translate('LBL_KEY');
```

Alternatively, you can also use the global variable `$app_strings` as follows:

```
global $app_strings;  
  
$label = '';  
if (isset($app_strings['LBL_KEY']))  
{  
    $label = $app_strings['LBL_KEY'];  
}
```

**Note:** If a label key is not found for the user's preferred language, the system will default to "en\_us" and pull the English (US) version of the label for display.

## Retrieving Lists

There are two ways to retrieve a label. The first is to use the `translate()` function found in `include/utils.php`. This function will retrieve the label for the current

---

user's language.

An example of this is:

```
require_once 'include/utils.php';
$list = translate('LIST_NAME');

//You can also retrieve a specific list value this way
$displayValue = translate('LIST_NAME', '', 'Key_Value');
```

Alternatively, you can also use the global variable `$app_list_strings` as follows:

```
global $app_list_strings;

$list = array();
if (isset($app_list_strings['LIST_NAME']))
{
    $list = $app_list_strings['LIST_NAME'];
}
```

**Note:** If a list key is not found for the user's preferred language, the system will default to "en\_us" and pull the English (US) version of the list for display.

## Accessing Application Strings in Sidecar

All language-pack strings are accessible within the Sidecar framework.

### **\$app\_strings**

To access `$app_strings` in Sidecar, use `app.lang.getAppString`:

```
app.lang.getAppString('LBL_MODULE');
```

To access `$app_strings` in your browser's console, use `SUGAR.App.lang.getAppString`:

```
SUGAR.App.lang.getAppString('LBL_MODULE');
```

For more information, please refer to the [app.lang.getAppString](#) section of the Languages page.

### **\$app\_list\_strings**

---

To access `$app_list_strings` in Sidecar, use `app.lang.getAppListStrings`:

```
app.lang.getAppListStrings('sales_stage_dom');
```

To access `$app_list_strings` in your browser's console, use `SUGAR.App.lang.getAppListStrings`:

```
SUGAR.App.lang.getAppListStrings('sales_stage_dom');
```

For more information, please refer to the [app.lang.getAppListStrings](#) section of the Languages page.

**Last Modified:** 2021-02-17 02:44:13

## Module Labels

```
require_once 'include/utils.php';
```

```
$label = translate('LBL_KEY', 'Accounts');
```

## Overview

Sugar, which is fully internationalized and localizable, differentiates languages with unique language keys. These keys prefix the files that correspond to particular languages. For example, the default language for the application is English (US), which is represented by the language key `en_us`. Any file that contains data specific to the English (US) language begins with the characters `en_us`. Language label keys that are not recognized will default to the English (US) version.

For more information on language keys, please refer to the [Languages](#) page.

## Module Labels

### `$mod_strings`

The module language strings are stored in `$mod_strings`. This section explains how the `$mod_strings` are compiled. All modules, whether out-of-box or custom, will have an initial set of language files in `./modules/<module>/language/<language key>.lang.php`.



---

As you work with the system and modify labels through Studio, changes to the labels are reflected in the corresponding module's custom extension directory: `./custom/Extension/modules/<module>/Ext/Language/<language key>.lang.php`.

## Customizing Labels

If you are developing a customization and want to be able to create new or override existing label values, you will need to work within the extension modules directory. To do this, create

`./custom/Extension/modules/<module>/Ext/Language/<language key>.<unique_name>.php`.

The file should contain your override values with each label index set individually. An example of this is:

```
<?php
```

```
$mod_strings['LBL_KEY'] = 'My Display Label';
```


Once the file is created with your adjustments, navigate to Admin > Repair > Quick Rebuild & Repair. This will compile all of the Extension files from `./custom/Extension/modules/<module>/Ext/Language/` to `./custom/modules/<module>/Ext/Language/<language key>.lang.ext.php`.

## Label Cache

The file locations discussed above are compiled into the cache directory, `./cache/modules/<module>/language/<language key>.lang.php`

The cached results of these files make up each module's `$mod_strings` definition.

## Hierarchy Diagram

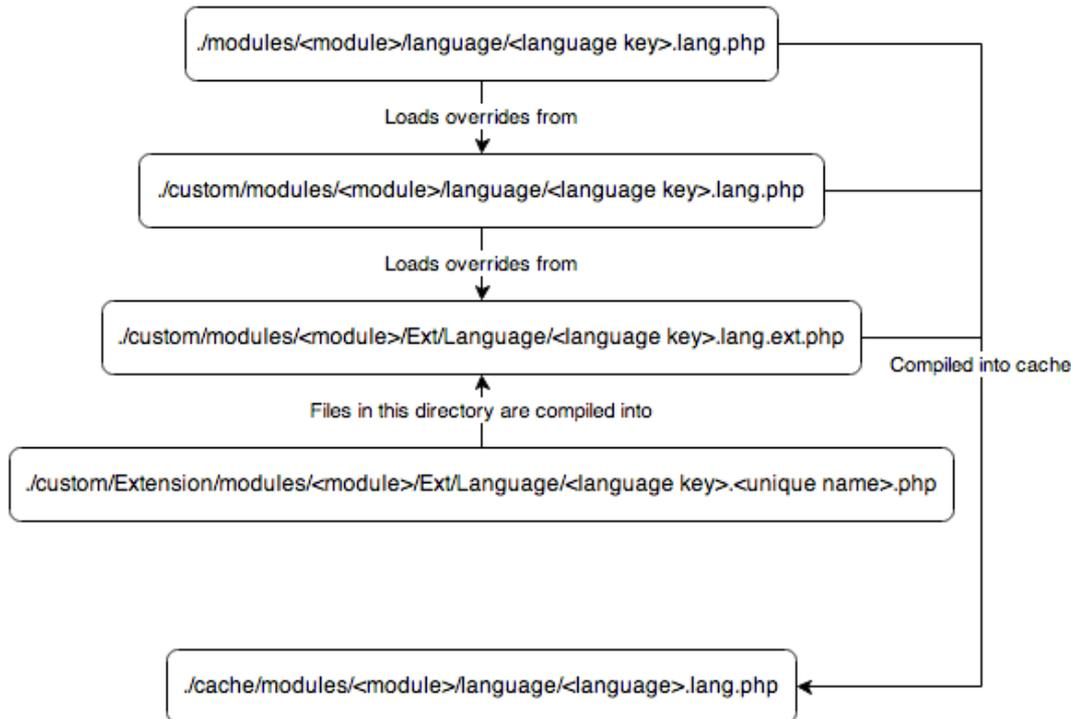

## Retrieving Labels

There are two ways to retrieve a label. The first is to use the `translate()` function found in `include/utills.php`. This function will retrieve the label for the current user's language and can also be used to retrieve labels from `$mod_strings`, `$app_strings`, or `app_list_strings`.

An example of this is:

```
require_once 'include/utills.php';

$label = translate('LBL_KEY', 'Accounts');
```

Alternatively, you can use the global variable `$mod_strings` as follows:

```
global $mod_strings;

$label = '';
if (isset($mod_strings['LBL_KEY']))
{
    $label = $mod_strings['LBL_KEY'];
}
```

## Accessing Module Strings in Sidecar

---

All language-pack strings are accessible within the Sidecar framework.

## **\$mod\_strings**

To access the \$mod\_strings in Sidecar, use `app.lang.get()`:

```
app.lang.get('LBL_NAME', 'Accounts');
```

To access the \$mod\_strings in your browser's console, use `SUGAR.App.lang.get()`:

```
SUGAR.App.lang.get('LBL_NAME', 'Accounts');
```

For more information, please refer to the [app.lang.get](#) section of the Languages page.

**Last Modified:** 2021-02-17 02:44:13

# **Managing Lists**

## **Overview**

There are three ways to manage lists in Sugar: by using Studio in the application, by directly modifying the list's language strings, and via the code-level Dropdown Helper. This page explains all three methods.

## **Managing Lists With Studio**

If you know the name of the list you would like to edit, you can access the application's dropdown editor by navigating to Admin > Dropdown Editor. Alternatively, navigate to a field that uses the list (Admin > Studio > {Module} > Fields > {field\_name}) and click "Edit" under the Dropdown List field:

---

Data Type: DropDown  
Field Name: account\_type  
Display Label: Type:  
System Label: LBL\_TYPE  
Help Text:  
Comment Text: The Company is of this  
Drop Down List: account\_type\_dom  
Edit Add  
Default Value:

For information on using the dropdown editor, please refer to the [Developer Tools](#) documentation in the Administration Guide.

## Directly Modifying Lists

There are two ways to directly modify the language strings. The first way is to modify the custom language file, located at `./custom/include/language/<language key>.lang.php`.

If you are developing a customization to be distributed and you want to be able to create new or override existing list values, you will need to work within the extension application directory. To do this you will create the following file: `./custom/Extension/application/Ext/Language/<language key>.<unique name>.php`.

The file will contain your override values. Please note that within this file you will set each label index individually. An example of this is:

```
<?php  
  
$app_list_strings['LIST_NAME']['Key_Value'] = 'My Display Value';
```

Once the file is created with your adjustments, navigate to Admin > Repair > Quick Rebuild & Repair. This will compile all of the Extension files from `./custom/Extension/application/Ext/Language/` to `./custom/application/Ext/Language/<language key>.lang.ext.php`.

## Managing Lists With Dropdown Helper

You can use the dropdown helper to manage lists at the code level. This example demonstrates how to add and update values for a specific dropdown list:

```
require_once 'modules/Studio/DropDowns/DropDownHelper.php';
```

---

```
$dropdownHelper = new DropDownHelper();

$parameters = array();
$parameters['dropdown_name'] = 'example_list';

$listValues = array(
    'Key_Value_1' => 'Display Value 1',
    'Key_Value_2' => 'Display Value 2',
    'Key_Value_3' => 'Display Value 3'
);

$count = 0;
foreach ($listValues as $key=>$value) {
    $parameters['slot_' . $count] = $count;
    $parameters['key_' . $count] = $key;
    $parameters['value_' . $count] = $value;
    //set 'use_push' to true to update/add values while keeping old values
    $parameters['use_push'] = true;
    $count++;
}

$dropdownHelper->saveDropDown($parameters);
```

**Last Modified:** 2021-02-17 02:44:13

## Language Packs

### Overview

Language packs are module-loadable packages that add support for new, localized languages to Sugar.

### Creating a Language Pack

To create a language pack, choose a unique [language key](#). This key is specific to your language definitions and should be unique from other language keys in the same instance to avoid conflicts. It is also important that your language key follows the xx\_xx format. For demonstrative purposes, we will create a Lorem Ipsum

---

language pack with the language key `Lo_Ip`.

## Application and Module Strings

In the module and application language definitions, there is a combination of `$app_list_strings`, `$mod_strings`, and `$mod_process_order_strings` variables. Your custom language needs to have a definition created to reflect each language key in a standard definition. To do this, duplicate an existing language and simply change the language values within the document and replace the language key in the name of the file with your new key. Be sure to only change the array values and leave the array keys as they are inside of each file.

**Note:** Should you miss an index, it will default to English.

The first step is to identify all of the application and module language files. While language files may vary from version to version due to new features, the stock language paths are generally as follows:

- `./include/language/xx_xx.lang.php`
- `./include/SugarObjects/implements/assignable/language/xx_xx.lang.php`
- `./include/SugarObjects/implements/email_address/language/xx_xx.lang.php`
- `./include/SugarObjects/implements/team_security/language/xx_xx.lang.php`
- `./include/SugarObjects/templates/basic/language/xx_xx.lang.php`
- `./include/SugarObjects/templates/company/language/xx_xx.lang.php`
- `./include/SugarObjects/templates/company/language/application/xx_xx.lang.php`
- `./include/SugarObjects/templates/file/language/xx_xx.lang.php`
- `./include/SugarObjects/templates/file/language/application/xx_xx.lang.php`
- `./include/SugarObjects/templates/issue/language/xx_xx.lang.php`
- `./include/SugarObjects/templates/issue/language/application/xx_xx.lang.php`
- `./include/SugarObjects/templates/person/language/xx_xx.lang.php`
- `./include/SugarObjects/templates/sale/language/xx_xx.lang.php`
- `./include/SugarObjects/templates/sale/language/application/xx_xx.lang.php`
- `./install/language/xx_xx.lang.php`
- `./modules/Accounts/language/xx_xx.lang.php`
- `./modules/ACL/language/xx_xx.lang.php`
- `./modules/ACLActions/language/xx_xx.lang.php`
- `./modules/ACLFields/language/xx_xx.lang.php`
- `./modules/ACLRoles/language/xx_xx.lang.php`
- `./modules/Activities/language/xx_xx.lang.php`
- `./modules/ActivityStream/Activities/language/xx_xx.lang.php`
- `./modules/Administration/language/xx_xx.lang.php`
- `./modules/Audit/language/xx_xx.lang.php`
- `./modules/Bugs/language/xx_xx.lang.php`
- `./modules/Calendar/language/xx_xx.lang.php`

- 
- ./modules/Calls/language/xx\_xx.lang.php
  - ./modules/CampaignLog/language/xx\_xx.lang.php
  - ./modules/Campaigns/language/xx\_xx.lang.php
  - ./modules/CampaignTrackers/language/xx\_xx.lang.php
  - ./modules/Cases/language/xx\_xx.lang.php
  - ./modules/Charts/language/xx\_xx.lang.php
  - ./modules/Configurator/language/xx\_xx.lang.php
  - ./modules/Connectors/language/xx\_xx.lang.php
  - ./modules/Contacts/language/xx\_xx.lang.php
  - ./modules/Contracts/language/xx\_xx.lang.php
  - ./modules/ContractTypes/language/xx\_xx.lang.php
  - ./modules/Currencies/language/xx\_xx.lang.php
  - ./modules/CustomQueries/language/xx\_xx.lang.php
  - ./modules/DataSets/language/xx\_xx.lang.php
  - ./modules/DocumentRevisions/language/xx\_xx.lang.php
  - ./modules/Documents/language/xx\_xx.lang.php
  - ./modules/DynamicFields/language/xx\_xx.lang.php
  - ./modules/EAPM/language/xx\_xx.lang.php
  - ./modules/EmailAddresses/language/xx\_xx.lang.php
  - ./modules/EmailMan/language/xx\_xx.lang.php
  - ./modules/EmailMarketing/language/xx\_xx.lang.php
  - ./modules/Emails/language/xx\_xx.lang.php
  - ./modules/EmailTemplates/language/xx\_xx.lang.php
  - ./modules/Employees/language/xx\_xx.lang.php
  - ./modules/ExpressionEngine/language/xx\_xx.lang.php
  - ./modules/Expressions/language/xx\_xx.lang.php
  - ./modules/Feedbacks/language/xx\_xx.lang.php
  - ./modules/Filters/language/xx\_xx.lang.php
  - ./modules/ForecastManagerWorksheets/language/xx\_xx.lang.php
  - ./modules/Forecasts/language/xx\_xx.lang.php
  - ./modules/ForecastWorksheets/language/xx\_xx.lang.php
  - ./modules/Groups/language/xx\_xx.lang.php
  - ./modules/Help/language/xx\_xx.lang.php
  - ./modules/History/language/xx\_xx.lang.php
  - ./modules/Holidays/language/xx\_xx.lang.php
  - ./modules/Home/language/xx\_xx.lang.php
  - ./modules/Import/language/xx\_xx.lang.php
  - ./modules/InboundEmail/language/xx\_xx.lang.php
  - ./modules/KBDocuments/language/xx\_xx.lang.php
  - ./modules/KBTags/language/xx\_xx.lang.php
  - ./modules/LabelEditor/language/xx\_xx.lang.php
  - ./modules/Leads/language/xx\_xx.lang.php
  - ./modules/MailMerge/language/xx\_xx.lang.php
  - ./modules/Manufacturers/language/xx\_xx.lang.php
  - ./modules/Meetings/language/xx\_xx.lang.php
  - ./modules/MergeRecords/language/xx\_xx.lang.php

- 
- ./modules/ModuleBuilder/language/xx\_xx.lang.php
  - ./modules/Notes/language/xx\_xx.lang.php
  - ./modules/Notifications/language/xx\_xx.lang.php
  - ./modules/OAuthKeys/language/xx\_xx.lang.php
  - ./modules/OAuthTokens/language/xx\_xx.lang.php
  - ./modules/Opportunities/language/xx\_xx.lang.php
  - ./modules/OptimisticLock/language/xx\_xx.lang.php
  - ./modules/PdfManager/language/xx\_xx.lang.php
  - ./modules/pmse\_Business\_Rules/language/xx\_xx.lang.php
  - ./modules/pmse\_Emails\_Templates/language/xx\_xx.lang.php
  - ./modules/pmse\_Inbox/language/xx\_xx.lang.php
  - ./modules/pmse\_Project/language/xx\_xx.lang.php
  - ./modules/ProductBundleNotes/language/xx\_xx.lang.php
  - ./modules/ProductBundles/language/xx\_xx.lang.php
  - ./modules/ProductCategories/language/xx\_xx.lang.php
  - ./modules/Products/language/xx\_xx.lang.php
  - ./modules/ProductTemplates/language/xx\_xx.lang.php
  - ./modules/ProductTypes/language/xx\_xx.lang.php
  - ./modules/Project/language/xx\_xx.lang.php
  - ./modules/ProjectTask/language/xx\_xx.lang.php
  - ./modules/ProspectLists/language/xx\_xx.lang.php
  - ./modules/Prospects/language/xx\_xx.lang.php
  - ./modules/Quotas/language/xx\_xx.lang.php
  - ./modules/Quotes/language/xx\_xx.lang.php
  - ./modules/Relationships/language/xx\_xx.lang.php
  - ./modules/Releases/language/xx\_xx.lang.php
  - ./modules/ReportMaker/language/xx\_xx.lang.php
  - ./modules/Reports/language/xx\_xx.lang.php
  - ./modules/RevenueLineItems/language/xx\_xx.lang.php
  - ./modules/Roles/language/xx\_xx.lang.php
  - ./modules/SavedSearch/language/xx\_xx.lang.php
  - ./modules/Schedulers/language/xx\_xx.lang.php
  - ./modules/SchedulersJobs/language/xx\_xx.lang.php
  - ./modules/Shippers/language/xx\_xx.lang.php
  - ./modules/SNIP/language/xx\_xx.lang.php
  - ./modules/Studio/language/xx\_xx.lang.php
  - ./modules/Styleguide/language/xx\_xx.lang.php
  - ./modules/SugarFavorites/language/xx\_xx.lang.php
  - ./modules/Sync/language/xx\_xx.lang.php
  - ./modules/Tasks/language/xx\_xx.lang.php
  - ./modules/TaxRates/language/xx\_xx.lang.php
  - ./modules/TeamNotices/language/xx\_xx.lang.php
  - ./modules/Teams/language/xx\_xx.lang.php
  - ./modules/TimePeriods/language/xx\_xx.lang.php
  - ./modules/Trackers/language/xx\_xx.lang.php
  - ./modules/UpgradeWizard/language/xx\_xx.lang.php



- 
- ./modules/Users/language/xx\_xx.lang.php
  - ./modules/UserSignatures/language/xx\_xx.lang.php
  - ./modules/WebLogicHooks/language/xx\_xx.lang.php
  - ./modules/WorkFlow/language/xx\_xx.lang.php
  - ./modules/WorkFlowActions/language/xx\_xx.lang.php
  - ./modules/WorkFlowActionShells/language/xx\_xx.lang.php
  - ./modules/WorkFlowAlerts/language/xx\_xx.lang.php
  - ./modules/WorkFlowAlertShells/language/xx\_xx.lang.php
  - ./modules/WorkFlowTriggerShells/language/xx\_xx.lang.php

## Dashlet Strings

Dashlet strings are mostly specific to BWC dashboards. Within each dashlet language definition is a `$dashletStrings` variable. Create a definition to mimic each dashlet file to reflect the new language. To do this, duplicate an existing language of your choice and change the language key in the path. Be sure to only change the array values and leave the array keys as they are inside of each file.

The dashlet paths are listed below:

- ./modules/Calendar/Dashlets/CalendarDashlet/CalendarDashlet.xx\_xx.lang.php
- ./modules/Charts/Dashlets/CampaignROIChartDashlet/CampaignROIChartDashlet.xx\_xx.lang.php
- ./modules/Charts/Dashlets/MyModulesUsedChartDashlet/MyModulesUsedChartDashlet.xx\_xx.lang.php
- ./modules/Charts/Dashlets/MyOpportunitiesGaugeDashlet/MyOpportunitiesGaugeDashlet.xx\_xx.lang.php
- ./modules/Charts/Dashlets/MyPipelineBySalesStageDashlet/MyPipelineBySalesStageDashlet.xx\_xx.lang.php
- ./modules/Charts/Dashlets/MyTeamModulesUsedChartDashlet/MyTeamModulesUsedChartDashlet.xx\_xx.lang.php
- ./modules/Charts/Dashlets/OpportunitiesByLeadSourceByOutcomeDashlet/OpportunitiesByLeadSourceByOutcomeDashlet.xx\_xx.lang.php
- ./modules/Charts/Dashlets/OpportunitiesByLeadSourceDashlet/OpportunitiesByLeadSourceDashlet.xx\_xx.lang.php
- ./modules/Charts/Dashlets/OutcomeByMonthDashlet/OutcomeByMonthDashlet.xx\_xx.lang.php
- ./modules/Charts/Dashlets/PipelineBySalesStageDashlet/PipelineBySalesStageDashlet.xx\_xx.lang.php
- ./modules/Home/Dashlets/ChartsDashlet/ChartsDashlet.xx\_xx.lang.php
- ./modules/Home/Dashlets/InvadersDashlet/InvadersDashlet.xx\_xx.lang.php
- ./modules/Home/Dashlets/JotPadDashlet/JotPadDashlet.xx\_xx.lang.php
- ./modules/Home/Dashlets/RSSDashlet/RSSDashlet.xx\_xx.lang.php
- ./modules/SugarFavorites/Dashlets/SugarFavoritesDashlet/SugarFavorites

- 
- Dashlet.xx\_xx.lang.php
  - ./modules/TeamNotices/Dashlets/TeamNoticesDashlet/TeamNoticesDashlet.xx\_xx.lang.php
  - ./modules/Trackers/Dashlets/TrackerDashlet/TrackerDashlet.xx\_xx.lang.php

## Templates

Sugar also contains templates that are used when emailing users. Duplicate an existing language template and change the language text as needed. This time, you will need to leave the language keys exactly as they are in the file.

The template paths are listed below:

- ./include/language/xx\_xx.notify\_template.html

## Configuration

Once you have your language definitions ready, you will need to tell Sugar a new language should be listed for users. For development purposes, you can add `$sugar_config['languages']['Lo_Ip'] = 'Lorem Ipsum';` to your `config_override.php`. It is important to note that this language configuration will automatically be set for you during the installation of a module loadable language package.

## Module Loadable Packages

Once you have the new language files ready, create an installer package so the files can be installed to a new instance. To do this, create an empty directory and move the files into it, mimicking the folder structures shown above. Once that is completed, create a `manifest.php` in the root of the new directory with a `$manifest['type']` of "langpack". An example manifest file is shown below this section. For more information on building manifests, please visit the [introduction to the manifest](#) page.

### Example Manifest File

```
<?php

$manifest = array (
    'acceptable_sugar_versions' =>
    array (
        'regex_matches' =>
```

---

```
        array (
            '11.0.*',
        ),
    ),
    'acceptable_sugar_flavors' =>
array (
    'PRO',
    'ENT',
    'ULT',
),
    'readme' => '',
    'key' => 1454474352,
    'author' => 'SugarCRM',
    'description' => 'Installs an example Lorem Ipsum language pack',
    'icon' => '',
    'is_uninstallable' => true,
    'name' => 'Lorem Ipsum Language Pack',
    'published_date' => '2018-02-03 00:00:00',
    'type' => 'langpack',
    'version' => 1454474352,
    'remove_tables' => '',
);

?>
```

Once your manifest is completed, you will need to zip up the contents of your new folder. An example of a language pack installer can be downloaded [here](#). When your language pack is ready, it can be installed through the module loader. The installation will automatically add your new language to the `$sugar_config['languages']` array in your `config.php`. After installation, it is highly recommended to navigate to the Sugar Administration page, click on "Repairs", and execute the following repair tools:

- Quick Repair and Rebuild
- Rebuild Javascript Languages

The new language should now be available for use in your Sugar instance. If you do not see the language listed, please clear your browser cache and refresh the page.

**Last Modified:** 2021-02-17 02:44:13

---

# Extensions

## Overview

The extension framework, defined in `./ModuleInstall/extensions.php`, provides the capability to modify Sugar metadata such as [vardefs](#) and [layouts](#) in a safe way that supports installing, uninstalling, enabling, and disabling without interfering with other customizations.

Application extensions are stored under `./custom/Extension/application/Ext/` and module extensions are under `./custom/Extension/modules/<module>/Ext/`. The files in each of these directories are aggregated into a single file with a predefined name for the system to use. An example of this is the `vardefs` extension. The `vardef` extension directory for Accounts is located in `./custom/Extension/modules/Accounts/Ext/Vardefs/`. When a module is installed, uninstalled, enabled, or disabled, the files contained in this directory are merged into `./custom/modules/Accounts/Ext/Vardefs/vardefs.ext.php`. A Quick Repair & Rebuild will also cause the files to merge.

The core extension mappings are listed in the Topics section at the bottom of this page.

## Extensions Properties

Each extension contains the following properties:

Property	Description
Extension Scope	<ul style="list-style-type: none"><li>• <b>All</b> : Extension can be applied to the <code>./custom/application/</code> or <code>./custom/&lt;module&gt;/</code> directory</li><li>• <b>Application</b> : Extension can only be applied to the <code>./custom/application/</code> directory</li><li>• <b>Module</b> : Extension can only be applied to the <code>./custom/&lt;module&gt;/</code> directory</li></ul>
Definition Variable	The variable that Sugar for utilizing the extension definition. If defined, this variable must be set with the appropriate definition properties.
Extension Directory	The directory that the extension

	<p>compiles files from</p> <ul style="list-style-type: none"> <li>• If the customization is for the application, the extension file should be placed in <code>./custom/Extension/application/Ext/&lt;extension_directory&gt;/</code></li> <li>• If the customization is for a module, the extension file should be placed in <code>./custom/Extension/modules/&lt;module&gt;/Ext/&lt;extension_directory&gt;/</code></li> </ul>
Compiled Extension File	<p>The name of the compiled extension file</p> <ul style="list-style-type: none"> <li>• If the extension is for the application, the compiled file will be located in <code>./custom/application/Ext/&lt;extension&gt;/&lt;extension&gt;.ext.php</code></li> <li>• If the extension is for a module, the compiled file will be located in <code>./custom/modules/&lt;module&gt;/Ext/&lt;extension&gt;/&lt;extension&gt;.ext.php</code></li> </ul>
Manifest Installdef	<p>The index of the \$installdef in the manifest file for module loadable packages.</p>

Last Modified: 2021-02-17 02:44:13

## ActionFileMap

### Overview

The ActionFileMap extension maps actions to files, which helps you map a file to a view outside of `./custom/modules/<module>/views/view.<name>.php`. This page is only applicable to modules running in backward compatibility mode.

---

## Properties

The following extension properties are available. For more information, please refer to the [Extension Property](#) documentation.

Property	Value
Extension Scope	Module
Sugar Variable	<code>\$action_file_map</code>
Extension Directory	<code>./custom/Extension/modules/&lt;module&gt;/Ext/ActionFileMap/</code>
Compiled Extension File	<code>./custom/&lt;module&gt;/Ext/ActionFileMap/action_file_map.ext.php</code>
Manifest Installdef	<code>\$installdefs['action_file_map']</code>

## Implementation

The following sections illustrate the various ways to implement a customization to a Sugar instance.

### File System

When working directly with the filesystem, you can create a file in `./custom/Extension/modules/<module>/Ext/ActionFileMap/` to map a new action in the system. The following example will create a new action called "example" in a module:

```
./custom/Extension/modules/<module>/Ext/ActionFileMap/<file>.php
```

```
<?php
```

```
$action_file_map['new_action'] = 'custom/modules/<module>/new_action.php';
```

Next, create your action file:

```
./custom/modules/<module>/new_action.php
```

```
<?php
```

```
//Encoded as JSON for AJAX layouts
```

---

```
echo '{"content": "Example View"}';  
  
?>
```

Next, navigate to Admin > Repair > Quick Repair and Rebuild. The system will then rebuild the extensions and compile your customization into `./custom/modules/<module>/Ext/ActionFileMap/action_file_map.ext.php`

## Module Loadable Package

When building a module-loadable package, you can use the `$installdefs['action_file_map']` index to install the extension file.

### Installdef Properties

Name	Type	Description
from	String	The basepath of the file to be installed.
to_module	String	The key of the module the file is to be installed to.

The example below demonstrates the proper install definition that should be used in the `./manifest.php` file in order to add the Action File Map file to a specific module. You should note that when using this approach, you still need to use the `$installdefs['copy']` index for the Action file, but Sugar will automatically execute Rebuild Extensions to reflect the new Action in the system.

`./manifest.php`

```
<?php  
  
$manifest = array(  
    ...  
);  
  
$installdefs = array(  
    'id' => 'ActionRemap_Example',  
    'action_file_map' => array(  
        array(  
            'from' => '<basepath>/Files/custom/Extension/modules/<module>/Ext/ActionFileMap/<file>.php',  
            'to_module' => '<module>',  
        )  
    )  
);
```

---

```
),
'copy' => array(
    array(
        'from' => '<basepath>/Files/custom/example.php',
        'to' => 'custom/example.php'
    )
)
);
```

Alternatively, you may use the `$installdefs['copy']` index for the Action File Map Extension file. When using this approach, you may need to manually run repair actions such as a Quick Repair and Rebuild. For more information on the `$installdefs['copy']` index and module-loadable packages, please refer to the [Introduction to the Manifest](#) page.

**Last Modified:** 2021-02-17 02:44:13

## ActionReMap

### Overview

The ActionReMap extension maps new actions to existing actions. This extension is only applicable to modules running in backward compatibility mode.

### Properties

The following extension properties are available. For more information, please refer to the [Extension Property](#) documentation.

Property	Value
Extension Scope	Module
Sugar Variable	<code>\$action_remap</code>
Extension Directory	<code>./custom/Extension/modules/&lt;module&gt;/Ext/ActionReMap/</code>
Compiled Extension File	<code>./custom/&lt;module&gt;/Ext/ActionReMap/action_remap.ext.php</code>
Manifest Installdef	<code>\$installdefs['action_remap']</code>



---

## Implementation

The following sections illustrate the various ways to implement a customization to a Sugar instance.

### File System

When working directly with the file system, you can create a file in `./custom/Extension/modules/<module>/Ext/ActionReMap/` to map an action to another defined action. The following example will map the action 'example' to 'detailview':

```
./custom/Extension/modules/<module>/Ext/ActionReMap/<file>.php
```

```
<?php
```

```
$action_remap['example'] = 'detailview';
```

Next, navigate to Admin > Repair > Quick Repair and Rebuild. The system will then rebuild the extensions and compile your customization into `./custom/modules/<module>/Ext/ActionReMap/action_remap.ext.php`.

### Module Loadable Package

When building a module loadable package, you can use the `$installdefs['action_remap']` index to install the extension file.

### Installdef Properties

Name	Type	Description
from	String	The basepath of the file to be installed
to_module	String	The key for the module where the file will be installed

The example below demonstrates the proper install definition that should be used in the `./manifest.php` file in order to add the Action Remap file to a specific module. You should note that when using this approach, Sugar will automatically execute Rebuild Extensions to reflect your changes in the system.

---

./manifest.php

```
<?php

$manifest = array(
    ...
);

$installdefs = array(
    'id' => 'ActionRemap_Example',
    'action_remap' => array(
        array(
            'from' => '<basepath>/Files/custom/Extension/modules/<module>/Ext/ActionReMap/<file>.php',
            'to_module' => '<module>',
        )
    )
);
```

Alternatively, you may use the `$installdefs['copy']` index. When using this approach, you may need to manually run repair actions such as a Quick Repair and Rebuild. For more information on the `$installdefs['copy']` index and module-loadable packages, please refer to the [Introduction to the Manifest](#) page.

**Last Modified:** 2021-02-17 02:44:13

## ActionViewMap

### Overview

The ActionViewMap extension maps additional actions for a module.

**Note:** Actions that apply to modules running in backward compatibility mode are mapped in `./custom/modules/<module>/controller.php`.

### Properties

The following extension properties are available. For more information, please refer to the [Extension Property](#) documentation.

Property	Value
Extension Scope	Module
Sugar Variable	\$action_view_map
Extension Directory	./custom/Extension/modules/<module>/Ext/ActionViewMap/
Compiled Extension File	./custom/<module>/Ext/ActionViewMap/action_view_map.ext.php
Manifest Installdef	\$installdefs['action_view_map']

## Implementation

The following sections illustrate the various ways to implement a customization to a Sugar instance.

### File System

When working directly with the filesystem, you can create a file in `./custom/Extension/modules/<module>/Ext/ActionViewMap/` to map a new view in the system. The following example will map a new action called 'example' to the 'example' view:

```
./custom/Extension/modules/<module>/Ext/ActionViewMap/<file>.php
```

```
<?php
```

```
$action_view_map['example'] = 'example';
```

```
./custom/modules/<module>/views/view.example.php
```

```
<?php
```

```
if(!defined('sugarEntry') || !sugarEntry) die('Not A Valid Entry Point');
```

```
require_once('include/MVC/View/views/view.detail.php');
```

```
class <module>ViewExample extends ViewDetail
```

```
{
    function <module>ViewExample()
    {
```

---

```

        parent::ViewDetail();
    }
    function display()
    {
        echo 'Example View';
    }
}
?>

```

Next, navigate to Admin > Repair > Quick Repair and Rebuild. The system will then rebuild the extensions and compile your customization into `./custom/modules/<module>/Ext/ActionViewMap/action_view_map.ext.php`.

## Module Loadable Package

When building a module-loadable package, use the `$installdefs['action_view_map']` index to install the extension file.

### Installdef Properties

Name	Type	Description
from	String	The basepath of the file
to_module	String	The key for the module where the file will be installed

The example below demonstrates the proper install definition for the `./manifest.php` file in order to add the Action View Map file to a specific module. You should note that when using this approach, you still need to use the `$installdefs['copy']` index for the View file, however, Sugar will automatically execute Rebuild Extensions to reflect the new Action View in the system.

`./manifest.php`

```

<?php

$manifest = array(
    ...
);

$installdefs = array(
    'id' => 'actionView_example',
    'action_view_map' => array(

```

---

```

        array(
            'from' => '<basepath>/Files/custom/Extension/modules/<module>/Ext/ActionViewMap/<file>.php',
            'to_module' => '<module>',
        )
    ),
    'copy' => array(
        array(
            'from' => '<basepath>/Files/custom/modules/<module>/views/view.example.php',
            'to' => 'custom/modules/<module>/views/view.example.php',
        ),
    )
);

```

Alternatively, you may use the `$installdefs['copy']` index for the Action View Map Extension file. When using this approach, you may need to manually run repair actions such as a Quick Repair and Rebuild.

For more information on module-loadable packages, please refer to the [Introduction to the Manifest](#) page .

**Last Modified:** 2021-02-17 02:44:13

## Administration

### Overview

The Administration extension adds new panels to Sugar's Administration page.

### Properties

The following extension properties are available. For more information, please refer to the [Extension Property](#) documentation.

Property	Value
Extension Scope	Module: Administration
Sugar Variable	<code>\$admin_group_header</code>

Extension Directory	./custom/Extension/modules/Administration/Ext/Administration/
Compiled Extension File	./custom/modules/Administration/Ext/Administration/administration.ext.php
Manifest Installdef	\$installdefs['administration']

## Implementation

The following sections illustrate the various ways to implement a customization to a Sugar instance.

### File System

When working directly with the filesystem, you can create a file in `./custom/Extension/modules/Administration/Ext/Administration/<file>.php` to add new Administration Links in the system. The following example will add a new panel to the Administration page called "Example Admin Panel", which will contain one link called "Example Link":

The following example will create a new admin panel:

`./custom/Extension/modules/Administration/Ext/Administration/<file>.php`

```
<?php

    $admin_option_defs = array();
    $admin_option_defs['Administration']['<section key>'] = array(
        //Icon name. Available icons are located in ./themes/default/images
        'Administration',

        //Link name label
        'LBL_LINK_NAME',

        //Link description label
        'LBL_LINK_DESCRIPTION',

        //Link URL - For Sidecar modules
        'javascript:parent.SUGAR.App.router.navigate("<module>/<path>"
, {trigger: true});',
```

---

```

        //Alternatively, if you are linking to BWC modules
        //'./index.php?module=<module>&action=<action>',
    );

    $admin_group_header[] = array(
        //Section header label
        'LBL_SECTION_HEADER',

        //Other_text parameter for get_form_header()
        '',

        //show_help parameter for get_form_header()
        false,

        //Section links
        $admin_option_defs,

        //Section description label
        'LBL_SECTION_DESCRIPTION'
    );

```

Next, we will populate the panel label values:

`./custom/Extension/modules/Administration/Ext/Language/en_us.<name>.php`

```
<?php
```

```

    $mod_strings['LBL_LINK_NAME'] = 'Example Link';
    $mod_strings['LBL_LINK_DESCRIPTION'] = 'Link Description';
    $mod_strings['LBL_SECTION_HEADER'] = 'Example Admin Panel';
    $mod_strings['LBL_SECTION_DESCRIPTION'] = 'Section Description';

```

Next, navigate to Admin > Repair > Quick Repair and Rebuild. The system will then rebuild the extensions, compiling your customization into `./custom/modules/Administration/Ext/Administration/administration.ext.php`, and the new panel will appear in the Administration section.

## Module Loadable Package

When building a module loadable package, use the `$installdefs['administration']` index to install the extension file.

## Installdef Properties

--	--	--

Name	Type	Description
from	String	The base path of the file to be installed

The example below demonstrates the proper install definition that should be used in the `./manifest.php` file in order to add the Administration file to the system. If you are utilizing a Language file, as recommended above, you must use the `$installdefs['language']` index to install the Language definition. Using the `$installdefs['administration']` index will automatically execute Rebuild Extensions to reflect the new Administration Links in the system.

```
<?php

$manifest = array(
    ...
);

$installdefs = array(
    'id' => 'administration_example',
    'administration' => array(
        array(
            'from' => '<basepath>/custom/Extension/modules/Administrati
on/Ext/Administration/<file>.php'
        )
    ),
    'language' => array(
        array(
            'from' => '<basepath>/custom/Extensions/modules/Administra
tion/Ext/Language/en_us.<file>.php',
            'to_module' => 'Administration',
            'language' => 'en_us'
        )
    )
);
```

Alternatively, you may also choose to use the `$installdefs['copy']` index for the Administration Link Extension file. When using this approach, you may need to manually run a repair action such as a Quick Repair and Rebuild.

For more information on the `$installdefs['copy']` index and module-loadable packages, please refer to the [Introduction to the Manifest](#) page.

**Last Modified:** 2021-02-17 02:44:13



---

# Application Schedulers

## Overview

Application Scheduler extensions add custom functions that can be used by scheduler jobs.

**Note:** This Extension is a duplicate of the [ScheduledTasks extension](#), which typically places Scheduled Tasks in the Schedulers directory.

## Properties

The following extension properties are available. For more information, please refer to the [Extension Property](#) documentation.

Property	Value
Extension Scope	Application
Sugar Variable	\$job_strings
Extension Directory	./custom/Extension/application/Ext/ScheduledTasks/
Compiled Extension File	./custom/application/Ext/ScheduledTasks/scheduledtasks.ext.php
Manifest Installdef	\$installdefs['appscheduleddefs']

## Implementation

The following sections illustrates the various ways to implement a customization to a Sugar instance.

### File System

When working directly with the filesystem, you can create a file in `./custom/Extension/application/Ext/ScheduledTasks/` to add a new Scheduler Task to the system. The following example will create a new Scheduler Task 'example\_job':

---

```
./custom/Extension/application/Ext/ScheduledTasks/<file>.php
```

```
<?php
$job_strings[] = 'exampleJob';

function exampleJob()
{
    //logic here

    //return true for completed
    return true;
}
```

Next create the Language file for the Scheduler, so that the Job properly displays in Admin > Schedulers section:

```
./custom/Extension/modules/Schedulers/Ext/Language/<language>.<file>.php
```

```
<?php
//Label will be LBL_[upper case function name]
$mod_strings['LBL_EXAMPLEJOB'] = 'Example Job';
```

Next, navigate to Admin > Repair > Quick Repair and Rebuild. The system will then rebuild the extensions and the customizations will be compiled into ./custom/application/Ext/ScheduledTasks/scheduledtasks.ext.php

## Module Loadable Package

When building a module loadable package, you can use the \$installdefs['appscheduleddefs'] index to install the extension file.

### Installdef Properties

Name	Type	Description
from	String	The base path of the file to be installed.

The example below demonstrates the proper install definition that should be used in the ./manifest.php file in order to add the custom Scheduler definition file to the system. You should note that, when using this approach, Sugar will automatically execute Rebuild Extensions to reflect the new scheduler in the system.

---

./manifest.php

```
<?php

$manifest = array(
    ...
);

$installdefs = array(
    'id' => 'appScheduledTasks_example',
    'appscheduleddefs' => array(
        array(
            'from' => '<basepath>/Files/custom/Extension/application/Ext/ScheduledTasks/<file>.php',
        )
    ),
    'language' => array(
        array(
            'from' => '<basepath>/Files/custom/Extension/modules/Schedulers/Ext/Language/<file>.php',
            'to_module' => 'Schedulers',
            'language' => 'en_us'
        )
    )
);
```

Alternatively, you may use the `$installdefs['copy']` index for the Scheduled Task Extension file. When using this approach, you may need to manually run a repair action such as a Quick Repair and Rebuild.

For more information about the `$installdefs['copy']` index and module-loadable packages, please refer to the [Introduction to the Manifest](#) page.

**Last Modified:** 2021-02-17 02:44:13

## Console

### Overview

The Console extension adds custom CLI commands to Sugar. More information on creating custom commands can be found in the [CLI](#) documentation.

---

## Properties

The following extension properties are available. For more information, please refer to the [Extension Property](#) documentation.

Property	Value
Extension Scope	Application
Extension Directory	./custom/Extension/application/Ext/Console/
Compiled Extension File	./custom/application/Ext/Console/console.ext.php
Manifest Installdef	<code>\$installdefs['console']</code>

## Implementation

The following sections illustrate the various ways to implement a customization to a Sugar instance.

### File System

To create a Sugar console extension, please refer to our [CLI](#) documentation.

### Module Loadable Package

When building a module loadable package, you can use the `$installdefs['console']` index to install the extension file.

### Installdef Properties

Name	Type	Description
from	String	The basepath of the file to be installed.

The example below demonstrates the proper install definition that should be used in the `./manifest.php` file in order to add the console command.

```
./manifest.php
```

---

```
<?php

$manifest = array(
    ...
);

$installdefs = array (
    'id' => 'console_Example',
    'console' => array(
        array(
            'from' => '<basepath>/Files/custom/Extension/application/Ext
/Console/RegisterHelloWorldCommand.php'
        )
    ),
    'copy' => array (
        0 => array (
            'from' => '<basepath>/Files/custom/src/Console/Command/HelloWorldCommand.php',
            'to' => 'custom/src/Console/Command/HelloWorldCommand.php',
        ),
    ),
);
```

Alternatively, you may use the `$installdefs['copy']` index to copy the file. When using this approach, you may need to manually run repair actions such as a Quick Repair and Rebuild. For more information on the `$installdefs['copy']` index and module-loadable packages, please refer to the [Introduction to the Manifest](#) page.

Download the module loadable example package [here](#).

**Last Modified:** 2021-02-17 02:44:13

## Dependencies

### Overview

Dependencies create dependent actions for fields and forms that can leverage more complicated logic.

---

## Properties

The following extension properties are available. For more information, please refer to the [Extension Property](#) documentation.

Property	Value
Extension Scope	Module
Sugar Variable	\$dependencies
Extension Directory	./custom/Extension/modules/<module>/Ext/Dependencies/
Compiled Extension File	./custom/modules/<module>/Ext/Dependencies/deps.ext.php
Manifest Installdef	\$installdefs['dependencies']

## Implementation

The following sections illustrate the various ways to implement a customization to a Sugar instance.

### File System

When working directly with the filesystem, you can create a file in `./custom/Extension/modules/<module>/Ext/Dependencies/<file>.php` to map a new dependency in the system. The following example will create a new required field dependency on a module that is evaluated upon editing a record:

```
./custom/Extension/modules/<module>/Ext/Dependencies/<file>.php
```

```
<?php
```

```
$dependencies['<module>']['<unique name>'] = array(  
    'hooks' => array("edit"),  
    //Trigger formula for the dependency. Defaults to 'true'.  
    'trigger' => 'true',  
    'triggerFields' => array('<trigger field>'),  
    'onload' => true,  
    //Actions is a list of actions to fire when the trigger is true  
    'actions' => array(  
        array(  

```

---

```

        'name' => 'SetRequired', //Action type
        //The parameters passed in depend on the action type
        'params' => array(
            'target' => '<field>',
            'label' => '<field label>', //normally <field>_label
            'value' => 'equal($<trigger field>, "Closed")', //Form
        ),
    ),
);

```

Next, navigate to Admin > Repair > Quick Repair and Rebuild. The system will then rebuild the extensions, compiling your customization into `./custom/modules/<module>/Ext/Dependencies/deps.ext.php`, and the dependency will be in place.

## Module Loadable Package

When building a module loadable package, you can use the `$installdefs['dependencies']` index to install the extension file.

### Installdef Properties

Name	Type	Description
from	String	The base path of the file
to_module	String	The key for the module where the file will be installed

The example below demonstrates the proper install definition that should be used in the `./manifest.php` file in order to add the Dependency file to a specific module. You should note that when using this approach, Sugar will automatically execute Rebuild Extensions to reflect the new Dependency in the system.

```

./manifest.php

<?php

$manifest = array(
    ...
);

```

---

```
$installdefs = array(
    'id' => 'dependency_example',
    'dependencies' => array(
        array(
            'from' => '<basepath>/Files/custom/Extension/modules/<module>/Ext/Dependencies/<file>.php',
            'to_module' => '<module>',
        )
    )
);
```

Alternatively, you may use the `$installdefs['copy']` index for the Dependency Extension file. When using this approach, you may need to manually run a repair action such as a Quick Repair and Rebuild.

For more information on the `$installdefs['copy']` index and module-loadable packages, please refer to the [Introduction to the Manifest](#) page.

**Last Modified:** 2021-02-17 02:44:13

## EntryPointRegistry

### Overview

The EntryPointRegistry extension maps additional entry points to the system. Please note that entry points will soon be deprecated. Developers should move custom logic to [endpoints](#). For more information, please refer to the [Entry Points](#) page.

### Properties

The following extension properties are available. For more information, please refer to the [Extension Property](#) documentation.

Property	Value
Extension Scope	Application
Sugar Variable	<code>\$entry_point_registry</code>
Extension Directory	<code>./custom/Extension/application/Ext/Entr</code>



	yPointRegistry/
Compiled Extension File	./custom/application/Ext/EntryPointRegistry/entry_point_registry.ext.php
Manifest Installdef	\$installdefs['entrypoints']

## Implementation

The following sections illustrate the various ways to implement a customization to a Sugar instance.

### File System

When working directly with the filesystem, you can create a file in `./custom/Extension/application/Ext/EntryPointRegistry/` to map a new entry point in the system. The following example will create a new entry point called `exampleEntryPoint` that will display the text, "Hello World":

```
./custom/Extension/application/Ext/EntryPointRegistry/<file>.php
```

```
<?php
$entry_point_registry['exampleEntryPoint'] = array(
    'file' => 'custom/exampleEntryPoint.php',
    'auth' => true
);
```

Next, create the file that will contain the entry point logic. This file can be located anywhere you choose, but we recommend putting it in the custom directory. More information on custom entry points can be found on the [Creating Custom Entry Points](#) page.

```
./custom/exampleEntryPoint.php
```

```
<?php
if(!defined('sugarEntry') || !sugarEntry) die('Not A Valid Entry Point
');
echo "Hello World!";
```

Next, navigate to Admin > Repair > Quick Repair and Rebuild. The system will

---

then rebuild the extensions and compile your customization into  
./custom/application/Ext/EntryPointRegistry/entry\_point\_registry.ext.php

## Module Loadable Package

When building a module loadable package, you can use the  
\$installdefs['entrypoints'] index to install the extension file.

### Installdef Properties

Name	Type	Description
from	String	The base path of the file to be installed.

The example below demonstrates the proper install definition that should be used in the ./manifest.php file, in order to add the Entry Point Extension file to the system. You should note that when using this approach, you still need to use the \$installdefs['copy'] index for the entry point's logic file, however Sugar will automatically execute Rebuild Extensions to reflect the new Entry Point in the system.

./manifest.php

```
<?php

$manifest = array(
    ...
);

$installdefs = array(
    'id' => 'entryPoint_Example',
    'entrypoints' => array(
        array(
            'from' => '<basepath>/Files/custom/Extension/application/Ext/EntryPointRegistry/<file>.php'
        )
    ),
    'copy' => array(
        array(
            'from' => '<basepath>/Files/custom/exampleEntryPoint.php',
            'to' => 'custom/exampleEntryPoint.php'
        )
    )
)
```

---

);

Alternatively, you may use the `$installdefs['copy']` index for the Entry Point Extension file. When using this approach, you may need to manually run repair actions such as a Quick Repair and Rebuild. For more information on the `$installdefs['copy']` index and module loadable packages, please refer to the [Introduction to the Manifest](#) page.

**Last Modified:** 2021-02-17 02:44:13

## Extensions

### Overview

This extension allows for developers to create custom extensions within the framework. Custom extensions are used alongside the extensions found in `./ModuleInstaller/extensions.php`.

### Properties

The following extension properties are available. For more information, please refer to the [Extension Property](#) documentation.

Property	Value
Extension Scope	Application
Sugar Variable	<code>\$extensions</code>
Extension Directory	<code>./custom/Extension/application/Ext/Extensions/</code>
Compiled Extension File	<code>./custom/application/Ext/Extensions/extensions.ext.php</code>
Manifest Installdef	<code>\$installdefs['extensions']</code>

### Parameters

- **section** : Section name in the manifest file

- 
- **extdir** : The directory containing the extension files
  - **file** : The name of the file where extension files are compiled into
  - **module** : Determines how the framework will interpret the extension (optional)
    - **<Empty>** : Will enable the extension for all modules
      - **Ext** : ./custom/Extension/modules/<module>/Ext/<Custom Extension>/
      - **Ext File** : ./custom/modules/<module>/Ext/<Extension Name>.ext.php
    - **<Specific Module>** : Will enable the extension for the specified module
      - **Ext Directory** : ./custom/Extension/modules/<Specific Module>/Ext/<Custom Extension>/
      - **Ext File** : ./custom/modules/<Specific Module>/Ext/<Extension Name>.ext.php
    - **Application** : enables the extension for application only
      - **Ext Directory** : ./custom/Extension/application/Ext/<Custom Extension>/
      - **Ext File** : ./custom/application/Ext/<Custom Extension>/<Extension Name>.ext.php

## Implementation

The following sections illustrate the various ways to implement a customization to a Sugar instance.

### File System

When working directly with the filesystem, you can create a file in ./custom/Extension/application/Ext/Extensions/ to map a new extension in the system. The following example will create a new extension called "example", which is only enabled for "application":

```
./custom/Extension/application/Ext/Extensions/<file>.php
```

```
<?php
```

```
$extensions['example'] = array(
    'section' => 'example',
    'extdir' => 'Example',
    'file' => 'example.ext.php',
    'module' => 'application' //optional paramater
);
```

---

Next, navigate to Admin > Repair > Quick Repair and Rebuild. The system will rebuild the extensions and compile your customization into `./custom/application/Ext/Extensions/extensions.ext.php`. Then you will be able to add your own extension files in `./custom/Extension/application/Ext/Example/`.

## Module Loadable Package

When building a module loadable package, you can use the `$installdefs['extensions']` index to install the extension file.

### Installdef Properties

Name	Type	Description
from	String	The base path of the file to be installed

The example below will demonstrate the proper install definition that should be used in the `./manifest.php` file in order to add the Extension file to the system. You should note that when using this approach, Sugar will automatically execute Rebuild Extensions to reflect the new Extension in the system.

`./manifest.php`

```
<?php
$manifest = array(
    ...
);

$installdefs = array(
    'id' => 'customExtension_Example',
    'extensions' => array(
        array(
            'from' => '<basepath>/Files/custom/Extension/application/Ext/Extensions/<file>.php'
        )
    )
);
```

Alternatively, you may use the `$installdefs['copy']` index for the Extension file. When using this approach, you may need to manually run repair actions such as a Quick Repair and Rebuild. For more information on the `$installdefs['copy']` index and module-loadable packages, please refer to the [Introduction to the Manifest](#)

---

page.

**Last Modified:** 2021-02-17 02:44:13

# FileAccessControlMap

## Overview

The FileAccessControlMap extension restricts specific view actions from users of the system.

**Note:** This is only applicable to modules running in backward compatibility mode.

## Properties

The following extension properties are available. For more information, please refer to the [Extension Property](#) documentation.

Property	Value
Extension Scope	Module
Sugar Variable	\$file_access_control_map
Extension Directory	./custom/Extension/modules/<module>/Ext/FileAccessControlMap/
Compiled Extension File	./custom/modules/<module>/Ext/FileAccessControlMap/file_access_control_map.ext.php
Manifest Installdef	\$installdefs['file_access']

## Implementation

The following sections illustrate the various ways to implement a customization to a Sugar instance.

### File System

---

When working directly with the filesystem, you can create a file in `./custom/Extension/modules/<module>/Ext/FileAccessControlMap/` to restrict a view of a module. The following example will create a new restriction for the detail view:

```
./custom/Extension/modules/<module>/Ext/FileAccessControlMap/<file>.php
```

```
<?php

$file_access_control_map['modules']['<lowercase module>']['actions'] =
    array(
        'detailview',
    );
```

Navigate to Admin > Repair > Quick Repair and Rebuild. The system will then rebuild the extensions and compile your customization into `./custom/modules/<module>/Ext/FileAccessControlMap/file_access_control_map.ext.php`

## Module Loadable Package

When building a module loadable package, you can use the `$installdefs['file_access']` index to install the extension file.

### Installdef Properties

Name	Type	Description
from	String	The base path of the file to be installed
to_module	String	The key of the module the file is to be installed to

The example below demonstrates the proper install definition that should be used in the `./manifest.php` file, in order to add the File Access Control Map file to a specific module. You should note that when using this approach, Sugar will automatically execute Rebuild Extensions to reflect the new Action in the system.

```
./manifest.php
```

```
<?php

$manifest = array(
    ...
);
```

---

```

$installdefs = array(
    'id' => 'ActionRemap_Example',
    'file_access' => array(
        array(
            'from' => '<basepath>/Files/custom/Extension/modules/<module>/Ext/FileAccessControlMap/<file>.php',
            'to_module' => '<module>',
        )
    )
);

```

Alternatively, you may use the `$installdefs['copy']` index for the File Access Control Map Extension file. When using this approach, you may need to manually run repair actions such as a Quick Repair and Rebuild. For more information on the `$installdefs['copy']` index and module-loadable packages, please refer to the [Introduction to the Manifest](#) page.

**Last Modified:** 2021-02-17 02:44:13

## Include

### Overview

The Modules extension maps additional modules in the system, typically when Module Builder deploys a module.

### Properties

The following extension properties are available. For more information, please refer to the [Extension Property](#) documentation.

Property	Value
Extension Scope	Application
Sugar Variable	<code>\$beanList</code> , <code>\$beanFiles</code> , <code>\$moduleList</code>
Extension Directory	<code>./custom/Extension/application/Ext/Include/</code>
Compiled Extension File	<code>./custom/application/Ext/Include/module</code>



	s.ext.php
Manifest Installdef	\$installdefs['beans']

## Implementation

The following sections illustrate the various ways to implement a customization to a Sugar instance.

### File System

When working directly with the filesystem, you can create a file in `./custom/Extension/application/Ext/Include/` to register a new module in the system. This extension is normally used when deploying custom modules. The example below shows what this file will look like after a module is deployed:

`./custom/Extension/application/Ext/Include/<file>.php`

```
<?php
```

```
$beanList['cust_module'] = 'cust_module';
$beanFiles['cust_module'] = 'modules/cust_module/cust_module.php';
$moduleList[] = 'cust_module';
```

Next, navigate to Admin > Repair > Quick Repair and Rebuild. The system will then rebuild the extensions and compile your customization into `./custom/application/Ext/Include/modules.ext.php`.

### Module Loadable Package

When building a module loadable package, you can use the `$installdefs['beans']` index to install the extension file.

### Installdef Properties

Name	Type	Description
module	String	The key of the module to be installed
class	String	The class name of the module to be installed

path	String	The path to the module's class
tab	Boolean	Whether or not the module will have a navigation tab (defaults to false)

The example below demonstrates the proper install definition that should be used in the `./manifest.php` file, in order to add a custom module to the system. When using this approach, you still need to use the `$installdefs['copy']` index for Module directory, however, Sugar will automatically execute the database table creation process, relationship table creation process, as well as Rebuild Extensions to reflect the new Module in the system.

`./manifest.php`

```
<?php

$manifest = array(
    ...
);

$installdefs = array(
    'id' => 'Beans_Example',
    'beans' => array(
        array(
            'module' => 'cust_Module',
            'class' => 'cust_Module',
            'path' => 'modules/cust_Module/cust_Module.php',
            'tab' => true
        )
    ),
    'copy' => array(
        array(
            'from' => '<basepath>/Files/modules/cust_Module',
            'to' => 'modules/cust_Module'
        )
    )
);
```

Alternatively, you may use the `$installdefs['copy']` index for copying the Modules definition file into the `./custom/Extension/application/Ext/Include/` directory. When using this approach, you may need to manually run repair actions such as a Quick Repair and Rebuild. For more information on the `$installdefs['copy']` index and module loadable packages, please refer to the [Introduction to the Manifest](#) page.

# JSGroupings

## Overview

The JSGroupings extension allows for additional JavaScript grouping files to be created or added to existing groupings within the system.

JSGroupings are file packages containing one or more minified JavaScript libraries. The groupings enhance system performance by reducing the number of JavaScript files that need to be downloaded for a given page. Some examples of JSGroupings in Sugar are `sugar_sidecar.min.js`, which contains the Sidecar JavaScript files, and `sugar_grp1.js`, which contains the base JavaScript files.

You can find all of the groups listed in `./jssource/JSGroupings.php`. Each group is loaded only when needed by a direct call (e.g., from a TPL file). For example, `sugar_grp1.js` is loaded for almost all Sugar functions, while `sugar_grp_yui_widgets.js` will usually be loaded for just record views.

To load a JSGroupings file for a custom module, simply add a new JSGrouping and then include the JavaScript file for your custom handlebars template. You can also [append to an existing grouping](#), such as `./include/javascript/sugar_grp7.min.js`, to include the code globally.

## Properties

The following extension properties are available. For more information, please refer to the [Extension Property](#) documentation.

Property	Value
Extension Scope	Application
Sugar Variable	<code>\$js_groupings</code>
Extension Directory	<code>./custom/Extension/application/Ext/JSGroupings/</code>
Compiled Extension File	<code>./custom/application/Ext/JSGroupings/jsgroups.ext.php</code>
Manifest Installdef	<code>\$installdefs['jsgroups']</code>

---

## Implementation

The following sections illustrate the various ways to implement a customization to a Sugar instance.

### File System

#### Creating New JSGroupings

When working directly with the filesystem, you can create a file in `./custom/Extension/application/Ext/JSGroupings/` to add or append Javascript to JSGroupings in the system. The following example will add a new JSGrouping file to the system:

```
./custom/Extension/application/Ext/JSGroupings/<file>.php
```

```
<?php

//creates the file cache/include/javascript/newGrouping.js
$js_groupings[] = $newGrouping = array(
    'custom/file1.js' => 'include/javascript/newGrouping.js',
    'custom/file2.js' => 'include/javascript/newGrouping.js',
);
```

Next, create the Javascript files that will be grouped as specified in the JSGrouping definition above:

```
./custom/file1.js
```

```
function one(){
    //logic
}
```

```
./custom/file2.js
```

```
function two(){
    //logic
}
```

Next, navigate to Admin > Repair > Quick Repair and Rebuild. The system will then rebuild the extensions and compile your customization into `./custom/application/Ext/JSGroupings/jsgroups.ext.php`.

---

Finally, navigate to Admin > Repair > Rebuild JS Grouping Files. This will create the grouping file in the cache directory as specified:

```
./cache/include/javascript/newGrouping.js
```

```
function one(){}/* End of File custom/file1.js */function two(){}/* End of File custom/file2.js */
```

## Appending to Existing JSGroupings

In some situations, you may find that you need to append your own JavaScript to a core Sugar JSGrouping. Similarly to creating a new JSGrouping, to append to a core JSGrouping you can create a new PHP file in

./custom/Extension/application/Ext/JSGroupings/. The example below demonstrates how to add the file ./custom/file1.js to ./cache/include/javascript/sugar\_grp7.min.js.

```
./custom/Extension/application/Ext/JSGroupings/<file>.php
```

```
<?php
```

```
//Loop through the groupings to find grouping file you want to append to
```

```
foreach ($js_groupings as $key => $groupings)
{
    foreach ($groupings as $file => $target)
    {
        //if the target grouping is found
        if ($target == 'include/javascript/sugar_grp7.min.js')
        {
            //append the custom JavaScript file
            $js_groupings[$key]['custom/file1.js'] = 'include/javascript/sugar_grp7.min.js';
        }
        break;
    }
}
```

Next, navigate to Admin > Repair > Quick Repair and Rebuild. The system will then rebuild the extensions and compile your customization into ./custom/application/Ext/JSGroupings/jsgroups.ext.php.

## Module Loadable Package

---

When building a module loadable package, you can use the `$installdefs['jsgroups']` index to install the extension file.

## Installdef Properties

Name	Type	Description
from	String	The basepath of the file to be installed
to_module	String	The key for the module where the file will be installed

The example below demonstrates the proper install definition that should be used in the `./manifest.php` file to add the JSGrouping Extension file to the system. When using this approach, you still need to use the `$installdefs['copy']` index for the custom JavaScript files you are adding to JSGroupings. Sugar will automatically execute Rebuild Extensions to reflect the new JSGrouping, however, you will still need to navigate to Admin > Repair > Rebuild JS Grouping Files, to create the grouping file in the cache directory.

`./manifest.php`

```
<?php

$manifest = array(
    ...
);

$installdefs = array(
    'id' => 'jsGroupings_Example',
    'jsgroups' => array(
        array(
            'from' => '<basepath>/Files/custom/Extension/application/Ext/JSGroupings/<file>.php',
            'to_module' => 'application',
        )
    ),
    'copy' => array(
        array(
            'from' => '<basepath>/Files/custom/file1.js',
            'to' => 'custom/file1.js'
        ),
        array(
            'from' => '<basepath>/Files/custom/file2.js',
```

---

```
        'to' => 'custom/file2.js'
    )
)
);
```

Alternatively, you may use the `$installdefs['copy']` index for the JSGrouping Extension file. When using this approach, you may need to manually run repair actions such as a Quick Repair and Rebuild. For more information on the `$installdefs['copy']` index and module-loadable packages, please refer to the [Introduction to the Manifest](#) page.

## Considerations

- The grouping path you specify will be created in the cache directory.
- If you wish to add a grouping that contains a file that is part of another group already, add a '.' after `<file>.js` to make the element key unique.

**Last Modified:** 2021-02-17 02:44:13

## Language

### Overview

The Language extension adds or overrides language strings.

This extension is applicable to both the application and module framework. For more information, please refer to the [Language Framework](#) page.

### Properties

The following extension properties are available. For more information, please refer to the [Extension Property](#) documentation.

Property	Value
Extension Scope	All - Application & Module
Sugar Variables	<ul style="list-style-type: none"><li>• If adding language files to application:</li></ul>

	<p><code>\$app_strings / \$app_list_strings</code></p> <ul style="list-style-type: none"> <li>• If adding language files to <code>&lt;module&gt;</code>: <code>\$mod_strings</code></li> </ul>
Extension Directory	<ul style="list-style-type: none"> <li>• Application: <code>./custom/Extension/application/Ext/Language/</code></li> <li>• Module: <code>./custom/Extension/modules/&lt;module&gt;/Ext/Language/</code></li> </ul>
Compiled Extension File	<ul style="list-style-type: none"> <li>• Application: <code>./custom/application/Ext/Language/&lt;language_key&gt;.lang.ext.php</code></li> <li>• Module: <code>./custom/modules/&lt;module&gt;/Ext/Language/&lt;language_key&gt;.lang.ext.php</code></li> </ul>
Manifest Installdef	<code>\$installdefs['language']</code>

## Implementation

The following sections illustrate the various ways to implement a customization to a Sugar instance.

### File System

#### Creating New Application Label

When working directly with the filesystem, you can create a file in `./custom/Extension/application/Ext/Language/` to add Labels for languages to the system. The following example will add a new Label 'LBL\_EXAMPLE\_LABEL' to the system:

```
./custom/Extension/application/Ext/Language/<language>.<file>.php
```

```
<?php
```

```
$app_strings['LBL_EXAMPLE_LABEL'] = 'Example Application Label';
```

Navigate to Admin > Repair > Quick Repair and Rebuild. The system will then rebuild the extensions and compile your customization



---

into./custom/application/Ext/Language/<language>.lang.ext.php

## Creating New Module Label

When working directly with the filesystem, you can create a file in ./custom/Extension/modules/<module>/Ext/Language/ to add Labels for languages to a particular module. The following example will add a new Label 'LBL\_EXAMPLE\_MODULE\_LABEL' to a module:

```
./custom/Extension/modules/<module>/Ext/Language/<language>.<file>.php
```

```
<?php
```

```
$mod_strings['LBL_EXAMPLE_MODULE_LABEL'] = 'Example Module Label';
```

Navigate to Admin > Repair > Quick Repair and Rebuild. The system will then rebuild the extensions and compile your customization into ./custom/modules/<module>/Ext/Language/<language>.lang.ext.php

## Module Loadable Package

When building a module loadable package, you can use the \$installdefs['language'] index to install the extension file.

### Installdef Properties

Name	Type	Description
from	String	The basepath of the file to be installed.
to_module	String	The key of the module the file is to be installed to.
language	String	The key of the language the file is to be installed to.

The example below will demonstrate the proper install definition that should be used in the ./manifest.php file, in order to add the Language Extension file to the system. You should note that when using this approach Sugar will automatically execute Rebuild Extensions to reflect the new Labels in the system.

```
./manifest.php
```

---

```
<?php

$manifest = array(
    ...
);

$installdefs = array(
    'id' => 'language_Example',
    'language' => array(
        array(
            'from' => '<basepath>/Files/custom/Extension/application/Ext/Language/<language>.lang.ext.php',
            'to_module' => 'application',
            'language' => '<language>'
        )
    )
);
```

Alternatively, you may use the `$installdefs['copy']` index to copy the file. When using this approach, you may need to manually run repair actions such as a Quick Repair and Rebuild. For more information on the `$installdefs['copy']` index and module-loadable packages, please refer to the [Introduction to the Manifest](#) page.

**Last Modified:** 2021-02-17 02:44:13

## Layoutdefs

### Overview

The Layoutdefs extension adds or overrides subpanel definitions.

**Note:** This extension is only applicable to modules running in backward compatibility mode.

### Properties

The following extension properties are available. For more information, please refer to the [Extension Property](#) documentation.

Property	Value
----------	-------

Extension Scope	Module
Sugar Variable	\$layout_defs
Extension Directory	./custom/Extension/modules/<module>/Ext/Layoutdefs/
Compiled Extension File	./custom/<module>/Ext/Layoutdefs/layoutdefs.ext.php
Manifest Installdef	\$installdefs['layoutdefs']

## Implementation

The following sections illustrate the various ways to implement a customization to a Sugar instance.

### File System

When working directly with the filesystem, you can create a file in `./custom/Extension/modules/<module>/Ext/Layoutdefs/` to add Layout Definition files to the system. The following example will add a subpanel definition for a module relationship:

```
./custom/Extension/modules/<module>/Ext/Layoutdefs/<file>.php
```

```
<?php
```

```
$layout_defs["<module>"]["subpanel_setup"]["<subpanel key>"] = array (
    'order' => 100,
    'module' => '<related module>',
    'subpanel_name' => 'default',
    'sort_order' => 'asc',
    'sort_by' => 'id',
    'title_key' => 'LBL_SUBPANEL_TITLE',
    'get_subpanel_data' => '<subpanel key>',
    'top_buttons' => array (
        array (
            'widget_class' => 'SubPanelTopButtonQuickCreate',
        ),
        array (
            'widget_class' => 'SubPanelTopSelectButton',
            'mode' => 'MultiSelect',
        ),
    ),
);
```

---

```
    ),  
);
```

Please note that, if you are attempting to override parts of an existing subpanel definition, you should specify the exact index rather than redefining the entire array. An example of overriding the subpanel `top_buttons` index is shown below:

```
<?php  
  
$layout_defs["<module>"]["subpanel_setup"]["<subpanel key>"]["top_buttons"] = array(  
    array(  
        'widget_class' => 'SubPanelTopButtonQuickCreate',  
    ),  
);
```

Next, navigate to Admin > Repair > Quick Repair and Rebuild. The system will then rebuild the extensions and compile your customizations to `./custom/modules/<module>/Ext/Layoutdefs/layoutdefs.ext.php`.

## Module Loadable Package

When building a module loadable package, you can use the `$installdefs['layoutdefs']` index to install the extension file.

### Installdef Properties

Name	Type	Description
from	String	The base path of the file to be installed
to_module	String	The key for the module where the file will be installed

The example below demonstrates the proper install definition that should be used in the `./manifest.php` file in order to add the Layout Definition Extension file to the system. When using this approach, Sugar will automatically execute Rebuild Extensions to reflect the customizations added with the Layout definition.

```
./manifest.php
```

```
<?php
```

---

```

$manifest = array(
    ...
);

$installdefs = array(
    'id' => 'layoutdefs_Example',
    'layoutdefs' => array(
        array(
            'from' => '<basepath>/Files/custom/Extension/modules/<module>/Ext/Layoutdefs/<file>.php',
            'to_module' => '<module>',
        )
    )
);

```

Alternatively, you may use the `$installdefs['copy']` index to copy the file. When using this approach, you may need to manually run repair actions such as a Quick Repair and Rebuild. For more information on the `$installdefs['copy']` index and module-loadable packages, please refer to the [Introduction to the Manifest](#) page.

**Last Modified:** 2021-02-17 02:44:13

## LogicHooks

### Overview

The LogicHooks extension adds actions to specific events such as, for example, before saving a bean. For more information on logic hooks in Sugar, please refer to the [Logic Hooks](#) documentation.

### Properties

The following extension properties are available. For more information, please refer to the [Extension Property](#) documentation.

Property	Value
Extension Scope	All - Application & Module
Sugar Variable	\$hook_array

Extension Directory	Application - ./custom/Extension/application/Ext/LogicHooks/ Module - ./custom/Extension/modules/<module>/Ext/LogicHooks/
Compiled Extension File	Application - ./custom/application/Ext/LogicHooks/logichooks.ext.php Module - ./custom/modules/<module>/Ext/LogicHooks/logichooks.ext.php
Manifest Installdef	\$installdefs['hookdefs']

## Implementation

The following sections illustrate the various ways to implement a customization to a Sugar instance.

### File System

When working directly with the filesystem, you can create a file in `./custom/Extension/application/Ext/LogicHooks/` to add a new logic hook to the application. The following example will create a new `before_save` logic hook that executes for all modules:

```
./custom/Extension/application/Ext/LogicHooks/<file>.php
```

```
<?php
    $hook_array['before_save'][] = Array(
        1,
        'Custom Logic',
        'custom/application_hook.php',
        'ApplicationHookConsumer',
        'before_method'
    );
```

Next, create the hook class:

```
./custom/application_hook.php
```

```
<?php
```

---

```
if (!defined('sugarEntry') || !sugarEntry) die('Not A Valid Entry Point');
```

```
class ApplicationHookConsumer
{
    function before_method($bean, $event, $arguments)
    {
        //logic
    }
}
```

```
?>
```

Finally, navigate to Admin > Repair > Quick Repair and Rebuild. The system will then rebuild the extensions and the customizations will be compiled into `./custom/application/Ext/LogicHooks/logichooks.ext.php`. Your logic hook will run before saving records in any module.

## Module Loadable Package

When building a module loadable package, you can use the `$installdefs['hookdefs']` index to install the extension file.

### Installdef Properties

Name	Type	Description
from	String	The basepath of the file to be installed.
to_module	String	The key of the module the file is to be installed to.

The example below demonstrates the proper install definition that should be used in the `./manifest.php` file in order to add the Action View Map file to a specific module. You should note that when using this approach, you still need to use the `$installdefs['copy']` index for the hook class file, however Sugar will automatically execute Rebuild Extensions to reflect the new logic hook in the system.

```
./manifest.php
```

```
<?php
```

```
$manifest = array(
```

---

```

    ...
);

$installdefs = array(
    'id' => 'actionView_example',
    'hookdefs' => array(
        array(
            'from' => '<basepath>/Files/custom/Extension/application/Ext/LogicHooks/<file>.php',
            'to_module' => 'application',
        )
    ),
    'copy' => array(
        array(
            'from' => '<basepath>/Files/custom/application_hook.php',
            'to' => 'custom/application_hook.php',
        )
    )
);

```

Alternatively, you may use the `$installdefs['copy']` index to copy the file. When using this approach, you may need to manually run repair actions such as a Quick Repair and Rebuild. For more information on the `$installdefs['copy']` index and module-loadable packages, please refer to the [Introduction to the Manifest](#) page.

### Alternative Installdef

Although not recommended, you could utilize the `$installdefs['logic_hooks']` index to deploy a logic hook to the system. Please note that there are a couple caveats to this installation method:

- The `$installdefs['logic_hooks']` index method only works for module-based logic hooks.
- The `$installdefs['logic_hooks']` index method installs to `./custom/modules/<module>/logic_hooks.php`, which is not part of the Extension framework.

### Properties

Name	Type	Description
module	String	The key of the module for the logic hook to be installed to.



hook	String	The type of logic hook to be installed.
order	Integer	The number in which the logic hook should run.
description	String	A description of the logic hook to be installed.
file	String	The file path which contains the logic hook class.
class	String	The class which houses the logic hook functionality.
function	String	The function the logic hook will execute.

The example below will demonstrate the `$installdefs['logic_hooks']` index in the `./manifest.php` file, in order to add an after save logic hook to a specific module. You should note that when using this approach, you still need to use the `$installdefs['copy']` index for the hook class file.

`./manifest.php`

```
<?php

$manifest = array(
    ...
);

$installdefs = array(
    'id' => 'actionView_example',
    'logic_hooks' => array(
        array(
            'module' => '<module>',
            'hook' => 'after_save',
            'order' => 1,
            'description' => 'Example After Save LogicHook',
            'file' => 'custom/modules/<module>/module_hook.php',
            'class' => '<module>HookConsumer'
            'function' => 'after'
        )
    ),
    'copy' => array(
        array(
            'from' => '<basepath>/Files/custom/modules/<module>/module
```

---

```
_hook.php',  
        'to' => 'custom/modules/<module>/module_hook.php',  
    ),  
)  
);
```

**Last Modified:** 2021-02-17 02:44:13

## Modules

### Overview

The Modules extension maps additional modules in the system, typically when Module Builder deploys a module.

### Properties

The following extension properties are available. For more information, please refer to the [Extension Property](#) documentation.

Property	Value
Extension Scope	Application
Sugar Variable	\$beanList, \$beanFiles, \$moduleList
Extension Directory	./custom/Extension/application/Ext/Include/
Compiled Extension File	./custom/application/Ext/Include/modules.ext.php
Manifest Installdef	\$installdefs['beans']

### Implementation

The following sections illustrate the various ways to implement a customization to a Sugar instance.

---

## File System

When working directly with the filesystem, you can create a file in `./custom/Extension/application/Ext/Include/` to register a new module in the system. This extension is normally used when deploying custom modules. The example below shows what this file will look like after a module is deployed:

```
./custom/Extension/application/Ext/Include/<file>.php
```

```
<?php
```

```
$beanList['cust_module'] = 'cust_module';  
$beanFiles['cust_module'] = 'modules/cust_module/cust_module.php';  
$moduleList[] = 'cust_module';
```

Next, navigate to Admin > Repair > Quick Repair and Rebuild. The system will then rebuild the extensions and compile your customization into `./custom/application/Ext/Include/modules.ext.php`.

## Module Loadable Package

When building a module loadable package, you can use the `$installdefs['beans']` index to install the extension file.

### Installdef Properties

Name	Type	Description
module	String	The key of the module to be installed
class	String	The class name of the module to be installed
path	String	The path to the module's class
tab	Boolean	Whether or not the module will have a navigation tab (defaults to false)

The example below demonstrates the proper install definition that should be used in the `./manifest.php` file, in order to add a custom module to the system. When using this approach, you still need to use the `$installdefs['copy']` index for Module directory, however, Sugar will automatically execute the database table creation

---

process, relationship table creation process, as well as Rebuild Extensions to reflect the new Module in the system.

./manifest.php

```
<?php

$manifest = array(
    ...
);

$installdefs = array(
    'id' => 'Beans_Example',
    'beans' => array(
        array(
            'module' => 'cust_Module',
            'class' => 'cust_Module',
            'path' => 'modules/cust_Module/cust_Module.php',
            'tab' => true
        )
    ),
    'copy' => array(
        array(
            'from' => '<basepath>/Files/modules/cust_Module',
            'to' => 'modules/cust_Module'
        )
    )
);
```

Alternatively, you may use the `$installdefs['copy']` index for copying the Modules definition file into the `./custom/Extension/application/Ext/Include/` directory. When using this approach, you may need to manually run repair actions such as a Quick Repair and Rebuild. For more information on the `$installdefs['copy']` index and module loadable packages, please refer to the [Introduction to the Manifest](#) page.

**Last Modified:** 2021-02-17 02:44:13

## Platforms

### Overview

---

The Platforms extension adds allowed REST API platforms when restricting custom platforms through the use of the [disable\\_unknown\\_platforms](#) configuration setting.

## Properties

The following extension properties are available. For more information, please refer to the [Extension Property](#) documentation.

Property	Value
Extension Scope	Application
Extension Directory	./custom/Extension/application/Ext/Platforms/
Compiled Extension File	./custom/application/Ext/Platforms/platforms.ext.php
Manifest Installdef	\$installdefs['platforms']

## Implementation

The following sections illustrate the various ways to implement a new platform type to a Sugar instance.

### File System

When working directly with the filesystem, enable the [disable\\_unknown\\_platforms](#) configuration by setting `$sugar_config['disable_unknown_platforms'] = true` in your `./config_override.php`. This will prevent the system from allowing unknown platform types from accessing the rest endpoints. Next, create a file in `./custom/Extension/application/Ext/Platforms/` to map a new platform in the system. The following example adds a new platform called 'integration' that can be used throughout the system:

```
./custom/Extension/application/Ext/Platforms/<file>.php
```

```
<?php
```

```
$platforms[] = 'integration';
```

Finally, navigate to Admin > Repair > Quick Repair and Rebuild. The system will then rebuild the extensions and your customizations will be compiled into

---

`./custom/application/Ext/Platforms/platforms.ext.php`.

Alternatively, platforms can also be added by creating `./custom/clients/platforms.php` and appending new platform types to the `$platforms` variable. This method of creating platforms is still compatible but is not recommended from a best practices standpoint.

Once installed, developers can take advantage of the new platform type when authenticating with the REST API [oauth2/token](#) endpoint. An example is shown below:

```
{
  "grant_type": "password",
  "username": "admin",
  "password": "password",
  "client_id": "sugar",
  "client_secret": "",
  "platform": "integration"
}
```

## Module Loadable Package

When building a module loadable package, you can use the `$installdefs['platforms']` index to install the extension file.

### Installdef Properties

Name	Type	Description
from	String	The base path of the file to be installed

The example below demonstrates the proper install definition that should be used in the `./manifest.php` file in order to add the utils to the system. You should note that when using this approach, Sugar will automatically execute `Rebuild Extensions` to reflect the new utils in the system.

`./manifest.php`

```
<?php
$manifest = array(
    ...
);
```

---

```

$installdefs = array(
    'id' => 'Platforms_Example',
    'platforms' => array(
        array(
            'from' => '<basepath>/Files/custom/Extension/application/Ext/Platforms/<file>.php',
        )
    )
);

```

Alternatively, you may use the `$installdefs['copy']` index to copy the file. When using this approach, you may need to manually run repair actions such as a Quick Repair and Rebuild. For more information on the `$installdefs['copy']` index and module-loadable packages, please refer to the [Introduction to the Manifest](#) page.

**Last Modified:** 2021-02-17 02:44:13

## ScheduledTasks

### Overview

The ScheduledTasks extension adds custom functions that can be used by scheduler jobs. For more information about schedulers in Sugar, please refer to the [Schedulers](#) documentation.

### Properties

The following extension properties are available. For more information, please refer to the [Extension Property](#) documentation.

Property	Value
Extension Scope	Module: Schedulers
Sugar Variable	<code>\$job_strings</code>
Extension Directory	<code>./custom/Extension/modules/Schedulers/Ext/ScheduledTasks/</code>
Compiled Extension File	<code>./custom/Schedulers/Ext/ScheduledTasks/scheduledtasks.ext.php</code>

## Implementation

The following sections illustrate the various ways to implement a customization to a Sugar instance.

### File System

When working directly with the filesystem, you can create a file in `./custom/Extension/modules/Schedulers/Ext/ScheduledTasks/` to add a new Scheduler Task to the system. The following example will create a new Scheduler Task 'example\_job':

```
./custom/Extension/modules/Schedulers/Ext/ScheduledTasks/<file>.php
```

```
<?php

$job_strings[] = 'exampleJob';

function exampleJob()
{
    //logic here

    //return true for completed
    return true;
}
```

Next, create the Language file for the scheduler so that the job properly displays in Admin > Schedulers:

```
./custom/Extension/modules/Schedulers/Ext/Language/<language>.<file>.php
```

```
<?php

//Label will be LBL_[upper case function name]
$mod_strings['LBL_EXAMPLEJOB'] = 'Example Job';
```

Next, navigate to Admin > Repair > Quick Repair and Rebuild. The system will then rebuild the extensions and the customizations will be compiled into `./custom/modules/Schedulers/Ext/ScheduledTasks/scheduledtasks.ext.php`



---

## Module Loadable Package

When building a module loadable package, you can use the `$installdefs['scheduledefs']` index to install the extension file.

### Installdef Properties

Name	Type	Description
from	String	The basepath of the file to be installed

The example below demonstrates the proper install definition that should be used in the `./manifest.php` file in order to add the custom Scheduler definition file to the system. When using this approach, Sugar will automatically execute Rebuild Extensions to reflect the new Scheduler in the system.

`./manifest.php`

```
<?php

$manifest = array(
    ...
);

$installdefs = array(
    'id' => 'actionView_example',
    'scheduledefs' => array(
        array(
            'from' => '<basepath>/Files/custom/Extension/modules/Scheduler/Ext/ScheduledTasks/<file>.php',
        )
    ),
    'language' => array(
        array(
            'from' => '<basepath>/Files/custom/Extension/modules/Schedulers/Ext/Language/<file>.php',
            'to_module' => 'Schedulers',
            'language' => 'en_us'
        )
    )
);
```

Alternatively, you may use the `$installdefs['copy']` index to copy the file. When using this approach, you may need to manually run repair actions such as a Quick

---

Repair and Rebuild. For more information on the `$installdefs['copy']` index and module-loadable packages, please refer to the [Introduction to the Manifest](#) page.

**Last Modified:** 2021-02-17 02:44:13

## Sidecar

### Overview

The Sidecar extension installs metadata files to their appropriate directories.

### Properties

The following extension properties are available. For more information, please refer to the [Extension Property](#) documentation.

Property	Value
Extension Scope	Module
Sugar Variable	<code>\$viewdefs</code>
Extension Directory	<code>./custom/Extension/modules/&lt;module&gt;/Ext/clients/&lt;client&gt;/&lt;type&gt;/&lt;subtype&gt;/</code>
Compiled Extension File	<code>./custom/&lt;module&gt;/Ext/clients/&lt;client&gt;/&lt;type&gt;/&lt;subtype&gt;/&lt;subtype&gt;.ext.php</code>
Manifest Installdef	<code>\$installdefs['sidecar']</code>

### Implementation

The following sections illustrate the various ways to implement a customization to a Sugar instance.

#### File System

When working directly with the filesystem, you can create a file in `./custom/Extension/modules/<module>/Ext/clients/<client>/<type>/<subtype>/` to

---

append the metadata extensions. The example below demonstrates how to add a new subpanel to a specific module:

```
./custom/Extension/modules/<module>/Ext/clients/base/layouts/subpanels/<file>.php
```

```
<?php
```

```
$viewdefs['<module>']['base']['layout']['subpanels']['components'][] =  
    array(  
        'layout' => 'subpanel',  
        'label' => 'LBL_RELATIONSHIP_TITLE',  
        'context' => array(  
            'link' => '<link_name>',  
        )  
    );
```

Next, navigate to Admin > Repair > Quick Repair and Rebuild. The system will then rebuild the extensions and compile your customization into `./custom/modules/<module>/Ext/clients/base/layouts/subpanels/subpanels.ext.php`

## Module Loadable Package

When building a module loadable package, you can use the `$installdefs['sidecar']` index to install the metadata file.

### Installdef Properties

Name	Type	Description
from	String	The base path of the file to be installed  <b>Note:</b> When adding the file to a module loadable package, its 'from' path must be formatted as <code>clients/&lt;client&gt;/&lt;type&gt;/&lt;subtype&gt;/&lt;file&gt;.php</code> for Sugar to recognize the installation location.
to_module	String	<ul style="list-style-type: none"><li>The key for the module where the file will be</li></ul>

		installed <ul style="list-style-type: none"> <li>• If not populated, 'application' is used</li> </ul>
--	--	---

The example below demonstrates the proper install definition that should be used in the `./manifest.php` file in order to add the metadata file to a specific module. When using this approach, Sugar will automatically execute Rebuild Extensions and Metadata Rebuild to reflect your changes in the system.

`./manifest.php`

```
<?php

$manifest = array(
    ...
);

$installdefs = array (
    'id' => 'sidecar_example',
    'sidecar' => array(
        array(
            'from' => '<basepath>/Files/custom/<module>/clients/base/layouts/subpanels/<file>.php',
            'to_module' => '<module>',
        ),
    ),
);
```

Alternatively, you may use the `$installdefs['copy']` index to copy the file. When using this approach, you may need to manually run repair actions such as a Quick Repair and Rebuild. For more information on the `$installdefs['copy']` index and module-loadable packages, please refer to the [Introduction to the Manifest](#) page.

**Last Modified:** 2021-02-17 02:44:13

# TinyMCE

## Overview

The TinyMCE extension affects the TinyMCE WYSIWYG editor's configuration for

---

backward compatible modules such as PDF Manager and Campaign Email Templates.

To review the default configuration for TinyMCE, please refer to the code in `./include/SugarTinyMCE.php`. Sidecar's TinyMCE configuration can be edited using the [Sidecar Framework](#) and editing the `htmleditable_tinymce` field.

## Properties

The following extension properties are available. For more information, please refer to the [Extension Property](#) documentation.

Property	Value
Extension Scope	Application
Sugar Variable	<code>\$defaultConfig</code> , <code>\$buttonConfigs</code> , <code>\$pluginsConfig</code>
Extension Directory	<code>./custom/Extension/application/Ext/TinyMCE/</code>
Compiled Extension File	<code>./custom/application/Ext/TinyMCE/tinymce.ext.php</code>
Manifest Installdef	<code>\$installdefs['tinymce']</code>

## Implementation

The following sections illustrate the various ways to implement a customization to a Sugar instance.

### File System

When working directly with the filesystem, you can create a file in `./custom/Extension/application/Ext/TinyMCE/` to customize the TinyMCE configuration. The following example will increase the height of the TinyMCE window, remove buttons, and remove plugins from the WYSIWYG Editor:

```
./custom/Extension/application/Ext/TinyMCE/<file>.php
```

```
<?php
```

```
$defaultConfig['height'] = '1000';
```

---

```

$buttonConfigs['default'] = array(
    'buttonConfig' => "bold,italic,underline,strikethrough,separator,b
ullist,numlist",
    'buttonConfig2' => "justifyleft,justifycenter,justifyright,justify
full",
    'buttonConfig3' => "fontselect,fontsizeselect",
);

```

```

$pluginsConfig['default'] = 'advhr,preview,paste,directionality';

```

Navigate to Admin > Repair > Quick Repair and Rebuild. The system will then rebuild the extensions and compile your customization into `./custom/application/Ext/TinyMCE/tinymce.ext.php`

## Module Loadable Package

When building a module loadable package, you can use the `$installdefs['tinymce']` index to install the extension file.

### Installdef Properties

Name	Type	Description
from	String	The base path of the file to be installed

The example below demonstrates the proper install definition that should be used in the `./manifest.php` file, in order to add the UserPage file to the system. You should note that when using this approach Sugar will automatically execute Rebuild Extensions to reflect the changes to TinyMCE in the system.

`./manifest.php`

```

<?php

$manifest = array(
    ...
);

$installdefs = array(
    'id' => 'tinyMCE_Example',
    'tinymce' => array(
        array(

```

---

```
        'from' => '<basepath>/Files/custom/Extension/application/Ext/TinyMCE/<file>.php',
        'to_module' => 'application'
    )
)
);
```

Alternatively, you may use the `$installdefs['copy']` index to copy the file. When using this approach, you may need to manually run repair actions such as a Quick Repair and Rebuild. For more information on the `$installdefs['copy']` index and module loadable packages, please refer to the [Introduction to the Manifest](#) page.

**Last Modified:** 2021-02-17 02:44:13

## UserPage

### Overview

The UserPage extension adds sections to the User Management view.

### Properties

The following extension properties are available. For more information, please refer to the [Extension Property](#) documentation.

Property	Value
Extension Scope	Module: Users
Extension Directory	./custom/Extension/modules/Users/Ext/UserPage/
Compiled Extension File	./custom/Users/Ext/UserPage/userpage.ext.php
Manifest Installdef	<code>\$installdefs['user_page']</code>

### Implementation

The following sections illustrate the various ways to implement a customization to

---

a Sugar instance.

## File System

When working directly with the filesystem, you can create a file in `./custom/Extension/modules/Users/Ext/UserPage/` to add custom elements to the User page. The following example will add a custom table to the Users module's detail view:

`./custom/Extension/modules/Users/Ext/UserPage/<file>.php`

```
<?php
```

```
$HTML=<<<HTML
```

```
    <table cellpadding="0" cellspacing="0" width="100%" border="0" cla
ss="list view">
        <tbody>
            <tr height="20">
                <th scope="col" width="15%">
                    <slot>Header</slot>
                </th>
            </tr>
            <tr height="20" class="oddListRowS1">
                <td scope="row" valign="top">
                    Content
                </td>
            </tr>
        </tbody>
    </table>
```

```
HTML;
```

```
    echo $HTML;
```

Navigate to Admin > Repair > Quick Repair and Rebuild. The system will then rebuild the extensions and compile your customization into `./custom/modules/Users/Ext/UserPage/userpage.ext.php`

## Module Loadable Package

When building a module loadable package, you can use the `$installdefs['user_page']` index to install the extension file.



---

## Installdef Properties

Name	Type	Description
from	String	The base path of the file to be installed

The example below demonstrates the proper install definition that should be used in the `./manifest.php` file in order to add the `UserPage` file to the system. When using this approach, Sugar will automatically execute `Rebuild Extensions` to reflect the changes to the `User` view in the system.

`./manifest.php`

```
<?php

$manifest = array(
    ...
);

$installdefs = array(
    'id' => 'userPage_Example',
    'user_page' => array(
        array(
            'from' => '<basepath>/Files/custom/Extension/modules/Users
/Ext/UserPage/<file>.php',
        )
    )
);
```

Alternatively, you may use the `$installdefs['copy']` index to copy the file. When using this approach, you may need to manually run repair actions such as a `Quick Repair and Rebuild`. For more information on the `$installdefs['copy']` index and module-loadable packages, please refer to the [Introduction to the Manifest](#) page.

**Last Modified:** 2021-02-17 02:44:13

## Utils

### Overview

The `Utils` extension adds functions to the global utility function list.

---

## Properties

The following extension properties are available. For more information, please refer to the [Extension Property](#) documentation.

Property	Value
Extension Scope	Application
Extension Directory	./custom/Extension/application/Ext/Utils/
Compiled Extension File	./custom/application/Ext/Utils/custom_utils.ext.php
Manifest Installdef	\$installdefs['utils']

## Implementation

The following sections illustrate the various ways to implement a customization to a Sugar instance.

### File System

When working directly with the filesystem, you can create a file in `./custom/Extension/application/Ext/Utils/` to map a new action in the system. The following example will create a new function called 'exampleUtilFunction' that can be used throughout the system:

```
./custom/Extension/application/Ext/Utils/<file>.php
```

```
<?php
```

```
function exampleUtilFunction()
{
    //logic
}
```

Next, navigate to Admin > Repair > Quick Repair and Rebuild. The system will then rebuild the extensions and your customizations will be compiled into `./custom/application/Ext/Utils/custom_utils.ext.php`.

Alternatively, functions can also be added by creating `./custom/include/custom_utils.php`. This method of creating utils is still compatible

---

but is not recommended from a best practices standpoint.

## Module Loadable Package

When building a module loadable package, you can use the `$installdefs['utils']` index to install the extension file.

### Installdef Properties

Name	Type	Description
from	String	The base path of the file to be installed

The example below demonstrates the proper install definition that should be used in the `./manifest.php` file in order to add the utils to the system. You should note that when using this approach, Sugar will automatically execute Rebuild Extensions to reflect the new utils in the system.

`./manifest.php`

```
<?php

$manifest = array(
    ...
);

$installdefs = array(
    'id' => 'utils_Example',
    'utils' => array(
        array(
            'from' => '<basepath>/Files/custom/Extension/application/E
xt/Utils/<file>.php',
        )
    )
);
```

Alternatively, you may use the `$installdefs['copy']` index to copy the file. When using this approach, you may need to manually run repair actions such as a Quick Repair and Rebuild. For more information on the `$installdefs['copy']` index and module-loadable packages, please refer to the [Introduction to the Manifest](#) page.

**Last Modified:** 2021-02-17 02:44:13

---

# Vardefs

## Overview

The Vardefs extension adds or overrides system vardefs, which provide the Sugar application with information about [SugarBeans](#).

For more information on vardefs in Sugar, please refer to the [Vardefs](#) documentation .

## Properties

The following extension properties are available. For more information, please refer to the [Extension Property](#) documentation.

Property	Value
Extension Scope	Module
Sugar Variable	\$dictionary
Extension Directory	./custom/Extension/modules/<module>/Ext/Vardefs/
Compiled Extension File	./custom/<module>/Ext/Vardefs/vardefs.ext.php
Manifest Installdef	\$installdefs['vardefs']

## Implementation

The following sections illustrate the various ways to implement a customization to a Sugar instance.

### File System

When working directly with the filesystem, you can create a file in `./custom/Extension/modules/<module>/Ext/Vardefs/` to edit or add vardefs to a module in the system.

---

The most common use of the Vardef extension is to alter the attributes of an existing vardef. To do this, avoid redefining the entire vardef and instead update the specific index you want to change. The following example updates the Required property on the Name field in a module:

```
./custom/Extension/modules/<module>/Ext/Vardefs/<file>.php
```

```
$dictionary['<module>']['fields']['name']['required'] = false;
```

Next, navigate to Admin > Repair > Quick Repair and Rebuild. The system will then rebuild the extensions and your customizations will be compiled into ./custom/modules/<module>/Ext/Vardefs/vardefs.ext.php .

**Notice** Never specify vardefs for a module under another module's extension path. For example, do not specify **\$dictionary['Accounts']['fields']['name']['required'] = false** under **./custom/Extension/modules/Contacts/Ext/Vardefs/**. Doing so will result in unexpected behavior within the system.

## Module Loadable Package

When building a module loadable package, you can use the \$installdefs['vardefs'] index to install the extension file.

### Installdef Properties

Name	Type	Description
from	String	The base path of the file to be installed
to_module	String	The key for the module where the file will be installed

The example below demonstrates the proper install definition that should be used in the ./manifest.php file in order to add the Vardefs file to a specific module. You should note that when using this approach Sugar will automatically execute Rebuild Extensions to reflect the vardef changes in the system.

```
./manifest.php
```

```
<?php
```

```
$manifest = array(
```

---

```
    ...
);

$installdefs = array(
    'id' => 'vardefs_Example',
    'vardefs' => array(
        array(
            'from' => '<basepath>/Files/custom/Extension/modules/<module>/Ext/Vardefs/<file>.php',
            'to_module' => '<module>',
        )
    )
);
```

Alternatively, you may use the `$installdefs['copy']` index to copy the file. When using this approach, you may need to manually run repair actions such as a Quick Repair and Rebuild. For more information on the `$installdefs['copy']` index and module-loadable packages, please refer to the [Introduction to the Manifest](#) page.

## Creating Custom Fields

If your goal is to manually create a custom field on an instance, you should be using the Module Installer to create the field. This can be used both for an installer package and programmatically. An example of creating a field from a module loadable package can be found under [Package Examples](#) in the article, [Creating an Installable Package that Creates New Fields](#). An example of programmatically creating a field can be found in the [Manually Creating Custom Fields](#) section of the Module Vardefs documentation.

**Last Modified:** 2021-02-17 02:44:13

# WirelessLayoutdefs

## Overview

The WirelessLayoutdefs extension adds additional subpanels to wireless views. This extension is only applicable to modules running in backward compatibility mode.

---

## Properties

The following extension properties are available. For more information, please refer to the [Extension Property](#) documentation.

Property	Value
Extension Scope	Module
Sugar Variable	\$layout_defs
Extension Directory	./custom/Extension/modules/<module>/Ext/WirelessLayoutdefs/
Compiled Extension File	./custom/<module>/Ext/WirelessLayoutdefs/wireless.subpaneldefs.ext.php
Manifest Installdef	\$installdefs['wireless_subpanels']

## Implementation

The following sections illustrate the various ways to implement a customization to a Sugar instance.

### File System

When working directly with the filesystem, you can create a file in `./custom/Extension/modules/<module>/Ext/WirelessLayoutdefs/` to add a subpanel to a module in the system. The following example will add a new subpanel to a specified module:

```
./custom/Extension/modules/<module>/Ext/WirelessLayoutdefs/<file>.php
```

```
<?php
```

```
$layout_defs['<module>']['subpanel_setup']['<subpanel module>'] = array(  
    'order' => 10,  
    'module' => '<subpanel module>',  
    'get_subpanel_data' => '<subpanel name>',  
    'title_key' => 'LBL_SUBPANEL_TITLE',  
);
```

Navigate to Admin > Repair > Quick Repair and Rebuild. The system will then rebuild the extensions and compile your customization into `./custom/modules/<mo`

---

dule>/Ext/WirelessLayoutdefs/wireless.subpaneldefs.ext.php.

## Module Loadable Package

When building a module loadable package, you can use the `$installdefs['wireless_subpanels']` index to install the extension file.

### Installdef Properties

Name	Type	Description
from	String	The base path of the file to be installed
to_module	String	The key for the module where the file will be installed

The example below will demonstrate the proper install definition that should be used in the `./manifest.php` file in order to add the subpanel file to a specific module. You should note that when using this approach Sugar will automatically execute `Rebuild Extensions` to reflect the subpanel in the system.

`./manifest.php`

```
<?php

$manifest = array(
    ...
);

$installdefs = array(
    'id' => 'wirelessLayoutdefs_Example',
    'wireless_subpanels' => array(
        array(
            'from' => '<basepath>/Files/custom/Extension/modules/<module>/Ext/WirelessLayoutdefs/<file>.php',
            'to_module' => '<module>',
        )
    )
);
```

Alternatively, you may use the `$installdefs['copy']` index to copy the file. When using this approach, you may need to manually run repair actions such as a `Quick Repair` and `Rebuild`. For more information on the `$installdefs['copy']` index and



---

module-loadable packages, please refer to the [Introduction to the Manifest](#) page.

**Last Modified:** 2021-02-17 02:44:13

## WirelessModuleRegistry

### Overview

The WirelessModuleRegistry extension adds modules to the available modules for mobile.

### Properties

The following extension properties are available. For more information, please refer to the [Extension Property](#) documentation.

Property	Value
Extension Scope	Application
Sugar Variable	\$wireless_module_registry
Extension Directory	./custom/Extension/application/Ext/WirelessModuleRegistry/
Compiled Extension File	./custom/application/Ext/WirelessModuleRegistry/wireless_module_registry.ext.php
Manifest Installdef	\$installdefs['wireless_modules']

### Implementation

The following sections illustrate the various ways to implement a customization to a Sugar instance.

#### File System

When working directly with the filesystem, you can create a file in

---

./custom/Extension/application/Ext/WirelessModuleRegistry/ to add modules to the list of available modules for mobile. The following example will add a new module, 'cust\_module', to the list of available modules for mobile:

./custom/Extension/application/Ext/WirelessModuleRegistry/<file>.php

```
<?php

$wireless_module_registry['cust_module'] = array(
    //enables/disables record creation
    'disable_create' => false,
);
```

Next, navigate to Admin > Repair > Quick Repair and Rebuild. The system will then rebuild the extensions and compile your customization into ./custom/application/Ext/WirelessModuleRegistry/wireless\_module\_registry.ext.php.

## Module Loadable Package

When building a module loadable package, you can use the \$installdefs['wireless\_modules'] index to install the extension file.

### Installdef Properties

Name	Type	Description
from	String	The base path of the file to be installed.
to_module	String	The key of the module the file is to be installed to.

The example below demonstrates the proper install definition that should be used in the ./manifest.php file in order to add the Wireless Module Registry file to the system. You should note that when using this approach, Sugar will automatically execute Rebuild Extensions to reflect the new module in the mobile application.

./manifest.php

```
<?php

$manifest = array(
    ...
);
```

---

```
$installdefs = array(
    'id' => 'wirelessModules_Example',
    'wireless_modules' => array(
        array(
            'from' => '<basepath>/Files/custom/Extension/application/E
xt/WirelessModuleRegistry/<file>.php',
            'to_module' => 'application',
        )
    )
);
```

Alternatively, you may use the `$installdefs['copy']` index to copy the file. When using this approach, you may need to manually run repair actions such as a Quick Repair and Rebuild. For more information on the `$installdefs['copy']` index and module-loadable packages, please refer to the [Introduction to the Manifest](#) page.

**Last Modified:** 2021-02-17 02:44:13

## Filters

### Overview

Filters are a way to predefine searches on views that render a list of records such as list views, pop-up searches, and lookups. This page explains how to implement the various types of filters for record list views.

Filters contain the following properties:

Property	Type	Description
id	String	A unique identifier for the filter
name	String	The label key for the display label of the filter
filter_definition	Array	The filter definition to apply to the results
editable	Boolean	Determines whether the user can edit the filter. <b>Note:</b> If you are creating a predefined filter for a

		user, this should be set to false
is_template	Boolean	Used with initial pop-up filters to determine if the filter is available as a template

**Note:** If a filter contains custom fields, those fields must be search-enabled in Studio > {Module Name} > Layouts > Search.

## Operators

Operators, defined in `./clients/base/filters/operators/operators.php`, are expressions used by a filter to represent query operators. They are constructed in the `filter_definition` to help generate the appropriate query syntax that is sent to the database for a specific field type. Operators can be defined on a global or module level. The accepted paths are listed below:

- `./clients/base/filters/operators/operators.php`
- `./custom/clients/base/filters/operators/operators.php`
- `./modules/<module>/clients/base/filters/operators.php`
- `./custom/modules/<module>/clients/base/filters/operators.php`

The list of stock operators is shown below:

Operator	Label / Key	Description
\$contains	<ul style="list-style-type: none"> <li>• is any of / LBL_OPERATOR_CONTAINS <ul style="list-style-type: none"> <li>◦ Used by multienum</li> </ul> </li> </ul>	Matches anything that contains the value.
\$empty	<ul style="list-style-type: none"> <li>• is empty / LBL_OPERATOR_EMPTY <ul style="list-style-type: none"> <li>◦ Used by enum and tag</li> </ul> </li> </ul>	Matches on empty values.
\$not_contains	<ul style="list-style-type: none"> <li>• is not any of / LBL_OPERATOR_NOT_CONTAINS <ul style="list-style-type: none"> <li>◦ Used by multienum</li> </ul> </li> </ul>	Matches anything that does not contain the specified value.
\$not_empty	<ul style="list-style-type: none"> <li>• is not empty / LBL_OPERATOR_NOT_EMPTY</li> </ul>	Matches on non-empty values.

	<ul style="list-style-type: none"> <li>◦ Used by enum and tag</li> </ul>	
\$in	<ul style="list-style-type: none"> <li>• is any of / LBL_OPERATOR_CONTAINS <ul style="list-style-type: none"> <li>◦ Used by enum, int, relate, teamset, and tag</li> </ul> </li> </ul>	Finds anything where field matches one of the values as specified as an array.
\$not_in	<ul style="list-style-type: none"> <li>• is not any of / LBL_OPERATOR_NOT_CONTAINS <ul style="list-style-type: none"> <li>◦ Used by enum, relate, teamset, and tag</li> </ul> </li> </ul>	Finds anything where the field does not match any of the values in the specified array of values.
\$equals	<ul style="list-style-type: none"> <li>• exactly matches / LBL_OPERATOR_MATCHES <ul style="list-style-type: none"> <li>◦ Used by varchar, name, email, text, and textarea</li> </ul> </li> <li>• is equal to / LBL_OPERATOR_EQUALS <ul style="list-style-type: none"> <li>◦ Used by currency, int, double, float, decimal, and date</li> </ul> </li> <li>• is / LBL_OPERATOR_IS <ul style="list-style-type: none"> <li>◦ Used by bool, phone, radioenum, and parent</li> </ul> </li> </ul>	Performs an exact match on that field.
\$starts	<ul style="list-style-type: none"> <li>• starts with / LBL_OPERATOR_STARTS_WITH <ul style="list-style-type: none"> <li>◦ Used by varchar,</li> </ul> </li> </ul>	Matches on anything that starts with the value.

	<p>name, email, text, textarea, and phone</p> <ul style="list-style-type: none"> <li>• is equal to / LBL_OPERATOR_EQUALS <ul style="list-style-type: none"> <li>◦ Used by datetime and dateti mecombo</li> </ul> </li> </ul>	
\$not_equals	<ul style="list-style-type: none"> <li>• is not equal to / LBL_OPERATOR_NOT_EQU ALS <ul style="list-style-type: none"> <li>◦ Used by currency, int, double, float, and decimal</li> </ul> </li> <li>• is not / LBL_OPERATOR_IS_NOT <ul style="list-style-type: none"> <li>◦ Used by radioenum</li> </ul> </li> </ul>	Matches on non-matching values.
\$gt	<ul style="list-style-type: none"> <li>• is greater than / LBL_OPERATOR_GREATER_ THAN <ul style="list-style-type: none"> <li>◦ Used by currency, int, double, float, and decimal</li> </ul> </li> <li>• after / LBL_OPERATOR_AFTER <ul style="list-style-type: none"> <li>◦ Used by date</li> </ul> </li> </ul>	Matches when the field is greater than the value.
\$lt	<ul style="list-style-type: none"> <li>• is less than / LBL_OPERATOR_LESS_THA N <ul style="list-style-type: none"> <li>◦ Used by currency, int, double, float, and decimal</li> </ul> </li> <li>• before / LBL_OPERATOR_BEFORE <ul style="list-style-type: none"> <li>◦ Used by date</li> </ul> </li> </ul>	Matches when the field is less than the value.

\$gte	<ul style="list-style-type: none"> <li>• is greater than or equal to / LBL_OPERATOR_GREATER_THAN_OR_EQUALS <ul style="list-style-type: none"> <li>◦ Used by currency, int, double, float, and decimal</li> </ul> </li> <li>• after / LBL_OPERATOR_AFTER <ul style="list-style-type: none"> <li>◦ Used by datetime and datetimecombo</li> </ul> </li> </ul>	Matches when the field is greater than or equal to the value
\$lte	<ul style="list-style-type: none"> <li>• is less than or equal to / LBL_OPERATOR_LESS_THAN_OR_EQUALS <ul style="list-style-type: none"> <li>◦ Used by currency, int, double, float, and decimal</li> </ul> </li> <li>• before / LBL_OPERATOR_BEFORE <ul style="list-style-type: none"> <li>◦ Used by datetime and datetimecombo</li> </ul> </li> </ul>	Matches when the field is less than or equal to the value.
\$between	<ul style="list-style-type: none"> <li>• is between / LBL_OPERATOR_BETWEEN <ul style="list-style-type: none"> <li>◦ Used by currency, int, double, float, and decimal</li> </ul> </li> </ul>	Matches when a numerical value is between two other numerical values.
last_7_days	<ul style="list-style-type: none"> <li>• last 7 days / LBL_OPERATOR_LAST_7_DAYS <ul style="list-style-type: none"> <li>◦ Used by date, datetime, and datetimecombo</li> </ul> </li> </ul>	Matches date in the last 7 days relative to the current date.
next_7_days	<ul style="list-style-type: none"> <li>• next 7 days /</li> </ul>	Matches dates in the next

	<p>LBL_OPERATOR_NEXT_7_DAYS</p> <ul style="list-style-type: none"> <li>◦ Used by date, datetime, and datetime mecombo</li> </ul>	7 days relative to the current date.
last_30_days	<ul style="list-style-type: none"> <li>• last 30 days / LBL_OPERATOR_LAST_30_DAYS <ul style="list-style-type: none"> <li>◦ Used by date, datetime, and datetime mecombo</li> </ul> </li> </ul>	Matches dates in the last 30 days relative to the current date.
next_30_days	<ul style="list-style-type: none"> <li>• next 30 days / LBL_OPERATOR_NEXT_30_DAYS <ul style="list-style-type: none"> <li>◦ Used by date, datetime, and datetime mecombo</li> </ul> </li> </ul>	Matches dates in the next 30 days relative to the current date.
last_month	<ul style="list-style-type: none"> <li>• last month / LBL_OPERATOR_LAST_MONTH <ul style="list-style-type: none"> <li>◦ Used by date, datetime, and datetime mecombo</li> </ul> </li> </ul>	Matches dates in the previous month relative to the current month.
this_month	<ul style="list-style-type: none"> <li>• this month / LBL_OPERATOR_THIS_MONTH <ul style="list-style-type: none"> <li>◦ Used by date, datetime, and datetime mecombo</li> </ul> </li> </ul>	Matches dates in the current month.
next_month	<ul style="list-style-type: none"> <li>• next month / LBL_OPERATOR_NEXT_MONTH <ul style="list-style-type: none"> <li>◦ Used by date, datetime, and datetime mecombo</li> </ul> </li> </ul>	Matches dates in the next month relative to the current month.



	mecombo	
last_year	<ul style="list-style-type: none"> <li>last year / LBL_OPERATOR_LAST_YEAR</li> <li>Used by date, datetime, and dateti mecombo</li> </ul>	Matches dates in the last year relative to the current year.
this_year	<ul style="list-style-type: none"> <li>this year / LBL_OPERATOR_THIS_YEAR</li> <li>Used by date, datetime, and dateti mecombo</li> </ul>	Matches dates in the current year.
next_year	<ul style="list-style-type: none"> <li>next year / LBL_OPERATOR_NEXT_YEAR</li> <li>Used by date, datetime, and dateti mecombo</li> </ul>	Matches dates in the next year relative to the current year.
\$dateBetween	<ul style="list-style-type: none"> <li>is between / LBL_OPERATOR_BETWEEN</li> <li>Used by date, datetime, and dateti mecombo</li> </ul>	Matches dates between two given dates.
yesterday	<ul style="list-style-type: none"> <li>yesterday / LBL_OPERATOR_YESTERDAY</li> <li>Used by date, datetime, and dateti mecombo</li> </ul>	Matches dates on yesterday relative to the current date.
today	<ul style="list-style-type: none"> <li>today / LBL_OPERATOR_TODAY</li> <li>Used by date, datetime,</li> </ul>	Matches dates in the current date.

	and dateti mecombo	
tomorrow	<ul style="list-style-type: none"> <li>• tomorrow / LBL_OPERATOR_TOMORRO W <ul style="list-style-type: none"> <li>◦ Used by date, datetime, and dateti mecombo</li> </ul> </li> </ul>	Matches dates on tomorrow relative to the current date.

## Example

The example below defines a filter where the type field must contain the value Customer and the name field must start with the letter A.

```
$filters = array(
  array(
    'type' => array(
      '$in' => array(
        'Customer',
      ),
    ),
  ),
  array(
    'name' => array(
      '$starts' => 'A',
    ),
  ),
);
```

## Sub-Expressions

Sub-expressions group filter expressions into groupings. By default, all expressions are bound by an \$and expression grouping.

Sub-Expression	Description
\$and	Joins the filters in an "and" expression
\$or	Joins the filters in an "or" expression

**Note:** Sub-Expressions are only applicable to predefined filters and cannot be used

---

for initial filters.

The example below defines a filter where the name field must begin with the letters A or C.

```
$filters = array(
    '$or' => array (
        array(
            'name' => array(
                '$starts' => 'A',
            ),
        ),
        array(
            'name' => array(
                '$starts' => 'C',
            ),
        ),
    ),
);
```

## Module Expressions

Module expressions operate on modules instead of specific fields. The current module can be specified by either using the module name `_this` or by leaving the module name as a blank string.

Module Expression	Description
<code>\$favorite</code>	Filters the records by the current users favorited items.
<code>\$owner</code>	Filters the records by the assigned user.

The example below defines a filter where records must be favorited items.


```
$filters = array(
    array(
        '$favorite' => '_this'
    ),
);
```

## Filter Examples

### Adding Predefined Filters to the List View Filter List

---

To add a predefined filter to the module's list view, create a new filter definition extension, which will append the filter to the module's viewdefs.

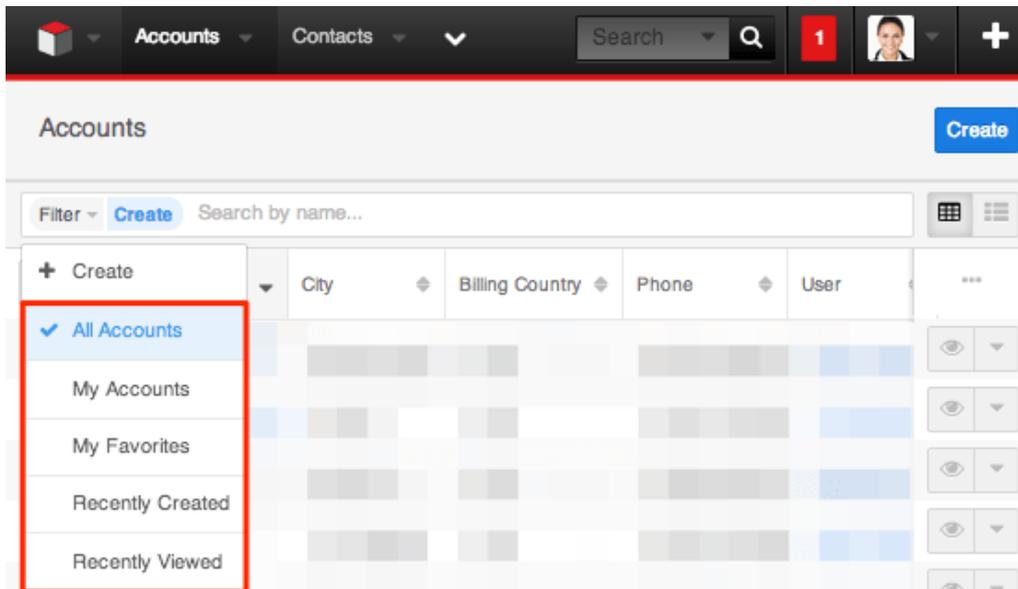

The following example will demonstrate how to add a predefined filter on the Accounts module to return all records with an account type of "Customer" and industry of "Other".

To create a predefined filter, create a display label extension in `./custom/Extension/modules/<module>/Ext/Language/`. For this example, we will create:

```
./custom/Extension/modules/Accounts/Ext/Language/en_us.filterAccountByTypeAndIndustry.php
```

```
<?php
```

```
$mod_strings['LBL_FILTER_ACCOUNT_BY_TYPE_AND_INDUSTRY'] = 'Customer/Other Accounts';
```

Next, create a custom filter extension in `./custom/Extension/modules/<module>/Ext/clients/base/filters/basic/`.

For this example, we will create:

```
./custom/Extension/modules/Accounts/Ext/clients/base/filters/basic/filterAccountByTypeAndIndustry.php
```

```
<?php
```

```
$viewdefs['Accounts']['base']['filter']['basic']['filters'][] = array(
```

---

```

'id' => 'filterAccountByTypeAndIndustry',
'name' => 'LBL_FILTER_ACCOUNT_BY_TYPE_AND_INDUSTRY',
'filter_definition' => array(
    array(
        'account_type' => array(
            '$in' => array(
                'Customer',
            ),
        ),
    ),
    array(
        'industry' => array(
            '$in' => array(
                'Other',
            ),
        ),
    ),
),
'editable' => false,
'is_template' => false,
);

```

You should notice that the `editable` and `is_template` options have been set to "false". If `editable` is not set to "false", the filter will not be displayed in the list view filter's list.

Finally, navigate to Admin > Repair and click "Quick Repair and Rebuild" to rebuild the extensions and make the predefined filter available for users.

## Adding Initial Filters to Lookup Searches

To add initial filters to record lookups and type-ahead searches, define a filter template. This will allow you to filter results for users when looking up a parent related record. The following example will demonstrate how to add an initial filter for the Account lookup on the Contacts module. This initial filter will limit records to having an account type of "Customer" and a dynamically assigned user value determined by the contact's assigned user.

To add an initial filter to the Contacts record view, create a display label for the filter in `./custom/Extension/modules/<module>/Ext/Language/`. For this example, we will create:

```
./custom/Extension/modules/Accounts/Ext/Language/en_us.filterAccountTemplate.php
```

---

```
<?php
```

```
$mod_strings['LBL_FILTER_ACCOUNT_TEMPLATE'] = 'Customer Accounts By A  
Dynamic User';
```

Next, create a custom template filter extension in  
./custom/Extension/modules/<module>/Ext/clients/base/filters/basic/. For this  
example, create:

./custom/Extension/modules/Accounts/Ext/clients/base/filters/basic/filterAccountTe  
mplate.php

```
<?php
```

```
$viewdefs['Accounts']['base']['filter']['basic']['filters'][] = array(  
    'id' => 'filterAccountTemplate',  
    'name' => 'LBL_FILTER_ACCOUNT_TEMPLATE',  
    'filter_definition' => array(  
        array(  
            'account_type' => array(  
                '$in' => array(),  
            ),  
        ),  
        array(  
            'assigned_user_id' => ''  
        )  
    ),  
    'editable' => true,  
    'is_template' => true,  
);
```

As you can see, the filter\_definition contains arrays for account\_type and  
assigned\_user\_id. These filter definitions will receive their values from the contact  
record view's metadata. You should also note that this filter has is\_template and  
editable set to "true". This is required for initial filters.

Once the filter template is in place, modify the contact record view's metadata. To  
accomplish this, edit

./custom/modules/Contacts/clients/base/views/record/record.php to adjust the  
account\_name field. If this file does not exist in your local Sugar installation,  
navigate to Admin > Studio > Contacts > Layouts > Record View and click "Save  
& Deploy" to generate it. In this file, identify the panel\_body array as shown below:

```
1 =>  
array (  
    'name' => 'panel_body',
```

---

```

'label' => 'LBL_RECORD_BODY',
'columns' => 2,
'labelsOnTop' => true,
'placeholders' => true,
'newTab' => false,
'panelDefault' => 'expanded',
'fields' =>
array (
    0 => 'title',
    1 => 'phone_mobile',
    2 => 'department',
    3 => 'do_not_call',
    4 => 'account_name',
    5 => 'email',
),
),

```

Next, modify the `account_name` field to contain the initial filter parameters.

```

1 =>
array (
    'name' => 'panel_body',
    'label' => 'LBL_RECORD_BODY',
    'columns' => 2,
    'labelsOnTop' => true,
    'placeholders' => true,
    'newTab' => false,
    'panelDefault' => 'expanded',
    'fields' =>
array (
    0 => 'title',
    1 => 'phone_mobile',
    2 => 'department',
    3 => 'do_not_call',
    4 => array (
        //field name
        'name' => 'account_name',

        //the name of the filter template
        'initial_filter' => 'filterAccountTemplate',

        //the display label for users
        'initial_filter_label' => 'LBL_FILTER_ACCOUNT_TEMPLATE',

        //the hardcoded filters to pass to the templates filter de

```

finition

---

```

        'filter_populate' => array(
            'account_type' => array('Customer')
        ),

        //the dynamic filters to pass to the templates filter definition
        //please note the index of the array will be for the field the data is being pulled from
        'filter_relate' => array(
            //'field_to_pull_data_from' => 'field_to_populate_data_to'
            'assigned_user_id' => 'assigned_user_id',
        )
    ),
    5 => 'email',
),
),
),

```

Finally, navigate to Admin > Repair and click "Quick Repair and Rebuild". This will rebuild the extensions and make the initial filter available for users when selecting a parent account for a contact.

## Adding Initial Filters to Drawers from a Controller

When creating your own views, you may need to filter a drawer called from within your custom controller. Using an initial filter, as described in the [Adding Initial Filters to Lookup Searches](#) section, we can filter a drawer with predefined values by creating a filter object and populating the `config.filter_populate` property as shown below:

```

//create filter
var filterOptions = new app.utils.FilterOptions()
    .config({
        'initial_filter': 'filterAccountTemplate',
        'initial_filter_label': 'LBL_FILTER_ACCOUNT_TEMPLATE',
        'filter_populate': {
            'account_type': ['Customer'],
            'assigned_user_id': 'seed_sally_id'
        }
    })
    .format();

//open drawer
app.drawer.open({
    layout: 'selection-list',

```



---

```
    context: {
      module: 'Accounts',
      filterOptions: filterOptions,
      parent: this.context
    }
  });
```

To create a filtered drawer with dynamic values, create a filter object and populate the `config.filter_relate` property using the `populateRelate` method as shown below:

```
//record to filter related fields by
var contact = app.data.createBean('Contacts', {
  'first_name': 'John',
  'last_name': 'Smith',
  'assigned_user_id': 'seed_sally_id'
});

//create filter
var filterOptions = new app.utils.FilterOptions()
  .config({
    'initial_filter': 'filterAccountTemplate',
    'initial_filter_label': 'LBL_FILTER_ACCOUNT_TEMPLATE',
    'filter_populate': {
      'account_type': ['Customer'],
    },
    'filter_relate': {
      'assigned_user_id': 'assigned_user_id'
    }
  })
  .populateRelate(contact)
  .format();

//open drawer
app.drawer.open({
  layout: 'selection-list',
  context: {
    module: 'Accounts',
    filterOptions: filterOptions,
    parent: this.context
  }
});
```

**Last Modified:** 2021-02-17 02:44:13

---

# Duplicate Check

## Overview

The duplicate-check framework provides the capability to alter how the system searches for duplicate records in the database when creating records. For information on duplicate checking during imports, please refer to the [index](#) documentation.

## Default Strategy

The default duplicate-check strategy, located in `./data/duplicatecheck/FilterDuplicateCheck.php`, is referred to as `FilterDuplicateCheck`. This strategy utilizes the [Filter API](#) and a defined filter in the [vardefs](#) of the module to search for duplicates and rank them based on matching data.

## Custom Filter

To alter a defined filter for a stock a module, you only need to update the [Vardefs](#) using the [Extensions framework](#). If you are working with a custom module, you can modify the vardefs in `./modules/<module>/vardefs.php` directly. The `FilterDuplicateCheck` Strategy accepts two properties in its metadata:

Name	Type	Description
<code>filter_template</code>	array	An array containing the Filter Definition for which fields to search for duplicates on. Please consult the Filter API for further information on the filter syntax
<code>ranking_fields</code>	array	A list of arrays with the following properties. The order in which you list the fields for ranking will determine the ranking score. The first ranks higher, than those after it.  <b>in_field_name:</b> Name of

---

	field in vardefs
--	------------------

	<b>dupe_field_name:</b> Name of field returned by filter
--	--

## Example

The following example will demonstrate how to manipulate the stock Accounts duplicate check to not filter on the shipping address city. The default Account duplicate\_check definition, located in ./modules/Accounts/vardefs.php, is shown below.

```
...
'duplicate_check' => array(
    'enabled' => true,
    'FilterDuplicateCheck' => array(
        'filter_template' => array(
            array(
                '$or' => array(
                    array('name' => array('$equals' => '$name')),
                    array('duns_num' => array('$equals' => '$duns_num'
)),
                array(
                    '$and' => array(
                        array('name' => array('$starts' => '$name'
)),
                    array(
                        '$or' => array(
                            array('billing_address_city' => ar
array('$starts' => '$billing_address_city')),
                            array('shipping_address_city' => a
rray('$starts' => '$shipping_address_city')),
                        )
                    ),
                )
            ),
        ),
    ),
    'ranking_fields' => array(
        array('in_field_name' => 'name', 'dupe_field_name' => 'nam
e'),
        array('in_field_name' => 'billing_address_city', 'dupe_fie
ld_name' => 'billing_address_city'),
```

---

```

        array('in_field_name' => 'shipping_address_city', 'dupe_fi
eld_name' => 'shipping_address_city'),
    )
)
),
...

```

To add or remove fields from the check, you will need to manipulate `$dictionary['<module>']['duplicate_check']['FilterDuplicateCheck']['filter_template']` and `$dictionary['<module>']['duplicate_check']['FilterDuplicateCheck']['ranking_fields']`. For our example, we will simply remove the references to `shipping_address_city`. It is important to familiarize yourself with [filter operators](#) before making any changes.

`./custom/Extension/modules/Accounts/Ext/Vardefs/newFilterDuplicateCheck.php`

```
<?php
```

```

$dictionary['Account']['duplicate_check']['FilterDuplicateCheck'] = ar
ray(
    'filter_template' => array(
        array(
            '$or' => array(
                array('name' => array('$equals' => '$name')),
                array('duns_num' => array('$equals' => '$duns_num')),
                array(
                    '$and' => array(
                        array('name' => array('$starts' => '$name')),
                        array(
                            '$or' => array(
                                array('billing_address_city' => array(
'$starts' => '$billing_address_city')),
                            )
                        ),
                    ),
                ),
            ),
        ),
    ),
    'ranking_fields' => array(
        array('in_field_name' => 'name', 'dupe_field_name' => 'name'),
        array('in_field_name' => 'billing_address_city', 'dupe_field_n
ame' => 'billing_address_city'),
    )
);

```

---

Finally, navigate to Admin > Repair > Quick Repair and Rebuild. The system will then enable the custom duplicate-check class.

If you want to disable the duplicate check entirely, you can set `$dictionary['<module>']['duplicate_check']['enabled']` to false in your vardefs and run a Quick Repair and Rebuild.

```
$dictionary['Account']['duplicate_check']['enabled'] = false;
```

## Custom Strategies

Custom duplicate-check class files are stored under `./custom/data/duplicatecheck/`. The files in this directory can be enabled on a module's `duplicate_check` property located in `./custom/Extension/modules/<module>/Ext/Vardefs/`. Only one duplicate-check class can be enabled on a module at a given time.

## Duplicate Check Class

To create a custom duplicate-check strategy, you need to create a custom duplicate-check class that extends the base `DuplicateCheckStrategy`, `./data/duplicatecheck/DuplicateCheckStrategy.php`. To work, this custom class requires the implementation of two methods:

Method Name	Description
<code>setMetadata</code>	Sets up properties for duplicate-check logic based on the passed-in metadata
<code>findDuplicates</code>	Finds possible duplicate records for a given set of field data

### Example

The following example will create a new duplicate-check class called "OneFieldDuplicateCheck" that will query the database based on the configured field for records that contain data similar to that one field:

```
./custom/data/duplicatecheck/OneFieldDuplicateCheck.php
```

```
<?php
```

```
if(!defined('sugarEntry') || !sugarEntry) die('Not A Valid Entry Point
```

```

');

class OneFieldDuplicateCheck extends DuplicateCheckStrategy
{
    protected $field;

    public function setMetadata($metadata)
    {
        if (isset($metadata['field'])) {
            $this->field = $metadata['field'];
        }
    }

    public function findDuplicates()
    {
        if (empty($this->field)){
            return null;
        }

        $Query = new SugarQuery();
        $Query->from($this->bean);
        $Query->where()->ends($this->field,$this->bean->{$this->field}
    );

        $Query->limit(10);
        //Filter out the same Bean during Edits
        if (!empty($this->bean->id)) {
            $Query->where()->notEquals('id',$this->bean->id);
        }
        $results = $Query->execute();
        return array(
            'records' => $results
        );
    }
}

```

## Vardef Settings

The duplicate-check vardef settings are configured on each module and can be altered using the [Extension framework](#).

Name	Type	Description
enabled	boolean	Whether or not duplicate-check framework is

		enabled on the module
<class_name>	array	The class name that will provide duplicate checking, set to an array of metadata that gets passed to the duplicate-check class

If you want to enable the OneFieldDuplicateCheck strategy (shown above) for the Accounts module, you must create the following file:

`./custom/Extension/modules/Accounts/Ext/Vardefs/newDuplicateCheck.php`

```
<?php
$dictionary['Account']['duplicate_check'] = array(
    'enabled' => true,
    'OneFieldDuplicateCheck' => array(
        'field' => 'name'
    )
);
```

Finally, navigate to Admin > Repair > Quick Repair and Rebuild. The system will then enable the custom duplicate-check class.

## Programmatic Usage

You can also use the duplicate-check framework in code such as in a logic hook or a scheduler. The following example shows how to use the module's defined duplicate-check strategy when utilizing a bean object by simply calling the findDuplicates method on the bean object:

```
$account = BeanFactory::newBean('Accounts');
$account->name = 'Test';
$duplicates = $account->findDuplicates();

if (count($duplicates['records'])>0){
    $GLOBALS['log']->fatal("Duplicate records found for Account");
}
```

**Last Modified:** 2021-02-17 02:44:13

---

# Elastic Search

## Overview

The focus of this document is to guide developers on how Sugar integrates with Elastic Search.

## Resources

We recommend the following resources to get started with Elasticsearch:

- [Elasticsearch: The Definitive Guide](#)
- [Elasticsearch Reference](#)

## Deployment

The following figure shows a typical topology of Elasticsearch with a Sugar system. All the communication with Elasticsearch goes through Sugar via REST APIs.






---

## Framework

The following figure shows the overall architecture with main components in the Elasticsearch framework and related components in Sugar framework.

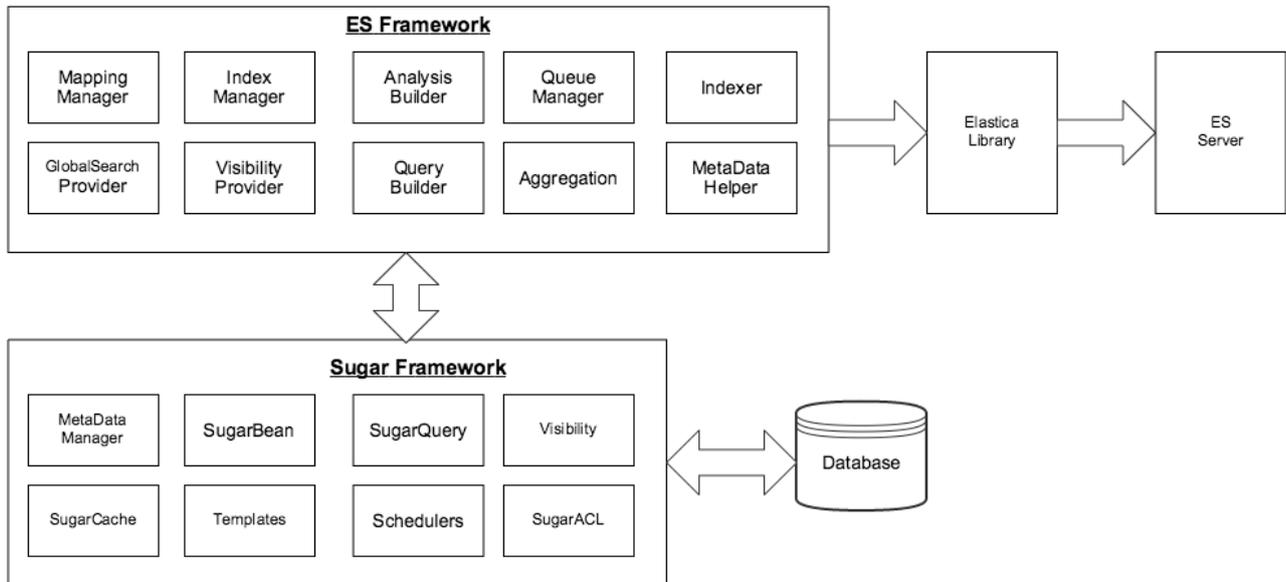

## Main Components

This section describes how to use each of the main components in detail.

### Mapping Manager

This component builds the mappings for providers in the system. The mappings are used for Elastic to interpret data stored there, which is similar to a database schema.

1. Define the `full_text_search` property in a module's `vardef` file for a given field:
  - **enabled** : sets the field to be enabled for global search;
  - **searchable** : sets the field to be searchable or not;
  - **boost** : sets the boost value so that the field can be ranked differently at search time.
  - **type** : overrides the sugar type originally defined;
  - **aggregations** : sets the properties specific related to aggregations;

---

2. Define what analyzers to use for a given sugar type:

- The analyzers for both indexing and searching are specified. They may be different for the same field. The index analyzer is used at indexing time, while the search analyzer is used at query time.
- Each of the providers generates its own mapping.

3. Generates mappings for each field and sends it over to Elasticsearch.

## Example Mapping

This section outlines how the mapping is created for Account module's name field. The Account module's name field is defined as "searchable" in the "full\_text\_search" index of the vardefs. The Sugar type "name" uses the regular and ngram string analyzers for indexing and search.

./modules/Accounts/vardefs.php

```
...
'name' => array(
    'name' => 'name',
    'type' => 'name',
    'dbType' => 'varchar',
    'vname' => 'LBL_NAME',
    'len' => 150,
    'comment' => 'Name of the Company',
    'unified_search' => true,
    'full_text_search' => array(
        'enabled' => true,
        'searchable' => true,
        'boost' => 1.9099999999999999,
    ),
    'audited' => true,
    'required' => true,
    'importable' => 'required',
    'duplicate_on_record_copy' => 'always',
    'merge_filter' => 'selected',
),
...
```

The field handler, located in ./src/Elasticsearch/Provider/GlobalSearch/Handler/Implement/MultiFieldHandler.php, defines the mappings used by Elasticsearch. The class property \$typesMultiField in the MultiFieldHandler class defines the relationship between types and mappings. For the "name" type, we use the gs\_string and gs\_string\_wildcard definitions to define our mappings and analyzers.

---

./src/Elasticsearch/Provider/GlobalSearch/Handler/Implement/MultiFieldHandler.php

```
...
protected $typesMultiField = array(
    ...
    'name' => array(
        'gs_string',
        'gs_string_wildcard',
    ),
    ...
);
...
```

The class property `$multiFieldDefs` in the `MultiFieldHandler` class defines the actual Elasticsearch mapping to be used.

```
...
protected $multiFieldDefs = [
    ...
    /*
     * Default string analyzer with full word matching base on d
     * the standard analyzer. This will generate hits on the full
     * words tokenized by the standard analyzer.
     */
    'gs_string' => [
        'type' => 'text',
        'index' => true,
        'analyzer' => 'gs_analyzer_string',
        'store' => true,
    ],
    /*
     * String analyzer using ngrams for wildcard matching. The
     * weighting of the hits on this mapping are less than full
     * matches using the default string mapping.
     */
    'gs_string_wildcard' => [
        'type' => 'text',
        'index' => true,
        'analyzer' => 'gs_analyzer_string_ngram',
        'search_analyzer' => 'gs_analyzer_string',
        'store' => true,
    ],
    ...
]
```

---

```
];  
...
```


The mapping is created from the definitions in Elasticsearch. A sample mapping is shown below:

```
"Accounts__name": {  
  "include_in_all": false,  
  "index": "not_analyzed",  
  "type": "string",  
  "fields": {  
    "gs_string_wildcard": {  
      "index_analyzer": "gs_analyzer_string_ngram",  
      "store": true,  
      "search_analyzer": "gs_analyzer_string",  
      "type": "string"  
    },  
    "gs_string": {  
      "store": true,  
      "analyzer": "gs_analyzer_string",  
      "type": "string"  
    }  
  }  
}
```

## Index Manager

An index includes types, similar to a database including tables. In our system, a type is based on a module consisting of mappings.

As shown in the following figure, the Index Manager combines the analysis built from Analysis Builder and the mappings from Mapping Manager from different providers and organizes them by modules.

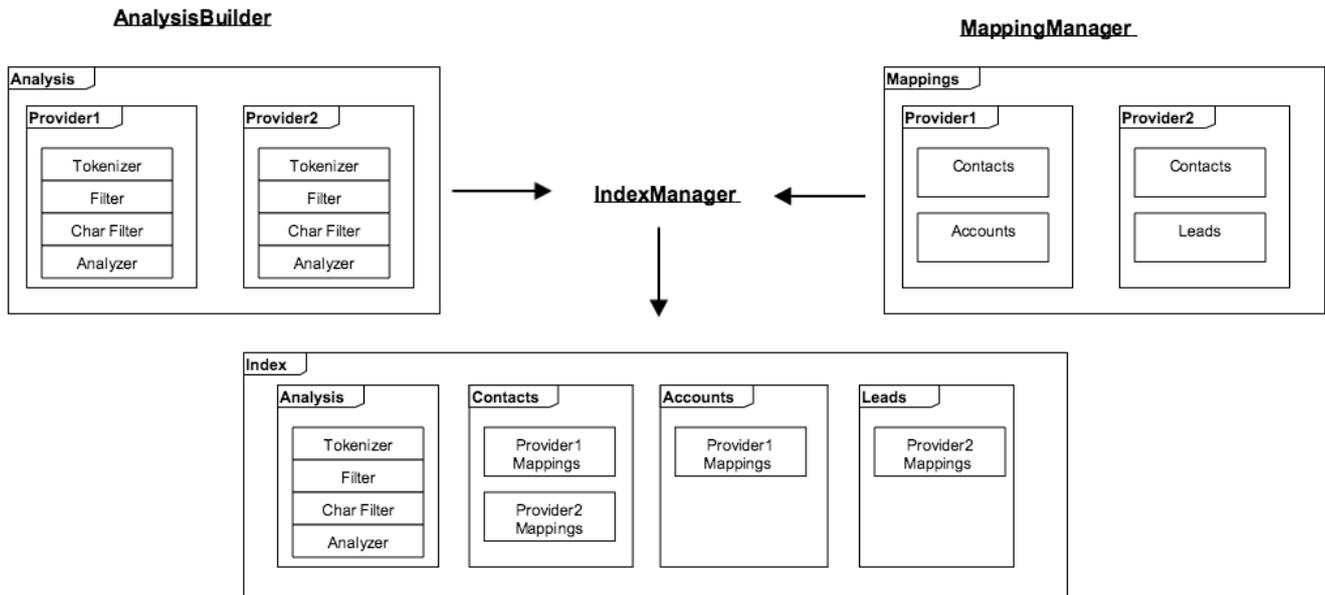


## Indexer & Queue Manager

After creating the index, data needs to be moved from the Sugar system to Elasticsearch. The queue manager uses the `fts_queue` and `job_queue` tables to queue the information. The indexer then processes data from Sugar bean into the format of Elasticsearch documents.

The whole process is as follows:


1. Each Sugar bean is added to `fts_queue` table.
2. Elasticsearch queue scheduler is added to `job_queue` table.
3. When the job starts, the scheduler generates an Elasticsearch queue consumer for each module.
4. Each consumer queries the `fts_queue` table to find the corresponding sugar beans.
5. The indexer gets fields from each bean and processes them into individual documents.
6. The indexer uses the bulk APIs to send documents to Elasticsearch in batches.

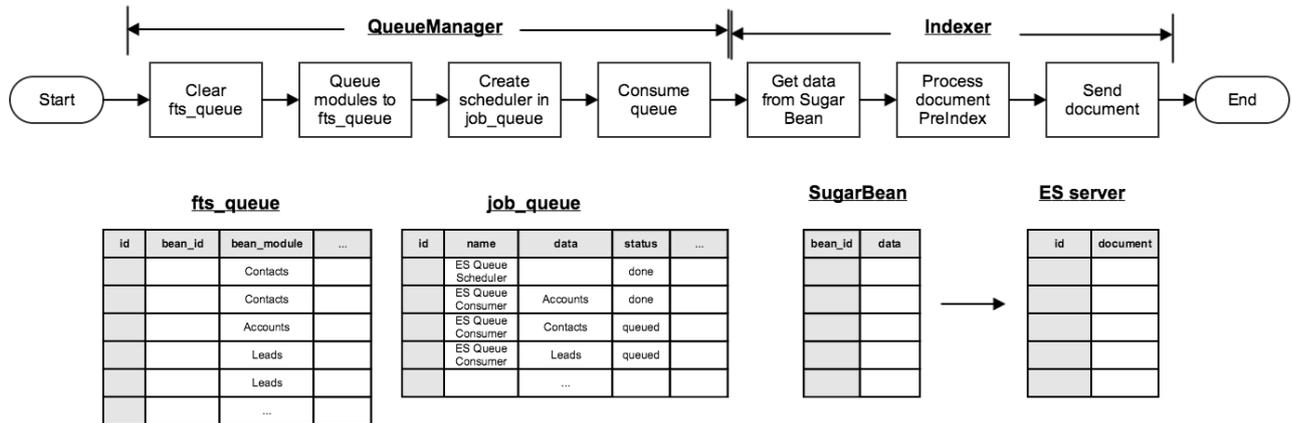

## Global Search Provider

The provider supplies information to build analysis, mapping, query, etc. It is done by using handlers. Currently, there are two providers in the system: global search and visibility. To extend the functionalities, new providers and handlers may be added.

The following figure shows the existing handler interfaces and some of the handlers implementing them.

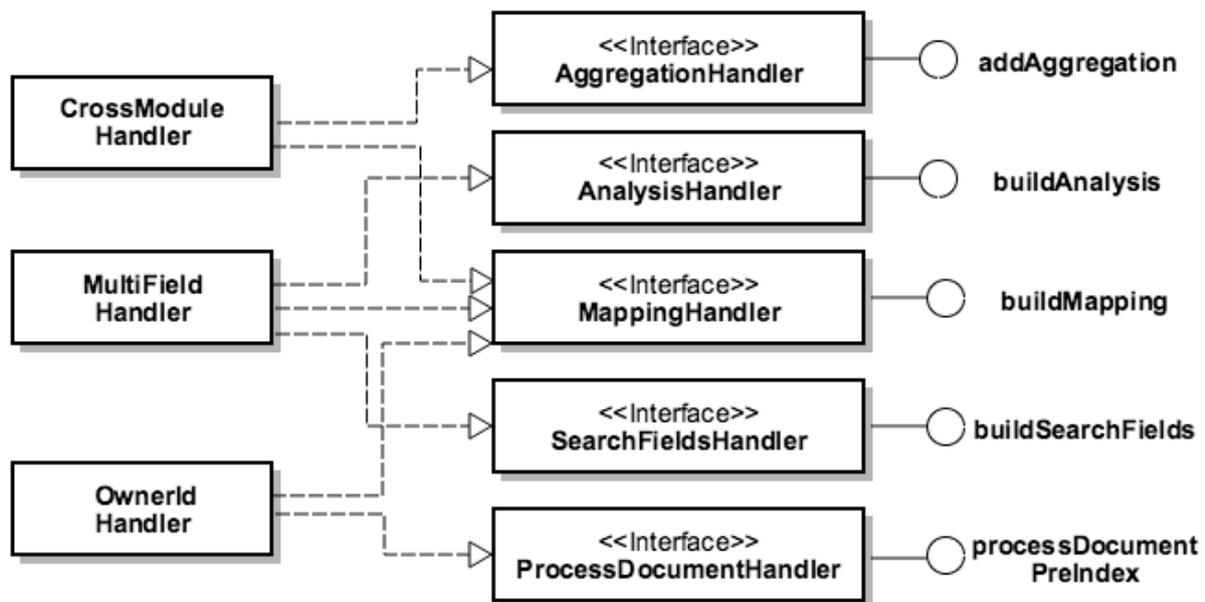

## Query Builder

The Query builder composes the query string for search. A structure of a typical multi-match query is shown as follows:

```

{
  "query": {
    "filtered": {
      "query": {
        "bool": {
          "must": [{
            "bool": {
              "should": [{
                "multi_match": {
                  "type": "cross_fields",
                  "query": "test",
                  "fields": [
                    "Cases__name.gs_string^1.53",
                    "Cases__name.gs_string_wildcar
d^0.69",
                    "Cases__description.gs_string^
0.66",
                    "Cases__description.gs_text_wi
ldcard^0.23",
                    "Bugs__name.gs_string^1.51",
                    "Bugs__name.gs_string_wildcard
^0.68",
                    "Bugs__description.gs_string^0
.68",
                    "Bugs__description.gs_text_wil
dcard^0.24"
                  ],
                  "tie_breaker": 1
                }
              }
            }
          ]
        },
        {
          "bool": {
            "should": [{
              "multi_match": {
                "type": "cross_fields",
                "query": "query",
                "fields": [
                  "Cases__name.gs_string^1.53",
                  "Cases__name.gs_string_wildcar
d^0.69",
                  "Cases__description.gs_string^
0.66",
                  "Cases__description.gs_text_wi
ldcard^0.23",

```

```

^0.68",
.68",
dcard^0.24"

"Bugs__name.gs_string^1.51",
"Bugs__name.gs_string_wildcard

"Bugs__description.gs_string^0

"Bugs__description.gs_text_wil

],
"tie_breaker": 1
}
}]
}
}]
},
"filter": {
  "bool": {
    "must": [{
      "bool": {
        "should": [{
          "bool": {
            "must": [{
              "term": {
                "_type": "Bugs"
              }
            }]
          }
        ]
      },
      {
        "bool": {
          "must": [{
            "term": {
              "_type": "Cases"
            }
          }]
        }
      }
    ]
  }
}
}],
}
}
},
"highlight": {
  "pre_tags": [
    "<strong>"

```



---

```
],
"post_tags": [
  "<\strong>"
],
"require_field_match": 1,
"number_of_fragments": 3,
"fragment_size": 255,
"encoder": "html",
"order": "score",
"fields": {
  ".*gs_string": {
    "type": "plain",
    "force_source": false
  },
  ".*gs_string_exact": {
    "type": "plain",
    "force_source": false
  },
  ".*gs_string_html": {
    "type": "plain",
    "force_source": false
  },
  ".*gs_string_wildcard": {
    "type": "plain",
    "force_source": false
  },
  ".*gs_text_wildcard": {
    "type": "plain",
    "force_source": false
  },
  ".*gs_phone_wildcard": {
    "type": "plain",
    "force_source": false
  },
  ".*gs_email": {
    "type": "plain",
    "force_source": false,
    "number_of_fragments": 0
  },
  ".*gs_email_wildcard": {
    "type": "plain",
    "force_source": false,
    "number_of_fragments": 0
  }
}
}
```

---

```
}
```

Figure 7: Multi-match query with aggregations.

A query may include multiple filters, post filters, queries, and settings, which can get complicated sometimes. To add new queries, we recommend adding new classes implementing *QueryInterface*, instead of modifying Query Builder or even calling Elastica APIs directly.

## ACL

ACL control is done in the Query Builder. The search fields are filtered based on their ACL access levels when being added to the query string in a specific query. For instance, *MultiMatchQuery* used for global search may include the following filterings:

1. If a field is owner read (i.e., `SugarACL::ACL_OWNER_READ_WRITE`), it will be added to a sub-query with a filter of `ownerId`.
2. If a field is not owner read, its access level must not equal to `SugarACL::ACL_NO_ACCESS`, in order to be added as one of the search fields in the query.

The corresponding function is `MultiMatchQuery.php::isFieldAccessible()`. Potentially this function can be shared by different queries that require ACL control.

## Visibility

The visibility model is applied when building the query too. It is done by adding filters built by individual visibility strategies, defined in `./data/visibility/` directory. These strategies implement *StrategyInterface* including:

1. building analysis,
2. building mapping,
3. processing document before being indexed,
4. getting bean index fields,
5. adding visibility filters.

The functions are similar to the global search provider's handler interfaces. The query builder only uses adding the visibility filters, while others provide information to Analysis builder, Mapping Manager, Indexer, etc. Hence the visibility provider is separated as an independent provider in the framework.

# Global Search

## Overview

How to customize the global search results.

## Configuring Search Results

The Search-List view, located in `./clients/base/views/search-list/`, is responsible for the global search results page. By default, it contains the row actions that are available for each result. The following sections will outline how to configure the primary and secondary fields.

### Primary and Secondary Fields

Each row returned from the global search is split into two lines. The first line contains the primary fields and avatar. A primary field is a field considered to be important to the identification of a record and is usually composed of the records name value and a link to the record. The avatar is an icon specific to the module the results are coming from.

The second line contains the highlighted matches and any secondary fields specified. A highlight is a hit returned by elastic search. Highlights are driven from elastic and no definition is needed in the metadata to define them. Both primary and secondary fields can be highlighted. A secondary field is a field that has regularly accessed data. It is important to note that the initial type-ahead drop-down will not show specified secondary fields unless the user hits enter and is taken to the search results page. Different modules have different secondary fields. For example, an account's secondary fields are email and phone number, while cases' secondary fields are case ID number and related account.

To leverage the metadata manager, the global search view reuses the same metadata format as other views. You can add any indexed field in elastic search to the search list view. An example of the stock metadata is shown below.

```
./modules/{module}/clients/base/views/search-list/search-list.php
```

```
<?php
```

---

```

$viewdefs[$moduleName]['base']['view']['search-list'] = array(
    'panels' => array(
        array(
            'name' => 'primary', // This is mandatory and the word `primary`
            can not be changed.
            'fields' => array(
                /*
                 * Put here the list of primary fields.
                 * You can either define a field as a string and the metadata
                 * manager will load the field vardefs, or you can define as an
                 * array if you want to add properties or override vardefs
                 * properties just for the search results view.
                 *
                 * You most likely want to show the module icon on the left of the
                 * view. For this, you need to add the following picture field as
                 * a primary field.
                 */
                array(
                    'name' => 'picture',
                    'type' => 'avatar',
                    'size' => 'medium',
                    'css_class' => 'pull-left',
                ),
                array(
                    'name' => 'name',
                    'type' => 'name',
                    'link' => true,
                    'label' => 'LBL_SUBJECT',
                ),
            ),
        ),
    ),
    /*
     * If you don't want secondary fields, you can remove the following array.
     */
    array(
        'name' => 'secondary', // This is mandatory and the word `secondary`
        can not be changed.
        'fields' => array(
            /*

```

```

        * Put here the list of secondary fields
        */
        'status', // This field is defined as a string for example.
    ),
    array(
        'name' => 'description',
        'label' => 'LBL_SEARCH_DESCRIPTION',
    ),
),
),
);

```


**Note:** You can technically override the row actions for the results of a module, however, the view currently only supports the preview action so it is not recommended to customize these actions.

## Examples

The following examples demonstrate how to modify the primary and secondary rows of the global search.

### Adding Fields to the Primary Row

This example will demonstrate how to add "Mobile" into the search-list view's primary row for Contact module results.

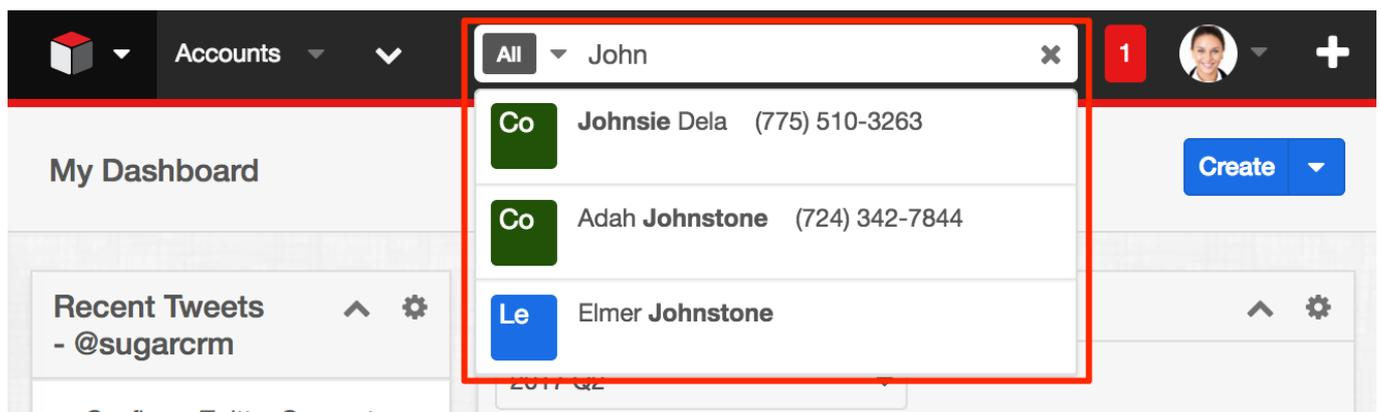

To accomplish this, you can duplicate `./modules/Contacts/clients/base/views/search-list/search-list.php` to `./custom/modules/Contacts/clients/base/views/search-list/search-list.php` if it doesn't exist. Once in place, add your `phone_mobile` definition to the `$viewdefs['Contacts']['base']['view']['search-list']['panels']` array definition with the name attribute equal to "primary". An example is shown below:

---

./custom/modules/Contacts/clients/base/views/search-list/search-list.php

<?php


```
$viewdefs['Contacts']['base']['view']['search-list'] = array(
    'panels' => array(
        array(
            'name' => 'primary',
            'fields' => array(
                array(
                    'name' => 'picture',
                    'type' => 'avatar',
                    'size' => 'medium',
                    'readonly' => true,
                    'css_class' => 'pull-left',
                ),
                array(
                    'name' => 'name',
                    'type' => 'name',
                    'link' => true,
                    'label' => 'LBL_SUBJECT',
                ),
                // Adding the mobile into first row of the results
                'phone_mobile',
            ),
        ),
        array(
            'name' => 'secondary',
            'fields' => array(
                array(
                    'name' => 'email',
                    'label' => 'LBL_PRIMARY_EMAIL',
                ),
            ),
        ),
    ),
);
```

Once in place, navigate to Admin > Repair > Quick Repair and Rebuild. Your changes will then be reflected in the system.

### **Adding Fields to the Secondary Row**

This example will demonstrate how to add "Mobile" into the search-list view's secondary row for Contact module results. It is important to note that the initial

type-ahead drop-down will not show specified secondary fields unless the user hits enter and is taken to the search results page.

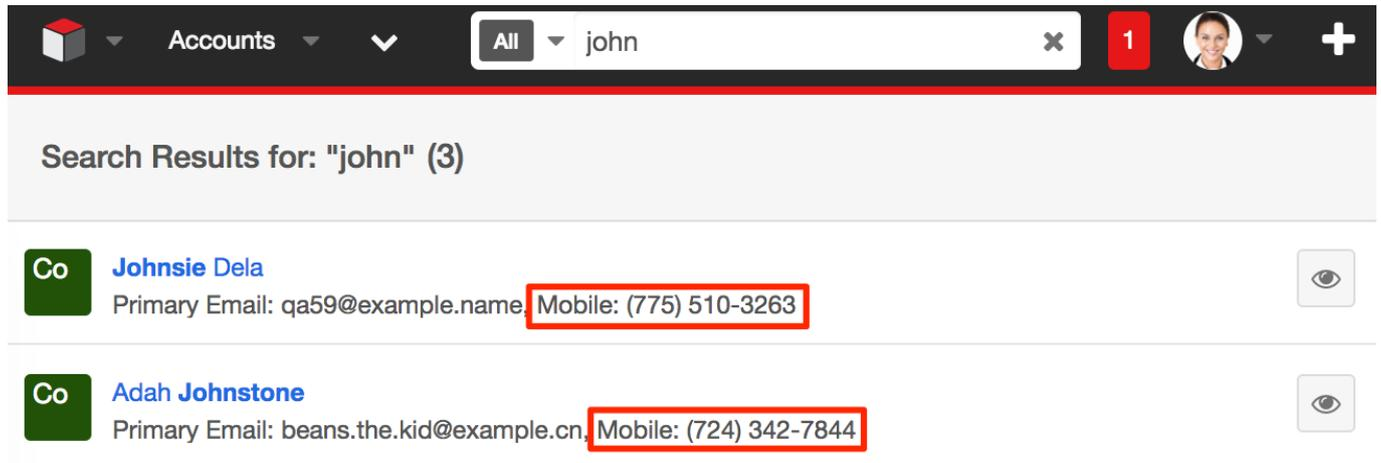

The screenshot shows a search interface with a header bar containing 'Accounts', a search bar with 'john', and a notification icon with '1'. Below the header, the search results are displayed for 'john' (3 results). Two contact entries are visible:

- Johnsie Dela**: Primary Email: qa59@example.name, Mobile: (775) 510-3263
- Adah Johnstone**: Primary Email: beans.the.kid@example.cn, Mobile: (724) 342-7844

Each entry includes a company logo (Co), a name, email address, mobile number, and an eye icon for visibility control.

In this example, we are going to add Portal Name into search-list for Contact module results.

To accomplish this, you can duplicate `./modules/Contacts/clients/base/views/search-list/search-list.php` to `./custom/modules/Contacts/clients/base/views/search-list/search-list.php` if it doesn't exist. Once in place, add your `phone_mobile` definition to the `$viewdefs['Contacts']['base']['view']['search-list']['panels']` array definition with the `name` attribute equal to `"secondary"`. An example is shown below:

```
<?php

$viewdefs['Contacts']['base']['view']['search-list'] = array(
    'panels' => array(
        array(
            'name' => 'primary',
            'fields' => array(
                array(
                    'name' => 'picture',
                    'type' => 'avatar',
                    'size' => 'medium',
                    'readonly' => true,
                    'css_class' => 'pull-left',
                ),
            ),
        ),
        array(
            'name' => 'name',
            'type' => 'name',
            'link' => true,
            'label' => 'LBL_SUBJECT',
        ),
    ),
);
```

---

```

        ),
    ),
    array(
        'name' => 'secondary',
        'fields' => array(
            array(
                'name' => 'email',
                'label' => 'LBL_PRIMARY_EMAIL',
            ),
            // Adding mobile to second row for search results in g
lobalsearch
            'phone_mobile'
        ),
    ),
);

```

Once in place, navigate to Admin > Repair > Quick Repair and Rebuild. Your changes will then be reflected in the system.

**Last Modified:** 2021-02-17 02:44:13

## Sugar Logic

### Overview

Sugar Logic, a feature in all Sugar products, enables custom business logic that is easy to create, manage, and reuse on both the server and client.

Sugar Logic is made up of multiple components that build on each other and is extensible at every step. The base component is the Sugar Formula Engine, which parses and evaluates human-readable formulas. Dependencies are units made up of triggers and actions that can express custom business logic. Each dependency defines a list of actions to be performed depending on the outcome of a trigger formula.

### Terminology

- **Formula** : An expression that conforms to the Formula Engine syntax,



- 
- consisting of nested functions and field variables
  - **Function** : A method that can be called in a formula
  - **Trigger** : A formula that evaluates to either true or false when a field in the equation is updated or when a record is retrieved/saved
  - **Action** : A method that modifies the current record or layout in some way
  - **Dependency** : A complete logical unit that includes a trigger and one or more actions

## Sugar Formula Engine

### Formulas

The fundamental object is called a formula. A formula can be evaluated for a given record using the Sugar Logic parser.

Some example formulas are:

Basic addition:

```
add(1, 2)
```

Boolean values:

```
not(equal($billing_state, "CA"))
```

Calculation:

```
multiply(number($employees), $seat_cost, 0.0833)
```

### Types

Sugar Logic has several fundamental types: [number](#), [string](#), [boolean](#), and [enum](#) (lists). Functions may take in any of these types or combinations thereof and return as output one of these types. Fields may also often have their value set to only a certain type.

#### Number Type

Number types essentially represent any real number (which includes positive, negative, and decimal numbers). They can be plainly typed as input to any function. For example, the operation  $(10 + 10 + (15 - 5))$  can be performed as follows:

---

```
add(10, 10, subtract(15, 5))
```

### **String Type**

A string type is very much like a string in most programming languages. However, it can only be declared within double quotes. For example, consider this function, which returns the length of the input string:

```
strlen("Hello World")
```

The function would appropriately return the value 11.

### **Boolean Type**

A boolean type is simple. It can be one of two values: "true" or "false". This type mainly acts as a flag that indicates whether a condition has been met or not. For example, this function contains takes two strings as input and returns "true" if the first string contains the second string, or "false" otherwise:

```
and(contains("Hello World", "llo Wo"), true)
```

The function would appropriately return the value "true".

### **Enum Type (list)**

An enum type is a collection of items. The items do not need to all be of the same type, they can be varied. An enum can be declared using the enum function as follows:

```
enum("hello world!", false, add(10, 15))
```

Alternatively, the createList() function (an alias to enum) can be used to create enums in a formula.

```
createList("hello world!", false, add(10, 15))
```

This function would appropriately return an enum type containing "hello world!", false, and 25 as its elements.

### **Link Type (relationship)**

A link represents one side of a relationship and is used to access related records.

---

For example, the accounts link field of Contacts is used to access the account\_type field of the account related to a contact:

```
related($accounts, "account_type")
```

For most of the out-of-the-box relationships, links are named with the name of the related module, in lower case.

Follow these steps to find the name of the link fields for relationships that do not follow the convention above:

1. Open the vardef file for the module you are working on:  
./cache/modules/{module}/{module}vardefs.php
2. Find the link field that matches the relationship you are looking for.

## Functions

Functions are methods to be used in formulas. Each function has a function name, a parameter count, a parameter type requirement, and returns a value. Some functions such as add() can take any number of parameters. For example: add(1), add(1, 2), and add(1, 2, 3) are all valid formulas. Functions are designed to produce the same result whether executed on the server or client.

## Triggers

A trigger is an object that listens for changes in field values and, after a change occurs, triggers the associated [actions](#) in a [dependency](#).

## Actions

Actions are functions that modify a target in some way and are fired when the trigger is TRUE. Most Actions require at least two parameters: a target and a formula. For example, a style action will change the style of a field based on a passed-in string formula. A value action will update a value of a field by evaluating a passed in formula.

## notActions

notActions are functions that modify a target in some way and are fired when the trigger is FALSE. notActions are optional and if they are not defined then nothing will fire when the trigger is FALSE. Most notActions require at least two

---

parameters: a target and a formula. For example, a style action will change the style of a field based on a passed-in string formula. A value action will update a value of a field by evaluating a passed in formula.

## Dependencies

A Dependency describes a set of rules based on a trigger and a set of actions. Examples include a field whose properties must be updated dynamically or a panel which must be hidden when a drop down value is not selected. When a Dependency is triggered it will appropriately carry out the action it is designed to. A basic Dependency is when a field's value is dependent on the result of evaluating a Expression. For example, consider a page with five fields with It's "a", "b", "c", "d", and "sum". A generic Dependency can be created between "sum" and the other four fields by using an Expression that links them together, in this case an add Expression. So we can define the Expression in this manner: 'add(\$a, \$b, \$c, \$d)' where each field id is prefixed with a dollar (\$) sign so that the value of the field is dynamically replaced at the time of the execution of the Expression.

An example of a more customized Dependency is when the field's style must be somehow updated to a certain value. For example, the DIV with id "temp" must be colored blue. In this case we need to change the background-color property of "temp". So we define a StyleAction in this case and pass it the field id and the style change that needs to be performed and when the StyleAction is triggered, it will change the style of the object as we have specified.

Sugar Logic Based Features

## Calculated Fields

Fields with calculated values can now be created from within Studio and Module Builder. The values are calculated based on Sugar Logic formulas. These formulas are used to create a new dependency that are executed on the client side in edit views and the server side on save. The formulas are saved in the varies or vardef extensions and can be created and edited directly. For example, the metadata for a simple calculated commission field in opportunities might look like:

```
'commission_c' => array(
    'name' => 'commission_c',
    'type' => 'currency',
    'calculated' => true,
    'formula' => 'multiply($amount, 0.1)',
    //enforced causes the field to appear read-only on the layout
    'enforced' => true
),
```

---

## Dependent fields

A dependent field will only appear on a layout when the associated formula evaluates to the Boolean value true. Currently these cannot be created through Studio and must be enabled manually with a custom vardef or vardef extension. The "dependency" property contains the expression that defines when this field should be visible. An example field that only appears when an account has an annual revenue greater than one million.

```
'dep_field'=> array(
  'name' => 'dep_field',
  'type' => 'varchar',
  'dependency' => 'greaterThan($annual_revenue, 1000000)',
),
```

## Dependent dropdowns

Dependent dropdowns are dropdowns for which options change when the selected value in a trigger dropdown changes. The metadata is defined in the vardefs and contains two major components, a "trigger" id which is the name of the trigger dropdown field and a 'visibility grid' that defines the set of options available for each key in the trigger dropdown. For example, you could define a sub-industry field in accounts whose available values depend on the industry field.

```
'sub_industry_c' => array(
  'name' => 'sub_industry_c',
  'type' => 'enum',
  'options' => 'sub_industry_dom',
  'visibility_grid'=> array(
    'trigger' => 'industry',
    'values' => array(
      'Education' => array(
        'primary',
        'secondary',
        'college'
      ),
      'Engineering' => array(
        'mechanical',
        'electrical',
        'software'
      ),
    ),
  ),
),
```

---

## Clearing the Sugar Logic Cache

The ./updatecache.php script traverses the Expression directory for every file that ends with "Expression.php" (ignoring a small list of excepted files) and constructs both a PHP and a JavaScript functions cache file which resides in ./cache/Expressions/functions\_cache.js and ./cache/Expressions/functionmap.php. If you create your custom expressions, you will need to rebuild the sugar logic functions by navigating to:

Admin > Repair > Rebuild Sugar Logic Functions

**Last Modified:** 2021-02-17 02:44:13

## Dependency Actions

### Overview

The following sections outline the available SugarLogic dependency actions.

### Dependency Parameters

Dependency definitions will generally contain most, if not all, of the parameters displayed in the table below. The following sections will outline each dependency action as well as dependency specific parameters.

| Parameter | Type  | Description  |
|-----------|-------|--|
| hooks     | Array | The views to execute the trigger on. Possible values are: "edit", "view", "save" and "all". If you include 'save' or 'all' then SugarCRM will try to save the calculated value to the database. So if your dependency is display only then only include the views that it will show up on. |

|               |         |  |
|---------------|---------|--|
| trigger       | String  | Optional. The trigger for the dependency. Defaults to 'true'.  |
| triggerFields | Array   | The list of fields to watch for change events. When changed, the trigger expressions will be recalculated. |
| onload        | Boolean | Whether or not to trigger the dependencies when the page is loaded.  |
| actions       | Array   | The list of dependencies to execute when the trigger expression is true.                                   |
| notActions    | Array   | The list of dependencies to execute when the trigger expression is false.                                  |

Last Modified: 2021-02-17 02:44:13

## ReadOnly

### Overview

The SugarLogic ReadOnly action, located in `./include/Expressions/Actions/ReadOnlyAction.php`, is used to determine if a field is editable or not based on a formula.

### Implementation

While the dependency metadata for your module can be defined in `./modules/<module>/metadata/dependencydefs.php` and `./custom/modules/<module>/metadata/dependencydef.php`, it is recommended to use the [extension framework](#) when customizing stock modules to prevent third-party plugins from conflicting with your customizations. The following section will demonstrate how to implement a read-only dependency.

---

## ReadOnly Parameters

| Parameter | Type   | Description  |
|-----------|--------|--|
| target    | String | The name of the field to make read only.   |
| value     | String | This parameter can accept a boolean formula or true and false values. Normally you would put a SugarLogic formula here to set the boolean. |

For more information on the various parameters in the dependency definitions, please refer to the [dependency actions](#) documentation.

## Example

For our example, we will create a dependency on the Accounts module that makes the name field read-only when the lock\_record\_c field has been checked. The first step is to create the lock\_record\_c checkbox field in Studio and add it to your Record View layout. When this checkbox is checked, we will make the name field read-only. Our example extension definition is shown below:

```
./custom/Extension/modules/<module>/Ext/Dependencies/custom_name_read_only.php
```

```
<?php
```

```
$dependencies['Accounts']['readonly_fields'] = array(
    'hooks' => array("edit"),
    'trigger' => 'true',
    //Optional, the trigger for the dependency. Defaults to 'true'.
    'triggerFields' => array('lock_record_c'),
    'onload' => true,
    //Actions is a list of actions to fire when the trigger is true
    // You could list multiple fields here each in their own array under 'actions'
    'actions' => array(
        array(
            'name' => 'ReadOnly',
            //The parameters passed in will depend on the action type set in 'name'
            'params' => array(
```



---

```
        'target' => 'name',
        'value' => 'equal($lock_record_c,true)',
    ),
),
);
```

Once you have all the files in place you will need to navigate to Admin > Repairs > and run a Quick Repair and Rebuild.

**Note:** It is important that the module name is plural ('Accounts' vs. 'Account') and that the name of the dependency, "readonly\_fields" in this example, is unique.

## Considerations

1. In some scenarios, you may want a specific field to always be read-only. To accomplish this, you can modify the 'value' attribute to always be "true". Given the above example, you would modify:

```
'value' => 'equal($lock_record_c,true)',
```

to be:

```
'value' => 'true',
```

**Last Modified:** 2021-02-17 02:44:13

## SetOptions

### Overview

The SugarLogic SetOptions action, located in `./include/Expressions/Actions/SetOptionsAction.php`, is used to set the options list of a dropdown field based on a formula.

### Implementation

---

While the dependency metadata for your module can be defined in `./modules/<module>/metadata/dependencydefs.php` and `./custom/modules/<module>/metadata/dependencydef.php`, it is recommended to use the [extension framework](#) when customizing stock modules to prevent third party plugins from conflicting with your customizations. The following section will demonstrate how to implement a read-only dependency.

## Setoptions Parameters

| Parameter | Type   | Description   |
|-----------|--------|---|
| target    | String | The name of the dropdown field that you want to change the option list for  |
| keys      | String | A formula used to get the option list keys for the target field or a list name from which keys will be extracted.     |
| labels    | String | A formula used to get the option list labels for the target field or a list name from which labels will be extracted. |

For more information on the various parameters in the dependency definitions, please refer to the [dependency actions](#) documentation.

## Examples

The following sections outline the various ways this dependency can be implemented.

### Using an Existing DropDown List

You can also set the options list to any current options list already in the system. For example, if you wanted to have the industry dropdown in Accounts show the 'bug\_type\_dom' list from Bugs, you could do this:

```
<?php
```

```
$dependencies['Leads']['setoptions_industry'] = array(
```

---

```
'hooks' => array("edit","save"),
'trigger' => 'true',
'triggerFields' => array('industry'),
'onload' => true,
'actions' => array(
  array(
    'name' => 'SetOptions',
    'params' => array(
      'target' => 'industry',
      'keys' => 'getDropdownKeySet("bug_type_dom")',
      'labels' => 'getDropdownValueSet("bug_type_dom")'
    )
  )
);
```

This would grab the keys and label from the 'bug\_type\_dom' using the getDropdownKeySet() and getDropdownValueSet() JavaScript functions and display them instead of the normal list.

Once you have the file in place, you will need to navigate to Admin > Repairs > and run a Quick Repair and Rebuild.

**Note:** It is important that the module name is plural ('Accounts' vs. 'Account') and that the name of the dependency, "setoptions\_industry" in this example, is unique.

## Complex Dynamic Lists

For our first example, we will change a dropdown called fruits\_c to include only fruits that are in season. This could be done with a dependent dropdown but that would require the user to pick the proper season. With this, we can have a function that returns only fruit that is in season right now. I added the dropdown fruits\_c to Leads and created a new list for it that looks like this

```
$app_list_strings['fruits_list']=array (
  'Apples' => 'Apples',
  'Strawberries' => 'Strawberries',
  'Mangos' => 'Mangos',
  'Pineapples' => 'Pineapples',
  'Blackberries' => 'BlackBerries',
  'BlueBerries' => 'BlueBerries',
);
```

To keep it simple I made the labels and the keys the same.

---

Then I extended SugarLogic as outlined in [Extending SugarLogic](#) and made a new function called `fruitInSeason()` that returns a string reflecting what fruit is in season right now. To work for the `createList()` function it would return a list like **"Apples","Mangos","BlueBerries"**.

```
./custom/Extension/modules/<module>/Ext/Dependencies/custom_fruit_in_season.php
```

```
<?php
```

```
$dependencies['Leads']['setoptions_fruit'] = array(
    'hooks' => array("edit","save"),
    'trigger' => 'true',
    'triggerFields' => array('fruits_c'),
    'onload' => true,
    'actions' => array(
        array(
            'name' => 'SetOptions',
            'params' => array(
                'target' => 'fruits_c',
                'keys' => "createList(fruitInSeason())",
                'labels' => "createList(fruitInSeason())"
            )
        ),
    ),
);
```

The `createList()` function is a JavaScript function from Sidecar. It requires a comma delimited quote enclosed list of options.

We only want this to affect EditViews and Saves, not normal record views since they need to be able to display all fruits and not a truncated list of them. So we make the 'hooks' array

```
'hooks' => array("edit","save"),
```

Once you have the file in place, you will need to navigate to Admin > Repairs > and run a Quick Repair and Rebuild.

**Note:** It is important that the module name is plural ('Leads' vs. 'Lead') and that the name of the dependency, "setoptions\_fruit" in this example, is unique.

**Last Modified:** 2021-02-17 02:44:13

---

# SetPanelVisibility

## Overview

The SugarLogic SetPanelVisibility action, defined in `./include/Expressions/Actions/PanelVisibilityAction.php`, is used to determine the visibility of a record view panel based on a formula.

## Implementation

While the dependency metadata for your module can be defined in `./modules/<module>/metadata/dependencydefs.php` and `./custom/modules/<module>/metadata/dependencydef.php`, it is recommended to use the [extension framework](#) when customizing stock modules to prevent third-party plugins from conflicting with your customizations. The following section will demonstrate how to implement a read-only dependency.

## SetPanelVisibility Parameters

| Parameter | Type   | Description   |
|-----------|--------|---|
| target    | String | The id of the panel to hide                               |
| value     | String | Formula used to determine if the panel should be visible. |

For more information on the various parameters in the dependency definitions, please refer to the [dependency actions](#) documentation.

## Example

For our example, we will create a dependency on the Cases module that will hide a specific panel if the status field on a case is set to "Closed". Our example extension definition is shown below:

```
./custom/Extension/modules/<module>/Ext/Dependencies/hide_panel_2_dep.php
```

```
<?php
```

```
$dependencies['Cases']['panel_2_visibility'] = array(
```

---

```

'hooks' => array("edit","view"),
'trigger' => 'equal($status, "Closed")',
'triggerFields' => array('status'),
'onload' => true,
//Actions is a list of actions to fire when the trigger is true
'actions' => array(
    array(
        'name' => 'SetPanelVisibility',
        'params' => array(
            'target' => 'detailpanel_2',
            'value' => 'true',
        ),
    ),
),
//notActions is a list of actions to fire when the trigger is fals
e
'notActions' => array(
    array(
        'name' => 'SetPanelVisibility',
        'params' => array(
            'target' => 'detailpanel_2',
            'value' => 'false',
        ),
    ),
),
);

```

Once you have the file in place, you will need to navigate to Admin > Repairs > and run a Quick Repair and Rebuild.

**Note:** It is important that the module name is plural ('Cases' vs. 'Case') and that the name of the dependency, "panel\_2\_visibility" in this example, is unique.

**Last Modified:** 2021-02-17 02:44:13

## SetRequired

### Overview

The SugarLogic SetRequired action, located in

---

`./include/Expressions/Actions/SetRequiredAction.php`, is used to determine if a field is required.

## Implementation

While the dependency metadata for your module can be defined in `./modules/<module>/metadata/dependencydefs.php` and `./custom/modules/<module>/metadata/dependencydef.php`, it is recommended to use the [extension framework](#) when customizing stock modules to prevent third-party plugins from conflicting with your customizations. The following section will demonstrate how to implement a read-only dependency.

## SetRequired Parameters

| Parameter | Type   | Description  |
|-----------|--------|--|
| target    | String | The name of the field to make required.                    |
| label     | String | id of label element for this field                         |
| value     | String | Formula used to determine if the field should be required. |

For more information on the various parameters in the dependency definitions, please refer to the [dependency actions](#) documentation.

## Example

For our example, we will create a dependency on the Cases module that will mark the resolution field as required when the status field is set to "Closed". Our example extension definition is shown below:

```
./custom/Extension/modules/<module>/Ext/Dependencies/required_resolution_dep.php
```

```
<?php
```

```
$dependencies['Cases']['required_resolution_dep'] = array(
    'hooks' => array("edit"),
    'trigger' => 'true',
    'triggerFields' => array('status'),
```

---

```
'onload' => true,
//Actions is a list of actions to fire when the trigger is true
'actions' => array(
    array(
        'name' => 'SetRequired',
        //The parameters passed in will depend on the action type
set in 'name'
        'params' => array(
            'target' => 'resolution',
            'label' => 'resolution_label',
            'value' => 'equal($status, "Closed")',
        ),
    ),
),
);
```

Once you have the file in place, you will need to navigate to Admin > Repairs > and run a Quick Repair and Rebuild.

**Note:** It is important that the module name is plural ('Cases' vs. 'Case') and that the name of the dependency, "required\_resolution\_dep" in this example, is unique.

**Last Modified:** 2021-02-17 02:44:13

## SetValue

### Overview

The SugarLogic SetValue action, located in `./include/Expressions/Actions/SetValueAction.php`, is used to set the value of a field based on a formula.

### Implementation

While the dependency metadata for your module can be defined in `./modules/<module>/metadata/dependencydefs.php` and `./custom/modules/<module>/metadata/dependencydef.php`, it is recommended to use the [extension framework](#) when customizing stock modules to prevent third party plugins from conflicting with your customizations. The following section will demonstrate how to implement a read-only dependency.



---

## SetValue Parameters

| Parameter | Type   | Description  |
|-----------|--------|--|
| target    | String | The name of the field to target for visibility.                |
| value     | String | SugarLogic formula used to get the value for the target field. |

For more information on the various parameters in the dependency definitions, please refer to the [dependency actions](#) documentation.

## Examples

The follow sections outline the various ways this dependency can be implemented.

## Dependency Extensions

For our example, we will create a dependency on the Leads module that will display the number of activities related to a Lead. Activities are composed of calls, meetings, tasks, notes, and emails. An example extension definition is shown below:

```
./custom/Extension/modules/<module>/Ext/Dependencies/custom_phone_alternate.php
```

```
<?php
```

```
$dependencies['Leads']['activity_count_dep'] = array(
    'hooks' => array("edit", "view"), //not including save so that the
    value isn't stored in the DB
    'trigger' => 'true', //Optional, the trigger for the dependency. D
    efaults to 'true'.
    'onload' => true, //Whether or not to trigger the dependencies whe
    n the page is loaded
    'actions' => array(
        array(
            'name' => 'SetValue',
            'params' => array(
                'target' => 'activity_count_c',
                'value' => 'add(
```

---

```

        count($notes),
        count($calls),
        count($emails),
        count($meetings),
        count($tasks)
    )'
)
)
);

```

Once you have the file in place, you will need to navigate to Admin > Repairs > and run a Quick Repair and Rebuild.

**Note:** It is important that the module name is plural ('Cases' vs. 'Case') and that the name of the dependency, "activity\_count\_dep" in this example, is unique.

## Chaining Dependencies

You can also add as many actions as you need to the array. In the example below, we want to display our count value but prevent users from being able to edit the value. An example extension definition is shown below:

```

<?php

$dependencies['Leads']['number_of_cases_dep'] = array(
    'hooks' => array("edit", "view"), //not including save so that the
    value isn't stored in the DB
    'trigger' => 'true', //Optional, the trigger for the dependency. D
    efaults to 'true'.
    //'triggerFields' => array('status'), //unneeded for this example
    as its not field triggered
    'onload' => true,
    'actions' => array(
        array(
            'name' => 'SetValue',
            'params' => array(
                'target' => 'activity_count_c',
                'value' => 'add(
                    count($notes),
                    count($calls),
                    count($emails),
                    count($meetings),
                    count($tasks)
                )'
            )
        )
    )
);

```

---

```

        )
    ),
    array(
        'name' => 'ReadOnly',
        'params' => array(
            'target' => 'activity_count_c',
            'value' => 'true', //Set to true instead of a formula
because its always read-only
        ),
    )
);

```

Once you have the file in place, you will need to navigate to Admin > Repairs > and run a Quick Repair and Rebuild.

**Note:** It is important that the module name is plural ('Cases' vs. 'Case') and that the name of the dependency, "number\_of\_cases\_dep" in this example, is unique.

## Dependencies in Field Definitions

Unlike several of the other dependencies, SetValue is built into Studio. So this dependency can be set as a custom vardef value or in the vardefs file of a custom module. If you wanted to add this dependency to an existing field then you can create a vardef extension such as

./custom/Extension/modules/<module>/Ext/Vardefs/. An example extension definition is shown below:

```
./custom/Extension/modules/Accounts/Ext/Vardefs/activity_count_c.php
```

```
<?php
```

```

$dictionary['Lead']['fields']['activity_count_c']['options'] = 'numeric_range_search_dom';
$dictionary['Lead']['fields']['activity_count_2_c']['calculated'] = 'true';
$dictionary['Lead']['fields']['activity_count_2_c']['formula'] = 'add(
    count($calls),
    count($emails),
    count($meetings),
    count($notes),
    count($tasks)
)';
$dictionary['Lead']['fields']['activity_count_2_c']['enforced'] = 'true';

```

---

```
$dictionary['Lead']['fields']['activity_count_2_c']['enable_range_search'] = '1';
```

Once you have the file in place, you will need to navigate to Admin > Repairs > and run a Quick Repair and Rebuild.

**Last Modified:** 2021-02-17 02:44:13

## SetVisibility

### Overview

The SugarLogic SetVisibility action, located in `./include/Expressions/Actions/VisibilityAction.php`, is used to determine the visibility logic of a field based on a formula.

### Implementation

While the dependency metadata for your module can be defined in `./modules/<module>/metadata/dependencydefs.php` and `./custom/modules/<module>/metadata/dependencydef.php`, it is recommended to use the [extension framework](#) when customizing stock modules to prevent third party plugins from conflicting with your customizations. The following section will demonstrate how to implement a read-only dependency.

### SetVisibility Parameters

| Parameter | Type   | Description  |
|-----------|--------|--|
| target    | String | The name of the field to target for visibility.  |
| value     | String | This parameter can accept a boolean formula or true and false values. Normally you would put a SugarLogic formula here to set the boolean. |

---

For more information on the various parameters in the dependency definitions, please refer to the [dependency actions](#) documentation.

## Examples

The follow sections outline the various ways this dependency can be implemented.

### SetVisibility Dependency Extensions

For our example, we will create a dependency on the Accounts module that shows the phone\_alternate field when the phone\_office field has been populated. An example is shown below.

```
./custom/Extension/modules/<module>/Ext/Dependencies/custom_phone_alternate.php
```

```
<?php
```

```
$dependencies['Accounts']['phone_alternate_hide'] = array(
    'hooks' => array("edit"),
    'triggerFields' => array('phone_office'),
    'onload' => true,
    //Actions is a list of actions to fire when the trigger is true
    'actions' => array(
        array(
            'name' => 'SetVisibility',
            'params' => array(
                'target' => 'phone_alternate',
                'value' => 'not(equal($phone_office,""))',
            ),
        ),
    ),
);
```

Once you have the file in place, you will need to navigate to Admin > Repairs > and run a Quick Repair and Rebuild.

**Note:** It is important that the module name is plural ('Accounts' vs. 'Account') and that the name of the dependency, "phone\_alternate\_hide" in this example, is unique.

---

## Visibility Dependencies in Field Definitions

Unlike several of the other dependencies, SetVisibility is built into Studio. So this dependency can be set as a custom vardef value or in the varefs file for a new module. If you wanted to add this dependency to an existing field then you could add a file to `./custom/Extension/modules/<module>/Ext/Vardefs/`. An example is shown below.

To accomplish this, we will create an extension in `./custom/Extension/modules/Accounts/Ext/Vardefs/`.

`./custom/Extension/modules/Accounts/Ext/Vardefs/phone_alternate.php`

```
<?php
```

```
$dictionary['Account']['fields']['phone_alternate']['dependency']='not
(equal($phone_office,"")
```

Next, you will need to navigate to Admin > Repairs > and run a Quick Repair and Rebuild. Once that is done, you can enter a value into `phone_office` and the `phone_alternate` field will show up once you tab out of the `phone_office` field. If you were coding a custom module with new fields, then you would just include it in the `modules vardefs.php` file as shown below

```
<?php
```

```
$dictionary['myModule'] = array(
    ...
    'fields' => array(
        ...
        'phone_alternate' => array(
            'name' => 'phone_alternate',
            'vname' => 'LBL_PHONE_ALTERNATE',
            'type' => 'varchar',
            'len' => 10,
            'dependency'=> 'not(equal($phone_office,""))',
            'comment' => 'Other Phone Number',
            'merge_filter' => 'enabled',
        ),
        ...
    )
    ...
);
```

**Last Modified:** 2021-02-17 02:44:13

---

# Extending Sugar Logic

## Overview

How to write custom Sugar Logic functions.

## Writing a Custom Formula Function

The most important feature of Sugar Logic is that it is simply and easily extendable. Both custom formula functions and custom actions can be added in an upgrade-safe manner to allow almost any custom logic to be added to Sugar.

Custom functions will be stored in

`./custom/include/Expressions/Expression/{Type}/{Function_Name}.php`.

The first step in writing a custom function is to decide what category the function falls under. Take, for example, a function for calculating the factorial of a number. In this case, we will be returning a number so we will create a file in

`./custom/include/Expressions/Expression/Numeric/` called `FactorialExpression.php`.

In the new PHP file we just created, we will define a class called

`FactorialExpression` that will extend `NumericExpression`. All formula functions must follow the format `{functionName}Expression.php` and the class name must match the file name.

Next, we need to decide what parameters the function will accept. In this case, we need take in a single parameter, the number to return the factorial of. Since this class will be a sub-class of `NumericExpression`, it by default accepts only numeric types and we do not need to worry about specifying the type requirement.

Next, we must define the logic behind evaluating this expression. So we must override the abstract `evaluate()` function. The parameters can be accessed by calling an internal function `getParameters()` which returns the parameters passed into this object. So, with all this information, we can go ahead and write the code for the function.

**Note:** For the custom function to appear in Studio after completing these steps, you must compile your code by running the Rebuild Sugar Logic Functions job in Admin > Schedulers and then clear your browser cache.

```
<?php
```

```
require_once 'include/Expressions/Expression/Numeric/NumericExpression
```

---

.php';

```
class FactorialExpression extends NumericExpression
{
    function evaluate()
    {
        $params = $this->getParameters();
        // params is an Expression object, so evaluate it
        // to get its numerical value
        $number = $params->evaluate();
        // exception handling
        if ( ! is_int( $number ) )
        {
            throw new Exception("factorial: Only accepts integers");
        }

        if ( $number < 0 )
        {
            throw new Exception("factorial: The number must be positiv
e");
        }

        // special case 0! = 1
        if ( $number == 0 ) return 1;

        // calculate the factorial
        $factorial = 1;
        for ( $i = 2 ; $i <= $number ; $i ++ )
        {
            $factorial = $factorial * $i;
        }

        return $factorial;
    }

    // Define the javascript version of the function
    static function getJSEvaluate()
    {
        return <<<EOQ
        var params = this.getParameters();
        var number = params.evaluate();
        // reg-exp integer test
        if ( ! /^\d*$/.test(number) )
            throw "factorial: Only accepts integers";

        if ( number < 0 )
```



---

```

        throw "factorial: The number must be positive";
        // special case, 0! = 1
        if ( number == 0 ) return 1;
        // compute factorial
        var factorial = 1;

        for ( var i = 2 ; i <= number ; i ++ )
            factorial = factorial * i;

        return factorial;
EOQ;
    }

    function getParameterCount()
    {
        return 1; // we only accept a single parameter
    }

    static function getOperationName()
    {
        return "factorial";
        // our function can be called by 'factorial'
    }
}

?>

```

One of the key features of Sugar Logic is that the functions should be defined in both PHP and JavaScript and have the same functionality under both circumstances. As you can see above, the `getJSEvaluate()` method should return the JavaScript equivalent of your `evaluate()` method. The JavaScript code is compiled and assembled for you after you run the "Rebuild Sugar Logic Functions" script through Admin > Schedulers.

## Writing a Custom Action

Using custom actions, you can easily create reusable custom logic or integrations that can include user-editable logic using the Sugar Formula Engine. Custom actions will be stored in `./custom/include/Expressions/Actions/{ActionName}.php`. Actions files must end in `Action.php` and the class defined in the file must match the file name and extend the `AbstractAction` class. The basic functions that must be defined are `fire`, `getDefinition`, `getActionName`, `getJavascriptClass`, and `getJavascriptFire`. Unlike functions, there is no requirement that an action works exactly the same for both server and client side as this is not always sensible or feasible.

---

A simple action could be "WarningAction" that shows an alert warning the user that something may be wrong and logs a message to the ./sugarcrm.log file if triggered on the server side. It will take in a message as a formula so that the message can be customized at runtime. We would do this by creating a PHP file in ./custom/include/Expressions/Actions/WarningAction.php as shown below:

```
./custom/include/Expressions/Actions/WarningAction.php
```

```
<?php
```

```
require_once("include/Expressions/Actions/AbstractAction.php");
```

```
class WarningAction extends AbstractAction {
```

```
    protected $messageExp = "";
```

```
    /**
```

```
     * Returns the javascript class equivalent to this php class
```

```
     * @return string javascript.
```

```
     */
```

```
    static function getJavascriptClass()
```

```
    {
```

```
        return <<<EOQ
```

```
        SUGAR.forms.WarningAction = function(message)
```

```
        {
```

```
            this.messageExp = message;
```

```
        };
```

```
        //Use the sugar extend function to extend AbstractAction
```

```
        SUGAR.util.extend(SUGAR.forms.WarningAction, SUGAR.forms.Abstr
```

```
actAction,
```

```
        {
```

```
            //javascript execution code
```

```
            exec : function()
```

```
            {
```

```
                //assume the message is a formula
```

```
                var msg = SUGAR.forms.evalVariableExpression(this.messageE
```

```
xp);
```

```
                alert(msg.evaluate());
```

```
            }
```

```
        });
```

```
        EOQ;
```

```
    }
```

```
    /**
```

---

```
* Returns the javascript code to generate this actions equivalent.
* @return string javascript.
*/

function getJavascriptFire()
{
    return "new SUGAR.forms.WarningAction('{ $this->messageExp }')";
}

/**
 * Applies the Action to the target.
 * @param SugarBean $target
 */
function fire(&$target)
{
    //Parse the message formula and log it to fatal.
    $expr = Parser::replaceVariables($this->messageExp, $target);
    $result = Parser::evaluate($expr)->evaluate();
    $GLOBALS['log']->warn($result);
}

/**
 * Returns the definition of this action in array format.
 */
function getDefinition()
{
    return array("message" => $this->messageExp);
}

/**
 * Returns the short name used when defining dependencies that use
this action.
 */
static function getActionName()
{
    return "Warn";
}
}

?>
```

**Last Modified:** 2021-02-17 02:44:13

---

# Using Sugar Logic Directly

How to use Sugar Logic

**Last Modified:** 2021-02-17 02:44:13

## Accessing an External API with a Sugar Logic Action

Let us say we were building a new Action called "SetZipCodeAction" that uses the Yahoo geocoding API to get the zip code for a given street + city + state address.

Since the Yahoo geocoding API requires JSON requests and returns XML data, we will have to write both PHP and JavaScript code to make and interpret the requests. Because accessing external APIs in a browser is considered cross-site scripting, a local proxy will have to be used. We will also allow the street, city, state parameters to be passed in as formulas so the action could be used in more complex Dependencies.

First, we should add a new action that acts as the proxy for retrieving data from the Yahoo API. The easiest place to add that would be a custom action in the "Home" module. The file that will act as the proxy will be `.custom/modules/Home/geocode.php`. It will take in the parameters via a REST call, make the call to the Yahoo API, and return the result in JSON format.

geocode.php contents:

```
<?php

function getZipCode($street, $city, $state)
{
    $appID = "6ruuUKjV34Fydi4TE.ca.I02rWh.9LTMPqQnSQo4QsCnjF5wIvyYRSXP
IzqlDbI.jfE-";
    $street = urlencode($street);
    $city = urlencode($city);
    $state = urlencode($state);
    $base_url = "http://local.yahooapis.com/MapsService/V1/geocode?";
    $params = "appid={$appID}&street={$street}&city={$city}&state={$st
ate}";

    //use file_get_contents to easily make the request
```

---

```

    $response = file_get_contents($base_url . $params);

    //The PHP XML parser is going to be overkill in this case, so just
    pull the zipcode with a regex.
    preg_match('/\([\d-]*\)/', $response, $matches);

    return $matches[1];
}

if (!empty($_REQUEST['execute']))
{
    if (empty($_REQUEST['street']) || empty($_REQUEST['city']) || empty($_
_REQUEST['state']))
    {
        echo("Bad Request");
    }
    else
    {
        echo json_encode(array('zip' => getZipCode($_REQUEST['street'], $_RE
QUEST['city'], $_REQUEST['state'])));
    }
}

?>

```

Next, we will need to map the geocode action to the geocode.php file. This is done by adding an action map to the Home Module. Create the file `./custom/modules/Home/action_file_map.php` and add the following line of code:

```

<?php

$action_file_map['geocode'] = 'custom/modules/Home/geocode.php';

```

We are now ready to write our Action. Start by creating the file `./custom/include/Expressions/Actions/SetZipCodeAction.php`. This file will use the proxy function directly from the PHP side and make an asynchronous call on the javascript side to the proxy.

`SetZipCodeAction.php` contents:

```

<?php

require_once "include/Expressions/Actions/AbstractAction.php";

class SetZipCodeAction extends AbstractAction

```

---

```

{
    protected $target = "";
    protected $streetExp = "";
    protected $cityExp = "";
    protected $stateExp = "";

    function SetZipCodeAction($params)
    {
        $this->target = empty($params['target']) ? " " : $params['target'];
        $this->streetExp = empty($params['street']) ? " " : $params['street'];
        $this->cityExp = empty($params['city']) ? " " : $params['city'];
        $this->stateExp = empty($params['state']) ? " " : $params['state'];
    }

    static function getJavascriptClass()
    {
        return "'($this->target)', '{$this->streetExp}', '{$this->cityExp}', '{$this->stateExp}'";
    }

    function fire(&$bean)
    {
        require_once("custom/modules/Home/geocode.php");
        $vars = array(
            'street' => 'streetExp',
            'city' => 'cityExp',
            'state' => 'stateExp'
        );

        foreach($vars as $var => $exp)
        {
            $toEval = Parser::replaceVariables($this->$exp, $bean);
            $var = Parser::evaluate($toEval)->evaluate();
        }

        $target = $this->target;
        $bean->$target = getZipCode($street, $city, $state);
    }

    function getDefinition()
    {
        return array(

```

---

```
        "action" => $this->getActionName(),
        "target" => $this->target,
    );
}

static function getActionName()
{
    return "SetZipCode";
}
}

?>
```

Once you have the action written, you need to call it somewhere in the code. Currently, this must be done as shown above using custom views, logic hooks, or custom modules.

**Last Modified:** 2021-02-17 02:44:13

## Creating a Custom Dependency for a View

Dependencies can also be created and executed outside of the built in features. For example, if you wanted to have the description field of the Calls module become required when the subject contains a specific value, you could extend the calls edit view to include that dependency.

`./custom/modules/Calls/views/view.edit.php`

```
<?php

require_once "include/MVC/View/views/view.edit.php";
require_once "include/Expressions/Dependency.php";
require_once "include/Expressions/Trigger.php";
require_once "include/Expressions/Expression/Parser/Parser.php";
require_once "include/Expressions/Actions/ActionFactory.php";

class CallsViewEdit extends ViewEdit
{

    function CallsViewEdit()
    {
```

---

```

    parent::ViewEdit();
}

function display()
{
    parent::display();
    $dep = new Dependency("description_required_dep");
    $triggerExp = 'contains($name, "important")';
    //will be array('name')

    $triggerFields = Parser::getFieldsFromExpression($triggerExp);
    $dep->setTrigger(new Trigger($triggerExp, $triggerFields));

    //Set the description field to be required if "important" is i
n the call subject
    $dep->addAction(ActionFactory::getNewAction('SetRequired', arr
ay(
        'target' => 'description',
        'label' => 'description_label',
        'value' => 'true'
    )));

    //Set the description field to NOT be required if "important"
is NOT in the call subject
    $dep->addFalseAction(ActionFactory::getNewAction('SetRequired'
, array(
        'target' => 'description',
        'label' => 'description_label',
        'value' => 'false'
    )));

    //Evaluate the trigger immediatly when the page loads
    $dep->setFireOnLoad(true);
    $javascript = $dep->getJavascript();
    echo

    SUGAR.forms.AssignmentHandler.registerView('EditView');

    {$javascript}

EOQ;
}
?>

```



---

The above code creates a new Dependency object with a trigger based on the 'name' (Subject) field in of the Calls module. It then adds two actions. The first will set the description field to be required when the trigger formula evaluates to true (when the subject contains "important"). The second will fire when the trigger is false and removes the required property on the description field. Finally, the javascript version of the Dependency is generated and echoed onto the page.

**Last Modified:** 2021-02-17 02:44:13

## Creating a Custom Dependency Using Metadata

The files should be located in  
./custom/Extension/modules/{module}/Ext/Dependencies/{dependency name}.php  
and be rebuilt with a quick repair after modification.

Dependencies can have the following properties:

- **hooks** : Defines when the dependency should be evaluated. Possible values are edit (on edit/quickCreate views), view (Detail/Wireless views), save (during a save action), and all (any time the record is accessed/saved).
- **trigger** : A boolean formula that defines if the actions should be fired. (optional, defaults to 'true')
- **triggerFields** : An array of field names that when when modified should trigger re-evaluation of this dependency on edit views. (optional, defaults to the set of fields found in the trigger formula)
- **onload** : If true, the dependency will be fired when an edit view loads (optional, defaults to true)
- **actions** : An array of action definitions to fire when the trigger formula is true.
- **notActions** : An array of action definitions to fire when the trigger formula is false. (optional)

The actions are defined as an array with the name of the action and a set of parameters to pass to that action. Each action takes different parameters, so you will have to check each actions class constructor to check what parameters it expects.

The following example dependency will set the resolution field of cases to be required when the status is Closed:

```
<?php
```

---

```

$dependencies['Cases']['required_resolution_dep'] = array(
    'hooks' => array("edit"),
    //Optional, the trigger for the dependency. Defaults to 'true'.
    'trigger' => 'true',
    'triggerFields' => array('status'),
    'onload' => true,
    //Actions is a list of actions to fire when the trigger is true
    'actions' => array(
        array(
            'name' => 'SetRequired',
            //The parameters passed in will depend on the action type
            set in 'name'
            'params' => array(
                'target' => 'resolution',
                //id of the label to add the required symbol to
                'label' => 'resolution_label',
                //Set required if the status is closed
                'value' => 'equal($status, "Closed")'
            )
        ),
    ),
    //Actions fire if the trigger is false. Optional.
    'notActions' => array(),
);

```

**Last Modified:** 2021-02-17 02:44:13

## Using Dependencies in Logic Hooks

### Overview

Dependencies can not only be executed on the server side but can be useful entirely on the server. For example, you could have a dependency that sets a rating based on a formula defined in a language file.

```
<?php
```

```

require_once "include/Expressions/Dependency.php";
require_once "include/Expressions/Trigger.php";
require_once "include/Expressions/Expression/Parser/Parser.php";

```

---

```
require_once "include/Expressions/Actions/ActionFactory.php";

class Update_Account_Hook
{
    function updateAccount($bean, $event, $args)
    {
        $formula = translate('RATING_FORMULA', 'Accounts');
        $triggerFields = Parser::getFieldsFromExpression($formula);
        $dep = new Dependency('updateRating');
        $dep->setTrigger(new Trigger('true', $triggerFields));
        $dep->addAction(ActionFactory::getNewAction('SetValue', array(
            'target' => 'rating',
            'value' => $formula
        )));
        $dep->fire($bean);
    }
}
```

**Last Modified:** 2021-02-17 02:44:13

## Administration

### Overview

The Administration class is used to manage settings stored in the database config table.

### The Administration Class

The Administration class is located in `./modules/Administration/Administration.php`. Settings modified using this class are written to the config table.

### Creating / Updating Settings

To create or update a specific setting, you can specify the new value using the `saveSetting()` function as shown here:

---

```
require_once 'modules/Administration/Administration.php';

$administrationObj = new Administration();

//save the setting
$administrationObj->saveSetting("MyCategory", "MySetting", 'MySettings
Value');
```

## Retrieving Settings

You can access the config settings by using the `retrieveSettings()` function. You can filter the settings by category by passing in a filter parameter. If no value is passed to `retrieveSettings()`, all settings will be returned. An example is shown here:

```
require_once 'modules/Administration/Administration.php';

$administrationObj = new Administration();

//Retrieve all settings in the category of 'MyCategory'.
//This parameter can be left empty to retrieve all settings.
$administrationObj->retrieveSettings('MyCategory');

//Use a specific setting
$MySetting = $administrationObj->settings['MyCategory_MySetting'];
```

## Considerations

The Administration class will store the settings in the config table, and the config table is cached using SugarCache as the `admin_settings_cache`. This class should be used for storing dynamic settings for a module, connector or the system as a whole, such as the last run date (for a scheduler) or an expiring token (for a connector). You should not use the Administration class to store User-based settings, settings that are frequently changing or being written to via the API, or excessively large values, as this can degrade the performance of the instance since all settings are loaded into the `admin_settings_cache`, which is used throughout the system.

Alternatively, you can use the [Configurator](#) class, located in `./modules/Configurator/Configurator.php`, to store the settings in the `./config_override.php` file if the settings are not dynamic or not changing programmatically. It is important to note that settings stored using the configurator will cause a metadata hash refresh that may lead to users being logged out of the system.

# Configurator

## Overview

The Configurator class, located in `./modules/Configurator/Configurator.php`, handles the config settings found in `./config.php` and `./config_override.php`.

## Retrieving Settings

You can access the Sugar config settings by using the global variable `$GLOBALS['sugar_config']` as shown below:

```
global $sugar_config;

//Use a specific setting
$MySetting = $sugar_config['MySetting'];
```

If you should need to reload the config settings, this is an example of how to retrieve a specific setting using the configurator:

```
require_once 'modules/Configurator/Configurator.php';

$configuratorObj = new Configurator();

//Load config
$configuratorObj->loadConfig();

//Use a specific setting
$MySetting = $configuratorObj->config['MySetting'];
```

## Creating / Updating Settings

To create or update a specific setting, you can specify the new value using the configurator as shown below:

```
require_once 'modules/Configurator/Configurator.php';
```

---

```
$configuratorObj = new Configurator();

//Load config
$configuratorObj->loadConfig();

//Update a specific setting
$configuratorObj->config['MySetting'] = "MySettingsValue";

//Save the new setting
$configuratorObj->saveConfig();
```

## Considerations

When looking to store custom settings, the Configurator class will store the settings in the `./config_override.php` file. This class should only be used for long-term configuration options as `Configurator->saveConfig()` will trigger a metadata refresh that may log users out of the system.

Alternatively, you can use the [Administration](#) class, located in `./modules/Administration/Administration.php`, to store settings in the config table in the database. This Administration class should be used for storing dynamic settings such as a last run date or an expiring token.

**Last Modified:** 2021-02-17 02:44:13

## Core Settings

### Overview

Sugar configuration settings.

### Settings Architecture

When you first install Sugar, all of the default settings are located in `./config.php`. As you begin configuring the system, the modified settings are stored in `./config_override.php`. Settings in `./config.php` are overridden by the values in `./config_override.php`.

---

## Settings

### activitystreamcleaner

|                  |   |
|------------------|---|
| Description      | Array that defines the parameters for the Activity Stream purger. |
| Type             | Array   |
| Versions         | 9.1.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell                   |
| Override Example | <pre>\$sugar_config['activitystreamcleaner'] = array();</pre>     |

### activitystreamcleaner.keep\_all\_relationships\_activities

|                  |  |
|------------------|--|
| Description      | This value is used by the ActivityStreamPurger scheduler job to determine whether the link type activities are to be removed. By default, these records are removed along with other activity types such as create, update, etc. This can be overridden by setting this value equal to true. |
| Type             | Boolean  |
| Range of values  | true or false  |
| Versions         | 9.1.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| Default Value    | false  |
| Override Example | <pre>\$sugar_config['activitystreamcleaner']['keep_all_relationships_activities'] = true;</pre>  |

### activitystreamcleaner.limit\_scheduler\_run

|             |  |
|-------------|--|
| Description | Sets the number of activity stream records to delete per batch when run by |
|-------------|--|

|                  |   |
|------------------|---|
|                  | the scheduled job that purges activity stream records.                              |
| Type             | Integer : Number of records   |
| Range of values  | Integers, values below 0 become 0   |
| Versions         | 9.1.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell                                     |
| Default Value    | 25000   |
| Override Example | <pre>\$sugar_config['activitystreamcleaner']['limit_scheduler_run'] = 1000; ;</pre> |

### **activitystreamcleaner.months\_to\_keep**

|                  |  |
|------------------|--|
| Description      | This value is used by the ActivityStreamPurger scheduler job. When this job runs, it uses this value to determine which Activity Stream records to prune from the activities table. Activities with a date older than the current date minus this number of months will be removed from the table. |
| Type             | Integer : Number of months   |
| Range of values  | Any integer greater than or equal to 0   |
| Versions         | 9.1.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| Default Value    | 6  |
| Override Example | <pre>\$sugar_config['activitystreamcleaner']['months_to_keep'] = 12;</pre>   |

### **activity\_streams**

|             |  |
|-------------|--|
| Description | Array that defines parameters for processing Data Privacy erasure requests for activity streams. |
| Type        | Array  |



|                  |  |
|------------------|--|
| Versions         | 8.0.1+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell                |
| Override Example | <code>\$sugar_config['activity_streams']<br/>= array();</code> |

### **activity\_streams.erasure\_job\_delay**

|                  |   |
|------------------|---|
| Description      | Defines the number of minutes between Activity Stream Erasure jobs. When multiple jobs are queued, this is the number of minutes that will separate their scheduled execution to allow Data Privacy erasures to occur in batches and minimize concurrent execution. These jobs can take some time to run and can tax the overall server performance if the number of Activity Stream records is very large. This setting is related to <a href="#">activity_streams.erasure_job_limit</a> . These settings should be considered together to optimize throughput of Activity Erasure jobs. |
| Type             | Integer : Minutes   |
| Versions         | 8.0.1+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell   |
| Default Value    | 0   |
| Override Example | <code>\$sugar_config['activity_streams']<br/>['erasure_job_delay'] = 5;</code>  |

### **activity\_streams.erasure\_job\_limit**

|             |   |
|-------------|---|
| Description | Defines the maximum number of Data Privacy Records that can be processed by a single running instance of the Activity Stream Erasure job. This setting is related to <a href="#">activity_streams.erasure_job_delay</a> . |
|-------------|---|

|                  |   |
|------------------|---|
|                  | These settings should be considered together to optimize throughput of Activity Erasure jobs. For example, the longer that an activity erasure job processes, the more delay will be needed to prevent too many jobs executing in parallel. |
| Type             | Integer   |
| Versions         | 8.0.1+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell   |
| Default Value    | 5   |
| Override Example | <code>\$sugar_config['activity_streams']['erasure_job_limit'] = 8;</code>   |

## **additional\_js\_config**

|                  |  |
|------------------|--|
| Description      | Configuration values for when the <code>./cache/config.js</code> file is generated. It is important to note that after changing this setting or any of its subsettings in your configuration, you must navigate to Admin > Repairs > Quick Repair & Rebuild. |
| Type             | Array  |
| Versions         | 7.5.0.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| Override Example | <code>\$sugar_config['additional_js_config'] = array();</code>   |

## **additional\_js\_config.alertAutoCloseDelay**

|             |   |
|-------------|---|
| Description | Defines the default auto close delay for system alerts. It is important to note that after changing this setting in your configuration, you must navigate to Admin > Repairs > Quick Repair & |
|-------------|---|

|                  |  |
|------------------|--|
|                  | Rebuild.   |
| Type             | Integer : Milliseconds   |
| Versions         | 7.8.1.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell                                    |
| Default Value    | 9000   |
| Override Example | <code>\$sugar_config['additional_js_config']['alertAutoCloseDelay'] = 3000;</code> |

### **additional\_js\_config.authStore**

|                  |  |
|------------------|--|
| Description      | <p>Defines the implementation of authentication data storage. The default storage, 'cache', is persistent and uses the localStorage API. Alternatively, 'cookie' storage may be used. This will store the authentication data in your browser window until the browser itself is closed. It is important to note that this behavior will differ between browsers. It is important to note that after changing this setting in your configuration, you must navigate to Admin &gt; Repairs &gt; Quick Repair &amp; Rebuild.</p> <p><b>Note:</b> This setting is not respected for instances that use <a href="#">SugarIdentity</a>.</p> |
| Type             | String   |
| Range of values  | 'cache' and 'cookie'   |
| Versions         | 7.5.0.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| Default Value    | cache  |
| Override Example | <code>\$sugar_config['additional_js_config']['authStore'] = 'cookie';</code>   |

### **additional\_js\_config.disableOmnibarTypeahead**

|                  |  |
|------------------|--|
| Description      | Disables the typeahead feature in the listview Omnibar and force users to hit Enter when filtering. From a technical perspective, this will reduce the number of hits to the server. |
| Type             | Boolean  |
| Range of values  | true and false   |
| Versions         | 7.7.0.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| Default Value    | false  |
| Override Example | <code>\$sugar_config['additional_js_config']['disableOmnibarTypeahead'] = true;</code>   |

#### **additional\_js\_config.logger.write\_to\_server**

|                  |  |
|------------------|--|
| Description      | <p>Enables the front end messages to be logged. The logger level must be tuned accordingly under Administration settings. Developers can set the client-side flag by running <code>App.config.logger.writeToServer = true;</code> in their browser's console.</p> <p>To simulate logging actions through the console, developers can use:<br/> <code>App.logger.trace('message');</code><br/> <code>App.logger.debug('message');</code><br/> <code>App.logger.info('message');</code><br/> <code>App.logger.warn('message');</code><br/> <code>App.logger.fatal('message');</code></p> |
| Type             | Boolean  |
| Range of values  | true and false   |
| Versions         | 7.5.0.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| Default Value    | false  |
| Override Example | <code>\$sugar_config['additional_js_config]</code>   |

|  |   |
|--|---|
|  | <pre>g']['logger']['write_to_server'] = true;</pre> |
|--|---|

### **additional\_js\_config.sidecarCompatMode**

|                  |   |
|------------------|---|
| Description      | By default, the Sidecar framework will prevent customizations from calling private Sidecar methods. If after upgrading you find this to be an issue, the configuration can be set to true as a temporary workaround. All JavaScript customizations are expected to use public Sidecar APIs. |
| Type             | Boolean   |
| Range of values  | true and false  |
| Versions         | 7.10.0.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell   |
| Default Value    | false   |
| Override Example | <pre>\$sugar_config['additional_js_config']['sidecarCompatMode'] = true;</pre>  |

### **admin\_access\_control**

|                 |  |
|-----------------|--|
| Description     | Removes Sugar Updates, Upgrade Wizard, Backups and Module Builder from the Admin menu. For developers, these restrictions can be found in ./include/MVC/Controller/file_access_control_map.php and overridden by creating ./custom/include/MVC/Controller/file_access_control_map.php. |
| Type            | Boolean  |
| Range of values | true and false   |
| Versions        | 5.2.0+   |
| Products        | Professional, Enterprise, Ultimate, Serve, Sell  |
| Default Value   | false  |

---

|                  |   |
|------------------|---|
| Override Example | <code>\$sugar_config['admin_access_control'] = true;</code> |
|------------------|---|

## **admin\_export\_only**

|                  |   |
|------------------|---|
| Description      | Allow only users with administrative privileges to export data. |
| Type             | Boolean   |
| Range of values  | true and false  |
| Versions         | 5.2.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell                 |
| Default Value    | false   |
| Override Example | <code>\$sugar_config['admin_export_only'] = true;</code>        |

## **allow\_oauth\_via\_get**

|                  |   |
|------------------|---|
| Description      | As of 7.8, Sugar does not support auth tokens being passed in from GET query string parameters by default. While allowing this functionality is not a recommended practice from a security standpoint, administrators may enable the setting at their own risk. |
| Type             | Boolean   |
| Range of values  | true and false  |
| Versions         | 7.8.0.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell   |
| Default Value    | false   |
| Override Example | <code>\$sugar_config['allow_oauth_via_get'] = true;</code>  |

---

## allow\_pop\_inbound

|                  |   |
|------------------|---|
| Description      | Inbound email accounts are setup to work with IMAP protocols by default. If your email provider required POP3 access instead of IMAP, you can enable POP3 as an available inbound email protocol. Please note that mailboxes configured with a POP3 connection are not supported by SugarCRM and may cause unintended consequences. IMAP is the recommended protocol to use for inbound email accounts. |
| Type             | Boolean   |
| Range of values  | true and false  |
| Versions         | 5.5.1+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell   |
| Override Example | <pre>\$sugar_config['allow_pop_inbound']<br/>= true;</pre>  |

## allow\_sendmail\_outbound

|                 |  |
|-----------------|--|
| Description     | Enables the option of choosing sendmail as an SMTP server in Admin > Email Settings. Sendmail must be enabled on the server for this option to work. Please note that mailboxes configured with sendmail are not supported and may cause unintended consequences. Instances running on Sugar's cloud environment will have this setting enforced as false. |
| Type            | Boolean  |
| Range of values | true and false   |
| Versions        | 5.5.1+   |
| Products        | Professional, Enterprise, Ultimate, Serve, Sell  |
| Default Value   | false  |
|                 |  |

|                  |  |
|------------------|--|
| SugarCloud Value | false  |
| Override Example | <code>\$sugar_config['allow_sendmail_outbound'] = true;</code> |

## analytics

|                  |   |
|------------------|---|
| Description      | An array defining properties for an analytics connector. Instances running on Sugar's cloud environment will have this setting enforced as a predetermined array. |
| Type             | Array   |
| Versions         | 7.7.0.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell   |
| SugarCloud Value | a predetermined array   |
| Override Example | <code>\$sugar_config['analytics'] = array();</code>   |

## analytics.connector

|                  |  |
|------------------|--|
| Description      | The name of the connector to use for gathering analytics. Instances running on Sugar's cloud environment will have this setting enforced as a predetermined value. |
| Type             | String : Connector name  |
| Versions         | 7.7.0.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| SugarCloud Value | a predetermined value  |
| Override Example | <code>\$sugar_config['analytics']['connector'] = 'Pendo';</code>   |

## analytics.enabled

|  |  |
|--|--|
|  |  |
|--|--|



|                  |  |
|------------------|--|
| Description      | Determines if the analytics are enabled. Instances running on Sugar's cloud environment will have this setting enforced as true. |
| Type             | Boolean  |
| Range of values  | true and false   |
| Versions         | 7.7.0.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| Default Value    | false  |
| SugarCloud Value | true   |
| Override Example | <code>\$sugar_config['analytics']['enabled'] = true;</code>  |

### **analytics.id**

|                  |   |
|------------------|---|
| Description      | The tracking id for the analytics connector. Instances running on Sugar's cloud environment will have this setting enforced as a predetermined value. |
| Type             | String : Tracking ID  |
| Versions         | 7.7.0.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell   |
| SugarCloud Value | a predetermined value   |
| Override Example | <code>\$sugar_config['analytics']['id'] = 'UA-XXXXXXX-X';</code>  |

### **api**

|                  |   |
|------------------|---|
| Description      | API specific configurations.                    |
| Type             | Integer   |
| Versions         | 7.5.0.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell |
| Override Example | <code>\$sugar_config['api']=array();</code>     |

---

## api.timeout

|                  |   |
|------------------|---|
| Description      | The timeout in seconds when uploading files through the REST API. |
| Type             | Integer : Seconds   |
| Versions         | 7.5.0.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell                   |
| Default Value    | 180   |
| Override Example | <code>\$sugar_config['api']['timeout'] = 240;</code>              |

## authenticationClass

|                  |  |
|------------------|--|
| Description      | The class to be used for login authentication.                           |
| Type             | String : Sugar Authentication Class                                      |
| Range of values  | SAMLAuthenticate   |
| Versions         | 5.2.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell                          |
| Default Value    | SugarAuthenticate  |
| Override Example | <code>\$sugar_config['authenticationClass'] = 'SAMLAuthenticate';</code> |

## aws

|             |  |
|-------------|--|
| Description | This configuration's functionality has been deprecated and will be removed in an upcoming release. |
| Type        | Array  |
| Versions    | 6.7.0+   |
| Products    | Professional, Enterprise, Ultimate,  |

|                  |   |
|------------------|---|
|                  | Serve, Sell                                   |
| Override Example | <code>\$sugar_config['aws'] = array();</code> |

### **aws.aws\_key**

|                  |  |
|------------------|--|
| Description      | This configuration's functionality has been deprecated and will be removed in an upcoming release. |
| Type             | String : Key   |
| Versions         | 6.7.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| Override Example | <code>\$sugar_config['aws']['aws_key'] = 'key';</code>   |

### **aws.aws\_secret**

|                  |  |
|------------------|--|
| Description      | This configuration's functionality has been deprecated and will be removed in an upcoming release. |
| Type             | String : Key   |
| Versions         | 6.7.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| Override Example | <code>\$sugar_config['aws']['aws_secret'] = 'secret';</code>                                       |

### **aws.upload\_bucket**

|             |  |
|-------------|--|
| Description | This configuration's functionality has been deprecated and will be removed in an upcoming release. |
| Type        | String : S3 bucket name  |
| Versions    | 6.7.0+   |
| Products    | Professional, Enterprise, Ultimate,  |

|                  |   |
|------------------|---|
|                  | Serve, Sell   |
| Override Example | <code>\$sugar_config['aws']['upload_bucket'] = 'bucket';</code> |

## cache

|                  |   |
|------------------|---|
| Description      | Array that defines additional properties for SugarCache if it's enabled (see <code>external_cache</code> ). |
| Type             | Array   |
| Versions         | 8.1.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell   |
| Override Example | <code>\$sugar_config['cache'] = array();</code>   |

## cache.backend

|                  |  |
|------------------|--|
| Description      | Defines the SugarCache backend to use via a fully qualified class name (FQCN). Instances running on Sugar's cloud environment will have this setting enforced as <code>Sugarcrm\Sugarcrm\Cache\Backend\BackwardCompatible</code> . |
| Type             | String : Cache Library   |
| Range of values  | 'Sugarcrm\Sugarcrm\Cache\Backend\Redis', '\Sugarcrm\Sugarcrm\Cache\Backend\APCu', '\Sugarcrm\Sugarcrm\Cache\Backend\Memcached', '\Sugarcrm\Sugarcrm\Cache\Backend\InMemory', ''  |
| Versions         | 8.1.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| Default Value    | <code>Sugarcrm\Sugarcrm\Cache\Backend\BackwardCompatible</code>  |
| SugarCloud Value | <code>Sugarcrm\Sugarcrm\Cache\Backend\BackwardCompatible</code>  |
| Override Example | <code>\$sugar_config['cache']['backend']</code>  |

|  |  |
|--|--|
|  | <code>= 'Sugarcrm\Sugarcrm\Cache\Backend\nRedis';</code> |
|--|--|

**cache.encryption\_key**

|                  |   |
|------------------|---|
| Description      | Used to store encryption key for SugarCache is in multi-tenant mode. By default, Sugar will generate a random UUID string for the encryption key as needed. It is not recommended to change or override this value since it will be regenerated whenever the cache is cleared. Not applicable without cache.multi_tenant. Instances running on Sugar's cloud environment will have this setting enforced as Random value (unique for each SugarCloud instance). |
| Type             | String : UUID string  |
| Range of values  | N/A as it is generated automatically  |
| Versions         | 8.1.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell   |
| Default Value    | Random value (generated on cache initialization)  |
| SugarCloud Value | Random value (unique for each SugarCloud instance)  |
| Override Example | <code>\$sugar_config['cache']['encryption_key'] = 'Sugar-generated encryption key';</code>  |

**cache.multi\_tenant**

|             |   |
|-------------|---|
| Description | Defines whether the SugarCache backend will be used by multiple Sugar instances as part of a multi-tenant deployment. This will modify Sugar's caching behavior to maintain isolation between Sugar instances. Instances running on Sugar's cloud environment |
|-------------|---|

|                  |  |
|------------------|--|
|                  | will have this setting enforced as true.                     |
| Type             | Boolean  |
| Range of values  | true and false   |
| Versions         | 8.1.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell              |
| Default Value    | false  |
| SugarCloud Value | true   |
| Override Example | <code>\$sugar_config['cache']['multi_tenant'] = true;</code> |

## cache\_dir

|                  |  |
|------------------|--|
| Description      | This is the directory SugarCRM will store all cached files. Can be relative to Sugar root directory. |
| Type             | String : Directory   |
| Versions         | 5.2.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| Default Value    | cache/   |
| Override Example | <code>\$sugar_config['cache_dir'] = 'cache/';</code>   |

## cache\_expire\_timeout

|                  |  |
|------------------|--|
| Description      | The length of time cached items should be expired after.   |
| Type             | Integer : Seconds  |
| Versions         | 6.2.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell            |
| Default Value    | 300  |
| Override Example | <code>\$sugar_config['cache_expire_timeout'] = 400;</code> |

---

## calendar

|                  |  |
|------------------|--|
| Description      | An array that defines all of the various settings for the Calendar module. |
| Type             | Array  |
| Versions         | 6.4.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell                            |
| Override Example | <pre>\$sugar_config['calendar'] = array( );</pre>                          |

## calendar.day\_timestep

|                  |   |
|------------------|---|
| Description      | Sets the default day time step.                             |
| Type             | Integer : Days  |
| Range of values  | 15, 30 and 60   |
| Versions         | 6.4.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell             |
| Default Value    | 15  |
| Override Example | <pre>\$sugar_config['calendar']['day_timestep'] = 15;</pre> |

## calendar.default\_view

|                  |  |
|------------------|--|
| Description      | Changes the default view in the calendar module. |
| Type             | String   |
| Range of values  | 'day', 'week', 'month' and 'share'               |
| Versions         | 6.4.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| Override Example | <pre>\$sugar_config['calendar']['default</pre>   |

|  |                                |
|--|--------------------------------|
|  | <code>_view'] = 'week';</code> |
|--|--------------------------------|

### **calendar.items\_draggable**

|                  |  |
|------------------|--|
| Description      | Enable/Disable drag-and-drop feature to move calendar items.       |
| Type             | Boolean  |
| Range of values  | true and false   |
| Versions         | 6.4.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell                    |
| Default Value    | true   |
| Override Example | <code>\$sugar_config['calendar']['items_draggable'] = true;</code> |

### **calendar.items\_resizable**

|                  |  |
|------------------|--|
| Description      | Sets whether items on the calendar can be resized via clicking and dragging. |
| Type             | Boolean  |
| Range of values  | true and false   |
| Versions         | 6.5.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell                              |
| Default Value    | true   |
| Override Example | <code>\$sugar_config['calendar']['items_resizable'] = true;</code>           |

### **calendar.show\_calls\_by\_default**

|                 |                                |
|-----------------|--------------------------------|
| Description     | Display/Hide calls by default. |
| Type            | Boolean                        |
| Range of values | true and false                 |
| Versions        | 6.4.0+                         |
|                 |                                |



|                  |  |
|------------------|--|
| Products         | Professional, Enterprise, Ultimate, Serve, Sell                          |
| Default Value    | true   |
| Override Example | <code>\$sugar_config['calendar']['show_calls_by_default'] = true;</code> |

### **calendar.week\_timestep**

|                  |  |
|------------------|--|
| Description      | The default week step size when viewing the calendar.          |
| Type             | Integer : Calendar Step Size                                   |
| Range of values  | 15, 30, and 60   |
| Versions         | 6.4.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell                |
| Override Example | <code>\$sugar_config['calendar']['week_timestep'] = 30;</code> |

### **check\_query**

|                  |  |
|------------------|--|
| Description      | Validates queries when adding limits.              |
| Type             | Boolean  |
| Range of values  | true and false                                     |
| Versions         | 5.2.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell    |
| Default Value    | true   |
| Override Example | <code>\$sugar_config['check_query'] = true;</code> |

### **check\_query\_cost**

|             |   |
|-------------|---|
| Description | Sets the maximum cost limit of a query. |
| Type        | Integer                                 |

|                  |   |
|------------------|---|
| Versions         | 5.2.0+  |
| Products         | Enterprise, Ultimate, Serve, Sell                     |
| Default Value    | 10  |
| Override Example | <code>\$sugar_config['check_query_cost'] = 10;</code> |

## clear\_resolved\_date

|                  |   |
|------------------|---|
| Description      | In Sugar Serve version 9.3 and higher, the Resolved Date field on Cases is automatically cleared when the case's status changes from "Closed", "Rejected", or "Duplicate" to any other value. Setting this parameter to false prevents Sugar from automatically clearing the Resolved Date field. |
| Type             | Boolean   |
| Range of values  | true and false  |
| Versions         | 9.3.0+  |
| Products         | Serve   |
| Default Value    | true  |
| Override Example | <code>\$sugar_config['clear_resolved_date'] = false;</code>   |

## cloud\_insight

|                  |  |
|------------------|--|
| Description      | Array that defines the properties for SugarCloud Insights. |
| Type             | Array  |
| Versions         | 9.1.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell            |
| Override Example | <code>\$sugar_config['cloud_insight'] = array();</code>    |

---

### **cloud\_insight.enabled**

|                  |  |
|------------------|--|
| Description      | Determines if the SugarCloud Insights service is enabled.        |
| Type             | Boolean  |
| Range of values  | true and false   |
| Versions         | 9.1.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell                  |
| Default Value    | true   |
| Override Example | <code>\$sugar_config['cloud_insight']['enabled'] = false;</code> |

### **cloud\_insight.key**

|                  |   |
|------------------|---|
| Description      | Specifies the unique key for the SugarCloud Insights service.                 |
| Type             | String : Key  |
| Versions         | 9.1.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell                               |
| Override Example | <code>\$sugar_config['cloud_insight']['key'] = '&lt;insights key&gt;;'</code> |

### **cloud\_insight.url**

|                  |   |
|------------------|---|
| Description      | The current URL for SugarCloud Insights service.  |
| Type             | String : URL  |
| Versions         | 9.1.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell   |
| Override Example | <code>\$sugar_config['cloud_insight']['url'] = 'https://sugarcloud-insights.service.sugarcrm.com';</code> |

---

## collapse\_subpanels

|                  |   |
|------------------|---|
| Description      | Pertains to Sidecar modules only. By default, all subpanels are in a collapsed state. If a user expands a subpanel, Sugar caches this preference so that it remains expanded on future visits to the same view. Set this value to 'true' to force a collapsed state for subpanels regardless of user preference, which may improve page-load performance by not querying for data until a user explicitly chooses to expand a subpanel. |
| Type             | Boolean   |
| Range of values  | true and false  |
| Versions         | 7.6.0.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell   |
| Default Value    | true  |
| Override Example | <pre>\$sugar_config['collapse_subpanels'] = true;</pre>   |

## cron

|                  |   |
|------------------|---|
| Description      | Array that defines all of the cron parameters.  |
| Type             | Array   |
| Versions         | 6.5.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell |
| Override Example | <pre>\$sugar_config['cron'] = array();</pre>    |

## cron.enforce\_runtime

|             |  |
|-------------|--|
| Description | Determines if cron.max_cron_runtime is enforced during the cron run. |
| Type        | Boolean  |
|             |  |

|                  |  |
|------------------|--|
| Range of values  | true and false   |
| Versions         | 7.2.2.2+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell                |
| Default Value    | false  |
| Override Example | <code>\$sugar_config['cron']['enforce_runtime'] = true;</code> |

### **cron.max\_cron\_jobs**

|                  |  |
|------------------|--|
| Description      | Maximum jobs per cron run. Default is 10. If you are using a version prior to 6.5.14, you will need to also populate max_jobs to set this value due to bug #62936 ( <a href="https://web.sugarcrm.com/support/issues/62936">https://web.sugarcrm.com/support/issues/62936</a> ). |
| Type             | Integer  |
| Versions         | 6.5.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| Default Value    | 6.5.x: 10<br>7.6.x: 25   |
| Override Example | <code>\$sugar_config['cron']['max_cron_jobs'] = 10;</code>   |

### **cron.max\_cron\_runtime**

|             |   |
|-------------|---|
| Description | Determines the maximum time in seconds that a single job should be allowed to run. If a single job exceeds this limit, cron.php is aborted with the long-running job marked as in progress in the job queue. The next time cron runs, it will skip the job that overran the limit and start on the next job in the queue. This limit is only enforced when cron.enforce_runtime is set to true. |
| Type        | Integer : Seconds   |

|                  |   |
|------------------|---|
| Versions         | 6.5.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell               |
| Default Value    | 180   |
| Override Example | <code>\$sugar_config['cron']['max_cron_runtime'] = 60;</code> |

### **cron.min\_cron\_interval**

|                  |   |
|------------------|---|
| Description      | Minimum time between cron runs. Setting this to 0 will disable throttling completely. |
| Type             | Integer : Seconds   |
| Versions         | 6.5.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell                                       |
| Default Value    | 30  |
| Override Example | <code>\$sugar_config['cron']['min_cron_interval'] = 30;</code>                        |

### **csrf**

|                  |   |
|------------------|---|
| Description      | An array defining attributes for CSRF token protection. |
| Type             | Array   |
| Versions         | 7.7.0.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell         |
| Default Value    | false   |
| Override Example | <code>\$sugar_config['csrf'] = array();</code>          |

### **csrf.soft\_fail\_form**

|             |   |
|-------------|---|
| Description | When opted in for CSRF form authentication, any failures will result in |
|-------------|---|

|                  |   |
|------------------|---|
|                  | <p>a CSRF message to the user indicating a potential CSRF attack and an aborted action. If you are unsure whether the CSRF tokens are properly implemented in your backward compatible modules, this configuration parameter can be set to true. Setting this to true will avoid any exceptions being thrown to the end user. By default, any failures will result in a fatal log message indicating the issue. If you are running in "soft failure", a second fatal message will be logged such as "CSRF: attack vector NOT mitigated, soft failure mode enabled". Be careful enabling this configuration as it will only log CSRF authentication failures and will not protect your system.</p> |
| Type             | Boolean   |
| Range of values  | true and false  |
| Versions         | 7.7.0.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell   |
| Default Value    | false   |
| Override Example | <code>\$sugar_config['csrf']['soft_fail_form'] = true;</code>   |

### **csrf.token\_size**

|                  |   |
|------------------|---|
| Description      | The size in bytes of the CSRF token to generate.        |
| Type             | Integer : Bytes   |
| Versions         | 7.7.0.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell         |
| Default Value    | 32  |
| Override Example | <code>\$sugar_config['csrf']['token_size'] = 16;</code> |

---

## customPortalPlatforms

|                  |   |
|------------------|---|
| Description      | This configuration allows a platform with custom authentication to be excluded from an IDM integration. |
| Type             | Array : Platforms   |
| Versions         | 9.1.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell   |
| Override Example | <pre>\$sugar_config['customPortalPlatforms'] = array('platform1', 'platform2');</pre>                   |

## custom\_help\_base\_url

|                  |   |
|------------------|---|
| Description      | Allows an instance to specify a custom help url for their user  |
| Type             | String : URL  |
| Versions         | 6.4.3+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell   |
| Default Value    | <a href="http://www.sugarcrm.com/crm/product_doc.php">http://www.sugarcrm.com/crm/product_doc.php</a> |
| Override Example | <pre>\$sugar_config['custom_help_base_url'] = 'http://www.custom_url/index.php';</pre>                |

## custom\_help\_url

|               |   |
|---------------|---|
| Description   | Designate the URL used to redirect the user to help documentation.                      |
| Type          | String : Website address  |
| Versions      | 6.4.3+  |
| Products      | Professional, Enterprise, Ultimate, Serve, Sell   |
| Default Value | <a href="http://www.sugarcrm.com/crm/product_">http://www.sugarcrm.com/crm/product_</a> |



|                  |  |
|------------------|--|
|                  | doc.php  |
| Override Example | <pre>\$sugar_config['custom_help_url'] = 'http://www.sugarcrm.com/crm/prod uct_doc.php';</pre> |

## dbconfig

|                  |   |
|------------------|---|
| Description      | Defines all of the connection parameters for the database server. |
| Type             | Array   |
| Versions         | 5.2.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell                   |
| Override Example | <pre>\$sugar_config['dbconfig'] = array( );</pre>                 |

### dbconfig.db\_host\_instance

|                  |  |
|------------------|--|
| Description      | Defines the host instance for MSSQL connections.                           |
| Type             | String : Database Host Instance Name                                       |
| Versions         | 5.2.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell                            |
| Default Value    | <i>empty</i>   |
| Override Example | <pre>\$sugar_config['dbconfig']['db_host _instance'] = 'SQLEXPRESS';</pre> |

### dbconfig.db\_host\_name

|                 |   |
|-----------------|---|
| Description     | Part of the 'dbconfig' array. Defines the host name of the database server. |
| Type            | String : Host name  |
| Range of values | host name of database server  |
| Versions        | 5.2.0+  |

|                  |  |
|------------------|--|
| Products         | Professional, Enterprise, Ultimate, Serve, Sell                        |
| Default Value    | <i>empty</i>   |
| Override Example | <code>\$sugar_config['dbconfig']['db_host_name'] = 'localhost';</code> |

### **dbconfig.db\_manager**

|                  |   |
|------------------|---|
| Description      | Part of the 'dbconfig' array. Defines the specific library used to connect with your database. Instances running on Sugar's cloud environment will have this setting enforced as MysqliManager. |
| Type             | String : Database Manager   |
| Range of values  | The class name of the database driver, Possible values are: 'MySQLManager', 'MysqliManager', 'FreeTDSManager', 'MssqlManager', and 'SqlsrvManager'.   |
| Versions         | 6.4.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell   |
| Default Value    | Determined by install: 'MySQLManager', 'MysqliManager', 'FreeTDSManager', 'MssqlManager', or 'SqlsrvManager'  |
| SugarCloud Value | MysqliManager   |
| Override Example | <code>\$sugar_config['dbconfig']['db_manager'] = 'MysqliManager';</code>  |

### **dbconfig.db\_name**

|                 |   |
|-----------------|---|
| Description     | Part of the 'dbconfig' array. Defines the database name to connect to on the database server. |
| Type            | String : Database Name  |
| Range of values | database name   |
| Versions        | 5.2.0+  |
| Products        | Professional, Enterprise, Ultimate,   |

|                  |  |
|------------------|--|
|                  | Serve, Sell  |
| Default Value    | <i>empty</i>   |
| Override Example | <code>\$sugar_config['dbconfig']['db_name'] = 'sugar_db';</code> |

### **dbconfig.db\_password**

|                  |   |
|------------------|---|
| Description      | Part of the 'dbconfig' array. Defines the password that correlates to the db_user_name parameter. |
| Type             | String : Password   |
| Range of values  | password of the user defined in db_user_name  |
| Versions         | 5.2.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell   |
| Default Value    | <i>empty</i>  |
| Override Example | <code>\$sugar_config['dbconfig']['db_password'] = 'sql_password';</code>                          |

### **dbconfig.db\_port**

|                  |  |
|------------------|--|
| Description      | Part of the 'dbconfig' array. Defines the port number on the server to connect to for authentication and transactions. |
| Type             | String : Network Port  |
| Range of values  | port number to connect to on the database server   |
| Versions         | 5.2.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| Default Value    | 3306   |
| Override Example | <code>\$sugar_config['dbconfig']['db_port'] = '3306';</code>   |

---

### **dbconfig.db\_type**

|                  |   |
|------------------|---|
| Description      | Defines the type of database being used with Sugar. It is important to note that db2 and oracle are only applicable to Sugar Enterprise and Ultimate. |
| Type             | String : Database Engine  |
| Range of values  | 'mysql', 'mssql', 'db2', and 'oci8'   |
| Versions         | 5.2.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell   |
| Override Example | <code>\$sugar_config['dbconfig']['db_type'] = 'mysql';</code>   |

### **dbconfig.db\_user\_name**

|                  |   |
|------------------|---|
| Description      | Defines the user to connect to the Sugar database as.                 |
| Type             | String : Database User  |
| Versions         | 5.2.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell                       |
| Override Example | <code>\$sugar_config['dbconfig']['db_user_name'] = 'sql_user';</code> |

### **dbconfigoption.autofree**

|                  |  |
|------------------|--|
| Description      | Automatically frees the database reference when it closes the reference. |
| Type             | Boolean  |
| Range of values  | true and false   |
| Versions         | 7.7.0.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell                          |
| Default Value    | false  |
| Override Example | <code>\$sugar_config['dbconfigoption']['autofree'] = true;</code>        |

---

### **dbconfigoption.collation**

|                  |   |
|------------------|---|
| Description      | The set of rules to be used for comparing characters in a character set.        |
| Type             | String : Collation type   |
| Versions         | 5.2.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell                                 |
| Default Value    | utf8_general_ci   |
| Override Example | <code>\$sugar_config['dbconfigoption']['collation'] = 'utf8_general_ci';</code> |

### **dbconfigoption.debug**

|                  |  |
|------------------|--|
| Description      | Enables debugging on the database connection.                  |
| Type             | Boolean  |
| Range of values  | true and false   |
| Versions         | 7.7.0.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell                |
| Default Value    | false  |
| Override Example | <code>\$sugar_config['dbconfigoption']['debug'] = true;</code> |

### **dbconfigoption.persistent**

|                 |  |
|-----------------|--|
| Description     | Determines whether Sugar should use persistent connection when possible to connecting to the database. |
| Type            | Boolean  |
| Range of values | true and false   |
| Versions        | 5.2.0+   |
| Products        | Professional, Enterprise, Ultimate,  |

|                  |   |
|------------------|---|
|                  | Serve, Sell   |
| Default Value    | false   |
| Override Example | <code>\$sugar_config['dbconfigoption']['persistent'] = true;</code> |

### **dbconfigoption.ssl**

|                  |  |
|------------------|--|
| Description      | Enables SSL on the database connection.                      |
| Type             | Boolean  |
| Range of values  | true and false   |
| Versions         | 7.7.0.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell              |
| Default Value    | false  |
| Override Example | <code>\$sugar_config['dbconfigoption']['ssl'] = true;</code> |

### **dbconfigoption.ssl\_options**

|                  |   |
|------------------|---|
| Description      | An array detailing the SSL database connection options.                 |
| Type             | Array   |
| Range of values  | true and false  |
| Versions         | 7.7.0.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell                         |
| Default Value    | <i>empty</i>  |
| Override Example | <code>\$sugar_config['dbconfigoption']['ssl_options'] = array();</code> |

### **dbconfigoption.ssl\_options.ssl\_capath**

|             |   |
|-------------|---|
| Description | The path the trusted SSL certificate authority file in PEM format for SSL |
|-------------|---|

|                  |  |
|------------------|--|
|                  | connection to the database.  |
| Type             | String : File path   |
| Range of values  | true and false   |
| Versions         | 7.7.0.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| Default Value    | <i>empty</i>   |
| Override Example | <code>\$sugar_config['dbconfigoption']['ssl_options']['ssl_cpath'] = 'path/to/ca-cert';</code> |

#### **dbconfigoption.ssl\_options.ssl\_cert**

|                  |  |
|------------------|--|
| Description      | The path the SSL certificate file for SSL connection to the database.                      |
| Type             | String : File path   |
| Range of values  | true and false   |
| Versions         | 7.7.0.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| Default Value    | <i>empty</i>   |
| Override Example | <code>\$sugar_config['dbconfigoption']['ssl_options']['ssl_cert'] = 'path/to/cert';</code> |

#### **dbconfigoption.ssl\_options.ssl\_cipher**

|                  |  |
|------------------|--|
| Description      | The SSL cipher to be used for encryption.  |
| Type             | String : Cipher  |
| Range of values  | true and false   |
| Versions         | 7.7.0.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| Default Value    | <i>empty</i>   |
| Override Example | <code>\$sugar_config['dbconfigoption']['ssl_options']['ssl_cipher'] = 'cipher';</code> |

|  |  |
|--|--|
|  | <code>ssl_options']['ssl_cipher'] = 'cipher';</code> |
|--|--|

**dbconfigoption.ssl\_options.ssl\_key**

|                  |  |
|------------------|--|
| Description      | The path the SSL key for SSL connection to the database.                                 |
| Type             | String : File path   |
| Range of values  | true and false   |
| Versions         | 7.7.0.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| Default Value    | <i>empty</i>   |
| Override Example | <code>\$sugar_config['dbconfigoption']['ssl_options']['ssl_key'] = 'path/to/key';</code> |

**default\_currency\_significant\_digits**

|                  |   |
|------------------|---|
| Description      | Changes the number of significant digits in currency by default.        |
| Type             | Integer : Number of significant digits                                  |
| Versions         | 5.2.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell                         |
| Default Value    | 2   |
| Override Example | <code>\$sugar_config['default_currency_significant_digits'] = 2;</code> |

**default\_date\_format**

|             |   |
|-------------|---|
| Description | Modifies the default date format for all users. |
| Type        | String : Date format                            |
| Versions    | 5.2.0+  |



|                  |   |
|------------------|---|
| Products         | Professional, Enterprise, Ultimate, Serve, Sell               |
| Default Value    | m/d/Y   |
| Override Example | <code>\$sugar_config['default_date_format'] = 'm/d/Y';</code> |

## default\_decimal\_seperator

|                  |   |
|------------------|---|
| Description      | Sets the character used as a decimal separator for numbers.     |
| Type             | String : Text character   |
| Range of values  | Any character   |
| Versions         | 5.2.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell                 |
| Default Value    | .   |
| Override Example | <code>\$sugar_config['default_decimal_seperator'] = '.';</code> |

## default\_email\_client

|                  |  |
|------------------|--|
| Description      | Sets the default email client that opens when users send emails. |
| Type             | String : Email client  |
| Range of values  | 'sugar', 'external'  |
| Versions         | 5.2.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell                  |
| Default Value    | sugar  |
| Override Example | <code>\$sugar_config['default_email_client'] = 'sugar';</code>   |

## default\_language

|  |  |
|--|--|
|  |  |
|--|--|

|                  |  |
|------------------|--|
| Description      | Sets each user's default language. Possible values include any language offered by Sugar, such as: 'ar_SA', 'bg_BG', 'ca_ES', 'cs_CZ', 'da_DK', 'de_DE', 'el_EL', 'en_UK', 'en_us', 'es_ES', 'es_LA', 'et_EE', 'fi_FI', 'fr_FR', 'he_IL', 'hu_HU', 'it_it', 'ja_JP', 'ko_KR', 'lt_LT', 'lv_LV', 'nb_NO', 'nl_NL', 'pl_PL', 'pt_BR', 'pt_PT', 'ro_RO', 'ru_RU', 'sk_SK', 'sq_AL', 'sr_RS', 'sv_SE', 'tr_TR', 'uk_UA', 'zh_CN' |
| Type             | String : Language key  |
| Range of values  | Any available language   |
| Versions         | 5.2.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| Default Value    | en_us  |
| Override Example | <code>\$sugar_config['default_language'] = 'en_us';</code>   |

### **default\_number\_grouping\_seperator**

|                  |   |
|------------------|---|
| Description      | Sets the character used as the 1000s separator for numbers.             |
| Type             | String : Text character   |
| Range of values  | Any character   |
| Versions         | 5.2.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell                         |
| Default Value    | ,   |
| Override Example | <code>\$sugar_config['default_number_grouping_seperator'] = ',';</code> |

### **default\_permissions**

|             |  |
|-------------|--|
| Description | Array that defines the ownership and permissions for directories and files |
|-------------|--|

|                  |   |
|------------------|---|
|                  | created naturally by the application.                         |
| Type             | Array   |
| Versions         | 5.2.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell               |
| Override Example | <code>\$sugar_config['default_permissions'] = array();</code> |

### **default\_permissions.dir\_mode**

|                  |  |
|------------------|--|
| Description      | Part of the 'default_permissions' array. Used in UNIX-based systems only to define the permissions on newly created directories. The value is stored in decimal notation while UNIX file permissions are octal. For example, an octal value of 1528 equates to the permissions 2770. Instances running on Sugar's cloud environment will have this setting enforced as 1528. |
| Type             | Integer : Octal Value  |
| Versions         | 5.2.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| SugarCloud Value | 1528   |
| Override Example | <code>\$sugar_config['default_permissions']['dir_mode'] = 1528;</code>   |

### **default\_permissions.file\_mode**

|             |   |
|-------------|---|
| Description | Part of the 'default_permissions' array. Used in UNIX-based systems only to define the permissions on newly created files. The value is stored in decimal notation while UNIX file permissions are octal. For example, an octal value of 432 in equates to the permissions 660. Instances running on Sugar's cloud environment will have this setting |
|-------------|---|

|                  |   |
|------------------|---|
|                  | enforced as 432.  |
| Type             | Integer : Octal value   |
| Versions         | 5.2.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell                         |
| SugarCloud Value | 432   |
| Override Example | <code>\$sugar_config['default_permissions'] ['file_mode'] = 432;</code> |

### **default\_permissions.group**

|                  |   |
|------------------|---|
| Description      | Used in UNIX-based systems only to define the group membership of any newly created directories and files. This value should be a group that the Apache user is a member of to help ensure proper functionality. Instances running on Sugar's cloud environment will have this setting enforced as <i>empty</i> . |
| Type             | String : Web group  |
| Versions         | 5.2.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell   |
| SugarCloud Value | <i>empty</i>  |
| Override Example | <code>\$sugar_config['default_permissions'] ['group'] = 'apache';</code>  |

### **default\_permissions.user**

|             |   |
|-------------|---|
| Description | Part of the 'default_permissions' array. Used in UNIX-based systems only to define the ownership of any newly created directories and files. This value should be the Apache user. Instances running on Sugar's cloud environment will have this setting enforced as <i>empty</i> . |
| Type        | String : Web user   |
|             |   |

|                  |  |
|------------------|--|
| Range of values  | Apache user  |
| Versions         | 5.2.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell                        |
| SugarCloud Value | <i>empty</i>   |
| Override Example | <code>\$sugar_config['default_permissions']['user'] = 'apache';</code> |

## **default\_user\_is\_admin**

|                  |   |
|------------------|---|
| Description      | Allows for determining whether a user is a system administrator by default. |
| Type             | Boolean   |
| Range of values  | true, false   |
| Versions         | 5.2.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell                             |
| Default Value    | false   |
| Override Example | <code>\$sugar_config['default_user_is_admin'] = true;</code>                |

## **developerMode**

|                 |  |
|-----------------|--|
| Description     | Rebuilds various cached files when a page is accessed. Can be set by an admin in Admin > System Settings. Instances running on Sugar's cloud environment will have this setting enforced as false. |
| Type            | Boolean  |
| Range of values | true and false   |
| Versions        | 5.2.0+   |
| Products        | Professional, Enterprise, Ultimate, Serve, Sell  |
| Default Value   | false  |
|                 |  |

|                  |  |
|------------------|--|
| SugarCloud Value | false  |
| Override Example | <code>\$sugar_config['developerMode'] = true;</code> |

## diagnostic\_file\_max\_lifetime

|                  |   |
|------------------|---|
| Description      | The interval in seconds of when to expire and remove diagnostic files. It is important to note that the "Remove diagnostic files" scheduler job must be enabled to remove the diagnostic files. |
| Type             | Integer : Seconds   |
| Versions         | 7.6.0.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell   |
| Default Value    | 604800  |
| Override Example | <code>\$sugar_config['diagnostic_file_max_lifetime'] = 604800;</code>   |

## disabled\_languages

|                  |  |
|------------------|--|
| Description      | Allows an admin to select languages that are disabled for the instance.  |
| Type             | String : CSV Language Keys   |
| Versions         | 6.2.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell                          |
| Default Value    | <i>empty</i>   |
| Override Example | <code>\$sugar_config['disabled_languages'] = 'bg_BG,da_DK,de_DE';</code> |

## disable\_count\_query

|             |   |
|-------------|---|
| Description | Removes the count totals from listviews. This is commonly used to prevent |
|-------------|---|

|                  |   |
|------------------|---|
|                  | performing expensive count queries on the database when loading listviews and subpanels. It is important to note that in 7.x, this parameter will only affect modules running in Backward Compatibility mode. |
| Type             | Boolean   |
| Range of values  | true and false  |
| Versions         | 5.2.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell   |
| Default Value    | false   |
| Override Example | <code>\$sugar_config['disable_count_query'] = true;</code>  |

## **disable\_export**

|                  |  |
|------------------|--|
| Description      | Prevents exports of data into .csv files. Normally set in the UI via Admin > Locale. |
| Type             | Boolean  |
| Range of values  | true and false   |
| Versions         | 5.2.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell                                      |
| Default Value    | false  |
| Override Example | <code>\$sugar_config['disable_export'] = true;</code>                                |

## **disable\_related\_calc\_fields**

|             |   |
|-------------|---|
| Description | When a calculated field in Sugar uses the related function in the Sugar Logic, this will cause the calculated field to be executed when the related module is updated. This can cause a cascading effect through the system to update |
|-------------|---|

|                  |   |
|------------------|---|
|                  | related calculated fields. When this happens you may receive a 502 Gateway Error. Please note that this is a global setting that will affect all modules. If you have a calculated field in Accounts that sums up all Opportunities for the account, setting this value to true will no longer update the opportunity account sum in Accounts until the account record itself is modified. However, if this setting is left disabled, the sum would update any time a related opportunity or the account is modified. |
| Type             | Boolean   |
| Range of values  | true and false  |
| Versions         | 6.3.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell   |
| Override Example | <code>\$sugar_config['disable_related_cal<br/>c_fields'] = true;</code>   |

## **disable\_team\_access\_check**

|                  |   |
|------------------|---|
| Description      | Prevents the system from checking to see if the creating/editing user has access to the record being saved. In normal circumstances, if a user creates a record and assigns it to a team they are not part of - their private team will be added. Setting this to true will prevent this. |
| Type             | Boolean   |
| Range of values  | true and false  |
| Versions         | 5.5.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell   |
| Override Example | <code>\$sugar_config['disable_team_access<br/>_check'] = true;</code>   |



---

## disable\_unknown\_platforms

|                  |  |
|------------------|--|
| Description      | Controls whether or not unregistered platforms are allowed to be used when logging in using REST API. Custom platforms can be registered via <a href="#">Admin &gt; Configure API Platforms</a> or by using the <a href="#">Platform extension</a> . Used to prevent excessive metadata generation when invalid or unrecognized platform types are specified in an API call. |
| Type             | Boolean  |
| Range of values  | true and false   |
| Versions         | 7.6.2.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| Default Value    | 7.6 - 7.10: false<br>7.11 and higher: true   |
| Override Example | <pre>\$sugar_config['disable_unknown_platforms'] = true;</pre>   |

## disable\_uw\_upload

|                  |  |
|------------------|--|
| Description      | Disables the upgrade wizard from being accessible through the Sugar admin interface. Instances running on Sugar's cloud environment will have this setting enforced as true. |
| Type             | Boolean  |
| Range of values  | true and false   |
| Versions         | 5.2.0.j+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| Default Value    | false  |
| SugarCloud Value | true   |
| Override Example | <pre>\$sugar_config['disable_uw_upload'] = true;</pre>   |

---

## disable\_vcr

|                  |   |
|------------------|---|
| Description      | Disables record paging in the detailview (VCR controls). Increases performance by not loading all records from a listview into memory when accessing the record detailview. In 7.x versions, this setting is only applicable to modules running in Backward Compatibility Mode. |
| Type             | Boolean   |
| Range of values  | true and false  |
| Versions         | 5.2.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell   |
| Default Value    | false   |
| Override Example | <pre>\$sugar_config['disable_vcr'] = true;</pre>  |

## dump\_slow\_queries

|                  |   |
|------------------|---|
| Description      | Logs slow queries to the sugar log file. Instances running on Sugar's cloud environment will have this setting enforced as false. |
| Type             | Boolean   |
| Range of values  | true and false  |
| Versions         | 5.2.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell   |
| Default Value    | false   |
| SugarCloud Value | false   |
| Override Example | <pre>\$sugar_config['dump_slow_queries'] = true;</pre>  |

## email\_address\_separator

---

|                  |   |
|------------------|---|
| Description      | Sets the character used to separate email addresses.          |
| Type             | String : Text character                                       |
| Range of values  | Any character   |
| Versions         | 6.4.3+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell               |
| Default Value    | ,   |
| Override Example | <code>\$sugar_config['email_address_separator'] = ',';</code> |

### **email\_default\_client**

|                  |  |
|------------------|--|
| Description      | Sets the default email client for all users.                   |
| Type             | String : String  |
| Range of values  | sugar, external  |
| Versions         | 5.2.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell                |
| Default Value    | sugar  |
| Override Example | <code>\$sugar_config['email_default_client'] = 'sugar';</code> |

### **email\_default\_delete\_attachments**

|                 |   |
|-----------------|---|
| Description     | When deleting an email, this setting will mark all related notes as deleted, and attempt to delete files that are related to those notes. |
| Type            | Boolean   |
| Range of values | true and false  |
| Versions        | 5.2.0+  |
| Products        | Professional, Enterprise, Ultimate, Serve, Sell   |
|                 |   |

|                  |  |
|------------------|--|
| Default Value    | true   |
| Override Example | <code>\$sugar_config['email_default_delete_attachments'] = false;</code> |

## email\_default\_editor

|                  |  |
|------------------|--|
| Description      | Allows configuring the default editor type for email. 'plain' sets the editor to only use plain text. 'html' allows the editor to be html enabled. |
| Type             | String : String  |
| Range of values  | 'plain' and 'html'   |
| Versions         | 5.2.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| Default Value    | html   |
| Override Example | <code>\$sugar_config['email_default_editor'] = 'plain';</code>   |

## email\_mailer\_timeout

|               |  |
|---------------|--|
| Description   | <p>The connection timeout period when sending an email.</p> <p><b>Note:</b> The default value for this configuration is 2 seconds for Sugar versions 12.2.0 and higher. The default value for Sugar versions 7.8.0.0 to 12.1.0 is 10 seconds. Instances running on Sugar's cloud environment will have this setting enforced as 2.</p> |
| Type          | Integer : Seconds  |
| Versions      | 7.8.0.0+   |
| Products      | Professional, Enterprise, Ultimate, Serve, Sell  |
| Default Value | 2  |

|                  |   |
|------------------|---|
| SugarCloud Value | 2   |
| Override Example | <code>\$sugar_config['email_mailer_timeout'] = 30;</code> |

### **enable\_inline\_reports\_edit (Deprecated in future release)**

|                  |   |
|------------------|---|
| Description      | Allows a user to edit specific field types (e.g., dropdowns, text fields) in a rows and columns report without having to navigate directly to the record. |
| Type             | Boolean   |
| Range of values  | true and false  |
| Versions         | 6.3.0 - 12.0.0  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell   |
| Default Value    | false   |
| Override Example | <code>\$sugar_config['enable_inline_reports_edit'] = true;</code>   |

### **enable\_link\_to\_drawer**

|                  |  |
|------------------|--|
| Description      | When true, the link-to-drawer feature known as "Focus Drawers" will be enabled for links to Sidecar module records instance-wide. Focus Drawers are exclusive to Sugar Sell and Sugar Serve. |
| Type             | Boolean  |
| Range of values  | true and false   |
| Versions         | 10.3.0+  |
| Products         | Serve, Sell  |
| Default Value    | true   |
| Override Example | <code>\$sugar_config['enable_link_to_drawer'] = false;</code>  |

---

## enable\_long\_text\_search

|                  |  |
|------------------|--|
| Description      | When true, Elasticsearch will enable long-text search for the following field types: 'longtext', 'htmleditable_tinymce'. |
| Type             | Boolean  |
| Range of values  | true and false   |
| Versions         | 10.2.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| Default Value    | false  |
| Override Example | <code>\$sugar_config['enable_long_text_search'] = true;</code>   |

## enable\_mobile\_redirect

|                  |   |
|------------------|---|
| Description      | Flag indicating whether smartphone users are automatically redirected to the mobile view when navigating to a Sugar instance. |
| Type             | Boolean   |
| Range of values  | true and false  |
| Versions         | 7.1.5+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell   |
| Default Value    | true  |
| Override Example | <code>\$sugar_config['enable_mobile_redirect'] = false;</code>  |

## enable\_one\_index

|             |  |
|-------------|--|
| Description | If you are running Elasticsearch 6 or higher, Elasticsearch creates a separate index for each full-text-search-enabled module. However, performance advantages are gained from instead using a single index for the entire |
|-------------|--|

|                  |   |
|------------------|---|
|                  | instance. The 'enable_one_index' config enables you to move from 1-index-per-module to 1-index-per-instance. This setting can be enabled by an administrator via Admin > Search > Re-Index, and the re-index will automatically switch the instance over to 1 index and change this config to true. |
| Type             | Boolean   |
| Range of values  | true or false   |
| Versions         | 11.0.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell   |
| Default Value    | false   |
| Override Example | <pre>\$sugar_config['enable_one_index'] = true;</pre>   |

## **exclude\_notifications**

|                  |  |
|------------------|--|
| Description      | This setting controls the modules that are excluded from assignment notifications. |
| Type             | Array  |
| Versions         | 5.2.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell                                    |
| Override Example | <pre>\$sugar_config['exclude_notifications'] = array();</pre>                      |

## **exclude\_notifications.module**

|                 |   |
|-----------------|---|
| Description     | Allows an administrator to explicitly disable modules from sending assignment notifications to users. |
| Type            | Boolean   |
| Range of values | true and false  |

|                  |  |
|------------------|--|
| Versions         | 5.2.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell                                |
| Default Value    | false  |
| Override Example | <code>\$sugar_config['exclude_notifications']['&lt;module&gt;'] = true;</code> |

## external\_cache

|                  |  |
|------------------|--|
| Description      | SugarCache basic configuration.                          |
| Type             | Array  |
| Versions         | 6.2.0+   |
| Products         | Enterprise, Serve, Sell                                  |
| Override Example | <code>\$sugar_config['external_cache'] = array();</code> |

## external\_cache.memcache

|                  |  |
|------------------|--|
| Description      | This setting controls the memcache properties.                       |
| Type             | Array  |
| Versions         | 6.2.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell                      |
| Override Example | <code>\$sugar_config['external_cache']['memcache'] = array();</code> |

## external\_cache.memcache.host

|             |   |
|-------------|---|
| Description | The host url for memchache.                     |
| Type        | String : Host URL                               |
| Versions    | 6.2.0+  |
| Products    | Professional, Enterprise, Ultimate, Serve, Sell |
|             |   |



|                  |  |
|------------------|--|
| Default Value    | 127.0.0.1  |
| Override Example | <code>\$sugar_config['external_cache']['memcache']['host'] = '192.168.1.1';</code> |

### **external\_cache.memcache.port**

|                  |  |
|------------------|--|
| Description      | The host port for memcache.  |
| Type             | Integer : Port number  |
| Versions         | 6.2.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell                            |
| Default Value    | 11211  |
| Override Example | <code>\$sugar_config['external_cache']['memcache']['port'] = 11212;</code> |

### **external\_cache.redis**

|                  |   |
|------------------|---|
| Description      | This setting controls the redis properties.                       |
| Type             | Array   |
| Versions         | 9.2.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell                   |
| Override Example | <code>\$sugar_config['external_cache']['redis'] = array();</code> |

### **external\_cache.redis.host**

|                 |   |
|-----------------|---|
| Description     | The IP address or the hostname of the Redis host.                                 |
| Type            | String  |
| Range of values | '127.0.0.1', '192.168.0.2', 'redis.serveraddress.com', 'local.redis.server.local' |
| Versions        | 9.2.0+  |
|                 |   |

|                  |   |
|------------------|---|
| Products         | Professional, Enterprise, Ultimate, Serve, Sell                                 |
| Default Value    | 127.0.0.1   |
| Override Example | <code>\$sugar_config['external_cache'] ['redis'] ['host'] = '127.0.0.1';</code> |

#### **external\_cache.redis.persistent**

|                  |   |
|------------------|---|
| Description      | The type of connection to the Redis server: persistent or not.                  |
| Type             | Boolean   |
| Range of values  | true and false  |
| Versions         | 9.2.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell                                 |
| Default Value    | true  |
| Override Example | <code>\$sugar_config['external_cache'] ['redis'] ['persistent'] = false;</code> |

#### **external\_cache.redis.port**

|                  |  |
|------------------|--|
| Description      | The Port number configured in the Redis host.                            |
| Type             | Integer  |
| Range of values  | Any TCP port number  |
| Versions         | 9.2.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell                          |
| Default Value    | 6379   |
| Override Example | <code>\$sugar_config['external_cache'] ['redis'] ['port'] = 6377;</code> |

#### **external\_cache.redis.timeout**

|             |  |
|-------------|--|
| Description | Connection timeout to the Redis server. 0 means unlimited or OS defined. |
|-------------|--|

|                  |  |
|------------------|--|
| Type             | Integer  |
| Range of values  | Any integer greater than or equal to 0                                       |
| Versions         | 9.2.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell                              |
| Default Value    | 0  |
| Override Example | <code>\$sugar_config['external_cache'] ['redis'] ['timeout'] = false;</code> |

### **external\_cache\_db\_gc\_probability**

|                  |  |
|------------------|--|
| Description      | Probability factor to determine when garbage collection on stale keys from the DB backend will happen. |
| Type             | Integer : Probability factor   |
| Versions         | 7.7.0.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| Default Value    | 0.0001   |
| Override Example | <code>\$sugar_config['external_cache_db_gc_probability'] = 0.0005;</code>                              |

### **external\_cache\_db\_gc\_threshold**

|                  |   |
|------------------|---|
| Description      | The threshold in milliseconds to flag garbage collection queries as [SLOW] in sugarcrm.log. |
| Type             | Integer : Milliseconds  |
| Range of values  | true and false  |
| Versions         | 7.7.0.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell   |
| Default Value    | 200   |
| Override Example | <code>\$sugar_config['external_cache_db_gc_threshold'] = 500;</code>                        |

---

## external\_cache\_disabled

|                  |  |
|------------------|--|
| Description      | Disables all external caching in Sugar. This is normally set to true to determine if there is a conflict with PHP caching. Instances running on Sugar's cloud environment will have this setting enforced as true. |
| Type             | Boolean  |
| Range of values  | true and false   |
| Versions         | 5.2.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| Default Value    | false  |
| SugarCloud Value | true   |
| Override Example | <code>\$sugar_config['external_cache_disabled'] = true;</code>   |

## external\_cache\_disabled\_memcached

|                  |  |
|------------------|--|
| Description      | Disables Memcached caching from working with Sugar. Recommended setting is false and is normally set to true to determine if there is a conflict with PHP caching. Instances running on Sugar's cloud environment will have this setting enforced as true. |
| Type             | Boolean  |
| Range of values  | true and false   |
| Versions         | 6.2.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| Default Value    | false  |
| SugarCloud Value | true   |
| Override Example | <code>\$sugar_config['external_cache_disabled'] = true;</code>   |

|  |  |
|--|--|
|  | <code>bled_memcached'] = false;</code> |
|--|--|

### **external\_cache\_disabled\_wincache**

|                  |   |
|------------------|---|
| Description      | Disables WinCache caching from working with Sugar. Recommended setting is false and is normally set to true to determine if there is a conflict with PHP caching. Instances running on Sugar's cloud environment will have this setting enforced as true. |
| Type             | Boolean   |
| Range of values  | true and false  |
| Versions         | 6.0.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell   |
| Default Value    | false   |
| SugarCloud Value | true  |
| Override Example | <code>\$sugar_config['external_cache_disabled_wincache'] = false;</code>  |

### **external\_cache\_force\_backend**

|                  |  |
|------------------|--|
| Description      | Force given external key/value cache backend. Make sure that the requirements are met and any other cache backend specific configuration is applied. |
| Type             | String : Backend type  |
| Range of values  | apc, db, file, memcache, memcached, memory, redis, smash, wincache, and zend   |
| Versions         | 6.2.0+   |
| Products         | Professional, Enterprise   |
| Default Value    | <i>empty</i>   |
| Override Example | <code>\$sugar_config['external_cache_force_backend'] = 'db';</code>  |

---

## forms

|                  |   |
|------------------|---|
| Description      | An array defining form requirements.            |
| Type             | Array   |
| Versions         | 5.2.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell |
| Override Example | <code>\$sugar_config['forms'] = array();</code> |

### forms.requireFirst

|                  |  |
|------------------|--|
| Description      | Presents all required fields grouped together in the first panel on the EditView form. |
| Type             | Boolean  |
| Range of values  | true and false   |
| Versions         | 5.2.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| Default Value    | false  |
| Override Example | <code>\$sugar_config['forms']['requireFirst'] = true;</code>                           |

### freebusy\_use\_vcal\_cache

|             |  |
|-------------|--|
| Description | Prior to Sugar version 7.6, FreeBusy Calendar searches used the vcal table to cache user meeting and call activity for the purpose of determining user availability in for future free time search. As of 7.6, a new design allowed for more accurate free/busy searching that no longer used this cache, but the cache was still being written to, by default, when calls/meetings were |
|-------------|--|

|                  |  |
|------------------|--|
|                  | created/updated for backward compatibility reasons. As of Sugar 7.9, in order to enhance performance, the cache is no longer being written to by default. Instead, the override variable 'FreeBusyCache_Enabled' must be set to true for the Cache to be written. Since this cache is no longer used inside the Sugar application, this option should be used with caution as the cache itself is expected to be removed from the Sugar product in a future release. |
| Type             | Boolean  |
| Range of values  | true and false   |
| Versions         | 6.1.0RC1+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| Default Value    | false  |
| Override Example | <code>\$sugar_config['freebusy_use_vcal_cache'] = true;</code>   |

## gs\_use\_shortcut\_operator

|                  |   |
|------------------|---|
| Description      | The default value of true permits use of shortcut operators in global search. These operators are: '&' for AND, ' ' for OR, and '-' for NOT. Setting this to false will disable the shortcut operators in global search and cause these characters to be interpreted as literals. |
| Type             | Boolean   |
| Range of values  | true and false  |
| Versions         | 8.3.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell   |
| Default Value    | true  |
| Override Example | <code>\$sugar_config['gs_use_shortcut_operator'] = false</code>   |

---

## hide\_admin\_licensing

|                  |   |
|------------------|---|
| Description      | Hides the License settings subpanel in the administrative panel. Instances running on Sugar's cloud environment will have this setting enforced as false. |
| Type             | Boolean   |
| Range of values  | true and false  |
| Versions         | 6.5.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell   |
| Default Value    | false   |
| SugarCloud Value | false   |
| Override Example | <code>\$sugar_config['hide_admin_licensing'] = true;</code>   |

## hide\_full\_text\_engine\_config

|                  |  |
|------------------|--|
| Description      | Determines if the FTS settings are present in the admin search page in Admin > Search. Instances running on Sugar's cloud environment will have this setting enforced as true. |
| Type             | Boolean  |
| Range of values  | true and false   |
| Versions         | 6.5.15+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| Default Value    | false  |
| SugarCloud Value | true   |
| Override Example | <code>\$sugar_config['hide_full_text_engine_config'] = true;</code>  |

## hide\_subpanels

|             |                                      |
|-------------|--------------------------------------|
| Description | This setting only applies to modules |
|-------------|--------------------------------------|



|                  |   |
|------------------|---|
|                  | running in Backward Compatibility Mode. When a DetailView is loaded, all subpanels are collapsed. Collapsing subpanels on load increases performance by not querying for data until a user explicitly expands a subpanel. |
| Type             | Boolean   |
| Range of values  | true and false  |
| Versions         | 5.2.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell   |
| Default Value    | false   |
| Override Example | <code>\$sugar_config['hide_subpanels'] = true;</code>   |

## hide\_subpanels\_on\_login

|                  |  |
|------------------|--|
| Description      | This setting only applies to modules running in backward compatibility mode. Collapses subpanels per session. When a DetailView is initially loaded during a session, all subpanels are collapsed. Once expanded, it will remain expanded until the user logs out. Collapsing subpanels on load increases performance by not querying for data until a user explicitly expands a subpanel. |
| Type             | Boolean  |
| Range of values  | true and false   |
| Versions         | 5.2.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| Default Value    | false  |
| Override Example | <code>\$sugar_config['hide_subpanels_on_login'] = true;</code>   |

---

## hint

|                  |   |
|------------------|---|
| Description      | The array of configurations related to Hint.    |
| Type             | Array   |
| Versions         | 10.3.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell |
| Override Example | <code>\$sugar_config['hint'] = array();</code>  |

## hint.hint\_install\_target\_geo

|                 |   |
|-----------------|---|
| Description     | <p>This optional property allows you to, before installation of Hint, explicitly set which region you would like Hint to connect to, overriding the default behavior of the Hint installer. The default behavior is for Hint to connect to services hosted in the region nearest to that of the Sugar instance on which it is being installed. See the Hint Administration Guide for more details on Hint service regions: <a href="https://support.sugarcrm.com/Documentation/Installable_Connectors/Hint/Hint_Installation_Guide/#Choosing_the_Hint_Services_Region">https://support.sugarcrm.com/Documentation/Installable_Connectors/Hint/Hint_Installation_Guide/#Choosing_the_Hint_Services_Region</a></p> <p><b>Note:</b> Once configured, it is not possible to modify the region Hint connects to. Switching regions requires completely uninstalling and reinstalling Hint, which will cause you to lose all existing system and end-user settings.</p> <p><b>Note:</b> 'APSE' is only available for 12.0 and higher.</p> |
| Type            | String  |
| Range of values | 'US', 'EU', 'APSE'  |
| Versions        | 10.3.0+   |
| Products        | Professional, Enterprise, Ultimate,   |

|                  |  |
|------------------|--|
|                  | Serve, Sell  |
| Override Example | <code>\$sugar_config['hint']['hint_installer_target_geo'] = 'US';</code> |

## history\_max\_viewed

|                  |   |
|------------------|---|
| Description      | The number of history items from the tracker to display for a user. |
| Type             | Integer   |
| Versions         | 5.2.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell                     |
| Default Value    | 50  |
| Override Example | <code>\$GLOBALS['sugar_config']['history_max_viewed'] = 25;</code>  |

## host\_name

|                  |  |
|------------------|--|
| Description      | Sets the host name of the instance, such as the website address or location where the instance is hosted and accessed. |
| Type             | String : String  |
| Versions         | 6.5.10+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| Default Value    | localhost  |
| Override Example | <code>\$sugar_config['host_name'] = 'localhost';</code>  |

## installer\_locked

|             |   |
|-------------|---|
| Description | Sets whether the installer is locked or not. When false, it is possible to access Sugar's initial configuration page to |
|-------------|---|

|                  |   |
|------------------|---|
|                  | reinstall the instance. Instances running on Sugar's cloud environment will have this setting enforced as true. |
| Type             | Boolean   |
| Range of values  | true and false  |
| Versions         | 5.2.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell   |
| Default Value    | true  |
| SugarCloud Value | true  |
| Override Example | <code>\$sugar_config['installer_locked'] = false;</code>  |

## jobs

|                  |   |
|------------------|---|
| Description      | Job Queue configurations.                       |
| Type             | Array   |
| Versions         | 6.5.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell |
| Override Example | <code>\$sugar_config['jobs'] = array();</code>  |

## jobs.hard\_lifetime

|                  |  |
|------------------|--|
| Description      | Hard deletes all jobs that are older than the hard cutoff. Default is 21 days. |
| Type             | Integer : Days   |
| Versions         | 6.5.1+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell                                |
| Default Value    | 21   |
| Override Example | <code>\$sugar_config['jobs']['hard_lifetime'] = 21;</code>                     |

---

### **jobs.max\_retries**

|                  |   |
|------------------|---|
| Description      | Maximum number of failures for job. Default is 5.       |
| Type             | Integer : Number of failures                            |
| Versions         | 6.5.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell         |
| Default Value    | 5   |
| Override Example | <code>\$sugar_config['jobs']['max_retries'] = 5;</code> |

### **jobs.min\_retry\_interval**

|                  |   |
|------------------|---|
| Description      | Minimal interval between job reruns. Default is 30 seconds.     |
| Type             | Integer : Seconds   |
| Versions         | 6.5.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell                 |
| Default Value    | 30  |
| Override Example | <code>\$sugar_config['jobs']['min_retry_interval'] = 30;</code> |

### **jobs.soft\_lifetime**

|                  |   |
|------------------|---|
| Description      | Soft deletes all jobs that are older than cutoff. Default is 21 days. |
| Type             | Integer : Days  |
| Versions         | 6.5.1+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell                       |
| Default Value    | 7   |
| Override Example | <code>\$sugar_config['jobs']['soft_lifetime'] = 7;</code>             |

---

## jobs.timeout

|                  |  |
|------------------|--|
| Description      | If a job is running longer than the limit, the job is failed by force. Specified in seconds. Default is 3600 seconds (1 hour). |
| Type             | Integer : Seconds  |
| Versions         | 6.5.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| Default Value    | 3600   |
| Override Example | <code>\$sugar_config['jobs']['timeout'] = 86400;</code>  |

## languages

|                  |  |
|------------------|--|
| Description      | The list of languages available in the system. An administrator can limit the languages available by removing them from this array. When modifying this array, you will need to make sure that the default_language config setting matches a language available in the list. |
| Type             | Array : Language Keys  |
| Versions         | 5.2.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| Default Value    | All available languages  |
| Override Example | <code>\$sugar_config['languages'] = array ('en_us' =&gt; 'English (US)');</code>   |

## list\_max\_entries\_per\_page

|             |                                     |
|-------------|-------------------------------------|
| Description | Listview items per page.            |
| Type        | String : Records per page           |
| Versions    | 5.2.0+                              |
| Products    | Professional, Enterprise, Ultimate, |

|                  |  |
|------------------|--|
|                  | Serve, Sell  |
| Default Value    | 20   |
| Override Example | <code>\$sugar_config['list_max_entries_per_page'] = '20';</code> |

## list\_report\_max\_per\_page

|                  |  |
|------------------|--|
| Description      | Sets the maximum number of reports that are listed on each page in the Reports module. |
| Type             | Integer : Number of records  |
| Versions         | 5.2.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| Default Value    | 100  |
| Override Example | <code>\$sugar_config['list_report_max_per_page'] = 100;</code>                         |

## logger

|                  |  |
|------------------|--|
| Description      | An array that defines all of the logging settings. |
| Type             | Array  |
| Versions         | 5.2.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell    |
| Override Example | <code>\$sugar_config['logger'] = array();</code>   |

## logger.channels

|             |  |
|-------------|--|
| Description | This setting controls the PSR-3 Logger channels. There are stock channels included in Sugar that can be utilized for various troubleshooting, and custom channels can easily be utilized in custom |
|-------------|--|

|                  |   |
|------------------|---|
|                  | code. Please consult the <a href="#">PSR-3 Logger Documentation</a> for further information on modifying channels and utilizing them. |
| Type             | Array   |
| Versions         | 7.9.1.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell   |
| Override Example | <pre>\$sugar_config['logger']['channels'] = array();</pre>  |

### **logger.channels.authentication**

|                  |  |
|------------------|--|
| Description      | This setting controls the PSR-3 Logger Channel configuration for the authentication channel. |
| Type             | Array  |
| Versions         | 7.10.0.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| Override Example | <pre>\$sugar_config['logger']['channels']['authentication'] = array();</pre>                 |

### **logger.channels.authentication.handlers**

|                  |  |
|------------------|--|
| Description      | This setting controls the PSR-3 Logger Handler utilized by the authentication logging channel. |
| Type             | Array  |
| Versions         | 7.10.0.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| Override Example | <pre>\$sugar_config['logger']['channels']['authentication']['handlers'] = 'File';</pre>        |



---

**logger.channels.authentication.level**

|                  |   |
|------------------|---|
| Description      | This setting controls the authentication PSR-3 Logger channel's log level. If you need to troubleshoot authentication issues in Sugar, and do not want to enable debug logging on the entire system, you can utilize this channel for more robust logging around the Authentication Controller. |
| Type             | String : Logging level  |
| Range of values  | 'emergency', 'alert', 'critical', 'error', 'warning', 'notice', 'info', 'debug', 'off'  |
| Versions         | 7.10.0.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell   |
| Override Example | <pre>\$sugar_config['logger']['channels']<br/>  ['authentication']['level'] = 'debug';</pre>  |

**logger.channels.authentication.processors**

|                  |   |
|------------------|---|
| Description      | This setting controls the authentication PSR-3 Logger channels processors.  |
| Type             | Array : Logging Processors  |
| Range of values  | 'request', 'backtrace'  |
| Versions         | 7.10.0.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell   |
| Override Example | <pre>\$sugar_config['logger']['authentication']<br/>  ['authentication']['processors'] = array('request', 'backtrace');</pre> |

**logger.channels.channel**

|             |  |
|-------------|--|
| Description | This setting controls the PSR-3 Logger channels. There are stock channels included in Sugar that can be utilized for various troubleshooting, and custom |
|-------------|--|

|                  |   |
|------------------|---|
|                  | channels can easily be utilized in custom code. The channel configuration typically consists of three properties, the level, handlers, and processors, however not all need to be defined as they do inherit their properties from the default Logger implementation. Please consult the <a href="#">PSR-3 Logger Documentation</a> for further information on adding custom channels and utilizing them. |
| Type             | Array   |
| Versions         | 7.9.1.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell   |
| Override Example | <code>\$sugar_config['logger']['channels']['&lt;channel&gt;'] = array();</code>   |

#### **logger.channels.channel.handlers**

|                  |  |
|------------------|--|
| Description      | This setting controls the PSR-3 Logger Handler utilized by the defined logging channel. By default Sugar only comes with the 'File' handler, however custom handlers can easily be added as outlined in our <a href="#">PSR-3 Logger Documentation</a> . |
| Type             | Array  |
| Versions         | 7.9.1.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| Override Example | <code>\$sugar_config['logger']['channels']['&lt;channel&gt;']['handlers'][] = 'File';</code>   |

#### **logger.channels.channel.level**

|             |  |
|-------------|--|
| Description | This setting controls the PSR-3 Log Level for the specified log channel. |
| Type        | String : Logging level   |
|             |  |

|                  |  |
|------------------|--|
| Range of values  | 'emergency', 'alert', 'critical', 'error', 'warning', 'notice', 'info', 'debug', 'off'   |
| Versions         | 7.9.1.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| Override Example | <code>\$sugar_config['logger']['channels']['&lt;channel&gt;']['level'] = 'alert';</code> |

#### **logger.channels.channel.processors**

|                  |   |
|------------------|---|
| Description      | This setting controls a specific PSR-3 Logger channels processors. To more easily debug issues, you can enable the provided backtrace or request Log Processors to provide more insight into a particular log. For more information on adding custom processors and using them on logging channels consult the <a href="#">PSR-3 Logger Documentation</a> . |
| Type             | Array : Logging Processors  |
| Range of values  | 'request', 'backtrace'  |
| Versions         | 7.9.1.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell   |
| Override Example | <code>\$sugar_config['logger']['channels']['&lt;channel&gt;']['processors'] = array('request', 'backtrace');</code>   |

#### **logger.channels.db**

|                  |  |
|------------------|--|
| Description      | This setting controls the PSR-3 Logger Channel configuration for the db channel. |
| Type             | Array  |
| Versions         | 8.1.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell                                  |
| Override Example | <code>\$sugar_config['logger']['channels'</code>                                 |

|  |                                 |
|--|---------------------------------|
|  | <code>]['db'] = array();</code> |
|--|---------------------------------|

**logger.channels.db.handlers**

|                  |  |
|------------------|--|
| Description      | This setting controls the PSR-3 Logger Handler utilized by the db logging channel. |
| Type             | Array  |
| Versions         | 8.1.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell                                    |
| Override Example | <code>\$sugar_config['logger']['channels']['db']['handlers'][] = 'File';</code>    |

**logger.channels.db.level**

|                  |  |
|------------------|--|
| Description      | This setting controls the Log Level for the db channel of the PSR-3 Logger.            |
| Type             | String : Logging level   |
| Range of values  | 'emergency', 'alert', 'critical', 'error', 'warning', 'notice', 'info', 'debug', 'off' |
| Versions         | 8.1.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| Override Example | <code>\$sugar_config['logger']['channels']['db']['level'] = 'debug';</code>            |

**logger.channels.db.processors**

|                 |  |
|-----------------|--|
| Description     | This setting controls the db PSR-3 Logger channels processors. |
| Type            | Array : Logging Processors                                     |
| Range of values | 'request', 'backtrace'   |
| Versions        | 8.1.0+   |
| Products        | Professional, Enterprise, Ultimate, Serve, Sell                |
|                 |  |

|                  |   |
|------------------|---|
| Override Example | <pre>\$sugar_config['logger']['channels']<br/>[['db']]['processors'] = array('request', 'backtrace');</pre> |
|------------------|---|

### logger.channels.input\_validation

|                  |  |
|------------------|--|
| Description      | This setting controls the PSR-3 Logger Channel configuration for the input_validation channel. |
| Type             | Array  |
| Versions         | 7.9.1.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| Override Example | <pre>\$sugar_config['logger']['channels']<br/>[['input_validation']] = array();</pre>          |

### logger.channels.input\_validation.handlers

|                  |  |
|------------------|--|
| Description      | This setting controls the PSR-3 Logger Handler utilized by the input_validation logging channel.       |
| Type             | Array  |
| Versions         | 7.9.1.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| Override Example | <pre>\$sugar_config['logger']['channels']<br/>[['input_validation']]['handlers']<br/>] = 'File';</pre> |

### logger.channels.input\_validation.level

|                 |   |
|-----------------|---|
| Description     | This setting controls the logging level for input validation failure messages when validation.soft_fail is enabled. |
| Type            | String : Logging level  |
| Range of values | 'emergency', 'alert', 'critical', 'error', 'warning', 'notice', 'info', 'debug', 'off'                              |
|                 |   |

|                  |   |
|------------------|---|
| Versions         | 7.9.1.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell   |
| Override Example | <code>\$sugar_config['logger']['channels']['input_validation']['level'] = 'warning';</code> |

#### **logger.channels.input\_validation.processors**

|                  |  |
|------------------|--|
| Description      | This setting controls the input_validation PSR-3 Logger channels processors.   |
| Type             | Array : Logging Processors   |
| Range of values  | 'request', 'backtrace'   |
| Versions         | 7.9.1.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| Override Example | <code>\$sugar_config['logger']['channels']['input_validation']['processors'] = array('request', 'backtrace');</code> |

#### **logger.channels.metadata**

|                  |  |
|------------------|--|
| Description      | This setting controls the PSR-3 Logger Channel configuration for the metadata channel. |
| Type             | Array  |
| Versions         | 7.9.1.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| Override Example | <code>\$sugar_config['logger']['channels']['metadata'] = array();</code>               |

#### **logger.channels.metadata.handlers**

|             |   |
|-------------|---|
| Description | This setting controls the PSR-3 Logger Handler utilized by the metadata |
|-------------|---|

|                  |   |
|------------------|---|
|                  | logging channel.  |
| Type             | Array   |
| Versions         | 7.9.1.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell                                       |
| Override Example | <code>\$sugar_config['logger']['channels']['metadata']['handlers'][] = 'File';</code> |

#### **logger.channels.metadata.level**

|                  |  |
|------------------|--|
| Description      | This logging channel can be used to track and debug metadata refresh issues. Overly frequent metadata refreshes will cause performance issues for affected Sugar instances. This metadata logging channel can help determine the frequency and causes of metadata refreshes. |
| Type             | String : Logging level   |
| Range of values  | 'emergency', 'alert', 'critical', 'error', 'warning', 'notice', 'info', 'debug', 'off'   |
| Versions         | 7.9.1.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| Override Example | <code>\$sugar_config['logger']['channels']['metadata']['level'] = 'debug';</code>  |

#### **logger.channels.metadata.processors**

|                  |  |
|------------------|--|
| Description      | This setting controls the metadata PSR-3 Logger channels processors. |
| Type             | Array : Logging Processors   |
| Range of values  | 'request', 'backtrace'   |
| Versions         | 7.9.1.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell                      |
| Override Example | <code>\$sugar_config['logger']['channels'</code>                     |

|  |   |
|--|---|
|  | <code>]['metadata']['processors'] = array('request', 'backtrace');</code> |
|--|---|

**logger.channels.rest**

|                  |  |
|------------------|--|
| Description      | This setting controls the PSR-3 Logger Channel configuration for the rest channel. |
| Type             | Array  |
| Versions         | 7.10.0.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell                                    |
| Override Example | <code>\$sugar_config['logger']['channels']['rest'] = array();</code>               |

**logger.channels.rest.handlers**

|                  |  |
|------------------|--|
| Description      | This setting controls the PSR-3 Logger Handler utilized by the rest logging channel. |
| Type             | Array  |
| Versions         | 7.10.0.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell                                      |
| Override Example | <code>\$sugar_config['logger']['channels']['rest']['handlers'][] = 'File';</code>    |

**logger.channels.rest.level**

|                 |  |
|-----------------|--|
| Description     | This setting controls the Log Level for the rest channel of the PSR-3 Logger.          |
| Type            | String : Logging level   |
| Range of values | 'emergency', 'alert', 'critical', 'error', 'warning', 'notice', 'info', 'debug', 'off' |
| Versions        | 7.10.0.0+  |
| Products        | Professional, Enterprise, Ultimate, Serve, Sell  |



|                  |  |
|------------------|--|
| Override Example | <pre>\$sugar_config['logger']['channels']<br/>[['rest']['level']] = 'debug';</pre> |
|------------------|--|

#### **logger.channels.rest.processors**

|                  |  |
|------------------|--|
| Description      | This setting controls the rest PSR-3 Logger channels processors.   |
| Type             | Array : Logging Processors   |
| Range of values  | 'request', 'backtrace'   |
| Versions         | 7.10.0.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| Override Example | <pre>\$sugar_config['logger']['channels']<br/>[['rest']['processors']] = array('r<br/>equest', 'backtrace');</pre> |

#### **logger.file.dateFormat**

|                  |   |
|------------------|---|
| Description      | The date format for the log file is any value that is acceptable to the PHP strftime() function. The default is '%c'. For a complete list of available date formats, please see the strftime() PHP documentation at <a href="http://php.net/manual/en/function.strftime.php">http://php.net/manual/en/function.strftime.php</a> . |
| Type             | String : Date format  |
| Range of values  | Pattern for date format   |
| Versions         | 5.2.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell   |
| Default Value    | %c  |
| Override Example | <pre>\$sugar_config['logger']['file']['d<br/>ateFormat']] = '%c';</pre>   |

#### **logger.file.ext**

|             |  |
|-------------|--|
| Description | The extension of the log file. The default |
|-------------|--|

|                  |  |
|------------------|--|
|                  | value is '.log'. Instances running on Sugar's cloud environment will have this setting enforced as .log. |
| Type             | String : File extension  |
| Range of values  | Extension for the log  |
| Versions         | 5.2.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| Default Value    | .log   |
| SugarCloud Value | .log   |
| Override Example | <code>\$sugar_config['logger']['file']['ext'] = '.log';</code>   |

#### **logger.file.maxLogs**

|                  |  |
|------------------|--|
| Description      | When the log file grows to the logger.file.maxSize value, the system will automatically roll the log file. The logger.file.maxLogs value controls the max number of logs that will be saved before it deletes the oldest. The default value is 10. |
| Type             | Integer : Number of logs   |
| Versions         | 5.2.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| Default Value    | 10   |
| Override Example | <code>\$sugar_config['logger']['file']['maxLogs'] = 10;</code>   |

#### **logger.file.maxSize**

|             |   |
|-------------|---|
| Description | This value controls the max file size of a log before the system will roll the log file. It must be set in the format '10MB' where 10 is number of MB to store. Always use MB as no other value is currently accepted. To disable log |
|-------------|---|

|                  |  |
|------------------|--|
|                  | rolling set the value to false. The default value is '10MB'. Instances running on Sugar's cloud environment will have this setting enforced as 10MB. |
| Type             | String : Size  |
| Versions         | 5.2.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| Default Value    | 10MB   |
| SugarCloud Value | 10MB   |
| Override Example | <code>\$sugar_config['logger']['file']['maxSize'] = '10MB';</code>   |

#### **logger.file.name**

|                  |  |
|------------------|--|
| Description      | The name of the log file to be written to. Instances running on Sugar's cloud environment will have this setting enforced as sugarcrm. |
| Type             | String : Filename  |
| Versions         | 5.2.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| Default Value    | sugarcrm   |
| SugarCloud Value | sugarcrm   |
| Override Example | <code>\$sugar_config['logger']['file']['name'] = 'sugarcrm';</code>  |

#### **logger.file.suffix**

|             |   |
|-------------|---|
| Description | The suffix to the file name to track logs chronologically. For instance, if you wanted to append the month and year to a file name, you can change this setting to '%m_%Y'. For a complete list of available date formats, please see the strftime() PHP documentation at <a href="http://php.net/manual/en/function.strftime.php">http://php.net/manual/en/function.strftime.php</a> . |
|-------------|---|

|                  |  |
|------------------|--|
|                  | Instances running on Sugar's cloud environment will have this setting enforced as <i>empty</i> . |
| Type             | String : Suffix pattern  |
| Versions         | 5.2.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| Default Value    | <i>empty</i>   |
| SugarCloud Value | <i>empty</i>   |
| Override Example | <code>\$sugar_config['logger']['file']['suffix'] = '%m_%Y';</code>                               |

### logger.level

|                  |  |
|------------------|--|
| Description      | Determines the logging level of the system. The recommended setting is 'fatal'. Instances running on Sugar's cloud environment will have this setting enforced as fatal. |
| Type             | String : Logging level   |
| Range of values  | 'debug', 'info', 'warn', 'deprecated', 'error', 'fatal', 'security', 'off'   |
| Versions         | 5.2.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| Default Value    | fatal  |
| SugarCloud Value | fatal  |
| Override Example | <code>\$sugar_config['logger']['level'] = 'fatal';</code>  |

### logger\_visible

|             |   |
|-------------|---|
| Description | Determines whether the Logger Settings panel is visible to administrators in Admin > System Settings. Instances running on Sugar's cloud environment will have this setting |
|-------------|---|

|                  |  |
|------------------|--|
|                  | enforced as false.                                     |
| Type             | Boolean  |
| Range of values  | true and false   |
| Versions         | 6.7.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell        |
| Default Value    | true   |
| SugarCloud Value | false  |
| Override Example | <code>\$sugar_config['logger_visible'] = false;</code> |

## log\_dir

|                  |   |
|------------------|---|
| Description      | Sets the location in the file system where the Sugar log file will be stored. By default, it is set to '.' meaning that it is stored in the root instance directory. Instances running on Sugar's cloud environment will have this setting enforced as .. |
| Type             | String : Directory Path   |
| Versions         | 5.2.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell   |
| Default Value    | .   |
| SugarCloud Value | .   |
| Override Example | <code>\$sugar_config['log_dir'] = '.';</code>   |

## log\_file

|             |  |
|-------------|--|
| Description | Designates the file name where the instance's logs will be stored. Instances running on Sugar's cloud environment will have this setting enforced as sugarcrm.log. |
| Type        | String : Name of the log file  |

|                  |  |
|------------------|--|
| Versions         | 5.2.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell              |
| Default Value    | sugarcrm.log   |
| SugarCloud Value | sugarcrm.log   |
| Override Example | <code>\$sugar_config['log_file'] = 'new_sugarcrm.log'</code> |

## log\_memory\_usage

|                  |   |
|------------------|---|
| Description      | Logs the memory usage. Instances running on Sugar's cloud environment will have this setting enforced as false. |
| Type             | Boolean   |
| Range of values  | true and false  |
| Versions         | 5.5.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell   |
| Default Value    | false   |
| SugarCloud Value | false   |
| Override Example | <code>\$sugar_config['log_memory_usage'] = true;</code>   |

## maintenanceMode

|                  |  |
|------------------|--|
| Description      | Allows the instance to be placed in a maintenance mode where non-admin users cannot access the instance. |
| Type             | Boolean  |
| Range of values  | true and false   |
| Versions         | 7.0.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| Default Value    | false  |
| Override Example | <code>\$sugar_config['maintenanceMode'] =</code>   |

---

|  |                     |
|--|---------------------|
|  | <code>false;</code> |
|--|---------------------|

## **marketing\_extras\_enabled**

|                  |  |
|------------------|--|
| Description      | This configuration disables the marketing content on the Sugar login screen. |
| Type             | Boolean  |
| Range of values  | true and false   |
| Versions         | 8.1.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell                              |
| Default Value    | true   |
| Override Example | <code>\$sugar_config['marketing_extras_enabled'] = false;</code>             |

## **mark\_emails\_seen**

|                  |   |
|------------------|---|
| Description      | Determines whether to mark an email as read before importing the email to Sugar during the inbound email import. This is not recommended as an import failure will cause the email to be marked as read which will be skipped during the next inbound email import. |
| Type             | Boolean   |
| Range of values  | true and false  |
| Versions         | 6.5.17+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell   |
| Default Value    | false   |
| Override Example | <code>\$sugar_config['mark_emails_seen'] = true;</code>   |

## **mass\_actions**

|                  |  |
|------------------|--|
| Description      | Array that defines mass action behaviors.              |
| Type             | Array  |
| Versions         | 7.0.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell        |
| Override Example | <code>\$sugar_config['mass_actions'] = array();</code> |

**mass\_actions.mass\_delete\_chunk\_size**

|                  |   |
|------------------|---|
| Description      | Number of records per chunk while performing a mass delete. |
| Type             | Integer   |
| Versions         | 7.0.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell             |
| Default Value    | 20  |
| Override Example | <code>\$sugar_config['mass_delete_chunk_size'] = 20;</code> |

**mass\_actions.mass\_link\_chunk\_size**

|                  |   |
|------------------|---|
| Description      | Number of records per chunk while performing mass linking updates.        |
| Type             | Integer   |
| Versions         | 7.0.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell                           |
| Default Value    | 20  |
| Override Example | <code>\$sugar_config['mass_actions']['mass_link_chunk_size'] = 20;</code> |

**mass\_actions.mass\_update\_chunk\_size**



|                  |  |
|------------------|--|
| Description      | Number of records per chunk while performing a mass update.                  |
| Type             | Integer  |
| Versions         | 7.0.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell                              |
| Default Value    | 500  |
| Override Example | <code>\$sugar_config['mass_actions']['mass_update_chunk_size'] = 500;</code> |

### **mass\_actions.max\_records\_to\_merge**

|                  |   |
|------------------|---|
| Description      | Number of records per chunk while performing a mass merge.                |
| Type             | Integer   |
| Versions         | 7.0.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell                           |
| Default Value    | 5   |
| Override Example | <code>\$sugar_config['mass_actions']['max_records_to_merge'] = 20;</code> |

### **max\_aggregate\_email\_attachments\_bytes**

|             |   |
|-------------|---|
| Description | The maximum allowed size of all uploaded attachments added together for a single email message. Users may upload files as email attachments within to the lowest of the PHP <code>upload_max_filesize</code> , <code>post_max_size</code> , and <code>system upload_maxsize</code> size limits, but users cannot upload more files to a single message than the <code>max_aggregate_email_attachments_bytes</code> configuration permits. |
| Type        | Integer : bytes   |
| Versions    | 7.10.0.0+   |

|                  |  |
|------------------|--|
| Products         | Professional, Enterprise, Ultimate, Serve, Sell                                  |
| Default Value    | 10000000   |
| Override Example | <code>\$sugar_config['max_aggregate_email_attachments_bytes'] = 20000000;</code> |

## **max\_session\_time**

|                  |  |
|------------------|--|
| Description      | Determines the maximum lock time in seconds between session requests. When a session request is locked for long periods of time, other requests are blocked until it is released. A null value will not implement a max session time. Instances running on Sugar's cloud environment will have this setting enforced as 1. |
| Type             | Integer : Seconds  |
| Versions         | 6.2.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| Default Value    | null   |
| SugarCloud Value | 1  |
| Override Example | <code>\$sugar_config['max_session_time'] = 1;</code>   |

## **metrics\_enabled**

|                 |  |
|-----------------|--|
| Description     | Whether or not system metrics have been enabled. |
| Type            | Boolean  |
| Range of values | true and false                                   |
| Versions        | 6.7.0+   |
| Products        | Professional, Enterprise, Ultimate, Serve, Sell  |
| Default Value   | false  |
|                 |  |

|                  |  |
|------------------|--|
| Override Example | <pre>\$sugar_config['metrics_enabled'] = true;</pre> |
|------------------|--|

## metric\_providers

|                  |  |
|------------------|--|
| Description      | A Name/Path array of metric providers for measuring system metrics                           |
| Type             | Array  |
| Versions         | 6.7.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| Override Example | <pre>\$sugar_config['metric_providers'] = array ('provider' =&gt; 'path/to/provider');</pre> |

## metric\_settings

|                  |   |
|------------------|---|
| Description      | The individual settings required by a metric provider. And values provided will be passed when instantiating the metric providers object. |
| Type             | Array : Metric Provider Settings  |
| Versions         | 6.7.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell   |
| Override Example | <pre>\$sugar_config['metric_settings'] = array ('provider' =&gt; array('setting' =&gt; 'value'));</pre>                                   |

## minify\_resources

|             |   |
|-------------|---|
| Description | Determines whether minification and compression are applied to javascript resources |
| Type        | Boolean   |
|             |   |

|                  |  |
|------------------|--|
| Range of values  | true and false   |
| Versions         | 7.7.0.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell          |
| Default Value    | true   |
| Override Example | <code>\$sugar_config['minify_resources'] = false;</code> |

## moduleInstaller

|                  |  |
|------------------|--|
| Description      | Array that defines restrictions on module installations via the Module Loader utility. |
| Type             | Array  |
| Versions         | 5.2.0.j+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| Override Example | <code>\$sugar_config['moduleInstaller'] = array();</code>                              |

## moduleInstaller.disableActions

|                 |  |
|-----------------|--|
| Description     | Part of the moduleInstaller array. When packageScan is set to 'true', Sugar does not restrict any specific actions that can be completed during the installation process. The disableActions parameter allows you to define any actions you wish to restrict from executing. |
| Type            | Array  |
| Range of values | Specific actions to restrict in module packages  |
| Versions        | 5.2.0j+  |
| Products        | Professional, Enterprise, Ultimate, Serve, Sell  |
| Default Value   | array()  |
|                 |  |

|                  |  |
|------------------|--|
| Override Example | <pre>\$sugar_config['moduleInstaller']['disableActions'] = array('pre_execute', 'post_execute');</pre> |
|------------------|--|

**moduleInstaller.disableFileScan**

|                  |  |
|------------------|--|
| Description      | When packageScan is set to 'true', Sugar scans all files in an installable package to ensure that the file extensions are acceptable and that the files do not contain denylisted class or function calls. Setting the disableFileScan parameter to 'true' avoids this scan from occurring while still enforcing other parameters set. |
| Type             | Boolean  |
| Range of values  | true and false   |
| Versions         | 5.2.0j+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| Override Example | <pre>\$sugar_config['moduleInstaller']['disableFileScan'] = true;</pre>  |

**moduleInstaller.packageScan**

|                 |   |
|-----------------|---|
| Description     | Enables package scanning on any modules uploaded through Module Loader prior to the installation. If the package is found to violate any restrictions of the packageScan, the installation will not proceed and an error report will be generated to the user attempting the install. Instances running on Sugar's cloud environment will have this setting enforced as true. |
| Type            | Boolean   |
| Range of values | true and false  |
| Versions        | 5.5.0+  |
| Products        | Professional, Enterprise, Ultimate,   |

|                  |   |
|------------------|---|
|                  | Serve, Sell   |
| Default Value    | false   |
| SugarCloud Value | true  |
| Override Example | <code>\$sugar_config['moduleInstaller']['packageScan'] = true;</code> |

### moduleInstaller.validExt

|                  |  |
|------------------|--|
| Description      | Part of the moduleInstaller array. When moduleInstaller.packageScan is set to true, Sugar will not allow certain file extensions to be present in an installable package. By default, Sugar allows the following extensions: 'png', 'gif', 'jpg', 'css', 'js', 'php', 'txt', 'html', 'htm', 'tpl', 'pdf', 'md5', 'xml', 'hbs', 'less', and 'wsdl'. This parameter allows you to define <b>additional</b> extensions deemed safe to install on your instance of Sugar. Instances running on Sugar's cloud environment will have this setting enforced as <code>array('eot','svg','tff','woff','woff2','xml')</code> . |
| Type             | Array : Extensions   |
| Range of values  | File extensions to allow   |
| Versions         | 6.0.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| Default Value    | <code>array()</code>   |
| SugarCloud Value | <code>array('eot','svg','tff','woff','woff2','xml')</code>   |
| Override Example | <code>\$sugar_config['moduleInstaller']['validExt'] = array('swf', 'log');</code>  |

### mso\_fixup\_paragraph\_tags

|             |   |
|-------------|---|
| Description | Determines whether email HTML is scrubbed for empty paragraph tags when displayed in the application. |
|-------------|---|

|                  |   |
|------------------|---|
|                  | Setting this value to true will enable the HTML scrubbing. Enabling this setting does not affect the HTML stored in the database from the initial import. Created as a result of bug 66022 ( <a href="https://web.sugarcrm.com/support/issues/66022">https://web.sugarcrm.com/support/issues/66022</a> ). |
| Type             | Boolean   |
| Range of values  | true and false  |
| Versions         | 7.7.0.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell   |
| Default Value    | false   |
| Override Example | <code>\$sugar_config['mso_fixup_paragraph_tags'] = true;</code>   |

### **new\_email\_addresses\_opted\_out**

|                  |  |
|------------------|--|
| Description      | If true, then newly created EmailAddress records in Sugar will be opted-out by default. This setting can also be controlled using the "Opt-out new email addresses by default" setting in Admin > System Email Settings. |
| Type             | Boolean  |
| Range of values  | true and false   |
| Versions         | 8.0.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| Default Value    | false  |
| Override Example | <code>\$sugar_config['new_email_addresses_opted_out'] = true;</code>   |

### **noPrivateTeamUpdate**

|             |  |
|-------------|--|
| Description | Prevents name changes to a users private team. This setting can be |
|-------------|--|

|                  |  |
|------------------|--|
|                  | modified by changing in Admin > System Settings > Advanced > Prevent name changes by users to update their Private Team Name |
| Type             | Boolean  |
| Range of values  | true and false   |
| Versions         | 7.6.1.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| Default Value    | false  |
| Override Example | <code>\$sugar_config['noPrivateTeamUpdate'] = true;</code>   |

## oauth2

|                  |  |
|------------------|--|
| Description      | Configutations for the oauth2 server.            |
| Type             | Array  |
| Versions         | 7.0.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| Override Example | <code>\$sugar_config['oauth2'] = array();</code> |

## oauth2.access\_token\_lifetime

|             |   |
|-------------|---|
| Description | <p>The lifetime of the access token in seconds. This setting controls how often Sugar will check to see if the user's token has expired. It is recommended for this value not to surpass more than half of the <code>oauth2.refresh_token_lifetime</code> setting.</p> <p><b>Note:</b> This setting cannot exceed the maximum PHP session timeout, which is configured by PHP setting <code>session.gc_maxlifetime</code>. In SugarCloud the maximum session timeout is set to 7200s (2 hours).</p> |
|-------------|---|



|                  |   |
|------------------|---|
|                  | <b>Note:</b> This setting is not respected for instances that use <a href="#">SugarIdentity</a> . |
| Type             | Integer : Seconds   |
| Versions         | 7.0.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell   |
| Default Value    | 3600  |
| Override Example | <code>\$sugar_config['oauth2']['access_token_lifetime'] = 3600;</code>                            |

### **oauth2.refresh\_token\_lifetime**

|                  |   |
|------------------|---|
| Description      | The lifetime of refresh token in seconds. We recommend the <code>oauth2.refresh_token_lifetime</code> remains at 1209600 seconds or less for security. Should you increase this number, do not exceed 2147220 seconds.<br><br><b>Note:</b> This setting is not respected for instances that use <a href="#">SugarIdentity</a> . |
| Type             | Integer   |
| Versions         | 7.0.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell   |
| Default Value    | 1209600   |
| Override Example | <code>\$sugar_config['oauth2']['refresh_token_lifetime'] = 1409600;</code>  |

### **oauth\_token\_expiry**

|                 |  |
|-----------------|--|
| Description     | Sets whether OAuth tokens will expire. |
| Type            | String                                 |
| Range of values | true and false                         |

|                  |  |
|------------------|--|
| Versions         | 7.5.0.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell          |
| Default Value    | False  |
| Override Example | <code>\$sugar_config['oauth_token_expiry'] = '0';</code> |

## oauth\_token\_life

|                  |   |
|------------------|---|
| Description      | Sets the length (in seconds) of the life of an OAuth token. |
| Type             | Integer : Seconds   |
| Versions         | 7.5.0.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell             |
| Default Value    | 86400   |
| Override Example | <code>\$sugar_config['oauth_token_life'] = '86400';</code>  |

## passwordHash

|                  |   |
|------------------|---|
| Description      | <p>Array that defines the password hashing behaviors.</p> <p><b>Note:</b> This configuration's functionality has been deprecated in Sugar versions 13.0 and higher and will be removed in a future release.</p> |
| Type             | Array   |
| Versions         | 7.7.0.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell   |
| Override Example | <code>\$sugar_config['passwordHash'] = array();</code>  |

---

## passwordHash.algo

|                  |  |
|------------------|--|
| Description      | <p>The specific algorithm to be used by the hashing backend. The available values depend on the selected passwordHash.backend. See <a href="http://php.net/manual/en/password.constants.php">http://php.net/manual/en/password.constants.php</a> for more information when using the native backend.</p> <p><b>Note:</b> This configuration's functionality has been deprecated in Sugar versions 13.0 and higher and will be removed in a future release.</p> |
| Type             | String : Algorithm Type  |
| Range of values  | For native backend: "PASSWORD_DEFAULT" and "PASSWORD_BCRYPT". For sha2 backend: "CRYPT_SHA256" and "CRYPT_SHA512"  |
| Versions         | 7.7.0.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| Default Value    | "PASSWORD_DEFAULT" for native.<br>"CRYPT_SHA256" for sha2 backend.   |
| Override Example | <pre>\$sugar_config['passwordHash']['algo'] = 'PASSWORD_BCRYPT';</pre>   |

## passwordHash.allowLegacy

|             |   |
|-------------|---|
| Description | <p>Allow logins of users who have their password stored using the insecure legacy MD5 hash. During the transition period for the 7.7 series, this will be allowed out of the box. Versions past 7.7 will no longer allow by default authentication against insecure hashes. This configuration parameter can be used to change the default behavior.</p> <p><b>Note:</b> This configuration's functionality</p> |
|-------------|---|

|                  |  |
|------------------|--|
|                  | has been deprecated in Sugar versions 13.0 and higher and will be removed in a future release. |
| Type             | Boolean  |
| Range of values  | true and false   |
| Versions         | 7.7.0.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| Default Value    | 7.7.x: true<br>7.8.x+:false  |
| Override Example | <code>\$sugar_config['passwordHash']['allowLegacy'] = false;</code>                            |

### **passwordHash.backend**

|                  |   |
|------------------|---|
| Description      | <p>The password hash backend class to use. By default, the "native" backend is used which uses Blowfish to hash the passwords in the database. An alternative is using the "sha2" backend which makes use of SHA-2 hashing instead. Depending on the backend, different configuration options are available for passwordHash.algo and passwordHash.options.</p> <p><b>Note:</b> This configuration's functionality has been deprecated in Sugar versions 13.0 and higher and will be removed in a future release.</p> |
| Type             | String  |
| Range of values  | 'sha2' and 'native'   |
| Versions         | 7.7.0.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell   |
| Default Value    | native  |
| Override Example | <code>\$sugar_config['passwordHash']['bac</code>  |

```
kend'] = 'sha2';
```

## passwordHash.options

|                  |  |
|------------------|--|
| Description      | <p>The available configuration values depend on the selected passwordHash.backend. See <a href="http://php.net/manual/en/function.password-hash.php">http://php.net/manual/en/function.password-hash.php</a> when using the native backend and <a href="http://php.net/manual/en/function.crypt.php">http://php.net/manual/en/function.crypt.php</a> for the sha2 backend. Note that only the following specified options are allowed. For native backend: passwordHash.options.cost. For sha2 backend: passwordHash.options.rounds.</p> <p><b>Note:</b> This configuration's functionality has been deprecated in Sugar versions 13.0 and higher and will be removed in a future release.</p> |
| Type             | Array  |
| Versions         | 7.7.0.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| Override Example | <pre>\$sugar_config['passwordHash']['options'] = array();</pre>  |

## passwordHash.options.cost

|             |   |
|-------------|---|
| Description | <p>An available option when the passwordHash.backend configuration is set to "native". More information on the native backend can be found at <a href="http://php.net/manual/en/function.password-hash.php">http://php.net/manual/en/function.password-hash.php</a></p> <p><b>Note:</b> This configuration's functionality has been deprecated in Sugar versions 13.0 and higher and will be removed in a future release.</p> |
|-------------|---|

|                  |  |
|------------------|--|
| Type             | Integer  |
| Versions         | 7.7.0.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell                      |
| Default Value    | 10   |
| Override Example | <code>\$sugar_config['passwordHash']['options']['cost'] = 15;</code> |

**passwordHash.options.rounds**

|                  |   |
|------------------|---|
| Description      | <p>An available option when the passwordHash.backend configuration is set to "sha2". More information on the sha2 backend can be found at <a href="http://php.net/manual/en/function.crypt.php">http://php.net/manual/en/function.crypt.php</a></p> <p><b>Note:</b> This configuration's functionality has been deprecated in Sugar versions 13.0 and higher and will be removed in a future release.</p> |
| Type             | Integer   |
| Versions         | 7.7.0.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell   |
| Default Value    | 5000  |
| Override Example | <code>\$sugar_config['passwordHash']['options']['rounds'] = 4000;</code>  |

**passwordHash.rehash**

|             |   |
|-------------|---|
| Description | <p>When enabled, the system will automatically rehash the user's password when successfully authenticated. This allows adoption to the newly configured password hash backend without resetting user's passwords.</p> |
|-------------|---|

|                  |  |
|------------------|--|
|                  | <b>Note:</b> This configuration's functionality has been deprecated in Sugar versions 13.0 and higher and will be removed in a future release. |
| Type             | Boolean  |
| Range of values  | true and false   |
| Versions         | 7.7.0.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| Default Value    | true   |
| Override Example | <code>\$sugar_config['passwordHash']['rehash'] = false;</code>   |

## passwordsetting

|                  |  |
|------------------|--|
| Description      | Defines all of the password requirements for the instance. |
| Type             | Array  |
| Versions         | 5.5.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell            |
| Override Example | <code>\$sugar_config['passwordsetting'] = array();</code>  |

## passwordsetting.forgotpasswordON

|                 |   |
|-----------------|---|
| Description     | Enables the Forgot Password features. When enabled, users will have the ability to reset their own passwords at the Login page. Set in UI via Admin->Password Management. |
| Type            | String  |
| Range of values | 0, 1  |
| Versions        | 5.5.0+  |
| Products        | Professional, Enterprise, Ultimate,   |

|                  |   |
|------------------|---|
|                  | Serve, Sell   |
| Default Value    | 1   |
| Override Example | <code>\$sugar_config['passwordsetting']['forgotpasswordON'] = '0';</code> |

### **passwordsetting.linkexpiration**

|                  |   |
|------------------|---|
| Description      | Determines whether the password reset link expires.                     |
| Type             | String  |
| Range of values  | 0, 1  |
| Versions         | 6.0.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell                         |
| Default Value    | 0   |
| Override Example | <code>\$sugar_config['passwordsetting']['linkexpiration'] = '0';</code> |

### **passwordsetting.onelower**

|                  |  |
|------------------|--|
| Description      | Configures whether at least one lower-case letter is required in users' passwords. |
| Type             | String   |
| Range of values  | 0, 1   |
| Versions         | 6.0.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell                                    |
| Default Value    | 0  |
| Override Example | <code>\$sugar_config['passwordsetting']['onespecial'] = '0';</code>                |

### **passwordsetting.onenumber**

|             |  |
|-------------|--|
| Description | Configures whether at least one number |
|-------------|--|



|                  |  |
|------------------|--|
|                  | is required in users' passwords.                                   |
| Type             | String   |
| Range of values  | 0, 1   |
| Versions         | 6.0.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell                    |
| Default Value    | 1  |
| Override Example | <code>\$sugar_config['passwordsetting']['onenumber'] = '1';</code> |

### **passwordsetting.oneupper**

|                  |   |
|------------------|---|
| Description      | Configures whether at least one uppercase letter is required in users' passwords. |
| Type             | Boolean   |
| Range of values  | 0, 1  |
| Versions         | 6.0.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell                                   |
| Default Value    | 0   |
| Override Example | <code>\$sugar_config['passwordsetting']['oneupper'] = 1;</code>                   |

### **passwordsetting.systexpirationtype**

|                 |  |
|-----------------|--|
| Description     | Specifies the unit of measurement for passwordsetting.systexpirationtime. The available options are: Days (1), Weeks (7) and Months (30). This value can be set in the UI via Admin > Password Management. |
| Type            | Integer  |
| Range of values | 1, 7, and 30   |
| Versions        | 5.5.0+   |
| Products        | Professional, Enterprise, Ultimate,  |

|                  |   |
|------------------|---|
|                  | Serve, Sell   |
| Default Value    | 1   |
| Override Example | <code>\$sugar_config['passwordsetting']['systemexpirationtype'] = '7';</code> |

## pdf\_file\_max\_lifetime

|                  |  |
|------------------|--|
| Description      | The interval in seconds of when to expire and remove generated PDF files. It is important to note that the "Remove temporary PDF files" scheduler job must be enabled to remove the PDF files. |
| Type             | Integer : Seconds  |
| Versions         | 7.6.0.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| Default Value    | 86400  |
| Override Example | <code>\$sugar_config['pdf_file_max_lifetime'] = 86400;</code>  |

## perfProfile

|             |   |
|-------------|---|
| Description | Allows for an admin to tweak aspects of the system for performance enhancements when fetching records. As every system is different, your mileage will vary when using the perfProfile settings. Increases or decreases in performance will depend on a combination of primarily the amount of users, amount of unique team sets, and data size per module. The perfProfile parameters are available to be able to fine tune the team security performance no your platform. It is not recommended to change any setting directly in a production environment without testing and understanding the impact. |
|-------------|---|

|                  |   |
|------------------|---|
| Type             | Array   |
| Versions         | 7.2.2.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell       |
| Override Example | <code>\$sugar_config['perfProfile'] = array();</code> |

### **perfProfile.TeamSecurity**

|                  |  |
|------------------|--|
| Description      | Determines whether the team security filtering is applied.             |
| Type             | Array  |
| Versions         | 7.2.2.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell                        |
| Override Example | <code>\$sugar_config['perfProfile']['Team Security'] = array();</code> |

### **perfProfile.TeamSecurity.default**

|                  |  |
|------------------|--|
| Description      | This setting is used to enable or disable Team Security denormalization feature by default across the application. |
| Type             | Array  |
| Range of values  | true and false   |
| Versions         | 7.7.2.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| Override Example | <code>\$sugar_config['perfProfile']['Team Security']['default'] = array();</code>                                  |

### **perfProfile.TeamSecurity.default.disable\_subquery\_optimizer\_hint**

|             |   |
|-------------|---|
| Description | As of Sugar 11.0.2, the default behavior of TeamSecurity on MySQL no longer uses an INNER JOIN to a 'team_sets' |
|-------------|---|

|                  |   |
|------------------|---|
|                  | subquery; instead, Sugar 11.0.2 and higher use WHERE team_set_id IN [team_sets subquery] with a MySQL optimizer hint. To disable this approach and switch back to the INNER JOIN implementation, set this config to 'true'. |
| Type             | Boolean   |
| Range of values  | true and false  |
| Versions         | 11.0.2+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell   |
| Default Value    | false   |
| Override Example | <code>\$sugar_config['perfProfile']['Team Security']['default']['disable_subquery_optimizer_hint'] = true;</code>   |

**perfProfile.TeamSecurity.default.teamset\_prefetch**

|                  |   |
|------------------|---|
| Description      | Fetches the list of team sets that the current user is a member of in a separate query and use those ID's directly in the team security clause to avoid adding a subquery. Under certain conditions, this may improve team security performance. It is important to note that 'default' applies this applied to all modules. To set specific settings for a specific module, you will need to use: <code>\$sugar_config['perfProfile']['TeamSecurity']['{module}']['teamset_prefetch'] = true;</code> |
| Type             | Boolean   |
| Range of values  | true and false  |
| Versions         | 7.2.2.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell   |
| Default Value    | false   |
| Override Example | <code>\$sugar_config['perfProfile']['Team Security']['default']['teamset_prefetch'] = true;</code>  |

**perfProfile.TeamSecurity.default.teamset\_prefetch\_max**

|                  |  |
|------------------|--|
| Description      | The maximum amount of team set ID's to include in the team security clause. If the current user is a member of more unique teams sets than this value, the system will fall back to using a regular subquery instead. Under certain conditions, this may improve team security performance. It is important to note that 'default' applies this applied to all modules. To set specific settings for a specific module, you will need to use: <code>\$sugar_config['perfProfile']['TeamSecurity']['{module}']['teamset_prefetch_max'] = true;</code> |
| Type             | Integer : Records  |
| Versions         | 7.2.2.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| Default Value    | <i>empty</i>   |
| Override Example | <code>\$sugar_config['perfProfile']['Team Security']['default']['teamset_prefetch_max'] = 500;</code>  |

**perfProfile.TeamSecurity.default.use\_denorm**

|             |  |
|-------------|--|
| Description | This setting is used to enable or disable Team Security denormalization feature. Team Security denormalization can significantly improve SQL query performance when there are a large number of Teams in a Sugar instance. The cost is that this feature relies on a separate Team security denormalization table that needs to be updated as records change to ensure Sugar's Team security visibility rules are applied properly. It is important to note that 'default' applies this to all modules. To |
|-------------|--|

|                  |   |
|------------------|---|
|                  | set specific settings for a specific module, you will need to use: <code>\$sugar_config['perfProfile']['TeamSecurity']['{module}']['use_denorm'] = true;</code> |
| Type             | Boolean   |
| Range of values  | true and false  |
| Versions         | 8.0.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell   |
| Default Value    | false   |
| Override Example | <code>\$sugar_config['perfProfile']['TeamSecurity']['default']['use_denorm'] = true;</code>   |

**perfProfile.TeamSecurity.default.where\_condition**

|                  |   |
|------------------|---|
| Description      | Determines whether the team security filtering is applied in the WHERE clause instead of SELECT clause. Under certain conditions, this may improve team security performance. It is important to note that 'default' applies this applied to all modules. To set specific settings for a specific module, you will need to use: <code>\$sugar_config['perfProfile']['TeamSecurity']['{module}']['where_condition'] = true;</code> |
| Type             | Boolean   |
| Range of values  | true and false  |
| Versions         | 7.2.2.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell   |
| Default Value    | false   |
| Override Example | <code>\$sugar_config['perfProfile']['TeamSecurity']['default']['where_condition'] = true;</code>  |

**perfProfile.TeamSecurity.gs\_use\_normalized\_teams**

|                  |   |
|------------------|---|
| Description      | Determines whether the team set IDs are cached; this may improve Elasticsearch indexing performance, especially for those instances with a large number of team sets per user. Admin must schedule re-indexing Elasticsearch server if this value has been changed. |
| Type             | Boolean   |
| Range of values  | true and false  |
| Versions         | 11.0.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell   |
| Default Value    | false   |
| Override Example | <pre>\$sugar_config['perfProfile']['Team Security']['gs_use_normalized_teams'] = true;</pre>  |

**perfProfile.TeamSecurity.inline\_update**

|                  |   |
|------------------|---|
| Description      | When denormalization is in use (perfProfile.TeamSecurity.default.use_denorm config set to true), this setting will allow the denormalization table to be updated in real time as records are updated in the system. If this setting is disabled, the denormalization table must be scheduled by the Sugar administrator via Schedulers > Rebuild Denormalized Team Security Data. |
| Type             | Boolean   |
| Range of values  | true and false  |
| Versions         | 8.0.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell   |
| Default Value    | false   |
| Override Example | <pre>\$sugar_config['perfProfile']['Team Security']['inline_update'] = true;</pre>  |

---

## **pmse\_settings\_default**

|                  |   |
|------------------|---|
| Description      | Settings for troubleshooting and debugging SugarBPM             |
| Type             | Array   |
| Versions         | 7.6.0.0+  |
| Products         | Enterprise, Ultimate, Serve, Sell                               |
| Override Example | <code>\$sugar_config['pmse_settings_default'] = array();</code> |

## **pmse\_settings\_default.error\_number\_of\_cycles**

|                  |  |
|------------------|--|
| Description      | Number of cycles before triggering an error in SugarBPM                              |
| Type             | String : Cycles  |
| Versions         | 7.6.0.0+   |
| Products         | Enterprise, Ultimate, Serve, Sell  |
| Default Value    | 10   |
| Override Example | <code>\$sugar_config['pmse_settings_default']['error_number_of_cycles'] = 15;</code> |

## **pmse\_settings\_default.error\_timeout**

|                  |   |
|------------------|---|
| Description      | Time in seconds of timeout before triggering an error in SugarBPM           |
| Type             | String : Seconds  |
| Versions         | 7.6.0.0+  |
| Products         | Enterprise, Ultimate, Serve, Sell   |
| Default Value    | 40  |
| Override Example | <code>\$sugar_config['pmse_settings_default']['error_timeout'] = 45;</code> |



---

### **pmse\_settings\_default.logger\_level**

|                  |   |
|------------------|---|
| Description      | The default logger level for SugarBPM   |
| Type             | String  |
| Range of values  | emergency, alert, critical, error, warning, notice, info, debug                   |
| Versions         | 7.6.0.0+  |
| Products         | Enterprise, Ultimate, Serve, Sell   |
| Default Value    | critical  |
| Override Example | <pre>\$sugar_config['pmse_settings_default']['logger_level'] = 'emergency';</pre> |

### **processes\_auto\_save\_interval**

|                  |   |
|------------------|---|
| Description      | Defines the interval (in milliseconds) at which auto-saving of process definitions will occur while using the SugarBPM process designer. A value of 0 will disable auto-saving. |
| Type             | Integer : Milliseconds  |
| Versions         | 8.3.0+  |
| Products         | Enterprise, Ultimate, Serve, Sell   |
| Default Value    | 30000   |
| Override Example | <pre>\$sugar_config['processes_auto_save_interval'] = 120000</pre>  |

### **processes\_auto\_validate\_on\_autosave**

|                 |  |
|-----------------|--|
| Description     | Defines whether validation of process definitions will automatically occur when a process definition is auto-saved. To enable this setting, 'processes_auto_save_interval' must be greater than 0. |
| Type            | Boolean  |
| Range of values | true and false   |

|                  |  |
|------------------|--|
| Versions         | 8.3.0+   |
| Products         | Enterprise, Ultimate, Serve, Sell  |
| Default Value    | true   |
| Override Example | <code>\$sugar_config['processes_auto_validate_on_autosave'] = false</code> |

## **processes\_auto\_validate\_on\_import**

|                  |   |
|------------------|---|
| Description      | Determines whether validation of process definitions will automatically occur immediately after a process definition is imported. |
| Type             | Boolean   |
| Range of values  | true and false  |
| Versions         | 8.3.0+  |
| Products         | Enterprise, Ultimate, Serve, Sell   |
| Default Value    | true  |
| Override Example | <code>\$sugar_config['processes_auto_validate_on_import'] = false</code>  |

## **push\_notification**

|                  |   |
|------------------|---|
| Description      | The array of configurations related to push notifications.  |
| Type             | Array   |
| Versions         | 11.0.0+   |
| Products         | Enterprise, Ultimate, Serve, Sell                           |
| Override Example | <code>\$sugar_config['push_notification'] = array();</code> |

## **push\_notification.enabled**

|             |  |
|-------------|--|
| Description | For Sugar instances that are eligible for push notifications, use this setting to turn push notifications on or off. See the |
|-------------|--|

|                  |  |
|------------------|--|
|                  | Android and iOS User Guides for the requirements to be eligible: <a href="https://support.sugarcrm.com/Documentation/Mobile_Solutions/SugarCRM_Mobile/SugarCRM_Mobile_for_iOS_User_Guide/#Eligible_Sugar_Instances">https://support.sugarcrm.com/Documentation/Mobile_Solutions/SugarCRM_Mobile/SugarCRM_Mobile_for_iOS_User_Guide/#Eligible_Sugar_Instances</a> <a href="https://support.sugarcrm.com/Documentation/Mobile_Solutions/SugarCRM_Mobile/SugarCRM_Mobile_for_Android_User_Guide/#Eligible_Sugar_Instances">https://support.sugarcrm.com/Documentation/Mobile_Solutions/SugarCRM_Mobile/SugarCRM_Mobile_for_Android_User_Guide/#Eligible_Sugar_Instances</a> |
| Type             | Boolean  |
| Range of values  | true and false   |
| Versions         | 11.0.0+  |
| Products         | Enterprise, Ultimate, Serve, Sell  |
| Default Value    | false  |
| Override Example | <code>\$sugar_config['push_notification']<br/>['enabled'] = true;</code>   |

### **push\_notification.service\_provider**

|                 |  |
|-----------------|--|
| Description     | For Sugar instances that are eligible for push notifications, this setting specifies the provider. Currently, SugarPush is the only available provider. See the Android and iOS User Guides for the requirements to be eligible: <a href="https://support.sugarcrm.com/Documentation/Mobile_Solutions/SugarCRM_Mobile/SugarCRM_Mobile_for_iOS_User_Guide/#Eligible_Sugar_Instances">https://support.sugarcrm.com/Documentation/Mobile_Solutions/SugarCRM_Mobile/SugarCRM_Mobile_for_iOS_User_Guide/#Eligible_Sugar_Instances</a> <a href="https://support.sugarcrm.com/Documentation/Mobile_Solutions/SugarCRM_Mobile/SugarCRM_Mobile_for_Android_User_Guide/#Eligible_Sugar_Instances">https://support.sugarcrm.com/Documentation/Mobile_Solutions/SugarCRM_Mobile/SugarCRM_Mobile_for_Android_User_Guide/#Eligible_Sugar_Instances</a> |
| Type            | String   |
| Range of values | 'SugarPush'  |
| Versions        | 11.0.0+  |
| Products        | Enterprise, Ultimate, Serve, Sell  |
| Default Value   | 'SugarPush'  |
|                 |  |

|                  |   |
|------------------|---|
| Override Example | <pre>\$sugar_config['push_notification']<br/>['service_provider'] = 'SugarPush'<br/>;</pre> |
|------------------|---|

## require\_accounts

|                  |  |
|------------------|--|
| Description      | Determines whether an account is required for record creation within the system. |
| Type             | Boolean  |
| Range of values  | true and false   |
| Versions         | 5.2.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell                                  |
| Default Value    | true   |
| Override Example | <pre>\$sugar_config['require_accounts']<br/>= false;</pre>                       |

## rest\_response\_etag\_cache\_age

|                  |  |
|------------------|--|
| Description      | Controls how long the browser should cache rest responses.           |
| Type             | Integer : Seconds  |
| Versions         | 7.7.0.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell                      |
| Default Value    | 10   |
| Override Example | <pre>\$sugar_config['rest_response_etag_<br/>cache_age'] = 15;</pre> |

## roleBasedViews

|             |   |
|-------------|---|
| Description | Enables role based views and dropdowns. |
| Type        | Boolean                                 |

|                  |   |
|------------------|---|
| Range of values  | true and false  |
| Versions         | 7.6.0.0+  |
| Products         | Enterprise, Ultimate, Serve, Sell                     |
| Default Value    | false   |
| Override Example | <code>\$sugar_config['roleBasedViews'] = true;</code> |

## SAML\_provisionUser

|                  |  |
|------------------|--|
| Description      | Determines whether or not a new user is auto-provisioned when authenticating through SAML. Setting this setting to false will prevent a new user from being created. |
| Type             | Boolean  |
| Range of values  | true and false   |
| Versions         | 7.7.0.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| Default Value    | true   |
| Override Example | <code>\$sugar_config['SAML_provisionUser'] = false;</code>   |

## SAML\_X509Cert

|                  |   |
|------------------|---|
| Description      | The SAML Certificate Key.   |
| Type             | String : SAML Certificate Key   |
| Versions         | 6.1.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell   |
| Override Example | <code>\$sugar_config['SAML_X509Cert'] = '-----BEGIN CERTIFICATE-----CERTIFICATE KEY-----END CERTIFICATE-----';</code> |

---

## schedule\_report\_with\_chart

|                  |   |
|------------------|---|
| Description      | By default, reports distributed via the Reports Schedule module in 8.1 and later will not include a chart in the emailed PDF even if one has been configured for display in Sugar. Because the report charts are not re-built when the scheduler runs a scheduled report, the chart may not accurately represent the data presented in the PDF. Instead, the chart will represent the data that was pulled the last time a user triggered a "Run Report" action on the report, which may or may not match the data available when the report is generated for the scheduled report. Consider this potential conflict carefully before using this config to override the default behavior. |
| Type             | Boolean   |
| Range of values  | true and false  |
| Versions         | 8.1.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell   |
| Default Value    | false   |
| Override Example | <pre>\$sugar_config['schedule_report_with_chart'] = true;</pre>   |

## search\_engine

|                  |   |
|------------------|---|
| Description      | Array that defines the search engine behaviors.       |
| Type             | Array   |
| Versions         | 7.2.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell       |
| Override Example | <pre>\$sugar_config['search_engine'] = array();</pre> |

---

### **search\_engine.max\_bulk\_delete\_threshold**

|                  |   |
|------------------|---|
| Description      | The maximum number of records that can be deleted at a time.                      |
| Type             | Integer : Number of records   |
| Versions         | 7.2.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell                                   |
| Default Value    | 3000  |
| Override Example | <code>\$sugar_config['search_engine']['max_bulk_delete_threshold'] = 3000;</code> |

### **search\_engine.max\_bulk\_query\_threshold**

|                  |  |
|------------------|--|
| Description      | The maximum number of records to process before starting to bulk insert. Prevents memory issues. |
| Type             | Integer : Number of records  |
| Versions         | 7.2.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| Default Value    | 15000  |
| Override Example | <code>\$sugar_config['search_engine']['max_bulk_query_threshold'] = 20000;</code>                |

### **search\_engine.max\_bulk\_threshold**

|                  |  |
|------------------|--|
| Description      | The maximum number of records to process before starting to bulk insert. Prevents memory issues. |
| Type             | Integer  |
| Versions         | 7.2.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| Default Value    | 5000   |
| Override Example | <code>\$sugar_config['search_engine']['search_engine.max_bulk_threshold'] =</code>               |

---

|  |        |
|--|--------|
|  | 10000; |
|--|--------|

### **search\_engine.postpone\_job\_time**

|                  |  |
|------------------|--|
| Description      | Amount of time to postpone a job by so that it's not executed twice during the same request. |
| Type             | Integer : Seconds  |
| Versions         | 7.2.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| Default Value    | 120  |
| Override Example | <pre>\$sugar_config['search_engine']['search_engine.postpone_job_time'] = 70;</pre>          |

### **search\_wildcard\_infront**

|                  |   |
|------------------|---|
| Description      | In Sugar 7.x+, this setting is only valid for modules running in BWC mode. When enabled, automatically adds a wildcard in front of any searches performed in the application. This setting is not recommended to be enabled as preceding wildcards results in database indices not being utilized and performance decreasing. |
| Type             | Boolean   |
| Range of values  | true and false  |
| Versions         | 6.4.3+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell   |
| Default Value    | false   |
| Override Example | <pre>\$sugar_config['search_wildcard_infront'] = true;</pre>  |



---

## session\_dir

|                  |  |
|------------------|--|
| Description      | Directory on the server to store Sugar session data. If left empty, the PHP session settings will be inherited. Instances running on Sugar's cloud environment will have this setting enforced as <i>empty</i> . |
| Type             | String   |
| Range of values  | Directory path   |
| Versions         | 5.2.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| Default Value    | <i>empty</i>   |
| SugarCloud Value | <i>empty</i>   |
| Override Example | <pre>\$sugar_config['session_dir'] = '/tmp/SugarSession/';</pre>   |

## showThemePicker

|                  |   |
|------------------|---|
| Description      | Removes the theme selection drop down.                |
| Type             | Boolean   |
| Range of values  | true and false  |
| Versions         | 5.2.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell       |
| Default Value    | true  |
| Override Example | <pre>\$sugar_config['showThemePicker'] = false;</pre> |

## show\_download\_tab

|             |  |
|-------------|--|
| Description | Used to determine whether the download tab will appear in the User settings. The download tab provides |
|-------------|--|

|                  |  |
|------------------|--|
|                  | users with access to Sugar plug-ins and other available downloads. |
| Type             | Boolean  |
| Range of values  | true and false   |
| Versions         | 6.2.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell                    |
| Override Example | <code>\$sugar_config['show_download_tab'] = true;</code>           |

## site\_url

|                  |  |
|------------------|--|
| Description      | Current URL of your Sugar instance. This value is critical in its accuracy for multiple points of functionality in the instance. |
| Type             | String : URL   |
| Range of values  | Current URL of Sugar   |
| Versions         | 5.2.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| Override Example | <code>\$sugar_config['site_url'] = 'http://my.sugarinstance.com';</code>   |

## slow\_query\_time\_msec

|                  |  |
|------------------|--|
| Description      | Slow query time threshold. Instances running on Sugar's cloud environment will have this setting enforced as 5000. |
| Type             | String : Milliseconds  |
| Versions         | 5.2.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| Default Value    | 5000   |
| SugarCloud Value | 5000   |
|                  |  |

|                  |   |
|------------------|---|
| Override Example | <pre>\$sugar_config['slow_query_time_msec'] = '1000';</pre> |
|------------------|---|

## smtp\_mailer\_debug

|                  |   |
|------------------|---|
| Description      | The smtp_mailer_debug is used for increasing the debugging output for PHPMailer on individual instances so that more information can be seen when there are bugs or escalations. The default is 0 and produces no additional output for errors. 1-4 log the additional error information to sugarcrm.log as specified by PHPMailer at <a href="https://github.com/PHPMailer/PHPMailer/wiki/SMTP-Debugging#debug-levels">https://github.com/PHPMailer/PHPMailer/wiki/SMTP-Debugging#debug-levels</a> . |
| Type             | Integer   |
| Range of values  | 0, 1, 2, 3, 4   |
| Versions         | 7.9.1.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell   |
| Default Value    | 0   |
| Override Example | <pre>\$sugar_config['smtp_mailer_debug'] = 4;</pre>   |

## stack\_trace\_errors

|                  |   |
|------------------|---|
| Description      | Displays stack trace of errors.                         |
| Type             | Boolean   |
| Range of values  | true and false  |
| Versions         | 5.2.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell         |
| Default Value    | false   |
| Override Example | <pre>\$sugar_config['stack_trace_errors'] = true;</pre> |

---

## studio\_max\_history

|                  |   |
|------------------|---|
| Description      | When layout changes are made in Studio, a history of those changes are recorded with each save & deploy under <code>./custom/history/modules/</code> . The <code>studio_max_history</code> parameter controls how many files Sugar keeps for a particular module. If this parameter is undefined, a default of 50 is observed and to keep all historical Studio actions, set this parameter to 0. Instances running on Sugar's cloud environment will have this setting enforced as 50. |
| Type             | Integer : Number of files to keep   |
| Range of values  | Any integer   |
| Versions         | 5.2.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell   |
| Default Value    | 50  |
| SugarCloud Value | 50  |
| Override Example | <pre>\$sugar_config['studio_max_history'] = 100;</pre>  |

## sugar\_version

|                  |   |
|------------------|---|
| Description      | The current version of Sugar that is being used. This value should not be modified as it is updated in the config when Sugar is upgraded. |
| Type             | String : Version Number   |
| Versions         | 5.2.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell   |
| Override Example | <pre>\$sugar_config['sugar_version'] = '6.7.3';</pre>   |

---

## time\_aware\_job\_max\_batch\_size

|                  |  |
|------------------|--|
| Description      | The number of records processed per batch by the "Process Time-Aware Schedules" job scheduler. It is important to note that the scheduler job must be enabled. |
| Type             | Integer : Records  |
| Versions         | 10.3.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| Default Value    | 100  |
| Override Example | <code>\$sugar_config['time_aware_job_max_batch_size'] = 200;</code>  |

## tmp\_dir

|                  |  |
|------------------|--|
| Description      | The directory path for temporary XML files used by charts and diagnostics. |
| Type             | String : Directory path  |
| Range of values  | Filesystem path  |
| Versions         | 5.2.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell                            |
| Default Value    | cache/xml/   |
| Override Example | <code>\$sugar_config['tmp_dir'] = 'cache/xml/';</code>                     |

## tmp\_file\_max\_lifetime

|             |   |
|-------------|---|
| Description | The interval in seconds of when to expire and remove temporary upload files. It is important to note that the "Remove temporary files" scheduler job must be enabled to remove the temporary files. |
| Type        | Integer : Seconds   |

|                  |   |
|------------------|---|
| Versions         | 7.6.0.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell               |
| Default Value    | 86400   |
| Override Example | <code>\$sugar_config['tmp_file_max_lifetime'] = 86400;</code> |

## **tracker\_max\_display\_length**

|                  |   |
|------------------|---|
| Description      | The number of records that will be shown per record in the "Last Viewed" section located under each module tab. |
| Type             | Integer : Number of records   |
| Versions         | 6.0.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell   |
| Override Example | <code>\$sugar_config['tracker_max_display_length'] = 45;</code>   |

## **uninstall\_timeout**

|                  |  |
|------------------|--|
| Description      | Controls the timeout time in seconds for an uninstall process. |
| Type             | Integer : Seconds  |
| Versions         | 10.2.1+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell                |
| Default Value    | 600  |
| Override Example | <code>\$sugar_config['uninstall_timeout'] = 300;</code>        |

## **unique\_key**

|             |  |
|-------------|--|
| Description | Specifies the unique identifier for the instance. This value is used in features |
|-------------|--|

|                  |   |
|------------------|---|
|                  | such as PHP caching, FTS indexing, and email archiving. It is extremely important that this string is unique from any other instances deployed even if they are only for development purposes only. |
| Type             | String : Unique Identifier  |
| Versions         | 5.2.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell   |
| Override Example | <code>\$sugar_config['unique_key'] = 'c0b5475f3f5b26ddb2976edc8865b5f6';</code>   |

## upload\_badext

|                  |   |
|------------------|---|
| Description      | An array of extensions that cannot be uploaded in their native file format. Sugar will append a .txt extension to the end of any files with an invalid extension to avoid security issues with running unauthorized scripts on an instance. |
| Type             | Array   |
| Range of values  | Extensions that cannot be uploaded as is  |
| Versions         | 5.2.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell   |
| Override Example | <code>\$sugar_config['upload_badext'][] = 'swf';</code>   |

## upload\_dir

|             |  |
|-------------|--|
| Description | The directory path where uploaded files are stored for note attachments, documents, and module loadable packages. By default, uploads are stored in the ./upload/ directory. For more information, refer to the <a href="#">Uploads</a> documentation. |
|-------------|--|

|                  |   |
|------------------|---|
| Type             | String  |
| Range of values  | Directory path  |
| Versions         | 5.2.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell       |
| Default Value    | upload/   |
| Override Example | <code>\$sugar_config['upload_dir'] = 'upload/'</code> |

## upload\_maxsize

|                  |  |
|------------------|--|
| Description      | The maximum individual file size that users can upload to modules that support file uploads. Restricts the upload limit from within Sugar without affecting any other applications that may be running on your server. This limit can be easily adjusted in Sugar via Admin > System Settings but is only useful if it is set to a size smaller than the php.ini limits. For more information, refer to the <a href="#">Uploads</a> documentation. |
| Type             | Integer : Filesize in bytes  |
| Versions         | 5.2.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| Override Example | <code>\$sugar_config['upload_maxsize'] = 40000000;</code>  |

## upload\_wrapper\_class

|             |   |
|-------------|---|
| Description | The name of the class used as upload wrapper.   |
| Type        | String : Upload wrapper class                   |
| Versions    | 6.7.0+  |
| Products    | Professional, Enterprise, Ultimate, Serve, Sell |



|                  |  |
|------------------|--|
| Default Value    | UploadStream   |
| Override Example | <code>\$sugar_config['upload_wrapper_classes'] = 'SugarUploadS3';</code> |

## use\_common\_ml\_dir

|                  |   |
|------------------|---|
| Description      | A security control that allows you to restrict Module Loader to read modules from a specific directory on the server and disable the ability to upload new modules into the Module Loader. To specify a new directory you will need to populate the config parameter 'common_ml_dir'. |
| Type             | Boolean   |
| Range of values  | true and false  |
| Versions         | 5.2.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell   |
| Default Value    | false   |
| Override Example | <code>\$sugar_config['use_common_ml_dir'] = true;</code>  |

## use\_php\_code\_json

|                  |  |
|------------------|--|
| Description      | Determines if the environment has a valid version of PHP-JSON. This should be determined by the function <code>returnPhpJsonStatus()</code> and shouldn't be overridden. |
| Type             | Boolean  |
| Range of values  | true and false   |
| Versions         | 5.2.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| Override Example | <code>\$sugar_config['use_php_code_json'] = true;</code>   |

---

## use\_real\_names

|                  |   |
|------------------|---|
| Description      | Display users' full names instead of their User Names in assignment fields. |
| Type             | Boolean   |
| Range of values  | true and false  |
| Versions         | 5.2.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell                             |
| Default Value    | true  |
| Override Example | <pre>\$sugar_config['use_real_names'] = true;</pre>                         |

## use\_sprites

|                  |  |
|------------------|--|
| Description      | A sprite is a two-dimensional image or animation that is integrated into a larger scene. This parameter is used to disable sprites. This is set to true by default (if you have GD libraries installed). |
| Type             | Boolean  |
| Range of values  | true and false   |
| Versions         | 6.4.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| Override Example | <pre>\$sugar_config['use_sprites'] = false;</pre>  |

## validation

|             |   |
|-------------|---|
| Description | An array that defines settings for user input validation behaviors. |
| Type        | Array   |

|                  |  |
|------------------|--|
| Versions         | 7.7.1.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell      |
| Override Example | <code>\$sugar_config['validation'] = array();</code> |

### **validation.compat\_mode**

|                  |  |
|------------------|--|
| Description      | Determines compatibility mode for superglobals in the input validation framework. When enabled, setting, unsetting, and modifying <code>\$_GET</code> , <code>\$_POST</code> , or <code>\$_REQUEST</code> values through PHP code is supported. Using PHP code to manipulate superglobals is discouraged. User input parameters should be considered read-only. As a transition period, this is currently allowed out-of-box, but may change in a future release. It is highly recommended for developers to verify their customizations work with this parameter set to false in preparation for the 7.9 release. |
| Type             | Boolean  |
| Range of values  | true and false   |
| Versions         | 7.7.1.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| Default Value    | 7.7.x: true<br>7.8.x: true<br>7.9.x: false   |
| Override Example | <code>\$sugar_config['validation']['compat_mode'] = false;</code>  |

### **validation.soft\_fail**

|             |  |
|-------------|--|
| Description | Determines whether soft failure mode for the input validation framework is |
|-------------|--|

|                  |  |
|------------------|--|
|                  | enabled. When this mode is enabled, any input validation violations will only be reported as a warning in the <code>sugarcrm.log</code> without having any negative impact on the request. When disabled, violations are reported as fatal in the <code>sugarcrm.log</code> and actual exceptions are being thrown resulting in an HTTP 500 response. It is highly recommended for developers to verify their customizations work with this parameter set to false in preparation for the 8.0 release. |
| Type             | Boolean  |
| Range of values  | true and false   |
| Versions         | 7.7.1.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| Default Value    | 7.7.x: true<br>7.8.x: true<br>7.9.x: true<br>8.0.x: false  |
| Override Example | <code>\$sugar_config['validation']['soft_fail'] = false;</code>  |

## **vcal\_time**

|                 |  |
|-----------------|--|
| Description     | Used to determine the number of months in advance of the current date that the Free/Busy information for calls and meetings will be published. To turn Free/Busy publishing off, set this variable to '0'. The minimum is 1 month; the maximum is 12 months. |
| Type            | String : Months  |
| Range of values | '1', '2', '3', '4', '5', '6', '7', '8', '9', '10', '11', and '12'  |
| Versions        | 5.2.0.c+   |
| Products        | Professional, Enterprise, Ultimate, Serve, Sell  |

|                  |   |
|------------------|---|
| Default Value    | 2   |
| Override Example | <code>\$sugar_config['vcal_time'] = '5';</code> |

## verify\_client\_ip

|                  |   |
|------------------|---|
| Description      | Whether or not to verify the client IP. Setting this to true will enable the system checking to see if the user is accessing Sugar from the IP address of their last page load.<br><br><b>Note:</b> This default value must be set to "false" in order to use <a href="#">Sugar Connect</a> and <a href="#">Sugar Integrate</a> . |
| Type             | Boolean   |
| Range of values  | true and false  |
| Versions         | 10.1.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell   |
| Default Value    | false   |
| Override Example | <code>\$sugar_config['verify_client_ip'] = true;</code>   |

## wl\_list\_max\_entries\_per\_page

|                  |   |
|------------------|---|
| Description      | The number of records to be shown per page on the listview of the mobile browser. |
| Type             | Integer : Number of records to display  |
| Versions         | 5.2.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell                                   |
| Default Value    | 10  |
| Override Example | <code>\$sugar_config['wl_list_max_entries_per_page'] = 10;</code>                 |

---

## **wl\_list\_max\_entries\_per\_subpanel**

|                  |  |
|------------------|--|
| Description      | Determines the number of records shown in the subpanels on the DetailView of the mobile browser. |
| Type             | Integer : Records  |
| Versions         | 5.2.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| Default Value    | 3  |
| Override Example | <code>\$sugar_config['wl_list_max_entries_per_subpanel'] = 3;</code>                             |

## **xhprof\_config**

|                  |   |
|------------------|---|
| Description      | Configuration settings for xhprof. More information on xhprof can be found at <a href="http://pecl.php.net/package/xhprof">http://pecl.php.net/package/xhprof</a> . |
| Type             | Array   |
| Versions         | 6.5.10+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell   |
| Override Example | <code>\$sugar_config['xhprof_config'] = array();</code>   |

## **xhprof\_config.enable**

|                  |  |
|------------------|--|
| Description      | Enables the xhprof profiler.                                   |
| Type             | Boolean  |
| Range of values  | true and false   |
| Versions         | 6.5.10+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell                |
| Default Value    | false  |
| Override Example | <code>\$sugar_config['xhprof_config']['enable'] = true;</code> |

---

### **xhprof\_config.filter\_wt**

|                  |  |
|------------------|--|
| Description      | The wall time. Values are specified in milliseconds.           |
| Type             | Integer : Wall time in milliseconds                            |
| Versions         | 7.6.0.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell                |
| Default Value    | 0  |
| Override Example | <code>\$sugar_config['xhprof_config']['filter_wt'] = 2;</code> |

### **xhprof\_config.flags**

|                  |   |
|------------------|---|
| Description      | The flags for xhprof profiler.  |
| Type             | String : xhprof flags   |
| Versions         | 6.5.10+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell   |
| Override Example | <code>\$sugar_config['xhprof_config']['flags'] = XHPROF_FLAGS_CPU + XHPROF_FLAGS_MEMORY;</code> |

### **xhprof\_config.ignored\_functions**

|                  |   |
|------------------|---|
| Description      | An array of function names to ignore from the profile.                                      |
| Type             | Array : Function names  |
| Versions         | 6.5.10+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell   |
| Override Example | <code>\$sugar_config['xhprof_config']['ignored_functions'] = array("function_name");</code> |

---

## xhprof\_config.log\_to

|                  |   |
|------------------|---|
| Description      | The path to log the xhprof profiler output to.  |
| Type             | String : Directory path   |
| Versions         | 6.5.10+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell   |
| Override Example | <code>\$sugar_config['xhprof_config']['log_to'] = '{instance server path}/cache/xhprof';</code> |

## xhprof\_config.manager

|             |   |
|-------------|---|
| Description | The xhprof manager class to use. Prior to 7.7, specifying values <code>xhprof_config.save_to</code> , <code>xhprof_config.mongodb_uri</code> , <code>xhprof_config.mongodb_db</code> , <code>xhprof_config.mongodb_collection</code> , <code>xhprof_config.mongodb_options</code> , and <code>xhprof_config.filter_wt</code> will need to have set <code>xhprof_config.manager</code> set to 'SugarXHprofPerformance'. As of 7.7, setting <code>xhprof_config.manager</code> is no longer required. If you want to customize SugarXHprof, you can create the folder <code>./custom/include/SugarXHprof/</code> and create a file with your custom class name. The custom class will need to extend SugarXHprof. If a custom class doesn't exist or hasn't been specified, SugarXHprof will be used. |
| Type        | String : Class  |
| Versions    | 6.5.10+   |
| Products    | Professional, Enterprise, Ultimate, Serve, Sell   |
|             |   |



|                  |  |
|------------------|--|
| Default Value    | SugarXHprof  |
| Override Example | <code>\$sugar_config['xhprof_config']['manager'] = 'CustomSugarXHprof';</code> |

### **xhprof\_config.memory\_limit**

|                  |   |
|------------------|---|
| Description      | The memory limit to set while saving profile data to storage.           |
| Type             | String : Memory Usage   |
| Versions         | 7.7.0.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell                         |
| Default Value    | 2048M   |
| Override Example | <code>\$sugar_config['xhprof_config']['memory_limit'] = '1024M';</code> |

### **xhprof\_config.mongoddb\_collection**

|                  |  |
|------------------|--|
| Description      | The name of the mongo db collections.  |
| Type             | String : Mongo collection name   |
| Versions         | 7.6.0.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell                              |
| Default Value    | results  |
| Override Example | <code>\$sugar_config['xhprof_config']['mongoddb_db'] = 'results_new';</code> |

### **xhprof\_config.mongoddb\_db**

|             |   |
|-------------|---|
| Description | The name of the mongo database.                 |
| Type        | String : Database name                          |
| Versions    | 7.6.0.0+  |
| Products    | Professional, Enterprise, Ultimate, Serve, Sell |
|             |   |

|                  |   |
|------------------|---|
| Default Value    | xhprof  |
| Override Example | <code>\$sugar_config['xhprof_config']['mongodb_db'] = 'xhprof2';</code> |

### **xhprof\_config.mongodb\_options**

|                  |   |
|------------------|---|
| Description      | Options for mongo db connection. The list of construct options can be found at: <a href="http://php.net/manual/en/mongoclient.construct.php#mongo.mongoclient.construct.parameters">http://php.net/manual/en/mongoclient.construct.php#mongo.mongoclient.construct.parameters</a> |
| Type             | Array : Mongo db options  |
| Versions         | 7.6.0.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell   |
| Default Value    | results   |
| Override Example | <code>\$sugar_config['xhprof_config']['mongodb_options'] = array();</code>  |

### **xhprof\_config.mongodb\_uri**

|                  |  |
|------------------|--|
| Description      | The mongo server URL.  |
| Type             | String : URL   |
| Versions         | 7.6.0.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell  |
| Default Value    | mongodb://localhost:27017  |
| Override Example | <code>\$sugar_config['xhprof_config']['mongodb_uri'] = 'mongodb://localhost:27018';</code> |

### **xhprof\_config.sample\_rate**

|             |   |
|-------------|---|
| Description | The sample rate of the xhprof profiler. 1/{specified value} requests are profiled. To sample all requests, set this |
|-------------|---|

|                  |  |
|------------------|--|
|                  | value to 1.  |
| Type             | Integer : Sample Rate (1/{value})                                |
| Versions         | 6.5.10+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell                  |
| Default Value    | 10   |
| Override Example | <code>\$sugar_config['xhprof_config']['sample_rate'] = 1;</code> |

### **xhprof\_config.save\_to**

|                  |   |
|------------------|---|
| Description      | The place to save xhprof data. If set to 'mongodb', the data is stored in the mongo database. |
| Type             | String : Save Location  |
| Range of values  | 'file' and 'mongodb'  |
| Versions         | 7.6.0.0+  |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell   |
| Default Value    | mongodb   |
| Override Example | <code>\$sugar_config['xhprof_config']['save_to'] = 'mongodb';</code>                          |

### **xhprof\_config.track\_elastic**

|                  |  |
|------------------|--|
| Description      | Whether or not to track elastic data.                                  |
| Type             | Boolean  |
| Range of values  | true or false  |
| Versions         | 7.7.0.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell                        |
| Default Value    | true   |
| Override Example | <code>\$sugar_config['xhprof_config']['track_elastic'] = false;</code> |

---

### **xhprof\_config.track\_elastic\_backtrace**

|                  |  |
|------------------|--|
| Description      | Whether or not to store the elastic backtrace data.                              |
| Type             | Boolean  |
| Range of values  | true or false  |
| Versions         | 7.7.0.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell                                  |
| Default Value    | true   |
| Override Example | <code>\$sugar_config['xhprof_config']['track_elastic_backtrace'] = false;</code> |

### **xhprof\_config.track\_sql**

|                  |  |
|------------------|--|
| Description      | Whether or not to track SQL queries.                               |
| Type             | Boolean  |
| Range of values  | true or false  |
| Versions         | 7.7.0.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell                    |
| Default Value    | true   |
| Override Example | <code>\$sugar_config['xhprof_config']['track_sql'] = false;</code> |

### **xhprof\_config.track\_sql\_backtrace**

|                 |   |
|-----------------|---|
| Description     | Whether or not to store the SQL backtrace data. |
| Type            | Boolean   |
| Range of values | true or false                                   |
| Versions        | 7.7.0.0+  |
| Products        | Professional, Enterprise, Ultimate, Serve, Sell |
| Default Value   | true  |
|                 |   |

---

|                  |  |
|------------------|--|
| Override Example | <code>\$sugar_config['xhprof_config']['track_sql_backtrace'] = false;</code> |
|------------------|--|

### **xhprof\_config.track\_sql\_backtrace**

|                  |  |
|------------------|--|
| Description      | Whether or not to store the SQL backtrace data.                              |
| Type             | Boolean  |
| Range of values  | true or false  |
| Versions         | 7.7.0.0+   |
| Products         | Professional, Enterprise, Ultimate, Serve, Sell                              |
| Default Value    | true   |
| Override Example | <code>\$sugar_config['xhprof_config']['track_sql_backtrace'] = false;</code> |

---

**Last Modified:** 2023-04-06 17:59:36

## **Silent Installer Settings**

### **Overview**

The Sugar silent installer facilitates and automates the installation of the Sugar application after the files have been copied onto the server. This is done by populating correct parameters in a configuration file and then making a web request to kick off the installation.

### **config\_si.php**

The `./config_si.php` file is located at the root level of the Sugar application. It contains an array of name-value pairs consisting of the relevant parameters for installation of the app. The array name is `$sugar_config_si`. An example file looks like:

---

```
<?php
```

```
$sugar_config_si = array (  
    'setup_site_url' => 'http://${domainname}:${webport}/sugar',  
    'setup_system_name' => '${systemname}',  
    'setup_db_host_name' => 'localhost',  
    'setup_site_admin_user_name' => 'admin',  
    'setup_site_admin_password' => '${sugarpassword}',  
    'demoData' => true,  
    'setup_db_type' => 'mysql',  
    'setup_db_host_name' => '{db_host_name}',  
    'setup_db_port_num' => 'db_port_number',  
    'setup_db_database_name' => 'sugar',  
    'setup_db_admin_user_name' => 'root',  
    'setup_db_admin_password' => '${rootpassword}',  
    'setup_db_options' => array(  
        'ssl' => true,  
    ),  
    'setup_db_drop_tables' => false,  
    'setup_db_create_database' => true,  
    'setup_license_key' => '${slkey}',  
    'setup_license_key_users' => '${slkeyusers}',  
    'setup_license_key_expire_date' => '${slkeyexpiredate}',  
    'setup_license_key_oc_licences' => '${slkey_oc_licences}',  
    'default_currency_iso4217' => 'USD',  
    'default_currency_name' => 'US Dollars',  
    'default_currency_significant_digits' => '2',  
    'default_currency_symbol' => '$',  
    'default_date_format' => 'Y-m-d',  
    'default_time_format' => 'H:i',  
    'default_decimal_seperator' => '.',  
    'default_export_charset' => 'ISO-8859-1',  
    'default_language' => 'en_us',  
    'default_locale_name_format' => 's f l',  
    'default_number_grouping_seperator' => ',',  
    'export_delimiter' => ',',  
);
```

## Essential Settings

The following are settings that must be set:

### General System Settings

---

### **setup\_system\_name**

|             |  |
|-------------|--|
| Description | A unique system name for the application that will be displayed on the web browser |
| Type        | String   |

### **setup\_site\_url**

|             |  |
|-------------|--|
| Description | The site location and URL of the Sugar application |
| Type        | String   |

### **setup\_site\_admin\_user\_name**

|             |  |
|-------------|--|
| Description | Specifies the admin username for the Sugar application |
| Type        | String   |

### **setup\_site\_admin\_password**

|             |  |
|-------------|--|
| Description | Specifies the admin password for the Sugar application |
| Type        | String   |

### **demoData**

|             |  |
|-------------|--|
| Description | Indicates whether the app will be installed with demo data |
| Type        | Boolean  |

## **Database Settings**

### **setup\_db\_type**

---

|             |   |
|-------------|---|
| Description | Defines the type of database being used with Sugar. It is important to note that db2 and oracle are only applicable to Sugar Ent and Ult. |
| Type        | String: valid options include mysql, mssql, db2, oracle   |

### **setup\_db\_host\_instance**

|             |  |
|-------------|--|
| Description | Defines the host instance for MSSQL connections. |
| Type        | String : Database Host Instance Name             |

### **setup\_db\_host\_name**

|             |  |
|-------------|--|
| Description | Defines the hostname of the database server. |
| Type        | String                                       |

### **setup\_db\_port\_num**

|             |  |
|-------------|--|
| Description | Defines the port number on the server to connect to for authentication and transactions. |
| Type        | String   |

### **setup\_db\_database\_name**

|             |   |
|-------------|---|
| Description | Defines the database name to connect to on the database server. |
| Type        | String  |

### **setup\_db\_admin\_user\_name**

|  |  |
|--|--|
|  |  |
|--|--|



|             |   |
|-------------|---|
| Description | Specifies the database administrator's username |
| Type        | String  |

### **setup\_db\_admin\_password**

|             |   |
|-------------|---|
| Description | Specifies the database administrator's password |
| Type        | String  |

## **Recommended Database Settings**

The following are not necessarily required, but it is recommended that at least one is set:

### **setup\_db\_create\_database**

|             |   |
|-------------|---|
| Description | Specifies whether Sugar will create a new database with the name given or use an existing database. |
| Type        | Boolean   |

### **setup\_db\_drop\_tables**

|             |  |
|-------------|--|
| Description | Specifies whether Sugar will drop existing tables on a database if the database already exists |
| Type        | Boolean  |

## **Extended Database Settings**

There is also an option for an additional array of db config settings. These array entries are equivalent to the Core Settings options prefixed with dbconfigoption. For example dbconfigoption.collation and dbconfigoption.ssl

---

## setup\_db\_options

|             |  |
|-------------|--|
| Description | See: Architecture/Configurator/Core_Settings/index.html#dbconfigoptionautofre<br>e |
| Type        | Array  |

## Full-Text Search (ElasticSearch) Settings

### setup\_fts\_type

|             |   |
|-------------|---|
| Description | The Full-Text Search service type                 |
| Type        | String, currently only supported value<br>Elastic |

### setup\_fts\_host

|             |   |
|-------------|---|
| Description | The hostname of the Full-Text Search<br>service |
| Type        | String  |

### setup\_fts\_port

|             |  |
|-------------|--|
| Description | The port number of the Full-Text Search<br>service |
| Type        | String   |

## Advanced Full-Text Search Configuration Settings

While not required, the Silent Installer offers a few FTS settings not available in the browser-based installation process. These settings are considered more advanced and should not be implemented casually. Further details on advanced ElasticSearch configuration can be found in the ElasticSearch installation guide in the section [Advanced Configuration](#).

---

## setup\_fts\_curl

|             |  |
|-------------|--|
| Description | Additional settings for the cURL request to the Elasticsearch server, keyed by the PHP cURL constants used for curl_setopt. For example<br><br><pre>'setup_fts_curl' =&gt; array( CURLOPT_SSL_VERIFYPEER = false, ),</pre> |
| Type        | Array  |

## License Settings

While not required during installation, the license settings are required for Sugar to be usable by all users. Setting the license settings during the Silent Install will save the need to enter this required data after the install.

### setup\_license\_key

|             |                           |
|-------------|---------------------------|
| Description | Specifies the license key |
| Type        | String                    |

### setup\_license\_key\_users

|             |   |
|-------------|---|
| Description | Specifies the number of license key users |
| Type        | Integer                                   |

### setup\_license\_key\_expire\_date

|             |  |
|-------------|--|
| Description | The expiration date of the license key |
| Type        | String: yyyy-mm-dd format              |

### setup\_site\_sugarbeet\_automatic\_checks

|             |  |
|-------------|--|
| Description | Specifies if License Validation checks |
|-------------|--|

---

|      |                            |
|------|----------------------------|
|      | should be set to Automatic |
| Type | Boolean                    |

Additionally, Offline Client license settings can be set in Silent Installer

### **setup\_license\_key\_oc\_licences**

|             |                                    |
|-------------|------------------------------------|
| Description | the number of offline client users |
| Type        | Integer                            |

### **setup\_num\_lic\_oc**

|             |                                    |
|-------------|------------------------------------|
| Description | the number of offline client users |
| Type        | Integer                            |

## **Making the Web Request**

After the `./config_si.php` file is in place, the following web request can be made to kick off the installation:

```
http://${hostname}/sugar/install.php?goto=SilentInstall&cli=true
```

where `${hostname}` is the name of the host. Upon completion of the process, the installation should respond with Success, and you may navigate to the web address to find an installed version of Sugar.

## **Configuring a Sugar-Specific Database User during Install**

By default, Sugar will use the database user set for the install process as the database user for general use after installation. There are three different Silent Install options for having Sugar use a different database user once installed. Which option the installer users is determined by the `dbUSRData` config setting.

The `dbUSRData` silent install config setting has four valid options:

---

## same

This is the default setting used, even when `dbUSRData` is not explicitly set. The DB user provided for installing Sugar is used for running Sugar after installation.

## auto

Sugar will create a new database user using a self-generated username and password.

In your `$sugar_config_si` array, the options for this to work as expected are:

```
'dbUSRData' => 'auto',  
'setup_db_create_sugarsales_user' => true,
```

## provide

Sugar will use the provided database username and password after installation, and the installer assumes that the database user has already been created on the database and that the provided password is valid. Essentially this is informing Sugar to use a different existing DB user after the installation has completed.

In your `$sugar_config_si` array, the options for this to work as expected are:

```
'dbUSRData' => 'provide',  
'setup_db_create_sugarsales_user' => false,  
'setup_db_sugarsales_user' => '{existing_db_user_name}',  
'setup_db_sugarsales_password' => '{existing_db_user_password}',  
'setup_db_sugarsales_password_retype' => '{existing_db_user_password}'  
,
```

## create

Sugar will create a new database user using the provided database username and password after installation. This is similar to 'provide', except that Sugar assumes that it will be creating the database user during installation.

In your `$sugar_config_si` array, the options for this to work as expected are:

```
'dbUSRData' => 'create',  
'setup_db_create_sugarsales_user' => true,  
'setup_db_sugarsales_user' => '{new_db_user_name}',
```

---

```
'setup_db_sugarsales_password' => '{new_db_user_password}',  
'setup_db_sugarsales_password_retype' => '{new_db_user_password}' ,
```

Note: For create, the installer will create a user with access only to the database created for this Sugar instance. It will also have limited access for which host it can connect from, versus the admin user, which usually has access from any host.

Sugar will set the user to have access to localhost and the provided hostname derived from `setup_site_url`. If there are issues connecting to the database during or after installation, check that the user was created correctly in the database and that the user can connect from the host that the instance is on.

## Other Silent Install Config Options

Many of these options match an equivalent Sugar Config option, with further descriptions available at [Core Settings](#).

### cache\_dir

|             |   |
|-------------|---|
| Description | This is the directory Sugar will store all cached files. Can be relative to Sugar root directory. |
| Type        | String, default "cache/"  |

## Locale Settings

The following options are locale settings. With one exception, these can be set or updated through Administration > Locale.

### export\_delimiter

|             |  |
|-------------|--|
| Description | The field delimiter (separator) used when exporting records as CSV |
| Type        | String, default ","  |

### default\_export\_charset

|             |   |
|-------------|---|
| Description | The default character set for CSV files |
|-------------|---|

---

|      |                                 |
|------|---------------------------------|
|      | to be encoded in when exporting |
| Type | String, default "ISO-8859-1"    |

### **default\_currency\_iso4217**

|             |   |
|-------------|---|
| Description | The ISO-4217 code of the default currency |
| Type        | String, default "USD"                     |

### **default\_currency\_name**

|             |  |
|-------------|--|
| Description | The name to use for the default currency |
| Type        | String, default "US Dollars"             |

### **default\_currency\_significant\_digits**

|             |   |
|-------------|---|
| Description | Changes the number of significant digits in currency by default.<br><br>Note that this setting can not be changed through the Admin panel after installation. It can be set for each user through the user's profile or can be updated globally by updating the config array. |
| Type        | Integer, default 2  |

### **default\_currency\_symbol**

|             |  |
|-------------|--|
| Description | The symbol to use for the default currency |
| Type        | String, default "\$"                       |

---

## default\_language

|             |   |
|-------------|---|
| Description | Sets each user's default language. Possible values include any language offered by Sugar, such as: 'ar_SA', 'bg_BG', 'ca_ES', 'cs_CZ', 'da_DK', 'de_DE', 'el_EL', 'en_UK', 'en_us', 'es_ES', 'es_LA', 'zh_CN' |
| Type        | String, default "en_US"   |

## default\_date\_format

|             |   |
|-------------|---|
| Description | Modifies the default date format for all users. |
| Type        | String, default "m/d/Y"                         |

## default\_time\_format

|             |   |
|-------------|---|
| Description | Modifies the default time format for all users. |
| Type        | String, default "H:i"                           |

## default\_decimal\_seperator

|             |   |
|-------------|---|
| Description | Sets the character used as a decimal separator for numbers. |
| Type        | String, default "."   |

## default\_number\_grouping\_seperator

|             |   |
|-------------|---|
| Description | Sets the character used as the 1000s separator for numbers. |
| Type        | String, default ","   |



---

## default\_locale\_name\_format

|             |  |
|-------------|--|
| Description | Sets the format for displaying full name (eg "Salutation FirstName LastName" vs "LastName, FirstName") |
| Type        | String, default "s f l"  |

**Last Modified:** 2021-02-17 02:44:13

## Module Loader

Module Loader is used when installing customizations, plugins, language packs, and hotfixes, and other customizations into a Sugar instance in the form of a Module Loadable Package. This documentation covers the basics and best practices for creating module loadable packages for a Sugar installation.

**Last Modified:** 2021-02-17 02:44:13

## Introduction to the Manifest

### Overview

Module loadable packages rely on a manifest.php file to define the basic properties and installation steps for the package. This documentation explains the various components that make up the manifest file.

### Manifest Definitions

Inside of the manifest.php file, there is a \$manifest variable that defines the basic properties of the module loadable package. The various manifest properties are outlined below:

| <b>Name</b> | <b>Type</b> | <b>Displayed in<br/>Module Loader</b> | <b>Description</b> |
|-------------|-------------|---------------------------------------|--------------------|
|-------------|-------------|---------------------------------------|--------------------|

---

**key**

String

**name**

String

**description**

String

**built\_in\_version**

String

---

**version**

String

**acceptable\_sugar\_versions**

Array

**acceptable\_sugar\_flavors**

Array

---

**author**

String

**readme**

String

**icon**

String

**is\_uninstallable**

Boolean

---

**published\_date**

String

**remove\_tables**

String

**type**

String

---

## **dependencies**

Array

## **uninstall\_before\_upgrade**

Boolean

## **Manifest Example**

An example of a manifest is shown below:

```
$manifest = array(  
  'key' => 1397052912,  
  'name' => 'My manifest',  
  'description' => 'My description',  
  'author' => 'SugarCRM',  
  'version' => '1.0.0',  
  'is_uninstallable' => true,  
  'published_date' => '05/09/2023 14:15:12',
```

---

```

'type' => 'module',
'acceptable_sugar_versions' =>
array(
    'exact_matches' => array(
        '11.0.6'
    ),
    //or
    'regex_matches' => array(
        '11.0.*' //any 11.0 release
    ),
),
'acceptable_sugar_flavors' =>
array(
    'PRO',
    'ENT',
    'ULT'
),
'readme' => '',
'icon' => '',
'remove_tables' => '',
'uninstall_before_upgrade' => false,
);

```

## Installation Definitions

The following section outlines the indexes specified in the `$installdefs` array contained in the `./manifest.php` file. The `$installdefs` array indexes are used by the Module Loader to determine the actual installation steps that need to be taken to install the package.

### `$installdef` Actions

| Name                                | Type | Description |
|-------------------------------------|------|-------------|
| <b><code>action_file_map</code></b> |      |             |
| Array                               |      |             |

---

**action\_remap**

Array

**action\_view\_map**

Array

**administration**

Array

**appscheduledefs**

Array

**beans**



---

Array

**connectors**

Array

**copy**

Array

---

**csp**

Array

**custom\_fields**

Array

---

**console**

Array

---

**dashlets**

Array

**dependencies**

Array

**entrypoints**

Array

**extensions**

Array

---

**file\_access**

Array

**hookdefs**

Array

**id**

String

**image\_dir**

String

---

**jsgroups**

Array

**language**

Array

**layoutdefs**

Array

**layoutfields**

Array

---

## **logic\_hooks**

Array

## **platforms**

Array

## **pre\_execute**

Array

---

## **post\_execute**

Array

## **pre\_uninstall**

Array



---

## **post\_uninstall**

Array

## **relationships**

Array

---

**scheduledefs**

Array

**sidecar**

Array

**tinymce**

Array

**user\_page**

Array

---

**utils**

Array

**vardefs**

Array

**wireless\_modules**

Array

**wireless\_subpanels**

Array

**Note:** Anything printed to the screen in the `pre_execute`, `post_execute`, `pre_uninstall`, or `post_uninstall` scripts will be displayed when clicking on the Display Log link.

# Module Loader Restrictions

## Overview

SugarCRM's hosting objective is to maintain the integrity of the standard Sugar functionality when we upgrade a customer instance and limit any negative impact our upgrade has on the customer's modifications. All instances hosted on Sugar's cloud service have package scanner enabled by default. This setting is not configurable and all packages must pass the package scan for installation on Sugar's cloud environment. This includes passing all health checks.

## Access Controls

The Module Loader includes a Module Scanner, which grants system administrators the control they need to determine the precise set of actions that they are willing to offer in their hosting environment. This feature is available in all Sugar products. Anyone who is hosting Sugar products can take advantage of this feature, as well.

## Enabling Package Scan

Scanning is disabled in default installations of Sugar and can be enabled through a configuration setting. This setting is added to `./config.php` or `./config_override.php`, and is not available to Administrator users to modify through the Sugar interface. Please note that this setting can only be managed on an on-site deployment and cannot be disabled for Sugar's cloud environment.

To enable Package Scan and its associated scans, add this setting to `./config_override.php`:

```
$sugar_config['moduleInstaller']['packageScan'] = true;
```

There are two categories of access control in the Package Scan:

- [File Scan](#)
- [Module Loader Actions](#)

---

## Enabling File Scan

By enabling Package Scan, File Scan will be performed on all files in the package uploaded through Module Loader. File Scan will be performed when a Sugar administrator attempts to install the package. Please note that these settings can only be managed on an on-site deployment. These settings are not permitted to be modified when hosted on Sugar's cloud service.

File Scan performs three checks:

- File extensions must be in the approved list of [valid extension types](#).
- Files must not contain any [suspicious classes](#).
- Files must not contain any [suspicious function calls](#).

Please refer to the next three sections which outline the default requirements for the File Scan checks.

### Valid Extension Types

File extensions must be in the approved list of valid extension types. The following extension types are valid by default:

- css
- gif
- hbs
- htm
- html
- jpg
- js
- md5
- pdf
- php
- png
- tpl
- txt
- xml

### Denylisted Classes

Files must not contain any of the following classes that are considered suspicious by File Scan.

- All variable classes (i.e., `$class()`) are prohibited by default.
- The following classes are denylisted by default:

- 
- lua
  - pclzip
  - reflection
  - reflectionclass
  - reflectionexception
  - reflectionextension
  - reflectionfunction
  - reflectionfunctionabstract
  - reflectionmethod
  - reflectionobject
  - reflectionparameter
  - reflectionproperty
  - reflectionzendextension
  - reflector
  - splfileinfo
  - splfileobject
  - ziparchive

## Denylisted Function Calls

Files must not contain any of the following function calls that are considered suspicious by File Scan.

- Variable functions (i.e., \$func()) are prohibited by default.
- Backticks ( ` ) are prohibited by File Scan.
- The following PHP functions are denylisted by default:
  - addfunction
  - addserver
  - array\_diff\_uassoc
  - array\_diff\_ukey
  - array\_filter
  - array\_intersect\_uassoc
  - array\_intersect\_ukey
  - array\_map
  - array\_reduce
  - array\_udiff
  - array\_udiff\_assoc
  - array\_udiff\_uassoc
  - array\_uintersect
  - array\_uintersect\_assoc
  - array\_uintersect\_uassoc
  - array\_walk
  - array\_walk\_recursive
  - call\_user\_func
  - call\_user\_func

- 
- call\_user\_func\_array
  - call\_user\_func\_array
  - chdir
  - chgrp
  - chmod
  - chroot
  - chown
  - clearstatcache
  - construct
  - consume
  - consumerhandler
  - copy
  - copy\_recursive
  - create\_cache\_directory
  - create\_custom\_directory
  - create\_function
  - dir
  - disk\_free\_space
  - disk\_total\_space
  - diskfreespace
  - eio\_busy
  - eio\_chmod
  - eio\_chown
  - eio\_close
  - eio\_custom
  - eio\_dup2
  - eio\_fallocate
  - eio\_fchmod
  - eio\_fchown
  - eio\_fdatasync
  - eio\_fstat
  - eio\_fstatvfs
  - eio\_fsync
  - eio\_ftruncate
  - eio\_futime
  - eio\_grp
  - eio\_link
  - eio\_lstat
  - eio\_mkdir
  - eio\_mknod
  - eio\_nop
  - eio\_open
  - eio\_read
  - eio\_readahead
  - eio\_readdir
  - eio\_readlink

- 
- eio\_realpath
  - eio\_rename
  - eio\_rmdir
  - eio\_sendfile
  - eio\_stat
  - eio\_statvfs
  - eio\_symlink
  - eio\_sync
  - eio\_sync\_file\_range
  - eio\_syncfs
  - eio\_truncate
  - eio\_unlink
  - eio\_utime
  - eio\_write
  - error\_log
  - escapeshellarg
  - escapeshellcmd
  - eval
  - exec
  - fclose
  - fdf\_enum\_values
  - feof
  - fflush
  - fgetc
  - fgetcsv
  - fgets
  - fgetss
  - file
  - file\_exists
  - file\_get\_contents
  - file\_put\_contents
  - fileatime
  - filectime
  - filegroup
  - fileinode
  - filemtime
  - fileowner
  - fileperms
  - filesize
  - filetype
  - flock
  - fnmatch
  - fopen
  - forward\_static\_call
  - forward\_static\_call\_array
  - fpassthru



- 
- fputcsv
  - fputs
  - fread
  - fscanf
  - fseek
  - fstat
  - ftell
  - ftruncate
  - fwrite
  - get
  - getbykey
  - getdelayed
  - getdelayedbykey
  - getfunctionvalue
  - getimagesize
  - glob
  - header\_register\_callback
  - ibase\_set\_event\_handler
  - ini\_set
  - is\_callable
  - is\_dir
  - is\_executable
  - is\_file
  - is\_link
  - is\_readable
  - is\_uploaded\_file
  - is\_writable
  - is\_writeable
  - iterator\_apply
  - lchgrp
  - lchown
  - ldap\_set\_rebind\_proc
  - libxml\_set\_external\_entity\_loader
  - link
  - linkinfo
  - lstat
  - mailparse\_msg\_extract\_part
  - mailparse\_msg\_extract\_part\_file
  - mailparse\_msg\_extract\_whole\_part\_file
  - mk\_temp\_dir
  - mkdir
  - mkdir\_recursive
  - move\_uploaded\_file
  - newt\_entry\_set\_filter
  - newt\_set\_suspend\_callback
  - ob\_start

- 
- open
  - opendir
  - parse\_ini\_file
  - parse\_ini\_string
  - passthru
  - passthru
  - pathinfo
  - pclose
  - pcntl\_signal
  - popen
  - preg\_replace\_callback
  - proc\_close
  - proc\_get\_status
  - proc\_nice
  - proc\_open
  - readdir
  - readfile
  - readline\_callback\_handler\_install
  - readline\_completion\_function
  - readlink
  - realpath
  - realpath\_cache\_get
  - realpath\_cache\_size
  - register\_shutdown\_function
  - register\_tick\_function
  - rename
  - rewind
  - rmdir
  - rmdir\_recursive
  - session\_set\_save\_handler
  - set\_error\_handler
  - set\_exception\_handler
  - set\_file\_buffer
  - set\_local\_infile\_handler
  - set\_time\_limit
  - setclientcallback
  - setcompletecallback
  - setdatacallback
  - setexceptioncallback
  - setfailcallback
  - setserverparams
  - setstatuscallback
  - setwarningcallback
  - setworkloadcallback
  - shell\_exec
  - simplexml\_load\_file

- 
- `simplexml_load_string`
  - `spl_autoload_register`
  - `sqlite_create_aggregate`
  - `sqlite_create_function`
  - `sqlitecreateaggregate`
  - `sqlitecreatefunction`
  - `stat`
  - `sugar_chgrp`
  - `sugar_chmod`
  - `sugar_chown`
  - `sugar_file_put_contents`
  - `sugar_file_put_contents_atomic`
  - `sugar_fopen`
  - `sugar_mkdir`
  - `sugar_rename`
  - `sugar_touch`
  - `sybase_set_message_handler`
  - `symlink`
  - `system`
  - `tempnam`
  - `timestamponcehandler`
  - `tmpfile`
  - `tokenhandler`
  - `touch`
  - `uasort`
  - `uksort`
  - `umask`
  - `unlink`
  - `unzip`
  - `unzip_file`
  - `usort`
  - `write_array_to_file`
  - `write_array_to_file_as_key_value_pair`
  - `write_encoded_file`
  - `xml_set_character_data_handler`
  - `xml_set_default_handler`
  - `xml_set_element_handler`
  - `xml_set_end_namespace_decl_handler`
  - `xml_set_external_entity_ref_handler`
  - `xml_set_notation_decl_handler`
  - `xml_set_processing_instruction_handler`
  - `xml_set_start_namespace_decl_handler`
  - `xml_set_unparsed_entity_decl_handler`
  - The following class functions are denylisted by default:
    - All variable functions (i.e., `$func()`) are prohibited by default.
    - `SugarLogger::setLevel`

- 
- SugarAutoLoader::put
  - SugarAutoLoader::unlink

## Health Check

Packages must pass all health checks in order to pass through the package scanner. For more information on troubleshooting Health Check output, see the collection of help articles in [Troubleshooting Health Check Output](#).

## Disabling File Scan

**Note:** Disabling File Scan is prohibited for instances on Sugar's cloud service.

To disable File Scan, add the following configuration setting to `config_override.php`:

```
$sugar_config['moduleInstaller']['disableFileScan'] = false;
```

## Extending the List of Valid Extension Types

**Note:** Modifying the valid extensions list is prohibited for instances on Sugar's cloud service.

To add more file extensions to the approved list of valid extension types, add the file extensions to the `validExt` array. The example below adds a `.log` file extension and `.htaccess` to the valid extension type list in `config_override.php`:

```
$sugar_config['moduleInstaller']['validExt'] = array(  
    'log',  
    'htaccess'  
);
```

## Denylisting Additional Function Calls

**Note:** Denylist modifications are prohibited for instances on Sugar's cloud service.

To add additional function calls to the denylist, add the function calls to the `blackList` array. The example below blocks the `strlen()` and `strtolower()` functions from being included in the package:

```
$sugar_config['moduleInstaller']['blackList'] = array(  

```

---

```
'strlen',
'strtolower'
);
```

## Overriding Denylisted Function Calls

**Note:** Denylist modifications are prohibited for instances on Sugar's cloud service.

To override the denylist and allow a specific function to be included in packages, add the function call to the `blackListExempt` array. The example below removes the restriction for the `file_put_contents()` function, allowing it to be included in the package:

```
$sugar_config['moduleInstaller']['blackListExempt'] = array(
    'file_put_contents'
);
```

## Disabling Restricted Copy

To ensure upgrade-safe customizations, System Administrators must restrict the copy action to prevent modifying the existing Sugar source code files. New files may be added anywhere (to allow new modules to be added), but core Sugar source code files must not be overwritten. This is enabled by default when you enable Package Scan.

**Note:** Disabling Restricted Copy is prohibited for instances on Sugar's cloud service.

To disable Restricted Copy, use this configuration setting:

```
$sugar_config['moduleInstaller']['disableRestrictedCopy'] = true;
```

## Module Loader Actions

Module loader actions, defined in `./ModuleInstall/ModuleScanner.php`, are identifiers that map to the installation definitions used in the `$installdefs` of a manifest.

| Action                              | <code>\$installdef</code> Actions | Description  |
|-------------------------------------|-----------------------------------|--|
| <code>install_administration</code> | <a href="#">administration</a>    | Installs an administration section into the Admin page |

|                       |                               |  |
|-----------------------|-------------------------------|--|
| install_connectors    | <a href="#">connectors</a>    | Installs SugarCloud Connectors               |
| install_copy          | <a href="#">copy</a>          | Installs files or directories                |
| install_dashlets      | <a href="#">dashlets</a>      | Installs dashlets into the Sugar application |
| install_images        | <a href="#">image_dir</a>     | Install images into the custom directory     |
| install_languages     | <a href="#">language</a>      | Installs language files                      |
| install_layoutdefs    | <a href="#">layoutdefs</a>    | Installs layouts                             |
| install_layoutfields  | <a href="#">layoutfields</a>  | Installs custom fields                       |
| install_logichooks    | <a href="#">logic_hooks</a>   | Installs logic hooks                         |
| install_relationships | <a href="#">relationships</a> | Installs relationships                       |
| install_userpage      | <a href="#">user_page</a>     | Installs a section to the User record page   |
| install_vardefs       | <a href="#">vardefs</a>       | Installs vardefs                             |
| post_execute          | <a href="#">post_execute</a>  | Called after a package is installed          |
| pre_execute           | <a href="#">pre_execute</a>   | Called before a package is installed         |

## Disabling Module Loader Actions

Certain Module Loader actions may be considered less desirable than others by a System Administrator. A System Administrator may want to allow some Module Loader actions, but disable specific actions that could impact the upgrade-safe integrity of the Sugar instance.

**Note:** Disabling Module Loader actions is prohibited for instances on Sugar's cloud service.

By default, all Module Loader actions are allowed. Enabling Package Scan does not affect the Module Loader actions. To disable specific Module Loader actions, add the action to the disableActions array. The example below restricts the pre\_execute and post\_execute actions:

```
$sugar_config['moduleInstaller']['disableActions'] = array(
    'pre_execute',
    'post_execute'
);
```

---

## Disabling Upgrade Wizard

If you are hosting Sugar and wish to lock down the upgrade wizard, you can set `disable_uw_upload` to 'true' in the `config_override`. This is intended for hosting providers to prevent unwanted upgrades.

```
$sugar_config['disable_uw_upload'] = true;
```

**Last Modified:** 2022-10-18 00:06:44

## Module Loader Restriction Alternatives

### Overview

This article provides workarounds for commonly used functions that are denylisted by Sugar for Sugar's cloud environment.

### Denylisted Functions

#### `$variable()`

Variable functions are sometimes used when trying to dynamically call a function. This is commonly used to retrieve a new bean object.

Restricted use:

```
$module = "Account";  
$id = "6468238c-da75-fd9a-406b-50199fe6b5f8";  
  
//creating a new bean  
$focus = new $module()  
  
//retrieving a specific record  
$focus->retrieve($id);
```

As of 6.3.0, we have implemented [newBean](#) and [getBean](#) which can be found in the [BeanFactory](#). Below is the recommended approach to create or fetch a bean:

---

```
$module = "Accounts";
$id = "6468238c-da75-fd9a-406b-50199fe6b5f8";

//creating a new bean
$focus = BeanFactory::newBean($module);

//or creating a new bean and retrieving a specific record
$focus = BeanFactory::getBean($module, $id);
```

## array\_filter()

The `array_filter` filters elements of an array using a callback function. It is restricted from use on Sugar's cloud service due to its ability to call other restricted functions.

Restricted use:

```
/**
 * Returns whether the input integer is odd
 * @param $var
 * @return int
 */
function odd($var) {
    return($var & 1);
}

$myArray = array(
    "a"=>1,
    "b"=>2,
    "c"=>3,
    "d"=>4,
    "e"=>5
);

$filteredArray = array_filter($myArray, "odd");
```

An alternative to using `array_filter` is to use a `foreach` loop.

```
$filteredArray = array();

$myArray = array(
    "a"=>1,
    "b"=>2,
    "c"=>3,
    "d"=>4,
```



---

```
        "e"=>5
    );

    foreach ($myArray as $key => $value) {
        // check whether the input integer is odd
        if($value & 1) {
            $filteredArray[$key] = $value;
        }
    }
}
```

## copy()

The copy method is sometimes used by developers when duplicating files in the uploads directory.

Restricted use:

```
$result = copy($oldFile, $newFile);
```

An alternative to using copy is the [duplicate\\_file](#) method found in the [UploadFile](#) class.

```
require_once 'include/upload_file.php';
```

```
$uploadFile = new UploadFile();
$result = $uploadFile->duplicate_file($oldFileId, $newFileId);
```

## file\_exists()

The file\_exists method is used by developers to determine if a file exists.

Restricted use:

```
if(file_exists($file_path)) {
    require_once($file);
}
```

An alternative to using file\_exists is the [fileExists](#) method found in the [SugarAutoLoader](#) class.

```
$file = 'include/utils.php';
if (SugarAutoloader::fileExists($file)) {
    require_once($file);
}
```

---

```
}
```

## **file\_get\_contents()**

The `file_get_contents` method is used to retrieve the contents of a file.

Restricted use:

```
$file_contents = file_get_contents('file.txt');
```

An alternative to using `file_get_contents` and `sugar_file_get_contents` is the [get\\_file\\_contents](#) method found in the [UploadFile](#) class.

```
require_once('include/upload_file.php');
```

```
$uploadFile = new UploadFile();
```

```
//get the file location
```

```
$uploadFile->temp_file_location = UploadFile::get_upload_path($file_id  
);
```

```
$file_contents = $uploadFile->get_file_contents();
```

## **fwrite()**

The `fwrite` method is a function used to write content to a file. As there isn't currently a direct alternative for this function, you may find one of the following a good solution to what you are trying to achieve.

### **Adding/Removing Logic Hooks**

When working with logic hooks, it is very common for a developer to need to modify `./custom/modules/<module>/logic_hooks.php`. When creating module loadable packages, developers will sometimes use `fwrite` to modify this file upon installation to include their additional hooks. As of Sugar 6.3, [Logic Hook Extensions](#) were implemented to allow a developer to append custom hooks. If you would prefer to edit the `logic_hooks.php` file, you will need to use the `check_logic_hook_file` method as described below:

```
//Adding a logic hook
```

```
require_once("include/utils.php");
```

```
$my_hook = Array(
```

---

```
    999,
    'Example Logic Hook',
    'custom/modules/<module>/my_hook.php',
    'my_hook_class',
    'my_hook_function'
);

check_logic_hook_file("Accounts", "before_save", $my_hook);
```

Removing a logic hook can be done by using `remove_logic_hook`:

```
//Removing a logic hook
require_once("include/utils.php");

$my_hook = Array(
    999,
    'Example Logic Hook',
    'custom/modules/<module>/my_hook.php',
    'my_hook_class',
    'my_hook_function'
);

remove_logic_hook("Accounts", "before_save", $my_hook);
```

## **getimagesize()**

The `getimagesize` method is used to retrieve information about an image file.

Restricted use:

```
$img_size = getimagesize($path);
```

If you are looking to verify an image is `.png` or `.jpeg`, you can use the `verify_uploaded_image` method:

```
require_once('include/utils.php');

if (verify_uploaded_image($path)) {
    //logic
}
```

If you are looking to get the mime type of an image, you can use the `get_file_mime_type` method:

```
$mime_type = get_file_mime_type($path);
```

# Sugar Exchange Package Guidelines

## Overview

The Sugar platform is open and flexible. Developers can customize any feature or integrate any system with Sugar using a [Sugar Module Loadable Package](#). This flexibility requires guidelines so that [SugarExchange](#) customers can rest assured that all package offerings adhere to consistent quality standards and will not interfere with existing customizations or prevent software upgrades.

This guide outlines the minimum standards we expect from any Sugar Developer writing code for the Sugar platform. From the development of Sugar packages to security, user interface, encapsulation, and performance considerations, SugarCRM takes the safety and integrity of the Sugar application and its community very seriously. **Compliance with these guidelines is a requirement for any package installed into Sugar's cloud service. Failure to follow these guidelines is grounds for having your package removed from Sugar's cloud service and de-listed from SugarExchange.**

SugarCRM reserves the right to change these guidelines at any time. Please send any questions or feedback on these guidelines to [developers@sugarcrm.com](mailto:developers@sugarcrm.com).

## Best Practices

These best practice guidelines have been curated based on years of collective experience working with Sugar Packages that get used by Sugar customers every day.

### Use a consistent coding style

For all PHP code, the style standard that SugarCRM uses is [PSR-2](#). For JavaScript code, we use the applicable PSR-2 conventions as well. For JavaScript code, we emphasize readability which means we make use of utilities like Underscore.js and avoid nested callbacks. All functions, methods, classes in our code are required to have [PHPDoc](#) and [JSDoc](#). While not all the code in the Sugar code base currently complies with these standards, we do enforce it as the standard on new code. Using a consistent code style increases the readability and maintainability of

---

application code for those that come after you.

## **Invest in unit testing during development**

For all JavaScript and PHP code, we strongly recommend the creation of unit tests. For PHP, we use PHPUnit and have developed a framework (to be shared) for testing Sugar server-side code using this framework. For JavaScript code, we use Jasmine and have also developed a framework (to be shared) there to bootstrap [Sidecar metadata](#) so that Jasmine tests can run without dependency on a Sugar server.

We recommend running unit tests frequently during the development process. We suggest developers run tests before each commit and as part of an automated continuous integration process. Running tests often means you catch failures sooner which makes them easier and cheaper to fix.

## **Use Sugar REST APIs**

The easiest way to integrate with a Sugar instance is not to install anything into Sugar at all. For Sugar 7, we have a full client [REST API](#) that is used to drive our web interface, our mobile client, and our plug-ins. If you can do it from our user interface, you can use our REST API separately to do it as well. If the REST API doesn't do everything you need it to do, it is very easily extensible. You can easily write code that adds your [custom API endpoints](#) in a minimally invasive way.

## **Use Module Builder when possible**

Many integrations can be accomplished with the help of Module Builder and the Sugar REST API. Module Builder allows you to quickly design new modules for Sugar that match concepts that you want to add to a Sugar instance. These custom modules can then be installed and populated via the REST API, making it a powerful integration mechanism that doesn't require writing a line of Sugar code. Using custom modules will prevent conflicts with other customizations, as well. For more information, please refer to the [Module Builder](#) documentation.

## **Use Extension framework and Dashlets for Sugar code customizations**

The [Extension framework](#) is the way to add server-side changes to a Sugar instance in a loosely coupled way. [Dashlets](#) are the best way to add new, custom user interface components to a Sugar instance that gives users maximum flexibility

---

in how they use your app. These mechanisms also avoid conflicts with other customizations since Extensions are additive and do not replace core files.

## Security Guidelines

Protecting and controlling access to CRM data is of paramount importance. It is important that Sugar Packages are good stewards of CRM data and access control.

### Use TLS/SSL for web services calls

Just as we don't recommend running Sugar in production without [TLS/SSL](#), all web-services calls that are initiated from a Sugar Package should also use SSL. The concern is the exposure of user credentials, OAuth/session tokens, or sensitive CRM data via plaintext transmission that would otherwise be handled securely.

### Do not hardcode sensitive information

You also should not hardcode any credentials, API keys, tokens, etc, within a Sugar Package. Sugar Packages and Sugar application code is never encrypted so there is always a risk that an attacker could discover these things and abuse them. Usernames and passwords, OAuth tokens, and similar credentials for accessing 3rd party systems should be stored in the database (for example, on the config table). The Sugar platform also provides encryption utilities that allow information to be stored in an encrypted form. These settings could then be changeable by the Administrator via the [Administration panel](#) or some other end-user input.

## User Interface Guidelines

Sugar packages can be used to add new user interface components or front-end customizations to Sugar. It is important to consider the impact that these changes have on the user experience and the look and feel of the Sugar application.

### Use the Sugar 7 Styleguide

In Sugar 7, we have doubled down on our emphasis on creating the best possible user experience. While other applications may use different usage patterns than the ones used in Sugar 7, it is important to think about how new functionality or integrations that you build in Sugar 7 fits within the overall Sugar 7 user experience. Users do not tolerate an inconsistent experience within a given tool - it makes it harder to learn to use, which lowers adoption of Sugar as well as your

---

application.

We want to make it easier for you to build applications within Sugar that use a consistent theme and user experience patterns, so we have included a [styleguide](#) for the Sugar application. You can find a link to the styleguide from the Sugar Administration page. There you can find all the information you need to leverage Sugar 7's styling including our CSS framework.

## **Don't use incompatible UI frameworks or external CSS libraries**

Mixing outside user interface frameworks into the Sugar application via a Sugar Package can easily break many different parts of the application. Please only include as much CSS as you need and make sure that it is properly formed so that it doesn't affect other parts of the Sugar application. At the very least, using different frameworks or themes within your application will create a disjointed experience for the end user. While your package may be installed into Sugar, the user experience will not be seamless.

## **Encapsulation Guidelines**

An important aspect of the quality of a Sugar Package is how well encapsulated and loosely coupled it is. A well encapsulated and loosely coupled package will encounter the fewest issues during upgrades, fewer breakages due to core code changes or due to interactions with other installed packages, as well minimizing bugs or problems that end users encounter.

## **Use Extensions framework and Custom Modules as much as possible**

A well-encapsulated package prefers the use of [Custom Modules](#) over customizing and repurposing existing Sugar Modules. A loosely coupled package uses [Extensions framework](#) for customizing and connecting with the core Sugar application. Only override the behavior of core Sugar application files as a last resort.

## **Avoid customizations to core Sugar application files**

Developers are strongly discouraged from overriding core Sugar Modules or Sugar framework code. In many cases, a cleaner approach for accomplishing the same goal exists. For example, using a logic hook to extend the behavior of a SugarBean instead of overriding the SugarBean itself. Every core customization is a barrier to

---

successful upgrades that creates recurring development costs over time. This is exacerbated in heavily customized Sugar instances as other customizations may exist on these files. Anytime there is a conflict then manual intervention by a Sugar Developer is required which is not only inconvenient but costly for everyone involved. If you do make core Sugar customizations then keeping track of such changes is very important to get in front of potential conflicts with other packages and upgrades.

## **Use Package Scanner to ensure your Sugar Package is ready for SugarCloud**

Sugar Packages should be designed with Sugar's cloud service in mind, as many Sugar customers choose this hosting option over hosting on-site or through a Sugar partner. Code that gets loaded into Sugar's cloud service must pass the [Package Scanner](#) utility and must not adversely impact the SugarCRM infrastructure. This stipulation is outlined in the [SugarCloud Policy Guide](#). Package Scanner can be enabled on any Sugar instance via the Sugar Administration panel which allows this to be tested easily. You should also educate yourself in some alternatives to [denylisted functions](#).

## **Performance Guidelines**

Sugar is primarily a database application however with the introduction of Sugar 7, more and more business logic is executed within the user's web browser. It is best to avoid pre-optimization and use tools to properly identify the root causes of performance issues that users could encounter.

Sugar 7 has instrumentation built into it for [New Relic APM](#), which can monitor browser and server performance simultaneously, as well as [XHprof](#) for Sugar PHP profiling. Slow query logging can also be enabled via the Sugar Administration panel under System Settings. For more information, refer to the [System](#) documentation. The Sugar Engineering team typically uses [Chrome DevTools](#) for JavaScript profiling.

## **Index for large frequently used queries**

The most common performance bottleneck for Sugar is the database. Using slow query logging makes it possible to identify bottlenecks and correct them. One way to address query bottlenecks is to [extend vardefs](#) to add [indices](#) during package install to improve the performance of those queries.



---

## Add scheduled jobs to prune large database tables

If your Package adds database tables that can tend to grow very large over time, it is a best practice to include scheduled jobs in your package that can be used to prune the size of this database over time. For Sugar, these background tasks can be created and managed using the [Job Queue](#) framework. At the very least, you'll want to create a [Custom Job](#) that Sugar Administrators can then run as needed. This will allow the package to remain in tip-top shape for your users over time. Especially if they are running on Sugar's cloud service because direct access to the underlying SQL database to do manual tuning and cleanup is not permitted.

## Ensure your application does not block user interface during long running processes

If your application prevents the user from getting feedback or using the interface while it is running a long process, this will impact the perceived performance of the application. Users typically expect some UI feedback within half a second. If you have transactions that will take longer than that, it is best to use the [Job Queue](#) framework to defer them for later or move them into a [scheduled Custom Job](#).

**Last Modified:** 2022-10-17 23:44:19

# Module Builder

## Overview

The Module Builder tool allows programmers to create custom modules without writing code and to create relationships between new and existing CRM modules. To illustrate how to use Module Builder, this article will show how to create and deploy a custom module.

For this example, a custom module to track media inquiries will be created to track public relations requests within a CRM system. This use case is an often requested enhancement for CRM systems that apply across industries.

## Creating New Modules

---

Module Builder functionality is managed within the 'Developer Tools' section of Sugar's administration console.

Upon selecting 'Module Builder', the user has the option of creating a "New Package". Packages are a collection of custom modules, objects, and fields that can be published within the application instance or shared across instances of Sugar. Once the user selects "New Package", the user describes the type of Custom Module to be created. A package key, usually based on the organization or name of the package creator is required to prevent conflicts between two packages with the same name from different authors. In this case, the package will be named "MediaTracking" to explain its purpose, and a key based on the author name will be used.

Once the new package is created and saved, the user is presented with a screen to create a Custom Module. Upon selecting the "New Module" icon, a screen appears showing six different object templates.

## **Understanding Object Templates**

Five of the six object templates contain pre-built CRM functionality for key CRM use cases. These objects are: "basic", "company", "file", "issue", "person", and "sale". The "basic" template provides fields such as Name, Assigned to, Team, Date Created, and Description. As their title denotes, the rest of these templates contain fields and application logic to describe entities similar to "Accounts", "Documents", "Cases", "Contacts", and "Opportunities", respectively. Thus, to create a Custom Module to track a type of account, you would select the "Company" template. Similarly, to track human interactions, you would select "People".

For the media tracking use case, the user will use the object template "Issue" because inbound media requests have similarities to incoming support cases. In both examples, there is an inquiry, a recipient of the issue, assignment of the issue and resolution. The final object template is named "Basic" which is the default base object type. This allows the administrator to create their own custom fields to define the object.

Upon naming and selecting the Custom Module template named "Issue", the user can further customize the module by changing the fields and layout of the application and creating relationships between this new module and existing standard or custom modules. This Edit functionality allows a user to construct a module that meets the specific data requirements of the Custom Module.

## **Editing Module Fields**

---

Fields can be edited and created using the field editor. Fields inherited from the custom module's templates can be relabeled while new fields are fully editable. New fields are added using the Add Field button. This displays a tab where you can select the type of field to add as well as any properties that field-type requires.

## **Editing Module Layouts**

The layout editor can be used to change the appearance of the screens within the new module, including the EditView, DetailView and ListView screens. When editing the Edit View or the Detail View, new panels and rows can be dragged from the toolbox on the left side to the layout area on the right. Fields can then be dragged between the layout area and the toolbox. Fields are removed from the layout by dragging them from the layout area to the recycling icon. Fields can be expanded or collapsed to take up one or two columns on the layout using the plus and minus icons. The List, Search, Dashlet, and Subpanel views can be edited by dragging fields between hidden/visible/available columns.

## **Building Relationships**

Once the fields and layout of the Custom Module have been defined, the user then defines relationships between this new module and existing CRM data by clicking "View Relationships". The "Add Relationship" button allows the user to associate the new module to an existing or new custom module in the same package. In the case of the Media Tracker, the user can associate the Custom Module with the existing, standard 'Contacts' module that is available in every Sugar installation using a many-to-many relationship. By creating this relationship, end-users will see the Contacts associated with each Media Inquiry. We will also add a relationship to the activities module so that a Media Inquiry can be related to calls, meetings, tasks, and emails.

## **Publishing and Uploading Packages**

After the user has created the appropriate fields, layouts, and relationships for the custom modules, this new CRM functionality can be deployed. Click the "Deploy" button to deploy the package to the current instance. This is the recommended way to test your package while developing. If you wish to make further changes to your package or custom modules, you should make those changes in Module Builder, and click the Deploy button again. Clicking the Publish button generates a zip file with the Custom Module definitions. This is the mechanism for moving the package to a test environment and then ultimately to the production environment. The Export button will produce a module loadable zip file, similar to the Publish functionality, except that when the zip file is installed, it will load the custom

---

package into Module Builder for further editing. This is a good method for storing the custom package in case you would like to make changes to it in the future on another Sugar instance. Once your module has been deployed in a production environment, we highly recommend that you do not redeploy the module in Module Builder but modify the module using Studio as outlined in our [Best Practices When Building Custom Modules](#).

After the new package has been published, the administrator must commit the package to the Sugar system through the Module Loader. The administrator uploads the files and commits the new functionality to the live application instance.

## Adding Custom Logic Using Code

While the key benefit of the Module Builder is that the Administrator user is able to create entirely new modules without the need to write code, there are still some tasks that require writing PHP code. For instance, adding custom logic or making a call to an external system through a Web Service. This can be done in one of two methods.

### Logic Hooks

One way is by writing PHP code that leverages the event handlers, or "logic hooks", available in Sugar. In order to accomplish this, the developer must create the custom code and then add it to the manifest file for the "Media Inquiry" package. More information on creating logic hooks can be found in the [Logic Hooks](#) section. Information on adding a hook to your installer package can be found in the [Creating an Installable Package for a Logic Hook](#) example.

### Custom Bean files

Another method is to add code directly to the custom bean. This is a more complicated approach because it requires understanding the SugarBean class. However, it is a far more flexible and powerful approach.

First, you must "build" your module. This can be done by either deploying your module or clicking the Publish button. Module Builder will then generate a folder for your package in `./custom/modulebuilder/builds/`. Inside that folder is where Sugar will have placed the bean files for your new module(s). In this case, we want `./custom/modulebuilder/builds/MediaTracking/SugarModules/modules/jsche_media request/`

Inside you will find two files of interest. The first one is `{module_name}sugar.php`. This file is generated by Module Builder and may be erased by further changes in

---

module builder or upgrades to the Sugar application. You should not make any changes to this file. The second is {module\_name}.php. This is the file where you make any changes you would like to the logic of your module. To add our timestamp, we would add the following code to jsche\_mediarequest.php

```
function save($check_notify = FALSE)
{
    global $current_user;
    $this->description .= "Saved on " . date("Y-m-
d g:i a"). " by ". $current_user->user_name;
    parent::save($check_notify);
}
```

The call to the parent::save function is critical as this will call on the out of box SugarBean to handle the regular Save functionality. To finish, re-deploy or re-publish your package from Module Builder.

You can now upload this module, extended with custom code logic, into your Sugar application using the Module Loader as described earlier.

## Using the New Module

After you upload the new module, the new custom module appears in the Sugar instance. In this example, the new module, named "Media" uses the object template "Issue" to track incoming media inquiries. This new module is associated with the standard "Contacts" modules to show which journalist has expressed interest. In this example, the journalist has requested a product briefing. On one page, users can see the nature of the inquiry, the journalist who requested the briefing, who the inquiry was assigned to, the status, and the description.

**Last Modified:** 2021-02-17 02:44:13

## Best Practices

### Overview

Sugar provides two tools for building and maintaining custom module configurations: Module Builder and Studio. As an administrator of Sugar, it is important to understand the strengths of both tools so that you have a sound development process as you look to build on Sugar's framework.

---

## Goal

This guide will provide you with all the necessary steps from initial definition of your module to the configuration and customization of the module functionality. Follow these tips to ensure your development process will be sound:

### **Build Your Module in Module Builder**

Build the initial framework for your module in Module Builder. Add all the fields you feel will be necessary for the module and construct the layouts with those fields. If possible, it is even better to create your custom modules in a development environment that mirrors your production environment.

### **Never Redeploy a Package**

Once a module has been promoted to a production environment, we recommend only making additional changes in Studio. Redeploying a package will remove all customizations related to your module in the following directories:

- ./modules/
- ./custom/modules/
- ./custom/Extension/modules/

This includes workflows, code customizations, changes through Studio, and much more. It is imperative that this directive is followed to ensure any desired configurations remain intact. When working in Studio, you can make the following types of changes:

- adding a new field
- updating the properties of a field that has been deployed with the module
- changing field layouts
- creating, modifying and removing relationships

### **Every Module in Module Builder Gets Its Very Own Package**

While it is possible to create multiple modules in a package, this can also cause design headaches down the road. If you end up wanting to uninstall a module and it is part of a larger package, all modules in that package would need to be uninstalled. Keeping modules isolated to their own packages allows greater flexibility in the future if a module is no longer needed.

---

## Create Relationships in Studio After the Module Is Deployed

This part is critical for success as relationships created in Module Builder cannot be removed after the module is deployed unless the package is updated and redeployed from Module Builder. Redeploying from Module Builder is what we are trying to avoid as mentioned above. If you deploy the module and then create the relationships in Studio, you can update or remove the relationships via Studio at any future point in time.

## Delete the Package from Module Builder Once It Is Deployed

Once the package is deployed, delete it from Module Builder so that it will not accidentally be redeployed. The only exception to this rule is in a development environment as you may want to continue working and testing until you are ready to move the module to your production environment. If you ever want to uninstall the module at a later date, you can do so under Admin > Module Loader.

**Last Modified:** 2021-02-17 02:44:13

## Quotes

### Overview

As of Sugar 7.9.0.0, the quotes module has been moved out of Backward Compatibility mode into [Sidecar](#). Customizations to the Quotes interface will need to be rewritten for the new Sidecar framework as an automated migration of these customizations is not possible. This document will outline common customizations and implementation methods.

### Quote Identifiers

Administrators can create custom quote identifiers that are more complex than the default auto-incrementing scheme found in an out of box installation. Utilizing this functionality, we can create numbering schemes that match any business needs.

### Creating Custom Identifiers

---

To create a custom identifier, navigate to Admin > Studio > Quotes > Fields. Next, create a TextField type field named to your liking and check the "Calculated Value" checkbox and click "Edit Formula". Once you see the formula builder, you can choose an example below or create your own. Once created, You can add the new field to your Quote module's layouts as desired.

### **User Field with Pseudo-Random Values**

This example creates a quote number in the format of <user last name>-##### that translates to Smith-87837. This identifier starts with the last name of the user creating it, followed by 5 pseudo-random numbers based on the creation time.

```
concat(related($created_by_link, "last_name"), "-", substr(toString(timestamp($date_entered)), 5, 5))
```

**Note:** when using Sugar Logic, updates to related fields will update any corresponding Sugar Logic fields. The example being that an update to the Created By last name field will update all related records with a field using this formula.

### **Related Field Value and Auto-Incrementing Number**

This example creates a quote number in the format of <billing account name>-#### that translates to Start Over Trust-0001. This number starts with the billing account name followed by a 4 digit auto-incrementing number.

```
concat(related($billing_accounts, "name"), "-", substr(toString(add($quote_num, 10000)), 1, 4))
```

**Note:** when using Sugar Logic, updates to related fields will update any corresponding Sugar Logic fields. The example being that an update to the Billing Account name will update all related records with a field using this formula.

## **Record Layout**

The following sections outline various changes that can be done to modify the record layout of the Quotes module, by outlining the extra views that can be updated.

### **Grand Totals Header**



---

The Grand Total Header contains the calculated totals for the quote.

## Modifying Fields in the Grand Totals Header

To modify the Grand Totals Header fields, you can copy `./modules/Quotes/clients/base/views/quote-data-grand-totals-header/quote-data-grand-totals-header.php` to `./custom/modules/Quotes/clients/base/views/quote-data-grand-totals-header/quote-data-grand-totals-header.php` or you may create a metadata extension in `./custom/Extension/modules/Quotes/clients/base/views/quote-data-grand-totals-header/`. Next, modify the `$viewdefs['Quotes']['base']['view']['quote-data-grand-totals-header']['panels'][0]['fields']` index to add or remove your preferred fields.

### Example

The example below will add the "Quote Number" field (`quotes.quote_num`) field to the layout and removes the "Total Discount" (`quotes.deal_tot`) from the layout. If adding a custom field from the Quotes module to the view, you will also need to add that field to the `related_fields` array as outlined in the [Record View documentation](#) below.

`./custom/modules/Quotes/clients/base/views/quote-data-grand-totals-header/quote-data-grand-totals-header.php`

```
<?php

$viewdefs['Quotes']['base']['view']['quote-data-grand-totals-
header'] = array(
    ...
    'panels' => array(
        array(
            'name' => 'panel_quote_data_grand_totals_header',
            'label' => 'LBL_QUOTE_DATA_GRAND_TOTALS_HEADER',
            'fields' => array(
                array(
                    'name' => 'quote_num',
                    'label' => 'LBL_LIST_QUOTE_NUM',
                    'css_class' => 'quote-totals-row-item',
                ),
                array(
                    'name' => 'new_sub',
                    'css_class' => 'quote-totals-row-item',
                ),
                array(
                    'name' => 'tax',
```

```

        'label' => 'LBL_TAX_TOTAL',
        'css_class' => 'quote-totals-row-item',
    ),
    array(
        'name' => 'shipping',
        'css_class' => 'quote-totals-row-item',
    ),
    array(
        'name' => 'total',
        'label' => 'LBL_LIST_GRAND_TOTAL',
        'css_class' => 'quote-totals-row-item',
    ),
    ),
),
);

```

## Modifying Buttons in the Grand Totals Header

The Quotes List Header contains row actions to create quoted line items, comments, and groupings. The actions are identified by the plus icon in the top left of the header. Editing the 'actions' will allow you to add or remove buttons. The following section will outline how these items can be modified.

| +  | 0.00%              | Total Discount<br>\$0.00 | Discounted Subtotal<br>\$520.00 | Total Tax<br>\$42.90 | Shipping<br>\$0.00 | Grand Total<br>\$562.90 |
|--|--------------------|--------------------------|---------------------------------|----------------------|--------------------|-------------------------|
| <input type="checkbox"/> ⋮   | Quantity           | Line Item                | Part Number                     | Unit Price           | Discount           | Line Item Total         |
| Use the + create menu to add a line item, comment, or group to this Quote. |                    |                          |                                 |                      |                    |                         |
| <b>+</b> ⋮   | <b>Mirrors</b>     |                          |                                 |                      |                    |                         |
| <input type="checkbox"/> ⋮   | Reflective Mirrors |                          |                                 |                      |                    |                         |
| <input type="checkbox"/> ⋮   | 1                  | 2.00                     | Reflective Mirror Widget        | 2.0                  | \$260.00           | 0.00% \$520.00          |
| <b>Group Total</b>   |                    |                          |                                 |                      |                    | <b>\$520.00</b>         |
| Discounted Subtotal  |                    |                          |                                 |                      |                    | <b>\$520.00</b>         |
| Tax  |                    |                          |                                 |                      |                    | <b>\$42.90</b>          |
| Shipping   |                    |                          |                                 |                      |                    | <b>\$0.00</b>           |
| <b>Grand Total</b>   |                    |                          |                                 |                      |                    | <b>\$562.90</b>         |

To modify the Row Actions in the Grand Total Header, you can copy `./modules/Quotes/clients/base/views/quote-data-grand-totals-header/quote-data-grand-totals-header.php` to `./custom/modules/Quotes/clients/base/views/quote-data-grand-totals-header/quote-data-grand-totals-header.php` or you may create a metadata extension in `./custom/Extension/modules/Quotes/clients/base/views/quote-data-grand-totals-header/`. Next, modify the `$viewdefs['Quotes']['base']['view']['quote-data-grand-totals-header']['buttons']` index to add or remove your preferred row

---

actions.

### Example

The example below will create a new view that extends the QuotesQuoteDataGrandTotalsHeader view and append a button to the Grand Total Header button list.

First, create your custom view type that will extend the QuotesQuoteDataGrandTotalsHeader view.

`./custom/modules/Quotes/clients/base/views/quote-data-grand-totals-header/quote-data-grand-totals-header.js`

```
({
  extendsFrom: 'QuotesQuoteDataGrandTotalsHeaderView',

  initialize: function(options) {
    this.events = _.extend({}, this.events, options.def.events, {
      'click [name="gth-custom-button]': 'buttonClicked'
    });

    this._super('initialize', [options]);
  },

  /**
   * Click event
   */
  buttonClicked: function() {
    app.alert.show('success_alert', {
      level: 'success',
      title: 'Grand Total Header Button was clicked!'
    });
  },
})
```

This code will append a click event to our button named `gth-custom-button` and trigger the `buttonClicked` method. Once completed, add your new button array to the grand total header in the `$viewdefs['Quotes']['base']['view']['quote-data-grand-totals-header']['buttons']` index.

`./custom/modules/Quotes/clients/base/views/quote-data-grand-totals-header/quote-data-grand-totals-header.php`

`<?php`

---

```

$viewdefs['Quotes']['base']['view']['quote-data-grand-totals-
header'] = array(
    'buttons' => array(
        array(
            'type' => 'quote-data-actiondropdown',
            'name' => 'panel_dropdown',
            'no_default_action' => true,
            'buttons' => array(
                array(
                    'type' => 'button',
                    'icon' => 'fa-plus',
                    'name' => 'create_qli_button',
                    'label' => 'LBL_CREATE_QLI_BUTTON_LABEL',
                    'acl_action' => 'create',
                    'tooltip' => 'LBL_CREATE_QLI_BUTTON_TOOLTIP',
                ),
                array(
                    'type' => 'button',
                    'icon' => 'fa-plus',
                    'name' => 'create_comment_button',
                    'label' => 'LBL_CREATE_COMMENT_BUTTON_LABEL',
                    'acl_action' => 'create',
                    'tooltip' => 'LBL_CREATE_COMMENT_BUTTON_TOOLTIP',
                ),
                array(
                    'type' => 'button',
                    'icon' => 'fa-plus',
                    'name' => 'create_group_button',
                    'label' => 'LBL_CREATE_GROUP_BUTTON_LABEL',
                    'acl_action' => 'create',
                    'tooltip' => 'LBL_CREATE_GROUP_BUTTON_TOOLTIP',
                ),
                array(
                    'type' => 'button',
                    'icon' => 'fa-plus',
                    'name' => 'gth-custom-button',
                    'label' => 'LBL_GTH_CUSTOM_BUTTON',
                    'acl_action' => 'create',
                    'tooltip' => 'LBL_GTH_CUSTOM_BUTTON_TOOLTIP',
                ),
            ),
        ),
    ),
    ...
);

```

Finally, create labels under Quotes for the label and tooltip indexes. To accomplish this, create a language extension:

`./custom/Extension/modules/Quotes/Ext/Language/en_us.custom-button.php`

```
<?php
```

```
$mod_strings['LBL_GTH_CUSTOM_BUTTON'] = 'Custom Button';
$mod_strings['LBL_GTH_CUSTOM_BUTTON_TOOLTIP'] = 'Custom Button Tooltip';
```

Once the files are in place, navigate to Admin > Repair > Quick Repair and Rebuild. Your changes will now be reflected in the system.

## List Header

The Quotes List Header is a complex view that pulls data from two different locations. The JavaScript controller is located in `./modules/Quotes/clients/base/views/quote-data-list-header/quote-data-list-header.js` and pulls the metadata from `./modules/Products/clients/base/views/quote-data-group-list/quote-data-group-list.php`. You should note that `ProductBundleNotes` combines its description field with Product fields in this list.

| +  |   | Total Discount     | Discounted Subtotal | Total Tax                | Shipping   | Grand Total |                 |          |
|--|---|--------------------|---------------------|--------------------------|------------|-------------|-----------------|----------|
| 0.00%  |   | \$0.00             | \$520.00            | \$42.90                  | \$0.00     | \$562.90    |                 |          |
| <input type="checkbox"/>   | : | Quantity           | Line Item           | Part Number              | Unit Price | Discount    | Line Item Total |          |
| Use the + create menu to add a line item, comment, or group to this Quote. |   |                    |                     |                          |            |             |                 |          |
| +  |   | <b>Mirrors</b>     |                     |                          |            |             |                 |          |
| <input type="checkbox"/>   | : | Reflective Mirrors |                     |                          |            |             |                 |          |
| <input type="checkbox"/>   | : | 1                  | 2.00                | Reflective Mirror Widget | 2.0        | \$260.00    | 0.00%           | \$520.00 |
| <b>Group Total</b>   |   |                    |                     |                          |            |             | <b>\$520.00</b> |          |
| Discounted Subtotal  |   |                    |                     |                          |            |             | <b>\$520.00</b> |          |
| Tax  |   |                    |                     |                          |            |             | <b>\$42.90</b>  |          |
| Shipping   |   |                    |                     |                          |            |             | <b>\$0.00</b>   |          |
| <b>Grand Total</b>   |   |                    |                     |                          |            |             | <b>\$562.90</b> |          |

## Modifying Fields in the List Header

To modify the List Header fields, you can copy `./modules/Products/clients/base/views/quote-data-group-list/quote-data-group-list.php` to `./custom/modules/Products/clients/base/views/quote-data-group-list/quote-data-group-list.php` or you may create a metadata extension in `./custom/Extension/modules/Products/Ext/clients/base/views/quote-data-group-list/`.

---

Next, modify the `$viewdefs['Products']['base']['view']['quote-data-group-list']['panels'][0]['fields']` index to add or remove your preferred fields.

### Example

The example below will remove the "Part Number" (`products.mft_part_num`) field and replace it with the "Weight" (`products.weight`) field.

`./custom/modules/Products/clients/base/views/quote-data-group-list/quote-data-group-list.php`

```
<?php
```

```
$viewdefs['Products']['base']['view']['quote-data-group-list'] = array(
    'panels' => array(
        array(
            'name' => 'products_quote_data_group_list',
            'label' => 'LBL_PRODUCTS_QUOTE_DATA_LIST',
            'fields' => array(
                array(
                    'name' => 'line_num',
                    'label' => null,
                    'widthClass' => 'cell-xsmall',
                    'css_class' => 'line_num tcenter',
                    'type' => 'line-num',
                    'readonly' => true,
                ),
                array(
                    'name' => 'quantity',
                    'label' => 'LBL_QUANTITY',
                    'widthClass' => 'cell-small',
                    'css_class' => 'quantity',
                    'type' => 'float',
                ),
                array(
                    'name' => 'product_template_name',
                    'label' => 'LBL_ITEM_NAME',
                    'widthClass' => 'cell-large',
                    'type' => 'quote-data-relate',
                    'required' => true,
                ),
                array(
                    'name' => 'weight',
                    'label' => 'LBL_WEIGHT',
```

---

```

        'type' => 'float',
    ),
    array(
        'name' => 'discount_price',
        'label' => 'LBL_DISCOUNT_PRICE',
        'type' => 'currency',
        'convertToBase' => true,
        'showTransactionalAmount' => true,
        'related_fields' => array(
            'discount_price',
            'currency_id',
            'base_rate',
        ),
    ),
    array(
        'name' => 'discount',
        'type' => 'fieldset',
        'css_class' => 'quote-discount-percent',
        'label' => 'LBL_DISCOUNT_AMOUNT',
        'fields' => array(
            array(
                'name' => 'discount_amount',
                'label' => 'LBL_DISCOUNT_AMOUNT',
                'type' => 'discount',
                'convertToBase' => true,
                'showTransactionalAmount' => true,
            ),
            array(
                'type' => 'discount-select',
                'name' => 'discount_select',
                'no_default_action' => true,
                'buttons' => array(
                    array(
                        'type' => 'rowaction',
                        'name' => 'select_discount_amount_
button',
                        'label' => 'LBL_DISCOUNT_AMOUNT',
                        'event' => 'button:discount_select
_change:click',
                    ),
                    array(
                        'type' => 'rowaction',
                        'name' => 'select_discount_percent
_button',
                        'label' => 'LBL_DISCOUNT_PERCENT',
                        'event' => 'button:discount_select

```





| +  |   | Total Discount     | Discounted Subtotal | Total Tax                | Shipping   | Grand Total |                 |          |
|--|---|--------------------|---------------------|--------------------------|------------|-------------|-----------------|----------|
| 0.00%  |   | \$0.00             | \$520.00            | \$42.90                  | \$0.00     | \$562.90    |                 |          |
| <input type="checkbox"/>   | : | Quantity           | Line Item           | Part Number              | Unit Price | Discount    | Line Item Total |          |
| Use the + create menu to add a line item, comment, or group to this Quote. |   |                    |                     |                          |            |             |                 |          |
| +  |   | Mirrors            |                     |                          |            |             |                 |          |
| <input type="checkbox"/>   | : | Reflective Mirrors |                     |                          |            |             |                 |          |
| <input type="checkbox"/>   | : | 1                  | 2.00                | Reflective Mirror Widget | 2.0        | \$260.00    | 0.00%           | \$520.00 |
| <b>Group Total</b>   |   |                    |                     |                          |            |             | <b>\$520.00</b> |          |
| Discounted Subtotal  |   |                    |                     |                          |            |             | <b>\$520.00</b> |          |
| Tax  |   |                    |                     |                          |            |             | <b>\$42.90</b>  |          |
| Shipping   |   |                    |                     |                          |            |             | <b>\$0.00</b>   |          |
| <b>Grand Total</b>   |   |                    |                     |                          |            |             | <b>\$562.90</b> |          |

To modify the Row Actions in the List Header, you can copy `./modules/Quotes/clients/base/views/quote-data-list-header/quote-data-list-header.php` to `./custom/module s/Quotes/clients/base/views/quote-data-list-header/quote-data-list-header.php` or you may create a metadata extension in `./custom/Extension/modules/Quotes/clients/base/views/quote-data-list-header/`. Next, modify the `$viewdefs['Quotes']['base']['view']['quote-data-list-header']['selection']['actions']` index to add or remove your preferred actions.

### Example

The example below will create a new view that extends the `QuotesQuoteDataListHeader` view and append a row action to the List Header action list.

First, create your custom view type that will extend the `QuotesQuoteDataListHeader` view.

`./custom/modules/Quotes/clients/base/views/quote-data-list-header/quote-data-list-header.js`

```
({
  extendsFrom: 'QuotesQuoteDataListView',

  initialize: function(options) {
    this.events = _.extend({}, this.events, options.def.events, {
      'click [name="lh-custom-button]': 'actionClicked'
    });

    this._super('initialize', [options]);
  },
},
```

---

```

/**
 * Click event
 */
actionClicked: function() {
    app.alert.show('success_alert', {
        level: 'success',
        title: 'List Header Row Action was clicked!'
    });
},
})

```

This code will append a click event to our field named lh-custom-button and trigger the actionClicked method. Once completed, add your new row action to the list header in the \$viewdefs['Quotes']['base']['view']['quote-data-list-header']['selection']['actions'] index.

./custom/modules/Quotes/clients/base/views/quote-data-list-header/quote-data-list-header.php

```
<?php
```

```

$viewdefs['Quotes']['base']['view']['quote-data-list-header'] = array(
    'selection' => array(
        'type' => 'multi',
        'actions' => array(
            array(
                'name' => 'group_button',
                'type' => 'rowaction',
                'label' => 'LBL_CREATE_GROUP_SELECTED_BUTTON_LABEL',
                'tooltip' => 'LBL_CREATE_GROUP_SELECTED_BUTTON_TOOLTIP',
                'acl_action' => 'edit',
            ),
            array(
                'name' => 'massdelete_button',
                'type' => 'rowaction',
                'label' => 'LBL_DELETE_SELECTED_LABEL',
                'tooltip' => 'LBL_DELETE_SELECTED_TOOLTIP',
                'acl_action' => 'delete',
            ),
            array(
                'name' => 'lh-custom-button',
                'type' => 'rowaction',
                'label' => 'LBL_LH_CUSTOM_ACTION',
                'tooltip' => 'LBL_LH_CUSTOM_ACTION_TOOLTIP',
                'acl_action' => 'edit',
            )
        )
    )
)

```

```

),
),
),
);

```

Finally, create labels under Quotes for the label and tooltip indexes. To accomplish this, create a language extension:

`./custom/Extension/modules/Quotes/Ext/Language/en_us.lh-custom-action.php`

```
<?php
```

```

$mod_strings['LBL_LH_CUSTOM_ACTION'] = 'Custom Action';
$mod_strings['LBL_LH_CUSTOM_ACTION_TOOLTIP'] = 'Custom Action Tooltip';
;

```

Once the files are in place, navigate to Admin > Repair > Quick Repair and Rebuild. Your changes will now be reflected in the system.

## Group Header

The Group Header contains the name and options for each grouping of quoted line items.

| +  |          | 0.00%              |           | Total Discount           | Discounted Subtotal | Total Tax | Shipping        | Grand Total     |          |
|--|----------|--------------------|-----------|--------------------------|---------------------|-----------|-----------------|-----------------|----------|
|  |          |                    |           | \$0.00                   | \$520.00            | \$42.90   | \$0.00          | \$562.90        |          |
| <input type="checkbox"/>   | :        | Quantity           | Line Item | Part Number              | Unit Price          | Discount  | Line Item Total |                 |          |
| Use the + create menu to add a line item, comment, or group to this Quote. |          |                    |           |                          |                     |           |                 |                 |          |
| <b>+</b>   | <b>:</b> | <b>Mirrors</b>     |           |                          |                     |           |                 |                 |          |
| <input type="checkbox"/>   | :        | Reflective Mirrors |           |                          |                     |           |                 |                 |          |
| <input type="checkbox"/>   | :        | 1                  | 2.00      | Reflective Mirror Widget | 2.0                 |           | \$260.00        | 0.00%           | \$520.00 |
| <b>Group Total</b>   |          |                    |           |                          |                     |           |                 | <b>\$520.00</b> |          |
| Discounted Subtotal  |          |                    |           |                          |                     |           |                 | <b>\$520.00</b> |          |
| Tax  |          |                    |           |                          |                     |           |                 | <b>\$42.90</b>  |          |
| Shipping   |          |                    |           |                          |                     |           |                 | <b>\$0.00</b>   |          |
| <b>Grand Total</b>   |          |                    |           |                          |                     |           |                 | <b>\$562.90</b> |          |

## Modifying Fields in the Group Header

To modify the Group Header fields, you can copy `./modules/ProductBundles/clients/base/views/quote-data-group-header/quote-data-group-header.php` to `./custom/modules/ProductBundles/clients/base/views/quote-data-group-header/quote-data-`

---

group-header.php or you may create a metadata extension in `./custom/Extension/modules/Products/clients/base/views/quote-data-group-header/`. Next, modify the `$viewdefs['ProductBundles']['base']['view']['quote-data-group-header']` index to add or remove your preferred fields.

### Example

The example below will append the group total (`product_bundles.subtotal`) field to the Group Header. It's important to note that when adding additional fields, that changes to the corresponding `.hbs` file may be necessary to correct any formatting issues.

`./custom/modules/ProductBundles/clients/base/views/quote-data-group-header/quote-data-group-header.php`

```
<?php

$viewdefs['ProductBundles']['base']['view']['quote-data-group-
header'] = array(
    ...
    'panels' => array(
        array(
            'name' => 'panel_quote_data_group_header',
            'label' => 'LBL_QUOTE_DATA_GROUP_HEADER',
            'fields' => array(
                array(
                    'name' => 'name',
                    'type' => 'quote-group-title',
                    'css_class' => 'group-name',
                ),
                'subtotal',
            ),
        ),
    ),
);
```

If adding a custom field from the Quotes module to the view, you will also need to add that field to the `related_fields` array as outlined in the [Record View documentation](#) below. Once the files are in place, navigate to Admin > Repair > Quick Repair and Rebuild. Your changes will now be reflected in the system.

### Modifying Row Actions in the Group Header

The Quotes Group Header contains row actions to add QLIs and comments as well

as editing and deleting QLI groupings. The actions are identified by, the plus and vertical ellipsis or "hamburger" icon buttons. The following section will outline how these items can be modified.

| +  |   | 0.00%              |           | Total Discount           | Discounted Subtotal | Total Tax | Shipping        | Grand Total     |
|--|---|--------------------|-----------|--------------------------|---------------------|-----------|-----------------|-----------------|
|  |   |                    |           | \$0.00                   | \$520.00            | \$42.90   | \$0.00          | \$562.90        |
| ☐  | : | Quantity           | Line Item | Part Number              | Unit Price          | Discount  | Line Item Total |                 |
| Use the + create menu to add a line item, comment, or group to this Quote. |   |                    |           |                          |                     |           |                 |                 |
| +  |   | <b>Mirrors</b>     |           |                          |                     |           |                 |                 |
| ☐  |   | Reflective Mirrors |           |                          |                     |           |                 |                 |
| ☐  |   | 1                  | 2.00      | Reflective Mirror Widget | 2.0                 | \$260.00  | 0.00%           | \$520.00        |
| <b>Group Total</b>   |   |                    |           |                          |                     |           |                 | <b>\$520.00</b> |
| Discounted Subtotal  |   |                    |           |                          |                     |           |                 | <b>\$520.00</b> |
| Tax  |   |                    |           |                          |                     |           |                 | <b>\$42.90</b>  |
| Shipping   |   |                    |           |                          |                     |           |                 | <b>\$0.00</b>   |
| <b>Grand Total</b>   |   |                    |           |                          |                     |           |                 | <b>\$562.90</b> |

To modify the buttons in the Group Header, you can copy `./modules/ProductBundles/clients/base/views/quote-data-group-header/quote-data-group-header.php` to `./custom/modules/ProductBundles/clients/base/views/quote-data-group-header/quote-data-group-header.php` or you may create a metadata extension in `./custom/Extension/modules/ProductBundles/clients/base/views/quote-data-group-header/`. Next, modify the `$viewdefs['ProductBundles']['base']['view']['quote-data-group-header']['buttons']` index to add or remove your preferred actions.

### Example

The example below will create a new view that extends the `ProductBundlesQuoteDataGroupHeader` view and append a row action to the Group Header vertical ellipsis action list.

First, create your custom view type that will extend the `ProductBundlesQuoteDataGroupHeader` view.

`./custom/modules/ProductBundles/clients/base/views/quote-data-group-header/quote-data-group-header.js`

```
({
  extendsFrom: 'ProductBundlesQuoteDataGroupHeaderView',

  initialize: function(options) {
    this.events = _.extend({}, this.events, options.def.events, {
      'click [name="gh-custom-action"]': 'actionClicked'
    });
  });
```

---

```

        this._super('initialize', [options]);
    },

    /**
     * Click event
     */
    actionClicked: function() {
        app.alert.show('success_alert', {
            level: 'success',
            title: 'Group Header Button was clicked!'
        });
    },
})

```

This code will append a click event to our field named gh-custom-action and trigger the actionClicked method. Once completed, add your new row action to the appropriate button group in \$viewdefs['Quotes']['base']['view']['quote-data-group-header']['buttons']. For this example we will target a row action to the edit drop down that is identified in the arrays as having a name of "edit-dropdown". Once found, add your new array to the buttons index of that array.

./custom/modules/ProductBundles/clients/base/views/quote-data-group-header/quote-data-group-header.php

```

<?php

$viewdefs['ProductBundles']['base']['view']['quote-data-group-
header'] = array(
    'buttons' => array(
        array(
            'type' => 'quote-data-actiondropdown',
            'name' => 'create-dropdown',
            'icon' => 'fa-plus',
            'no_default_action' => true,
            'buttons' => array(
                array(
                    'type' => 'rowaction',
                    'css_class' => 'btn-invisible',
                    'icon' => 'fa-plus',
                    'name' => 'create_qli_button',
                    'label' => 'LBL_CREATE_QLI_BUTTON_LABEL',
                    'tooltip' => 'LBL_CREATE_QLI_BUTTON_TOOLTIP',
                    'acl_action' => 'create',
                ),
            ),
        ),
    ),
)

```

---

```

        'type' => 'rowaction',
        'css_class' => 'btn-invisible',
        'icon' => 'fa-plus',
        'name' => 'create_comment_button',
        'label' => 'LBL_CREATE_COMMENT_BUTTON_LABEL',
        'tooltip' => 'LBL_CREATE_COMMENT_BUTTON_TOOLTIP',
        'acl_action' => 'create',
    ),
),
array(
    'type' => 'quote-data-actiondropdown',
    'name' => 'edit-dropdown',
    'icon' => 'fa-ellipsis-v',
    'no_default_action' => true,
    'buttons' => array(
        array(
            'type' => 'rowaction',
            'name' => 'edit_bundle_button',
            'label' => 'LBL_EDIT_BUTTON',
            'tooltip' => 'LBL_EDIT_BUNDLE_BUTTON_TOOLTIP',
            'acl_action' => 'edit',
        ),
        array(
            'type' => 'rowaction',
            'name' => 'delete_bundle_button',
            'label' => 'LBL_DELETE_GROUP_BUTTON',
            'tooltip' => 'LBL_DELETE_BUNDLE_BUTTON_TOOLTIP',
            'acl_action' => 'delete',
        ),
        array(
            'type' => 'rowaction',
            'name' => 'gh-custom-action',
            'label' => 'LBL_GH_CUSTOM_ACTION',
            'tooltip' => 'LBL_GH_CUSTOM_ACTION_TOOLTIP',
            'acl_action' => 'edit',
        ),
    ),
),
...
);

```

Finally, create labels under Quotes for the label and tooltip indexes. To accomplish this, create a language extension:

./custom/Extension/modules/Quotes/Ext/Language/en\_us.gh-custom-action.php

<?php

```
$mod_strings['LBL_GH_CUSTOM_ACTION'] = 'Custom Action';  
$mod_strings['LBL_GH_CUSTOM_ACTION_TOOLTIP'] = 'Custom Action Tooltip';  
;
```

Once the files are in place, navigate to Admin > Repair > Quick Repair and Rebuild. Your changes will now be reflected in the system.

## Group List

The Group List contains the comments and selected quoted line items.

| +  |   | 0.00%              |           | Total Discount           | Discounted Subtotal |            | Total Tax |                 | Shipping |                 | Grand Total |  |
|--|---|--------------------|-----------|--------------------------|---------------------|------------|-----------|-----------------|----------|-----------------|-------------|--|
|  |   |                    |           | \$0.00                   | \$520.00            |            | \$42.90   |                 | \$0.00   |                 | \$562.90    |  |
| <input type="checkbox"/>   | : | Quantity           | Line Item | Part Number              |                     | Unit Price | Discount  | Line Item Total |          |                 |             |  |
| Use the + create menu to add a line item, comment, or group to this Quote. |   |                    |           |                          |                     |            |           |                 |          |                 |             |  |
| +  |   | :                  |           | Mirrors                  |                     |            |           |                 |          |                 |             |  |
| <input type="checkbox"/>   | : | Reflective Mirrors |           |                          |                     |            |           |                 |          |                 |             |  |
| <input type="checkbox"/>   | : | 1                  | 2.00      | Reflective Mirror Widget | 2.0                 | \$260.00   | 0.00%     |                 |          | \$520.00        |             |  |
| <b>Group Total</b>   |   |                    |           |                          |                     |            |           |                 |          | <b>\$520.00</b> |             |  |
| Discounted Subtotal  |   |                    |           |                          |                     |            |           |                 |          | <b>\$520.00</b> |             |  |
| Tax  |   |                    |           |                          |                     |            |           |                 |          | <b>\$42.90</b>  |             |  |
| Shipping   |   |                    |           |                          |                     |            |           |                 |          | <b>\$0.00</b>   |             |  |
| <b>Grand Total</b>   |   |                    |           |                          |                     |            |           |                 |          | <b>\$562.90</b> |             |  |

## Modifying Fields in the Group List

To modify the Group List fields, you can copy ./modules/Products/clients/base/views/quote-data-group-list/quote-data-group-list.php to ./custom/modules/Products/clients/base/views/quote-data-group-list/quote-data-group-list.php or you may create a metadata extension in

./custom/Extension/modules/Products/Ext/clients/base/views/quote-data-group-list/.

Next, modify the \$viewdefs['Products']['base']['view']['quote-data-group-list']['panels'] index to add or remove your preferred fields.

### Example

The example below will remove the "Manufacturer Part Number" (products.mft\_part\_num) and append the "Vendor Part Number"



---

(products.vendor\_part\_num) field to the Group List.

./custom/modules/Products/clients/base/views/quote-data-group-list/quote-data-group-list.php

```
<?php
```

```
$viewdefs['Products']['base']['view']['quote-data-group-  
list'] = array(  
    'panels' => array(  
        array(  
            'name' => 'products_quote_data_group_list',  
            'label' => 'LBL_PRODUCTS_QUOTE_DATA_LIST',  
            'fields' => array(  
                array(  
                    'name' => 'line_num',  
                    'label' => null,  
                    'widthClass' => 'cell-xsmall',  
                    'css_class' => 'line_num tcenter',  
                    'type' => 'line-num',  
                    'readonly' => true,  
                ),  
                array(  
                    'name' => 'quantity',  
                    'label' => 'LBL_QUANTITY',  
                    'widthClass' => 'cell-small',  
                    'css_class' => 'quantity',  
                    'type' => 'float',  
                ),  
                array(  
                    'name' => 'product_template_name',  
                    'label' => 'LBL_ITEM_NAME',  
                    'widthClass' => 'cell-large',  
                    'type' => 'quote-data-relate',  
                    'required' => true,  
                ),  
                array(  
                    'name' => 'vendor_part_num',  
                    'label' => 'LBL_VENDOR_PART_NUM',  
                    'type' => 'base',  
                ),  
                array(  
                    'name' => 'discount_price',  
                    'label' => 'LBL_DISCOUNT_PRICE',  
                    'type' => 'currency',  
                    'convertToBase' => true,  
                ),  
            ),  
        ),  
    ),  
);
```

```

        'showTransactionalAmount' => true,
        'related_fields' => array(
            'discount_price',
            'currency_id',
            'base_rate',
        ),
    ),
array(
    'name' => 'discount',
    'type' => 'fieldset',
    'css_class' => 'quote-discount-percent',
    'label' => 'LBL_DISCOUNT_AMOUNT',
    'fields' => array(
        array(
            'name' => 'discount_amount',
            'label' => 'LBL_DISCOUNT_AMOUNT',
            'type' => 'discount',
            'convertToBase' => true,
            'showTransactionalAmount' => true,
        ),
        array(
            'type' => 'discount-select',
            'name' => 'discount_select',
            'no_default_action' => true,
            'buttons' => array(
                array(
                    'type' => 'rowaction',
                    'name' => 'select_discount_amount_
button',
                    'label' => 'LBL_DISCOUNT_AMOUNT',
                    'event' => 'button:discount_select
_change:click',
                ),
                array(
                    'type' => 'rowaction',
                    'name' => 'select_discount_percent
_button',
                    'label' => 'LBL_DISCOUNT_PERCENT',
                    'event' => 'button:discount_select
_change:click',
                ),
            ),
        ),
    ),
),
array(

```

---

```

        'name' => 'total_amount',
        'label' => 'LBL_LINE_ITEM_TOTAL',
        'type' => 'currency',
        'widthClass' => 'cell-medium',
        'showTransactionalAmount' => true,
        'related_fields' => array(
            'total_amount',
            'currency_id',
            'base_rate',
        ),
    ),
),
),
);

```

Next, create the LBL\_VENDOR\_PART\_NUM label under Quotes as this is not included in the stock installation. To accomplish this, we will need to create a language extension:

```
./custom/Extension/modules/Quotes/Ext/Language/en_us.vendor.php
```

```
<?php
```

```
$mod_strings['LBL_VENDOR_PART_NUM'] = 'Vendor Part Number';
```

If adding a custom field from the Quotes module to the view, you will also need to add that field to the `related_fields` array as outlined in the [Record View documentation](#) below. Once the files are in place, navigate to Admin > Repair > Quick Repair and Rebuild. Your changes will now be reflected in the system.

## Modifying Row Actions in the Group List

The Quotes Group List contains row actions to add/remove QLIs and comments. The actions are identified by, the vertical ellipsis icon buttons. The following section will outline how these items can be modified.

| +  |   | Total Discount     | Discounted Subtotal | Total Tax                | Shipping   | Grand Total |                 |          |
|--|---|--------------------|---------------------|--------------------------|------------|-------------|-----------------|----------|
| 0.00%  |   | \$0.00             | \$520.00            | \$42.90                  | \$0.00     | \$562.90    |                 |          |
| ☐  | : | Quantity           | Line Item           | Part Number              | Unit Price | Discount    | Line Item Total |          |
| Use the + create menu to add a line item, comment, or group to this Quote. |   |                    |                     |                          |            |             |                 |          |
| +  |   | Mirrors            |                     |                          |            |             |                 |          |
| ☐  | : | Reflective Mirrors |                     |                          |            |             |                 |          |
| ☐  | : | 1                  | 2.00                | Reflective Mirror Widget | 2.0        | \$260.00    | 0.00%           | \$520.00 |
| <b>Group Total</b>   |   |                    |                     |                          |            |             | <b>\$520.00</b> |          |
| Discounted Subtotal  |   |                    |                     |                          |            |             | \$520.00        |          |
| Tax  |   |                    |                     |                          |            |             | \$42.90         |          |
| Shipping   |   |                    |                     |                          |            |             | \$0.00          |          |
| <b>Grand Total</b>   |   |                    |                     |                          |            |             | <b>\$562.90</b> |          |

To modify the buttons in the Group List , you can copy `./modules/ProductBundles/clients/base/views/quote-data-group-list/quote-data-group-list.php` to `./custom/modules/ProductBundles/clients/base/views/quote-data-group-list/quote-data-group-list.php` or you may create a metadata extension in `./custom/Extension/modules/ProductBundles/clients/base/views/quote-data-group-list/`. Next, modify the `$viewdefs['ProductBundles']['base']['view']['quote-data-group-list']['selection']` index to add or remove your preferred actions.

### Example

The example below will create a new view that extends the `ProductBundlesQuoteDataGroupList` view and append a row action to the Group List's vertical elipsis action list.

First, create your custom view type that will extend the `ProductBundlesQuoteDataGroupList` view. This will contain the JavaScript for your action.

`./custom/modules/ProductBundles/clients/base/views/quote-data-group-list/quote-data-group-list.js`

```
({
  extendsFrom: 'ProductBundlesQuoteDataGroupListView',

  initialize: function(options) {
    this.events = _.extend({}, this.events, options.def.events, {
      'click [name="gl-custom-action]': 'actionClicked'
    });

    this._super('initialize', [options]);
  },
},
```

---

```

/**
 * Click event
 */
actionClicked: function() {
    app.alert.show('success_alert', {
        level: 'success',
        title: 'List Header Row Action was clicked!'
    });
},
}))

```

This code will append a click event to our field named `gl-custom-action` and trigger the `actionClicked` method. Once completed, add your new row action to the group list in the `$viewdefs['ProductBundles']['base']['view']['quote-data-group-list']['selection']['actions']` index.

`./custom/modules/ProductBundles/clients/base/views/quote-data-group-list/quote-data-group-list.php`

```
<?php
```

```

$viewdefs['ProductBundles']['base']['view']['quote-data-group-
list'] = array(
    'selection' => array(
        'type' => 'multi',
        'actions' => array(
            array(
                'type' => 'rowaction',
                'name' => 'edit_row_button',
                'label' => 'LBL_EDIT_BUTTON',
                'tooltip' => 'LBL_EDIT_BUTTON',
                'acl_action' => 'edit',
            ),
            array(
                'type' => 'rowaction',
                'name' => 'delete_row_button',
                'label' => 'LBL_DELETE_BUTTON',
                'tooltip' => 'LBL_DELETE_BUTTON',
                'acl_action' => 'delete',
            ),
            array(
                'type' => 'rowaction',
                'name' => 'gl-custom-action',
                'label' => 'LBL_GL_CUSTOM_ACTION',
                'tooltip' => 'LBL_GL_CUSTOM_ACTION_TOOLTIP',
            )
        )
    )
)

```

```

        'acl_action' => 'edit',
    ),
),
);

```

Finally, create labels under Quotes for the label and tooltip indexes. To accomplish this, create a language extension:

```
./custom/Extension/modules/Quotes/Ext/Language/en_us.gh-custom-action.php
```

```
<?php
```

```

$mod_strings['LBL_GL_CUSTOM_ACTION'] = 'Custom Action';
$mod_strings['LBL_GL_CUSTOM_ACTION_TOOLTIP'] = 'Custom Action Tooltip'
;

```

Once the files are in place, navigate to Admin > Repair > Quick Repair and Rebuild. Your changes will now be reflected in the system.

## Group Footer

The Group Footer contains the total for each grouping of quoted line items.

| +  |   | 0.00%              |           | Total Discount           | Discounted Subtotal | Total Tax | Shipping        | Grand Total     |
|--|---|--------------------|-----------|--------------------------|---------------------|-----------|-----------------|-----------------|
|  |   |                    |           | \$0.00                   | \$520.00            | \$42.90   | \$0.00          | \$562.90        |
| ☐  | ⋮ | Quantity           | Line Item | Part Number              | Unit Price          | Discount  | Line Item Total |                 |
| Use the + create menu to add a line item, comment, or group to this Quote. |   |                    |           |                          |                     |           |                 |                 |
| +  | ⋮ | Mirrors            |           |                          |                     |           |                 |                 |
| ☐  | ⋮ | Reflective Mirrors |           |                          |                     |           |                 |                 |
| ☐  | ⋮ | 1                  | 2.00      | Reflective Mirror Widget | 2.0                 | \$260.00  | 0.00%           | \$520.00        |
| <b>Group Total</b>   |   |                    |           |                          |                     |           |                 | <b>\$520.00</b> |
| Discounted Subtotal  |   |                    |           |                          |                     |           |                 | \$520.00        |
| Tax  |   |                    |           |                          |                     |           |                 | \$42.90         |
| Shipping   |   |                    |           |                          |                     |           |                 | \$0.00          |
| <b>Grand Total</b>   |   |                    |           |                          |                     |           |                 | <b>\$562.90</b> |

## Modifying Fields in the Group Footer

To modify the GroupFooter fields, you can copy `./modules/ProductBundles/clients/base/views/quote-data-group-footer/quote-data-group-footer.php` to `./custom/modules/ProductBundles/clients/base/views/quote-data-group-footer/quote-data-group-footer.php` or you may create a metadata extension in `./custom/Extension/modules/`

---

ProductBundles/clients/base/views/quote-data-group-footer/. Next, modify the \$viewdefs['ProductBundles']['base']['view']['quote-data-group-footer'] index to add or remove your preferred fields.

### Example

The example below will append the bundle stage (product\_bundles.bundle\_stage) field to the Group Footer. It's important to note that when adding additional fields, that changes to the corresponding .hbs file may be necessary to correct any formatting issues.

./custom/modules/ProductBundles/clients/base/views/quote-data-group-header/quote-data-group-footer.php

```
<?php

$viewdefs['ProductBundles']['base']['view']['quote-data-group-
footer'] = array(
    'panels' => array(
        array(
            'name' => 'panel_quote_data_group_footer',
            'label' => 'LBL_QUOTE_DATA_GROUP_FOOTER',
            'fields' => array(
                'bundle_stage',
                array(
                    'name' => 'new_sub',
                    'label' => 'LBL_GROUP_TOTAL',
                    'type' => 'currency',
                ),
            ),
        ),
    ),
);
```

If adding custom fields from the Product Bundles module to the view, you will also need to add that field to the related\_fields array as outlined in the [Record View documentation](#) below. Once the files are in place, navigate to Admin > Repair > Quick Repair and Rebuild. Your changes will now be reflected in the system.

## Grand Totals Footer

The Grand Total Footer contains the calculated totals for the quote. It mimics the information found in the [Grand Total Header](#).

| +  |   | Total Discount     | Discounted Subtotal | Total Tax                | Shipping   | Grand Total |                 |          |
|--|---|--------------------|---------------------|--------------------------|------------|-------------|-----------------|----------|
| 0.00%  |   | \$0.00             | \$520.00            | \$42.90                  | \$0.00     | \$562.90    |                 |          |
| ☐  | : | Quantity           | Line Item           | Part Number              | Unit Price | Discount    | Line Item Total |          |
| Use the + create menu to add a line item, comment, or group to this Quote. |   |                    |                     |                          |            |             |                 |          |
| +  |   | Mirrors            |                     |                          |            |             |                 |          |
| ☐  |   | Reflective Mirrors |                     |                          |            |             |                 |          |
| ☐  |   | 1                  | 2.00                | Reflective Mirror Widget | 2.0        | \$260.00    | 0.00%           | \$520.00 |
| <b>Group Total</b>   |   |                    |                     |                          |            |             | <b>\$520.00</b> |          |
| Discounted Subtotal  |   |                    |                     |                          |            |             | <b>\$520.00</b> |          |
| Tax  |   |                    |                     |                          |            |             | <b>\$42.90</b>  |          |
| Shipping   |   |                    |                     |                          |            |             | <b>\$0.00</b>   |          |
| <b>Grand Total</b>   |   |                    |                     |                          |            |             | <b>\$562.90</b> |          |

## Modifying Fields in the Grand Totals Footer

To modify the Grand Totals Footer fields, you can copy `./modules/Quotes/clients/base/views/quote-data-grand-totals-footer/quote-data-grand-totals-footer.php` to `./custom/modules/Quotes/clients/base/views/quote-data-grand-totals-footer/quote-data-grand-totals-footer.php` or you may create a metadata extension in `./custom/Extension/modules/Quotes/clients/base/views/quote-data-grand-totals-footer/`. Next, modify the `$viewdefs['Quotes']['base']['view']['quote-data-grand-totals-footer']['panels'][0]['fields']` index to add or remove your preferred fields.

### Example

The example below will remove the "Shipping" field (`quotes.shipping`) field from the layout.

`./custom/modules/Quotes/clients/base/views/quote-data-grand-totals-footer/quote-data-grand-totals-footer.php`

```
<?php

$viewdefs['Quotes']['base']['view']['quote-data-grand-totals-
footer'] = array(
    'panels' => array(
        array(
            'name' => 'panel_quote_data_grand_totals_footer',
            'label' => 'LBL_QUOTE_DATA_GRAND_TOTALS_FOOTER',
            'fields' => array(
                'quote_num',
                array(
                    'name' => 'new_sub',
```



---

```

        'type' => 'currency',
    ),
    array(
        'name' => 'tax',
        'type' => 'currency',
        'related_fields' => array(
            'taxrate_value',
        ),
    ),
    array(
        'name' => 'total',
        'label' => 'LBL_LIST_GRAND_TOTAL',
        'type' => 'currency',
        'css_class' => 'grand-total',
    ),
),
),
);

```

If adding custom fields from the Quotes module to the view, you will also need to add that field to the `related_fields` array as outlined in the [Record View documentation](#) below. Once the files are in place, navigate to Admin > Repair > Quick Repair and Rebuild. Your changes will now be reflected in the system.

## Record View

The record view for Quotes is updated and used like the standard Record View for all modules. The one major difference to note is that the JavaScript models used by the previous views above, are derived from the Model defined in the record view metadata.

### Adding Custom Related Fields to Model

In the Record View metadata, the first panel `panel_header` containing the picture and name fields for the Quote record, contains a `related_fields` property in the name definition that defines the related Product Bundles and Products data that is pulled into the JavaScript model. When custom fields are added to the above mentioned views you will need to add them to the `related_fields` property in their respective related module so that they are properly loaded during the page load.

The following example adds the `custom_product_bundle_field_c` field from the Product Bundles module, and the `custom_product_field_c` from the Products module into the retrieved Model.

---

./custom/modules/Quotes/clients/base/views/record/record.php

```
<?php
$viewdefs['Quotes']['base']['view']['record'] = array(
    ...
    'panels' => array(
        array(
            'name' => 'panel_header',
            'label' => 'LBL_PANEL_HEADER',
            'header' => true,
            'fields' => array(
                array(
                    'name' => 'picture',
                    'type' => 'avatar',
                    'size' => 'large',
                    'dismiss_label' => true,
                    'readonly' => true,
                ),
                array(
                    'name' => 'name',
                    'events' => array(
                        'keyup' => 'update:quote',
                    ),
                    'related_fields' => array(
                        array(
                            'name' => 'bundles',
                            'fields' => array(
                                'id',
                                'bundle_stage',
                                'currency_id',
                                'base_rate',
                                'currencies',
                                'name',
                                'deal_tot',
                                'deal_tot_usdollar',
                                'deal_tot_discount_percentage',
                                'new_sub',
                                'new_sub_usdollar',
                                'position',
                                'related_records',
                                'shipping',
                                'shipping_usdollar',
                                'subtotal',
                                'subtotal_usdollar',
                                'tax',
                                'tax_usdollar',
                            )
                        )
                    )
                )
            )
        )
    )
);
```



---

## Quote PDFs

### Ungrouped Quoted Line Items and Notes

As of Sugar 7.9, the quotes module allows users to add quoted line items and notes without first adding a group. Adding at least one group to your quote was mandatory in earlier versions. This document will cover how to update your custom PDF templates to support ungrouped QLIs and notes. Ungrouped items are technically added to a default group. The goal is to exclude this group when no items exist in it.

### PDF Manager Templates

In your PDF Manager templates, you may have code similar to what is shown below to iterate over the groups in a quote:

```
{foreach from=$product_bundles item="bundle"}
    ....
{/foreach}
```

To correct this for 7.9, we will need to add an if statement to check to see if the group is empty. If it is empty, it will be ignored in your PDF. The benefit is that it will also exclude any other empty groups in your quote and clean the generated PDF.

```
{foreach from=$product_bundles item="bundle"}
    {if $bundle.products|@count}
        ....
    {/if}
{/foreach}
```

### Smarty Templates

In Smarty templates, you may have code similar to what is shown below to iterate over the groups in a quote:

```
{literal}{foreach from=$product_bundles item="bundle"}{/literal}
    ...
{literal}{/foreach}{/literal}
```

To correct this for 7.9, we will need to add an if statement to check to see if the group is empty. If it is empty, it will be ignored in your PDF. The benefit is that it will also exclude any other empty groups in your quote and clean the generated PDF.

---

```
{literal}{foreach from=$product_bundles item="bundle"}{/literal}
  {literal}{if $bundle.products|@count}{/literal}
    ...
  {literal}{/if}{/literal}
{literal}{/foreach}{/literal}
```

## Creating Custom PDF Templates

With Sugar, there are generally two routes that can be taken to create custom PDF templates. The first and most recommended route is to use the [PDF Manager](#) found in the Admin > PDF Manager. The second route is to extend the [Sugarpdf](#) class and write your own template using PHP and the TCPDF library. This method should only be used if you are unable to accomplish your business needs through the PDF Manager.

### Creating the TCPDF Template

The first step is to create your custom TCPDF template in `./custom/modules/Quotes/sugarpdf/`. For our example, we will extend `QuotesSugarpdfStandard`, found at `./modules/Quotes/sugarpdf/sugarpdf.standard.php`, to a new file in `./custom/modules/Quotes/sugarpdf/` to create a custom invoice. The `QuotesSugarpdfStandard` class sets up our general quote requirements and extends the `Sugarpdf` class. Technical documentation on templating can be found in the [Sugar PDF](#) documentation. Our class will be named `QuotesSugarpdfCustomInvoice` as the naming must be in the format of `<module>Sugarpdf<pdf view>`.

```
./custom/modules/Quotes/sugarpdf/sugarpdf.custominvoice.php
```

```
<?php

if (!defined('sugarEntry') || !sugarEntry) die('Not A Valid Entry Point');

require_once('modules/Quotes/sugarpdf/sugarpdf.standard.php');

class QuotesSugarpdfCustomInvoice extends QuotesSugarpdfStandard
{
    function preDisplay()
    {
        global $mod_strings, $timedate;
        parent::preDisplay();
    }
}
```

---

```

        $quote[0]['TITLE'] = $mod_strings['LBL_PDF_INVOICE_NUMBER'];
        $quote[1]['TITLE'] = $mod_strings['LBL_PDF_QUOTE_DATE'];
        $quote[2]['TITLE'] = $mod_strings['LBL_PURCHASE_ORDER_NUM'];
        $quote[3]['TITLE'] = $mod_strings['LBL_PAYMENT_TERMS'];
        $quote[0]['VALUE']['value'] = format_number_display($this->bean->quote_num, $this->bean->system_id);
        $quote[1]['VALUE']['value'] = $timedate->nowDate();
        $quote[2]['VALUE']['value'] = $this->bean->purchase_order_num;
        $quote[3]['VALUE']['value'] = $this->bean->payment_terms;
        // these options override the params of the $options array.
        $quote[0]['VALUE']['options'] = array();
        $quote[1]['VALUE']['options'] = array();
        $quote[2]['VALUE']['options'] = array();
        $quote[3]['VALUE']['options'] = array();

        $html = $this->writeHTMLTable($quote, true, $this->headerOptions);
        $this->SetHeaderData(PDF_HEADER_LOGO, PDF_HEADER_LOGO_WIDTH, $mod_strings['LBL_PDF_INVOICE_TITLE'], $html);
    }

    /**
     * This method build the name of the PDF file to output.
     */
    function buildFileName()
    {
        global $mod_strings;

        $fileName = preg_replace("#[^A-Z0-9\_\\.]\#i", "_", $this->bean->shipping_account_name);

        if (!empty($this->bean->quote_num)) {
            $fileName .= "_{$this->bean->quote_num}";
        }

        $fileName = $mod_strings['LBL_INVOICE'] . "_{$fileName}.pdf";

        if (isset($_SERVER['HTTP_USER_AGENT']) && preg_match("/MSIE/", $_SERVER['HTTP_USER_AGENT'])) {
            // $fileName = $locale->translateCharset($fileName, $locale->getExportCharset());
            $fileName = urlencode($fileName);
        }

        $this->fileName = $fileName;
    }

```

---

---

```
}
```

Next, register the layout. This is a two step process. The first step is to create `./custom/modules/Quotes/Layouts.php` which will map our view action to the physical PHP file.

```
./custom/modules/Quotes/Layouts.php
```

```
<?php
```

```
$layouts['CustomInvoice'] = 'custom/modules/Quotes/sugarpdf/sugarpdf.c  
ustominvoice.php';
```

The second step is to update the `layouts_dom` dropdown list by navigating to Admin > Dropdown Editor. Once there, create a new entry in the list with an Item Name of "CustomInvoice" and a Display Label of your choice. It's also recommended to remove the Quote and Invoice Templates if they are not being used to avoid confusion. This will create a `./custom/Extension/application/Ext/Language/en_us.sugar_layouts_dom.php` file that should look similar to:

```
./custom/Extension/application/Ext/Language/en_us.sugar_layouts_dom.php
```

```
<?php
```

```
$app_list_strings['layouts_dom']=array (  
    'CustomInvoice' => 'Custom Invoice',  
);
```

Once the layout is registered, we need to extend the `pdfaction` field for the Quotes module to render our custom pdf templates in the record view. An example of this is shown below:

```
./custom/modules/Quotes/clients/base/fields/pdfaction/pdfaction.js
```

```
/**
```

```
 * @class View.Fields.Base.Quotes.PdfactionField  
 * @alias SUGAR.App.view.fields.BaseQuotesPdfactionField  
 * @extends View.Fields.Base.PdfactionField  
 */
```

```
( {  
    extendsFrom: 'PdfactionField',
```

```
/**
```

```
 * @inheritdoc  
 * Create PDF Template collection in order to get available templa
```

---

```

te list.
    */
    initialize: function(options) {
        this._super('initialize', [options]);
    },

    /**
     * Define proper filter for PDF template list.
     * Fetch the collection to get available template list.
     * @private
     */
    _fetchTemplate: function() {
        this.fetchCalled = true;
        var collection = this.templateCollection;
        collection.filterDef = {'$and': [{
            'base_module': this.module
        }, {
            'published': 'yes'
        }]};
        collection.fetch({
            success: function(){
                var models = [];
                _.each(app.lang.getAppListStrings('layouts_dom'), function(template, id){
                    var model = new Backbone.Model({
                        id: id,
                        name: template
                    });
                    models.push(model);
                });
                collection.add(models);
            }
        });
    },

    /**
     * Build download link url.
     *
     * @param {String} templateId PDF Template id.
     * @return {string} Link url.
     * @private
     */
    _buildDownloadLink: function(templateId) {
        var sugarpdf = this._isUUID(templateId)? 'pdfmanager' : templateId;
        var urlParams = $.param({

```



---

```

        'action': 'sugarpdf',
        'module': this.module,
        'sugarpdf': sugarpdf,
        'record': this.model.id,
        'pdf_template_id': templateId
    });
    return '?' + urlParams;
},

/**
 * Build email pdf link url.
 *
 * @param {String} templateId PDF Template id.
 * @return {string} Email pdf url.
 * @private
 */
_buildEmailLink: function(templateId) {
    var sugarpdf = this._isUUID(templateId)? 'pdfmanager' : templateId;
    return '#' + app.bwc.buildRoute(this.module, null, 'sugarpdf',
    {
        'sugarpdf': sugarpdf,
        'record': this.model.id,
        'pdf_template_id': templateId,
        'to_email': '1'
    });
},

/**
 * tests to see if a templateId is a uuid or template name.
 *
 * @param {String} templateId PDF Template id
 * @return {boolean} true if uuid, false if not
 * @private
 */
_isUUID: function(templateId) {
    var regex = /^[0-9a-f]{8}-[0-9a-f]{4}-[0-9a-f]{4}-[0-9a-f]{4}-[0-9a-f]{12}$/i;
    return regex.test(templateId);
}
})

```

Once the files are in place, navigate to Admin > Repair > Quick Repair and Rebuild. Your changes will now be reflected in the system and navigating to a url in the format of `index.php?module=Quotes&record=<record id>&action=sugarpdf&sugarpdf=CustomInvoice` will generate the pdf document.

---

## Hiding PDF Buttons

In some circumstances, users may not have a need to generate PDFs from Quotes. If this should occur, a developer can copy `./modules/Quotes/clients/base/views/record/record.php` to `./custom/modules/Quotes/clients/base/views/record/record.php` if it doesn't already exist. Next, find the array with a name of `main_dropdown` in the `$viewdefs['Quotes']['base']['view']['record']['buttons']` index. Once found, you will then need to locate the `buttons` index within that array. You will then need to remove the following arrays from that index:

```
array(
    'type' => 'pdfaction',
    'name' => 'download-pdf',
    'label' => 'LBL_PDF_VIEW',
    'action' => 'download',
    'acl_action' => 'view',
),
array(
    'type' => 'pdfaction',
    'name' => 'email-pdf',
    'label' => 'LBL_PDF_EMAIL',
    'action' => 'email',
    'acl_action' => 'view',
),
```

Your file should look similar to what is shown below:

```
custom/modules/Quotes/clients/base/views/record/record.php
```

```
<?php
```

```
$viewdefs['Quotes']['base']['view']['record'] = array(
    'buttons' => array(
        array(
            'type' => 'button',
            'name' => 'cancel_button',
            'label' => 'LBL_CANCEL_BUTTON_LABEL',
            'css_class' => 'btn-invisible btn-link',
            'showOn' => 'edit',
            'events' => array(
                'click' => 'button:cancel_button:click',
            ),
        ),
    ),
    array(
```

---

```

        'type' => 'rowaction',
        'event' => 'button:save_button:click',
        'name' => 'save_button',
        'label' => 'LBL_SAVE_BUTTON_LABEL',
        'css_class' => 'btn btn-primary',
        'showOn' => 'edit',
        'acl_action' => 'edit',
    ),
    array(
        'type' => 'actiondropdown',
        'name' => 'main_dropdown',
        'primary' => true,
        'showOn' => 'view',
        'buttons' => array(
            array(
                'type' => 'rowaction',
                'event' => 'button:edit_button:click',
                'name' => 'edit_button',
                'label' => 'LBL_EDIT_BUTTON_LABEL',
                'acl_action' => 'edit',
            ),
            array(
                'type' => 'shareaction',
                'name' => 'share',
                'label' => 'LBL_RECORD_SHARE_BUTTON',
                'acl_action' => 'view',
            ),
            array(
                'type' => 'divider',
            ),
            array(
                'type' => 'convert-to-opportunity',
                'event' => 'button:convert_to_opportunity:click',
                'name' => 'convert_to_opportunity_button',
                'label' => 'LBL_QUOTE_TO_OPPORTUNITY_LABEL',
                'acl_module' => 'Opportunities',
                'acl_action' => 'create',
            ),
            array(
                'type' => 'divider',
            ),
            array(
                'type' => 'rowaction',
                'event' => 'button:historical_summary_button:click',
                'name' => 'historical_summary_button',

```

---

```

        'label' => 'LBL_HISTORICAL_SUMMARY',
        'acl_action' => 'view',
    ),
    array(
        'type' => 'rowaction',
        'event' => 'button:audit_button:click',
        'name' => 'audit_button',
        'label' => 'LNK_VIEW_CHANGE_LOG',
        'acl_action' => 'view',
    ),
    array(
        'type' => 'rowaction',
        'event' => 'button:find_duplicates_button:click',
        'name' => 'find_duplicates_button',
        'label' => 'LBL_DUP_MERGE',
        'acl_action' => 'edit',
    ),
    array(
        'type' => 'divider',
    ),
    array(
        'type' => 'rowaction',
        'event' => 'button:delete_button:click',
        'name' => 'delete_button',
        'label' => 'LBL_DELETE_BUTTON_LABEL',
        'acl_action' => 'delete',
    ),
    ),
    ),
    array(
        'name' => 'sidebar_toggle',
        'type' => 'sidebartoggle',
    ),
    ),
    ...
);

```

Once the files are in place, navigate to Admin > Repair > Quick Repair and Rebuild. Your changes will now be reflected in the system.

**Last Modified:** 2021-02-17 02:44:13

---

# SugarBPM

## Introduction

SugarBPM™ automation suite is the next-generation workflow management tool for Sugar. Introduced in 7.6, SugarBPM is loosely based on BPMN process notation standards and provides a simple drag-and-drop user interface along with an intelligent flow designer to allow for the creation of easy yet powerful process definitions.

**Note:** SugarBPM™ is not available for Sugar Professional.

SugarBPM enables administrators to streamline common business processes by managing approvals, sales processes, call triaging, and more. The easy-to-use workflow tool adds advanced BPM functionality to the core Sugar software stack.

A business process is a set of logically related tasks that are performed in order to achieve a specific organizational goal. It presents all of the tasks that must be completed in a simplified and streamlined format. SugarBPM empowers Sugar administrators, allowing for the automation of vital business processes for their organization. The SugarBPM automation suite features an extensive toolbox of modules that provide the ability to easily create digital forms and map out fully functioning workflows.

## SugarBPM Modules

SugarBPM is broken down into four distinct modules, each with its own area of responsibility. Three of the four SugarBPM modules have access control settings that restrict its visibility to System Administrators, Module Administrators, and Module Developers.

## Process Definitions

A process definition defines the steps in an overall business process. Process definitions are created by either a Sugar administrator, a module Administrator or a module Developer. The process definition consists of a collection of activities and their relationships, criteria to indicate the start and end of the process, and information about the individual activities (e.g., participants) contained within the business process.

---

## Business Rules

A business rule is a reusable set of conditions and outcomes that can be embedded in a process definition. The set of rules may enforce business policy, make a decision, or infer new data from existing data. For example, if Sally manages all business opportunities of \$10,000 or more, and Chris manages all business opportunities under \$10,000, a business rule can be created and used by all relevant process definitions based on the same target module to ensure that the assignment policy is respected. In the case of an eventual personnel change, only the business rule will need to be edited to affect all related processes.

## Email Templates

A process email template is required in order to include a Send Message event in a process definition. The SugarCRM core product includes several places where email templates can be created for different purposes, but SugarBPM requires all sent messages to be created via the Process Email Templates module.

## Processes

A process is a running instance of a process definition. A single process begins every time a process definition meeting certain criteria is executed. For example, a single process definition could be created to automate quote approvals, but because users may engage in several quote approvals per day, each approval will be represented by a separate process instance, all governed by the single process definition.

## Database Tables

Information surrounding various portions of SugarBPM can be found in the following SugarBPM database tables:

| Table name                   | Description   |
|------------------------------|---|
| pmse_bpm_access_management   | This table is not used.   |
| pmse_bpm_activity_definition | Holds definition data for an activity. Maps directly to the pmse_bpmn_activity table and may, in the future, be merged with the pmse_bpmn_activity table to prevent forked data backends. |
| pmse_bpm_activity_step       | This table is not used.   |


| Table name                  | Description  |
|-----------------------------|--|
| pmse_bpm_activity_user      | This table is not used.  |
| pmse_bpm_config             | This table is not used.  |
| pmse_bpm_dynamic_forms      | Holds module specific form information - basically viewdefs for a module - for a process.  |
| pmse_bpm_event_definition   | Holds definition data for an event. Maps directly to the pmse_bpmn_event table and may, in the future, be merged with the pmse_bpmn_event table to prevent forked data backends.                 |
| pmse_bpm_flow               | Holds information about triggered process flows as well as state of any process that is currently running.   |
| pmse_bpm_form_action        | Holds information about a process that has been acted upon.  |
| pmse_bpm_gateway_definition | Holds definition data for a gateway. Maps directly to the pmse_bpmn_event table and may, in the future, be merged with the pmse_bpmn_gateway table to prevent forked data backends.              |
| pmse_bpm_group              | This table is not used.  |
| pmse_bpm_group_user         | This table is not used.  |
| pmse_bpm_notes              | Holds notes saved for a process record.  |
| pmse_bpm_process_definition | Holds definition data for a process definition. Maps directly to the pmse_bpmn_process table and may, in the future, be merged with the pmse_bpmn_process table to prevent forked data backends. |
| pmse_bpm_related_dependency | Holds information about dependencies related to an event   |
| pmse_bpm_thread             | Holds information related to process threads for running processes.  |
| pmse_bpmn_activity          | Please see pmse_bpm_activity_definition  |
| pmse_bpmn_artifact          | Holds BPM artifact information, like Comments on a process diagram. At present, SugarBPM only supports the text annotation artifact.   |
| pmse_bpmn_bound             | Data related to element boundaries on  |

| Table name              | Description  |
|-------------------------|--|
|                         | the diagram.   |
| pmse_bpmn_data          | This table is not used.  |
| pmse_bpmn_diagram       | Data related to a process definition's diagram.                                      |
| pmse_bpmn_documentation | This table is not used.  |
| pmse_bpmn_event         | Please see pmse_bpm_event_definition   |
| pmse_bpmn_extension     | This table is not used.  |
| pmse_bpmn_flow          | Holds information about the connecting flows of a diagram.                           |
| pmse_bpmn_gateway       | Please see pmse_bpm_gateway_definition   |
| pmse_bpmn_lane          | This table is not used.  |
| pmse_bpmn_laneset       | This table is not used.  |
| pmse_bpmn_participant   | This table is not used.  |
| pmse_bpmn_process       | Please see pmse_bpm_process_definition   |
| pmse_business_rules     | Holds business rule record data.   |
| pmse_emails_templates   | Holds email template record data.  |
| pmse_inbox              | Holds information about processes that are currently running or that have completed. |
| pmse_project            | Holds process definition record information.   |

## Relationships

The following Entity Relationship Diagram highlights the relationships between the various SugarBPM tables.



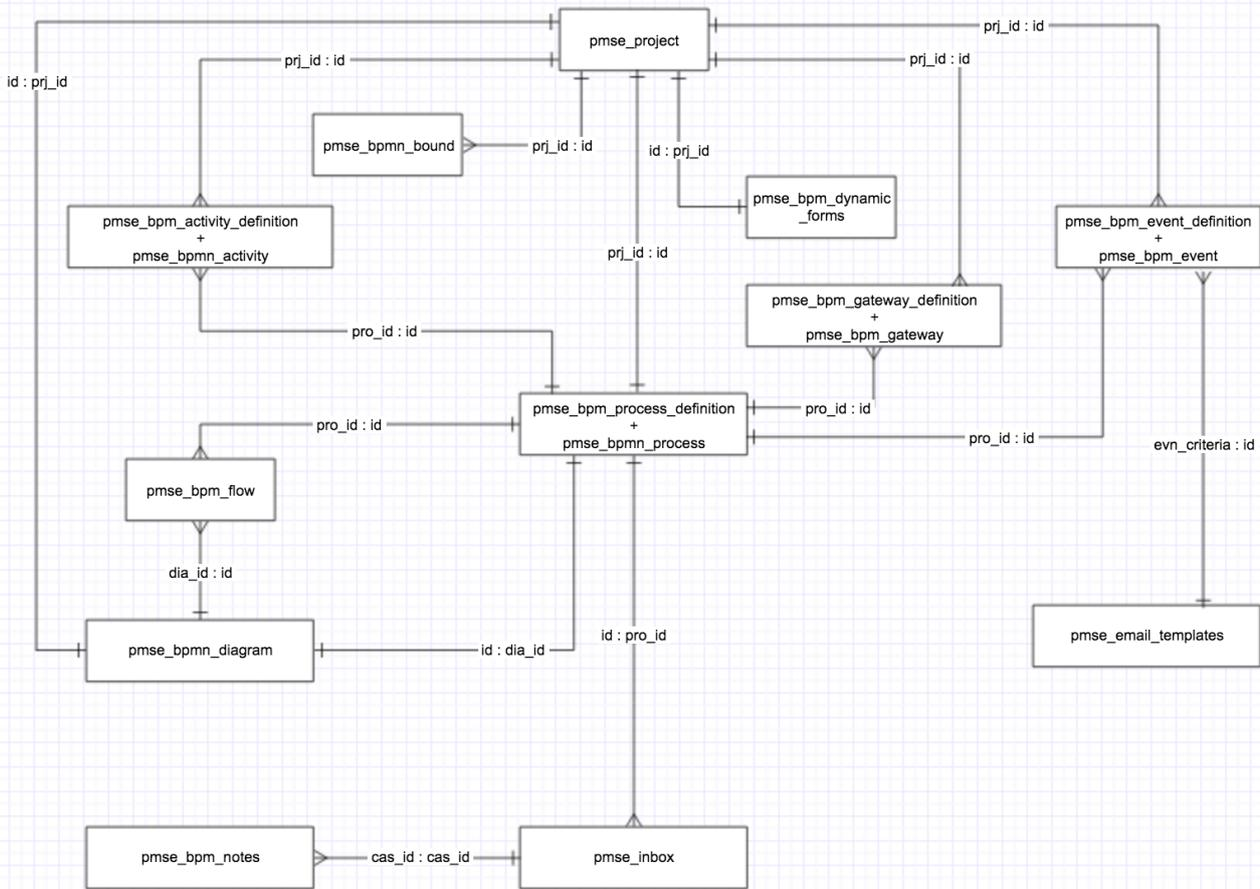

-Relationships" width="1654"  
 recordid="e3710de4-b5b1-11e6-a3de-005056bc231a" style="width: nullpx; height: NaNpx;" />

## Flows

When a process definition is created the following 5 tables get populated:

- pmse\_bpm\_dynamic\_forms contains dyn\_view\_defs which is the JSON encoded string of module-specific form information
- pmse\_bpm\_process\_definition contains the module associated with and the status of a process definition
- pmse\_bpmn\_diagram contains process definition name as well and a diagram uid
- pmse\_bpmn\_process contains process definition name. The same Id is shared between pmse\_bpm\_process\_definition and pmse\_bpmn\_process dia\_id is a foreign key related to pmse\_bpmn\_diagram
- pmse\_project contains process definition name, project id, module, status. Other tables have a foreign key of prj\_id in them.

---

Upon adding a start/end/send message event:

- pmse\_bpmn\_event contains event name
- pmse\_bpm\_event\_definition Shares id with pmse\_bpmn\_event
- pmse\_bpmn\_bound

When Settings is changed to "New Records Only"

- pmse\_bpm\_related\_dependency

Upon adding an action or activity:

- pmse\_bpm\_activity\_definition contains the action name
  - The act\_fields column contains the JSON encoded list of fields which will be changed
- pmse\_bpm\_activity contains action name. Shares id with pmse\_bpm\_activity\_definition. act\_script\_type contains the type of action e.g. CHANGE\_FIELD
- pmse\_bpmn\_bound

Upon adding a connector between start event and action:

- pmse\_bpmn\_flow contains origin and destination info

Upon adding a Gateway:

- pmse\_bpm\_gateway\_definition
- pmse\_bpm\_gateway shares id with pmse\_bpm\_gateway\_definition
- pmse\_bpmn\_flowflo\_condition contains JSON encoded string of conditions required to proceed ahead with an action or activity
- pmse\_bpmn\_bound

When a process runs:

- pmse\_inboxcas\_status indicates the status of a process
- pmse\_bpm\_thread
- pmse\_bpm\_flow Stores the entire flow that the process elements went through (so if 3 elements and 2 connectors are in the process definition then 5 records will exist)

After Process has run and appears in Process Management:

- pmse\_bpm\_case\_data
- pmse\_bpm\_form\_action contains frm\_action, cas\_pre\_data , and cas\_data

Add a comment:

- 
- pmse\_bpmn\_artifact contains the comment
  - pmse\_bpm\_bound

Add a business rule to a process definition:

- pmse\_business\_rulesrst\_source\_definition contains the conditions of the business rule
- pmse\_bpm\_activity\_definitionact\_fields contains the business rule id

Add an email template to a process definition:

- pmse\_email\_templates
- pmse\_bpm\_event\_definitionevn\_criteria contains the email template id

## Extension and Customization

In Sugar 7.8, Sugar introduced the Process Manager library to support extending SugarBPM in an upgrade-safe way. For more information on extending SugarBPM, or on using the Process Manager library, please read the [Process Manager](#) documentation.

### Caveats

In Sugar 7.8, the Process Manager library brought [Registry Object to maintain the state of SugarBPM processes during a PHP Process](#). This change introduced a limitation in SugarBPM that prevents the same process definition from running on multiple records inside the same PHP process. For certain customizations in Sugar, if you are updating multiple records in a module using SugarBean, you may want them to trigger the defined process definitions for each record.

The following code can be added to your customization to allow for that functionality:

```
use Sugarcrm\Sugarcrm\ProcessManager\Registry;

//custom code

Registry\Registry::getInstance()->drop('triggered_starts');

$bean->save();
```

The 'triggered\_starts' registry contains the Start Event IDs that have been triggered previously in the PHP process, thus allowing the SugarBean::save()

---

method to trigger SugarBPM and go through the same Start Event again.

**Last Modified:** 2021-02-17 02:44:13

## Extending SugarBPM (Process Manager)

### Introduction

From its earliest version, Sugar has been a tool that allows for customizing and extending in a way that allows developers to shape and mold it to a specific business need. Most components of Sugar are customizable or extensible through the use of custom classes (for custom functionality) or extensions (for custom metadata). However, a recent addition to the product, the SugarBPM™ automation suite, did not fit this paradigm. In response, the Process Manager Library was introduced to give developers the ability to customize any portion of SugarBPM where object instantiation was previously handled using the 'new' operator.

**Note:** SugarBPM™ is not available in Sugar Professional. For an introduction to the SugarBPM modules and architecture, please refer to the [SugarBPM](#) documentation in this guide.

### Process Manager

By way of `ProcessManager\Factory` we can now develop custom versions of most any `PMSE*` class and have that class used in place of the core `PMSE*` class.

### Limitations

The current implementation of the Process Manager Library only handles server-side customizations by way of the `Factory` class. These customizations can be applied to any instantiable `pmse_*` object, however, static classes and singleton classes, such as the following, are not affected by the library:

- `PMSE`
- `PMSEEngineUtils`
- `PMSELogger`

While some effort has been made to allow for the creation of custom actions in the Process Definition designer, as of Sugar 7.8, that is the only client customization

---

allowance that will be implemented.

## Library Structure

The Process Manager Library is placed under the Sugarcrm\Sugarcrm\ProcessManager namespace and contains the following directories and classes:

- Factory
- Exception/
  - BaseException
  - DateTimeException
  - ExceptionInterface
  - ExecutionException
  - InvalidDataException
  - NotAuthorizedException
  - RuntimeException
- Field/
  - Evaluator/
    - AbstractEvaluator
    - Base
    - Currency
    - Datetime
    - Decimal
    - EvaluatorInterface
    - Int
    - Multienum
    - Relate
- Registry/
  - Registry
  - RegistryInterface

## Examples

### Getting a SugarBPM object

Almost all objects in SugarBPM can be instantiated through the Process Manager Factory. When loading a class, the Factory getPMSEObject method will look in the following directories as well as the custom versions of these directories for files that match the object name being loaded:

- modules/pmse\_Business\_Rules/
- modules/pmse\_Business\_Rules/clients/base/api/

- 
- modules/pmse\_Emails\_Templates/
  - modules/pmse\_Emails\_Templates/clients/base/api/
  - modules/pmse\_Inbox/clients/base/api/
  - modules/pmse\_Inbox/engine/
  - modules/pmse\_Inbox/engine/parser/
  - modules/pmse\_Inbox/engine/PMSEElements/
  - modules/pmse\_Inbox/engine/PMSEHandlers/
  - modules/pmse\_Inbox/engine/PMSEPreProcessor/
  - modules/pmse\_Inbox/engine/wrappers/
  - modules/pmse\_Project/clients/base/api/
  - modules/pmse\_Project/clients/base/api/wrappers/
  - modules/pmse\_Project/clients/base/api/wrappers/PMSEObservers/

What this means is that virtually any class that is found by name in these directories can be instantiated and returned via the `getPMSEObject()` method. This also means that customizations to any of these classes can be easily implemented by creating a Custom version of the class under the appropriate `./custom` directory path.

For example, to create a custom version of `PMSEProjectWrapper`, you would create a `CustomPMSEProjectWrapper` class at `./custom/modules/pmse_Project/clients/base/api/wrappers/CustomPMSEProjectWrapper.php`. This allows you to have full control of your instance of SugarBPM while giving you the flexibility to add any classes you want and consuming them through the factory.

`./custom/modules/pmse_Project/clients/base/api/wrappers/CustomPMSEProjectWrapper.php`

```
<?php
```

```
require_once 'modules/pmse_Project/clients/base/api/wrappers/PMSEProjectWrapper.php';
```

```
class CustomPMSEProjectWrapper extends PMSEProjectWrapper
{
}
```

This can now be consumed by simply calling the `getPMSEObject()` method:

```
<?php
```

```
// Set the process manager library namespace
use \Sugarcrm\Sugarcrm\ProcessManager\Factory;
```

```
// Get our wrapper
$wrapper = ProcessManager\Factory::getPMSEObject('PMSEProjectWrapper');
```

---

;

## Getting a SugarBPM Element Object

Element objects in SugarBPM generally represent some part of the Process engine, and often time map to design elements. All Element objects can be found in the `modules/pmse_inbox/engine/PMSEElements/` directory.

Getting a SugarBPM Element object can be done easily by calling the `getElement()` method of the Process Manager Factory:

```
<?php

use \Sugarcrm\Sugarcrm\ProcessManager\Factory;

// Get a default PMSElement object
$element = ProcessManager\Factory::getElement();
```

To get a specific object, you can pass the object name to the `getElement()` method:

```
$activity = ProcessManager\Factory::getElement('PMSEActivity');
```

Alternatively, you can remove the PMSE prefix and call the method with just the element name:

```
$gateway = ProcessManager\Factory::getElement('Gateway');
```

To create a custom SugarBPM Element, you can simply create a new file at `./custom/modules/pmse_inbox/engine/PMSEElements/` where the file name is prefixed with `Custom`.

```
./custom/modules/pmse_inbox/engine/PMSEElements/CustomPMSEScriptTask.php
```

```
<?php

require_once 'modules/pmse_inbox/engine/PMSEElements/PMSEScriptTask.php';

use Sugarcrm\Sugarcrm\ProcessManager;

class CustomPMSEScriptTask extends PMSEScriptTask
{
}
```

**Note:** All SugarBPM Element classes must implement the `PMSERunnable`

---

interface. Failure to implement this interface will result in an exception when using the Factory to get an Element object.

To get a custom ScriptTask object via the Factory, just call getElement():

```
$obj = ProcessManager\Factory::getElement('ScriptTask');
```

To make your own custom widget element, you can implement the PMSERunnable interface:

```
./custom/modules/pmse_Inbox/engine/PMSEElements/CustomPMSEWidget.php
```

```
<?php  
  
require_once 'modules/pmse_Inbox/engine/PMSEElements/PMSERunnable.php'  
;  
  
use Sugarcrm\Sugarcrm\ProcessManager;  
  
class CustomPMSEWidget implements PMSERunnable  
{  
}  
}
```

To get a Widget object via the Factory, just call getElement():

```
$obj = ProcessManager\Factory::getElement('Widget');
```

## Getting and Using a Process Manager Field Evaluator Object

Process Manager Field Evaluator objects determine if a field on a record has changed and if a field on a record is empty according to the field type. The purpose of these classes can grow to include more functionality in the future.

Getting a field evaluator object is also done through the Factory:

```
<?php  
  
use \Sugarcrm\Sugarcrm\ProcessManager\Factory;  
  
// Get a Datetime Evaluator. Type can be date, time, datetime or datet  
imecombo  
$eval = ProcessManager\Factory::getFieldEvaluator(['type' => 'date'])  
;  
}
```



---

A more common way of getting a field evaluator object is to pass the field definitions for a field on a SugarBean into the Factory:

```
$eval = ProcessManager\Factory::getFieldEvaluator($bean ->field_defs[$field]);
```

```
$eval =ProcessManager\Factory::getFieldEvaluator($bean ->field_defs[$field]);
```

Once the evaluator object is fetched, you may initialize it with properties:

```
/*
  This is commonly used for field change evaluations
 */

// $bean is a SugarBean object
// $field is the name of the field being evaluated
// $data is an array of data that is used in the evaluation
$eval ->init($bean, $field, $data);

// Has the field changed?
$changed = $eval->hasChanged();
```

Or you can set properties onto the evaluator:

```
/*
  This is commonly used for empty evaluations
 */

// Set the bean onto the evaluator
$eval->setBean($bean);

// And set the name onto the evaluator
$eval->setName($field);

// Are we empty?
$isEmpty = $eval->isEmpty();
```

Creating and consuming a custom field evaluator is as easy as creating a custom class and extending the Base class:

```
./custom/src/ProcessManager/Field/Evaluator/CustomWidget.php
```

```
<?php
```

---

```
namespace Sugarcrm\Sugarcrm\ProcessManager\Field\Evaluator;

/**
 * Custom widget field evaluator
 * @package ProcessManager
 */
class CustomWidget extends Base
{
}
```

Alternatively, you can create a custom evaluator that extends the `AbstractEvaluator` parent class if you implement the `EvaluatorInterface` interface.

`./custom/src/ProcessManager/Field/Evaluator/CustomWidget.php`

```
<?php

namespace Sugarcrm\Sugarcrm\ProcessManager\Field\Evaluator;

/**
 * Custom widget field evaluator
 * @package ProcessManager
 */
class CustomWidget extends AbstractEvaluator implements EvaluatorInterface
{
}
```

And at this point, you can use the Factory to get your widget object:

```
// Get a custom widget evaluator object
$eval = ProcessManager\Factory::getFieldEvaluator(['type' => 'widget']);
```

## Getting an Exception Object with Logging

Getting a SugarBPM exception with logging is as easy as calling a single Factory method. Currently, the Process Manager library supports the following exception types:

- `DateTime`
- `Execution`
- `InvalidData`

- 
- NotAuthorized
  - Runtime

As a fallback, the Base exception can be used. All exceptions log their message to the PMSE log when created, and all exceptions implement ExceptionInterface.

The most basic way to get a ProcessManager exception is to call the `getException()` method on the Factory with no arguments:

```
<?php

use \Sugarcrm\Sugarcrm\ProcessManager\Factory;

// Get a BaseException object, with a default message
// of 'An unknown Process Manager exception had occurred'
$exception = ProcessManager\Factory::getException();
```

To get a particular type of exception, or to set your message, you can add the first two arguments:

```
if ($error) {
    throw ProcessManager\Factory::getException('InvalidData', $error)
;
}
```

It is possible to set an exception code, as well as a previous exception, when creating an Exception object:

```
// Assume $previous is an ExecutionException
throw ProcessManager\Factory::getException('Runtime', 'Cannot carry o
ut the action', 255, $previous);
```

Finally, to create your own custom exception classes, you must add a new custom file in the following path with the file named appropriately:

`./custom/src/ProcessManager/Exception/CustomEvaluatorException.php`

```
<?php

namespace Sugarcrm\Sugarcrm\ProcessManager\Exception;

/**
 * Custom Evaluator exception
 * @package ProcessManager
 */
```

---

```
class CustomEvaluatorException extends BaseException implements ExceptionInterface
{
}
```

And to consume this custom exception, call the Factory:

```
$exception = ProcessManager\Factory::getException('Evaluator', 'Could not evaluate the expression');
```

## Maintaining State Throughout a Process

The Registry class implements the RegistryInterface which exposes the following public methods:

- set(\$key, \$value, \$override = false)
- get(\$key, \$default = null)
- has(\$key)
- drop(\$key)
- getChanges(\$key)
- reset()

To use the Registry class, simply use the namespace to get the singleton:

```
<?php
use \Sugarcrm\Sugarcrm\ProcessManager\Registry;

$registry = Registry\Registry::getInstance();
```

To set a value into the registry, simply add it along with a key:

```
$registry->set('reg_key', 'Hold on to this');
```

**NOTE:** To prevent named index collision, it is advisable to write indexes to contain a namespace indicator, such as a prefix.

```
$registry->set('mykeyindex:reg_key', 'Hold on to this');
```

Once a value is set in the registry, it is immutable unless the set(\$key, \$value, \$override = false) method is called with the override argument set to true:

```
// Sets the reg_key value
$registry->set('reg_key', 'Hold on to this');
```

---

```
// Since the registry key reg_key is already set, this will do nothing
$registry->set('reg_key', 'No wait!');
```

```
// To forcefully set it, add a true for the third argument
$registry->set('reg_key', 'No wait!', true);
```

When a key is changed on the registry, these changes are logged and can be inspected using `getChanges()`:

```
// Set and reset a value on the registry
$registry->set('key', 'Foo');
$registry->set('key', 'Bar', true);
$registry->set('key', 'Baz', true);

// Get the changes for this key
$changes = $registry ->getChanges('key');
```

```
/*
$changes will be:
array(
    0 => array(
        'from' => 'Foo',
        'to' => 'Bar',
    ),
    1 => array(
        'from' => 'Bar',
        'to' => 'Baz',
    ),
)
*/
```

To get the value of the key you just set, call the `get()` method:

```
$value = $registry->get('reg_key');
```

To get a value of a key with a default, you can pass the default value as the second argument to `get()`:

```
// Will return either the value for attendee_count or 0
$count = $registry->get('attendee_count', 0);
```

To see if the registry currently holds a value, call the `has()` method:

```
if ($registry->has('field_list')) {
    // Do something here
}
```

---

To remove a value from the registry, use the `drop()` method. This will add an entry to the changelog, provided the key was already set.

```
$registry->drop('key');
```

Finally, to clear the entire registry of all values and changelog entries, use the `reset()` method.

```
$registry->reset();
```

Note: This is very destructive. Please use with caution because you can purge settings that you didn't own.

**Last Modified:** 2021-02-17 02:44:13

## Entry Points

### Overview

Entry points, defined in `./include/MVC/Controller/entry_point_registry.php`, were used to ensure that proper security and authentication steps are applied consistently across the entire application. While they are still used in some areas of Sugar, any developers using custom entry points should adjust their customizations to use the latest [REST API endpoints](#) instead.

### Accessing Entry Points

Available custom entry points can be accessed using a URL pattern as follows:

```
http://{sugar url}/index.php?entryPoint={entry point name}
```

The entry point name will be the specified index in the `$entry_point_registry` array. Access to this entry point outside of sugar will be dependent on the `auth` parameter defined in the `$entry_point_registry` array as well. For more information, refer to the [Creating Custom Entry Points](#) page.

**Last Modified:** 2022-09-22 16:08:53

---

# Creating Custom Entry Points

## Overview

As of 6.3.x, entry points can be created using the extension framework. The entry point extension directory, located at `./custom/Extension/application/Ext/EntryPointRegistry/`, is compiled into `./custom/application/Ext/EntryPointRegistry/entry_point_registry.ext.php` after a Quick Repair and Rebuild. Additional information can be found in the extensions [EntryPointRegistry](#) section.

## Custom Entry Points

Prior to 6.3.x, an entry point could be added by creating the file `./custom/include/MVC/Controller/entry_point_registry.php`. This method of creating entry points is still compatible but is not recommended from a best practices standpoint as duplicating `./include/MVC/Controller/entry_point_registry.php` to `./custom/include/MVC/Controller/entry_point_registry.php` will prevent any upgrader updates to `./include/MVC/Controller/entry_point_registry.php` from being reflected in the system. Entry point registries contain two properties:

- **file** - The path to the entry point.
- **auth** - A Boolean value that determines whether or not the user must be authenticated in order to access the entry point.

```
$entry_point_registry['customEntryPoint'] = array(  
    'file' => 'path/to/customEntryPoint.php',  
    'auth' => true  
);
```

## Example

The first step is to create the actual entry point. This is where all of the logic for your entry point will be located. This file can be located anywhere you choose. For my example, I will create:

```
./custom/customEntryPoint.php
```

```
<?php
```

```
if(!defined('sugarEntry') || !sugarEntry) die('Not A Valid Entry Point
```

---

```
');  
  
echo "Hello World!";
```

Next, we will need to create our extension in the application extensions. This will be located at:

```
./custom/Extension/application/Ext/EntryPointRegistry/customEntryPoint.php
```

```
<?php
```

```
$entry_point_registry['customEntryPoint'] = array(  
    'file' => 'custom/customEntryPoint.php',  
    'auth' => true  
);
```

Finally, navigate to Admin > Repair > Quick Repair and Rebuild. The system will then generate the file

```
./custom/application/Ext/EntryPointRegistry/entry_point_registry.ext.php
```

containing your registry entry. We are now able to access our entry point by navigating to:

```
http://{sugar url}/index.php?entryPoint=customEntryPoint
```

**Last Modified:** 2021-02-17 02:44:13

## Job Queue

### Overview


The Job Queue executes automated tasks in Sugar through a scheduler, which integrates with external UNIX systems and Windows systems to run jobs that are scheduled through those systems. Jobs are the individual runs of the specified function from a scheduler.

The Job Queue is composed of the following parts:

- **SugarJobQueue** : Implements the queue functionality. The queue contains the various jobs.
- **SchedulersJob** : A single instance of a job. This represents a single executable task and is held in the SugarJobQueue.
- **Scheduler** : This is a periodically occurring job.



- 
- **SugarCronJobs** : The cron process that uses SugarJobQueue to run jobs. It runs periodically and does not support parallel execution.

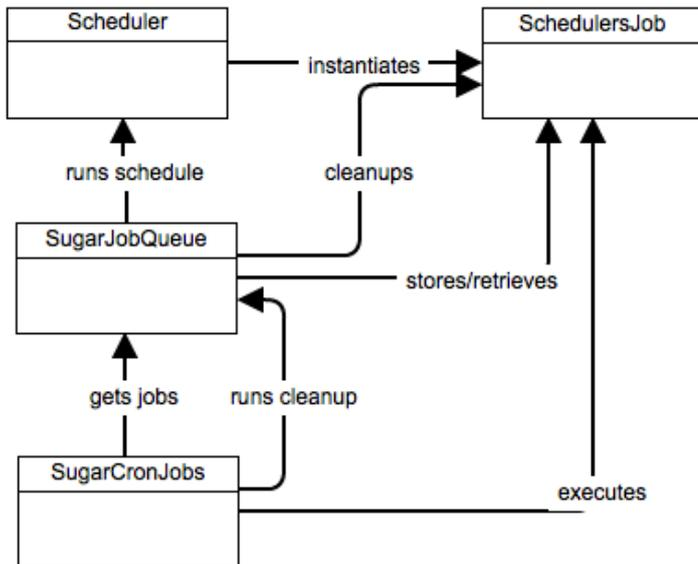

## Stages

### Schedule Stage

On the scheduling stage (checkPendingJobs in Scheduler class), the queue checks if any schedules are qualified to run at this time and do not have job instance already in the queue. If such schedules exist, a job instance will immediately be created for each.

### Execution Stage

The SQL queue table is checked for any jobs in the "Pending" status. These will be set to "Running" and then executed in accordance to its target and settings.

### Cleanup Stage

The queue is checked for jobs that are in the "Running" state longer than the defined timeout. Such jobs are considered "Failed" jobs (they may be re-queued if their definition includes re-queuing on failure).

**Last Modified:** 2021-02-17 02:44:13



- 
- Schedulers execute the next time the cron runs after the interval of time has passed, which may not be at the exact time specified on the scheduler.
  - If you see the message "Job runs too frequently, throttled to protect the system" in the Sugar log, the cron is running too frequently.
  - If you would prefer the cron to run more frequently, set the [cron.min\\_cron\\_interval](#) setting to 0 and disable throttling completely.

**Last Modified:** 2021-02-17 02:44:13

## Creating Custom Schedulers

### Overview

In addition to the default schedulers that are packaged with Sugar, developers can create custom scheduler jobs.

### Defining the Job Label

The first step to create a custom scheduler is creating a label extension file. This will add the display text for the scheduler job when creating a new scheduler in Admin > Scheduler. The file path of our file will be in the format of `./custom/Extension/modules/Schedulers/Ext/Language/<language key>.<name>.php`. For our example, name the file `en_us.custom_job.php`.

```
./custom/Extension/modules/Schedulers/Ext/Language/en_us.custom_job.php
```

```
<?php
```

```
$mod_strings['LBL_CUSTOM_JOB'] = 'Custom Job';
```

### Defining the Job Function

Next, define the custom job's function using the extension framework. The file path of the file will be in the format of `./custom/Extension/modules/Schedulers/Ext/ScheduledTasks/<function_name>.php`. For this example, name the file `custom_job.php`. Prior to 6.3.x, job functions were added by creating the file `./custom/modules/Schedulers/_AddJobsHere.php`. This method of creating functions is still compatible but is not recommended from a best practices standpoint.

---

```
./custom/Extension/modules/Schedulers/Ext/ScheduledTasks/custom_job.php
```

```
<?php  
  
array_push($job_strings, 'custom_job');  
function custom_job()  
{  
    //logic here  
    //return true for completed  
    return true;  
}
```

## Using the New Job

Once the files are in place, navigate to Admin > Repair > Quick Repair and Rebuild. This will rebuild the extension directories with our additions. Next, navigate to Admin > Scheduler > Create Scheduler. In the Jobs dropdown, there will be a new custom job in the list.

**Last Modified:** 2021-02-17 02:44:13

## Scheduler Jobs

### Overview

Jobs are the individual runs of the specified function from a scheduler. This article will outline the various parts of a Scheduler Job.

### Properties

- **name** : Name of the job
- **scheduler\_id** : ID of the scheduler that created the job. This may be empty as schedulers are not required to create jobs
- **execute\_time** : Time when job is ready to be executed
- **status** : Status of the job
- **resolution** : Notes whether or not the job was successful
- **message** : Contains messages produced by the job, including errors
- **target** : Function or URL called by the job
- **data** : Data attached to the job

- 
- **requeue** : Boolean to determine whether the job will be replaced in the queue upon failure
  - **retry\_count** : Determines how many times the system will retry the job before failure
  - **failure\_count** : The number f times the job has failed
  - **job\_delay** : The delay (in seconds) between each job run
  - **assigned\_user\_id** : User ID of which the job will be executed as
  - **client** : The name of the client owning the job
  - **percent\_complete** : For postponed jobs, this can be used to determine how much of the job has been completed

## Creating a Job

To create job, you must first create an instance of SchedulesJobs class and use submitJob in SugarJobQueue. An example is shown below:

```
<?php

$jq = new SugarJobQueue();
$job = new SchedulersJob();
$job->name = "My Job";
$job->target = "function::myjob";
$jobid = $jq->submitJob($job);

echo "Created job $jobid!";
```

## Job Targets

Job target contains two components, type and name, separated by "::". Type can be:

- **function** : Name or static method name (using :: syntax). This function will be passed the job object as the first parameter and if **data** is not empty, it will be passed as the second parameter.
- **url** : External URL to call when running the job

## Running the Job

The job is run via the runJob() function in SchedulersJob. This function will return a boolean success value according to the value returned by the target function. For URL targets, the HTTP error code being less than 400 will return success.

---

If the function updated the job status from 'running', the return value of a function is ignored. Currently, the postponing of a URL job is not supported.

## Job status

Jobs can be in following statuses:

- **queued** : The job is waiting in the queue to be executed
- **running** : The job is currently being executed
- **done** : The job has executed and completed

## Job Resolution

Job resolution is set when the job is finished and can be:

- **queued** : The job is still not finished
- **success** : The job has completed successfully
- **failure** : The job has failed
- **partial** : The job is partially done but needs to be completed

## Job Logic Hooks

The scheduler jobs module has two additional logic hooks that can be used to monitor jobs. The additional hooks that can be used are shown below:

- **job\_failure\_retry** : Executed when a job fails but will be retried
- **job\_failure** : Executed when the job fails for the final time

You can find more information on these hooks in the [Job Queue Hooks](#) section.

**Last Modified:** 2021-02-17 02:44:13

# Creating Custom Jobs

## Overview

How to create and execute your own custom jobs.

---

## How it Works

As of 6.3.0, custom job functions can be created using the extension framework. The function for the job will be defined in `./custom/Extension/modules/Schedulers/Ext/ScheduledTasks/`. Files in this directory are compiled into `./custom/modules/Schedulers/Ext/ScheduledTasks/scheduledtasks.ext.php` and then included for use in `./modules/Schedulers/_AddJobsHere.php`.

## Creating the Job

This first step is to create your jobs custom key. For this example we will be using 'custom\_job' as our job key.

`./custom/Extension/modules/Schedulers/Ext/ScheduledTasks/custom_job.php`

```
<?php

//add the job key to the list of job strings
array_push($job_strings, 'custom_job');

function custom_job()
{
    //custom job code

    //return true for completed
    return true;
}
```

Next, we will need to define our jobs label string:

`./custom/Extension/modules/Schedulers/Ext/Language/en_us.custom_job.php`

```
<?php

$mod_strings['LBL_CUSTOM_JOB'] = 'Custom Job';
```

Finally, We will need to navigate to:

Admin / Repair / Quick Repair and Rebuild

Once a Quick Repair and Rebuild has been run, the new job will be available for use when creating new schedulers in:

**Last Modified:** 2021-02-17 02:44:13

## Queuing Logic Hook Actions

### Overview

This example will demonstrate how to pass tasks to the job queue. This enables you to send longer running jobs such as sending emails, calling web services, or doing other resource intensive jobs to be handled asynchronously by the cron in the background.

### Example

This example will queue an email to be sent out by the cron when an account record is saved. First, we will create a `before_save` logic hook on accounts.

```
./custom/modules/Accounts/logic_hooks.php
```

```
<?php
```

```
    $hook_version = 1;
    $hook_array = Array();

    $hook_array['before_save'][] = Array();
    $hook_array['before_save'][] = Array(
        1,
        'Queue Job Example',
        'custom/modules/Accounts/Accounts_Save.php',
        'Accounts_Save',
        'QueueJob'
    );
```

```
?>
```

In our logic hook, we will create a new `SchedulersJob` and submit it to the `SugarJobQueue` targeting our custom `AccountAlertJob` that we will create next.

```
./custom/modules/Accounts/Accounts_Save.php
```



---

```

<?php

    if (!defined('sugarEntry') || !sugarEntry) die('Not A Valid Entry
Point');

require_once 'include/SugarQueue/SugarJobQueue.php';
class Accounts_Save
{
    function QueueJob(&$bean, $event, $arguments)
    {
        //create the new job
        $job = new SchedulersJob();
        //job name
        $job->name = "Account Alert Job - {$bean->name}";
        //data we are passing to the job
        $job->data = $bean->id;
        //function to call
        $job->target = "function::AccountAlertJob";

        global $current_user;
        //set the user the job runs as
        $job->assigned_user_id = $current_user->id;

        //push into the queue to run
        $jq = new SugarJobQueue();
        $jobid = $jq->submitJob($job);
    }
}
?>

```

Next, we will need to define the Job. This will be done by creating a new function to execute our code. We will put this file in the `./custom/Extension/modules/Schedulers/Ext/ScheduledTasks/` directory with the name `AccountAlertJob.php`.

`./custom/Extension/modules/Schedulers/Ext/ScheduledTasks/AccountAlertJob.php`

```

<?php

function AccountAlertJob($job)
{
    if (!empty($job->data))
    {
        $bean = BeanFactory::getBean('Accounts', $job->data);
    }
}

```

---

```
$emailObj = new Email();
$defaults = $emailObj->getSystemDefaultEmail();
$mail = new SugarPHPMailer();
$mail->setMailerForSystem();
$mail->From = $defaults['email'];
$mail->FromName = $defaults['name'];
$mail->Subject = from_html($bean->name);
$mail->Body = from_html("Email alert that '{$bean->name}' was
saved");
$mail->prepForOutbound();
$mail->AddAddress('example@sugar.crm');

if($mail->Send())
{
    //return true for completed
    return true;
}

return false;
}
```

Finally, navigate to Admin / Repair / Quick Repair and Rebuild. The system will then generate the file `./custom/modules/Schedulers/Ext/ScheduledTasks/scheduledtasks.ext.php` containing our new function. We are now able to queue and run the scheduler job from a logic hook.

**Last Modified:** 2021-02-17 02:44:13

## Access Control Lists

### Overview

Access Control Lists (ACLs) are used to control access to the modules, data, and actions available to users in Sugar. By default, Sugar comes with a default ACL Strategy that is configurable by an Admin through the Roles module via Admin > [Role Management](#). Sugar also comes with other ACL strategies that are located in the `./data/acl/` folder, and are used in other parts of the system such as the Administration module, Emails module, Locked Fields functionality, and many others. They can also be leveraged by customizations and custom ACL strategies

---

can be implemented to control your own customizations.

## Actions

Actions are the use cases in which a User interacts with a particular module in the system. ACLs control access by using different logic to determine if a user can do an action. Below is a list of actions that are utilized by Sugar and will be requested actions against a custom ACL strategy implementation. You can add your own actions to be checked against in a custom strategy, but the following list should always be considered:

- **index, list, listview** - for module ListView access
- **detail, detailview, view** - module DetailView access
- **popupeditview, editview** - module EditView access
- **edit, save** - editing module data
- **import** - import into the module
- **export** - export from the module
- **delete** - delete module record
- **team\_security** - should this module have team security enabled?
- **field** - access field ACLs. The field action is specified via context array, see below
- **subpanel** - checks if subpanel should be displayed. Should have "subpanel" context option.

**Note:** Action names are not case sensitive, although the standard practice is to use them in all lowercase

## Field Actions

When using the field action, the action for the particular field that is being checked is passed via [Context](#). The field actions that are used in Sugar are:

- **access** - any access to field data
- **read, detail** - read access
- **write, edit** - write access

## Context

The context array is used throughout Sugar's ACL architecture as a way to pass extra contextual data that is used by an ACL Strategy to determine the access request. The following context parameters are used in stock contexts, and should be used as a guideline for custom ACL implementations as parameters that should

---

be accommodated or used:

- **bean** (*SugarBean*) - the current SugarBean object
- **user** (*User*) - the user to check access for, otherwise defaults to the current user.
- **user\_id** (*String*) - the current user ID (also overrides global current user). If the current user object is available, use the **user** context, since it has precedent.
- **owner\_override** (*Bool*) - if set to true, apply ACLs as if the current user were the owner of the object.
- **subpanel** (*aSubPanel*) - used in subpanel action to provide aSubPanel object describing the panel.
- **field, action** (*String*) - used to specify field name and action name for field ACL requests.
- **massupdate** (*Bool*) - true if save operation is a mass update

## SugarACL

The SugarACL Class, `./data/SugarACL.php`, is the static API for checking access for an action against a module.

### checkAccess()

The `checkAccess()` method is used to check a users access for a given action against a module.

```
SugarACL::checkAccess('Accounts','edit');
```

### Arguments

| Name                   | Type   | Required | Description   |
|------------------------|--------|----------|---|
| <code>\$module</code>  | String | true     | The name of the module  |
| <code>\$action</code>  | String | true     | The name of the action. <a href="#">See Actions section.</a>                |
| <code>\$context</code> | Array  | false    | The associative array of context data. <a href="#">See Context section.</a> |

---

## Returns

*Boolean*

## checkField()

The checkField() method is used to check a users access for a given field against a module.

```
SugarACL::checkField('Accounts','account_type','view');
```

## Arguments

| Name      | Type   | Required | Description   |
|-----------|--------|----------|---|
| \$module  | String | true     | The name of the module  |
| \$field   | String | true     | The name of the field   |
| \$action  | String | true     | The name of the action. <a href="#">See Actions section.</a>                |
| \$context | Array  | false    | The associative array of context data. <a href="#">See Context section.</a> |

## Returns

*Boolean*

## getFieldAccess()

The getFieldAccess() method is used to get the access level for a specific

```
$access = SugarACL::getFieldAccess('Accounts','account_type');
```

## Arguments

|  |  |  |  |
|--|--|--|--|
|  |  |  |  |
|--|--|--|--|

| Name      | Type   | Required | Description   |
|-----------|--------|----------|---|
| \$module  | String | true     | The name of the module  |
| \$field   | String | true     | The name of the field   |
| \$context | Array  | false    | The associative array of context data. <a href="#">See Context section.</a> |

## Returns

*Integer*

The integers are represented as constants in the SugarACL class, and correspond as follows:

- SugarACL::ACL\_NO\_ACCESS = 0 - access denied
- SugarACL::ACL\_READ\_ONLY = 1 - read only access
- SugarACL::ACL\_READ\_WRITE = 4 - full access

## filterModuleList()

The filterModuleList() method is used to filter the list of modules available for a given action. For example, if you wanted to get all the modules the current user had edit access to, you might call the following in code:

```
global $app_list_strings;
$modules = $app_list_strings['module_list'];
$editableModules = SugarACL::filterModuleList($modules, 'edit');
```

## Arguments

| Name      | Type   | Required | Description   |
|-----------|--------|----------|---|
| \$modules | Array  | true     | The list of modules you want to filter  |
| \$action  | String | false    | The action to check for, <a href="#">See Actions section</a> . Defaults to <b>'access'</b> action |

|             |         |       |  |
|-------------|---------|-------|--|
| \$use_value | Boolean | false | <p>Whether to the module name in the \$modules array is in the Key or the Value of the array.<br/> <b>Defaults to false</b></p> <p>For example, if filtering an array of modules, where the modules are defined in the values of the array:</p> <pre>\$modules = array (   'Accounts',   'Cases', 'Administration'); accessModules = SugarACL::filter ModuleList(\$modules, 'access', true);</pre> |
|-------------|---------|-------|--|

## Returns

*Array*

The filtered list of modules.

## disabledModuleList()

Similar to the previous method, the disableModuleList() method filters a list of modules to those that the user does not have access to.

```
global $app_list_strings;
$modules = $app_list_strings['module_list'];
$disabledModules = SugarACL::disabledModuleList($modules, 'access');
```

## Arguments

| Name | Type | Required | Description |
|------|------|----------|-------------|
|------|------|----------|-------------|

|             |         |       |  |
|-------------|---------|-------|--|
| \$modules   | Array   | true  | The list of modules you want to filter   |
| \$action    | String  | false | The action to check for, <a href="#">See Actions section</a> . <b>Defaults to 'access' action</b>  |
| \$use_value | Boolean | false | Whether to the module name in the \$modules array is in the Key or the Value of the array. <b>Defaults to false</b><br><br>For example, if filtering an array of modules, where the modules are defined in the values of the array:<br><br><pre>\$modules = array (   'Accounts',     'Cases',   'Ad ministration'); accessModules = SugarACL::filter ModuleList(\$modu les,'access',tru e);</pre> |

## Returns

*Array*

The filtered list of modules.

## moduleSupportsACL()

The moduleSupportsACL() method is used to check if a module has ACLs defined on the vardefs. A good use case for this method is to not run any ACL checks if module has no ACL definitions.



---

```
SugarACL::moduleSupportsACL('Accounts');
```

## Arguments

| Name     | Type   | Required | Description            |
|----------|--------|----------|------------------------|
| \$module | String | true     | The name of the module |

## Returns

*Boolean*

## listFilter()

The `listFilter()` method allows for filtering an array of fields for a module to remove those which the user does not have access to. The removal can be done in a couple of different ways, provided by the `$options` argument. The filtering of the array is done in place, rather than returning the filtered list.

```
$Account = BeanFactory::getBean('Accounts', '12345');
$fields = array(
    'account_type' => 'foobar',
    'status' => 'New',
    'name' => 'Customer'
);

$context = array(
    'bean' => $Account
);

$options = array(
    'blank_value' => true
);

SugarACL::listFilter('Accounts', $fields, $context, $options);
echo <pre>json_encode($fields)</pre>;
```

Should the user not have access to the 'status' field, the above might output:

```
{
  "account_type": "foobar",
```

```

"status": "",
"name": "Customer"
}

```

## Arguments

| Name      | Type   | Required | Description  |
|-----------|--------|----------|--|
| \$module  | String | true     | The name of the module   |
| \$list    | Array  | true     | The array, as a reference, which will be filtered  |
| \$context | Array  | false    | The associative array of context data. <a href="#">See Context section.</a>  |
| \$options | Array  | false    | <p>An associative array containing some of the following options:</p> <ul style="list-style-type: none"> <li>• <b>blank_value (Bool)</b> - instead of removing inaccessible field put "" there</li> <li>• <b>add_acl (Bool)</b> - instead of removing fields add 'acl' value with access level</li> <li>• <b>suffix (String)</b> - strip suffix from field names</li> <li>• <b>min_access (Int)</b> -</li> </ul> |

|  |  |  |  |
|--|--|--|--|
|  |  |  | <p>require this level of access for the field.</p> <p><b>Defaults to SugarACL::ACL_READ_ONLY or 0</b></p> <ul style="list-style-type: none"> <li>• <b>use_value (Bool)</b> - look for field name in value, not in the key of the list</li> </ul> |
|--|--|--|--|

**Returns**

*Void*

**SugarBean Usage**

The SugarBean class also comes with some methods for working with the ACLs in regards to the current SugarBean context. These methods automatically provide the 'bean' context parameter and provide a wrapper that utilizes the SugarACL class

**getACLCategory()**

The getACLCategory() method is used by all of the ACL helper methods that exist on the SugarBean and is used to determine the module name that should be checked against for the current Bean. By default, it will return the acl\_category property set on the Bean, otherwise if that is not set, it will use the module\_dir property that is configured on the Bean. This method can be overridden by a custom Bean implementation, but the following code shows which properties on a Bean implementation should be set for usage with ACLs.

```
<?php
```

---

```
class testBean extends SugarBean
{
    public $module_dir = 'testBean';
    //all the other SugarBean class logic...
}

class test_SubmoduleBean extends SugarBean
{
    public $module_dir = 'testBean/submodule';
    public $acl_category = 'test_SubmoduleBean';
    ///all the other SugarBean class logic...
}

$test = new testBean();
//echoes testBean
echo $test->getACLCategory();

$submodule = new test_SubmoduleBean();
//echoes test_SubmoduleBean
echo $submodule->getACLCategory();
```

## Arguments

*None*

## Returns

*String*

## ACLAccess()

The ACLAccess() method is a wrapper for SugarACL::checkField() method, which provides the Bean context as the current SugarBean.

```
$Account = BeanFactory::getBean('Accounts','12345');
if ($Account->ACLFieldAccess('account_type','edit')){
    //do something if User has account_type edit access
}
```

## Arguments

---

|  |  |  |  |
|--|--|--|--|
|  |  |  |  |
|--|--|--|--|

| Name      | Type   | Required | Description   |
|-----------|--------|----------|---|
| \$action  | String | false    | The name of the action to check. <a href="#">See Actions section.</a>       |
| \$context | Array  | false    | The associative array of context data. <a href="#">See Context section.</a> |

## Returns

*Boolean*

## ACLFieldAccess()

The ACLFieldAccess() method is a wrapper for SugarACL::checkAccess() method, which provides the Bean context as the current SugarBean.

```
$Account = BeanFactory::getBean('Accounts', '12345');
if ($Account->ACLAccess('edit')){
    //do something if User has edit access
}
```

## Arguments

| Name      | Type   | Required | Description   |
|-----------|--------|----------|---|
| \$field   | String | true     | The name of the field   |
| \$action  | String | false    | The name of the action to check, <a href="#">see Field Actions section</a> . Defaults to 'access' |
| \$context | Array  | false    | The associative array of context data. <a href="#">See Context section.</a>                       |

---

## Returns

*Boolean*

## ACLFieldGet()

The ACLFieldGet() method is a wrapper for SugarACL::getFieldAccess() method, which provides the Bean context as the current SugarBean.

```
$Account = BeanFactory::getBean('Accounts','12345');  
$accountTypeAccess = $Account->ACLFieldGet('account_type');
```

## Arguments

| Name      | Type   | Required | Description   |
|-----------|--------|----------|---|
| \$field   | String | true     | The name of the field   |
| \$context | Array  | false    | The associative array of context data. <a href="#">See Context section.</a> |

## Returns

*Boolean*

## ACLFilterFields()

The ACLFilterFields() method uses the SugarACL::checkField() method to blank out those fields which a user doesn't have access to on the current SugarBean.

```
$Account = BeanFactory::getBean('Accounts','12345');  
$Account->status = 'Old';  
$Account->ACLFilterFields('edit');
```

```
echo $Account->status;
```

Should the user not have 'edit' access to the 'status' field, the above wouldn't output any data since the status field would be blank.

---

## Arguments

| Name      | Type   | Required | Description   |
|-----------|--------|----------|---|
| \$action  | String | true     | The name of the action to check. <a href="#">See Actions section.</a>       |
| \$context | Array  | false    | The associative array of context data. <a href="#">See Context section.</a> |

## Returns

*Void*

## ACLFilterFieldList()

The ACLFilterFieldList() method is a wrapper for SugarACL::listFilter() method, which provides the Bean context as the current SugarBean.

```
$Account = BeanFactory::getBean('Accounts', '12345');
$fields = array(
    'account_type' => 'foobar',
    'status' => 'New',
    'name' => 'Customer'
);

$options = array(
    'blank_value' => true
);

$Account->ACLFilterFieldList($fields, array(), $options);
echo "<pre>".json_encode($fields)."</pre>";
```

Should the user not have access to the 'status' field, the above might output:

```
{
  "account_type": "foobar",
  "status": "",
  "name": "Customer"
}
```

## Arguments

| Name      | Type  | Required | Description  |
|-----------|-------|----------|--|
| \$list    | Array | true     | The array, as a reference, which will be filtered  |
| \$context | Array | false    | The associative array of context data. <a href="#">See Context section.</a>  |
| \$options | Array | false    | An associative array containing some of the following options: <ul style="list-style-type: none"><li>• <b>blank_value (Bool)</b> - instead of removing inaccessible field put " there</li><li>• <b>add_acl (Bool)</b> - instead of removing fields add 'acl' value with access level</li><li>• <b>suffix (String)</b> - strip suffix from field names</li><li>• <b>min_access (Int)</b> - require this level of access for the field. <b>Defaults to</b></li></ul> |



---

|  |  |  |  |
|--|--|--|--|
|  |  |  | <b>SugarACL::<br/>ACL_READ<br/>_ONLY or 0</b> <ul style="list-style-type: none"> <li>• <b>use_value<br/>(Bool)</b> -<br/>look for<br/>field name<br/>in value, not<br/>in the key of<br/>the list</li> </ul> |
|--|--|--|--|

## Returns

*Void*

## Legacy Methods

When working in the Sugar codebase there might be areas that still utilize the following legacy ACLController class. The following gives a brief overview of a few methods that might still be used but should be avoided in future custom development.

### **ACLController::checkAccess()**

The ACLController::checkAccess() method is just a wrapper for SugarACL::checkAccess() method and has been left in place for backward compatibility.

### **ACLController::moduleSupportsACL()**

The ACLController::moduleSupportsACL() method is just a wrapper for SugarACL::moduleSupportsACL() method and has been left in place for backward compatibility.

### **ACLController::displayNoAccess()**

This method does an echo to display a "no access" message for pages.

# Teams

## Overview

Teams provide the ability to limit access at the record level, allowing sharing flexibility across functional groups. Developers can [manipulate teams programmatically](#) provided they understand Sugar's [visibility framework](#).

For more information on teams, please refer to the [Team Management](#) documentation.

## Database Tables

| Table             | Description   |
|-------------------|---|
| teams             | Each record in this table represents a team in the system.  |
| team_sets         | Each record in this table represents a unique team combination. For example, each user's private team will have a corresponding team set entry in this table. A team set may also be comprised of one or more teams.  |
| team_sets_teams   | The team_sets_teams table maintains the relationships to determine which teams belong to a team set. Each table that previously used the team_id column to maintain team security now uses the team_set_id column's value to associate the record to team(s). |
| team_sets_modules | This table is used to manage team sets and keep track of which modules have records that are or were associated to a particular team set.   |

Never modify these tables without going through the PHP object methods. Manipulating the team sets with direct SQL may cause undesired side effects in the system due to how the validations and security methods work.

---

## Module Team Fields

In addition to the team tables, each module table also contains a `team_id` and `team_set_id` column. The `team_set_id` contains the id of a record in the `team_sets` table that contains the unique combination of teams associated with the record. The `team_id` will contain the id of the primary team designated for a record.

### Team Sets (`team_set_id`)


As mentioned above, Sugar implemented this feature not as a many-to-many relationship but as a one-to-many relationship. On each table that had a `team_id` field we added a `'team_set_id'` field. We have also added a `team_sets` table, which maintains the `team_set_id`, and a `team_sets_teams` table, which relates a team set to the teams. When performing a team based query we use the `'team_set_id'` field on the module table to join to `team_sets_teams.team_set_id` and then join all of the teams associated with that set. Given the list of teams from `team_memberships` we can then decide if the user has access to the record.

### Primary Team (`team_id`)

The `team_id` is still being used, not only to support backwards compatibility with workflow and reports, but also to provide some additional features. When displaying a list, we use the team set to determine whether the user has access to the record. When displaying the data, we show the team from team id in the list. When the user performs a mouseover on that team, Sugar performs an Ajax call to display all of the teams associated with the record. This `team_id` field is designated as the Primary Team because it is the first team shown in the list, and for sales territory management purposes, can designate the team that actually owns the record and can report on it.

## Team Security

The `team_sets_teams` table allows the system to check for permissions on multiple teams. The following diagram illustrates table relationships in SugarBean's `add_team_security_where_clause` method.

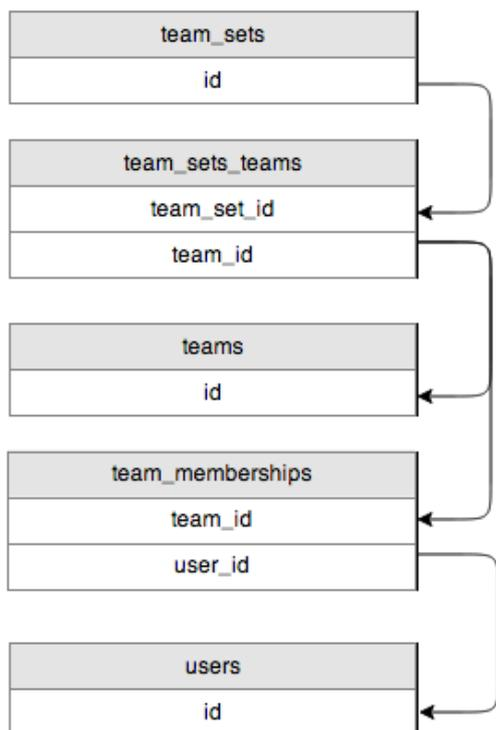

Using the `team_sets_teams` table the system will determine which teams are associated with the `team_set_id` and then look in the `team_memberships` table for users that belong to the team(s).

## TeamSetLink

Typically, any relationship in a class is handled by the `data/Link2.php` class. As a part of dynamic teams, we introduced the ability to provide your own custom `Link` class to handle some of the functionality related to managing relationships. The `team_security` parent vardefs in the Sugar objects contain the following in the 'teams' field definition:

```
'link_class' => 'TeamSetLink',  
'link_file' => 'modules/Teams/TeamSetLink.php',
```

The `link_class` entry defines the class name we are using, and the `link_file` tells us where that class file is located. This class extends the legacy `Link.php` and overrides some of the methods used to handle relationships such as 'add' and 'delete'.

**Last Modified:** 2021-02-17 02:44:13

---

# Manipulating Teams Programmatically

## Overview

How to manipulate team relationships.

## Fetching Teams

To fetch teams related to a bean, you will need to retrieve an instance of a TeamSet object and use the getTeams() method to retrieve the teams using the team\_set\_id. An example is shown below:

```
//Create a TeamSet bean - no BeanFactory
require_once 'modules/Teams/TeamSet.php';
$teamSetBean = new TeamSet();

//Retrieve the bean
$bean = BeanFactory::getBean($module, $record_id);

//Retrieve the teams from the team_set_id
$teams = $teamSetBean->getTeams($bean->team_set_id);
```

## Adding Teams

To add a team to a bean, you will need to load the team's relationship and use the add() method. This method accepts an array of team ids to add. An example is shown below:

```
//Retrieve the bean
$bean = BeanFactory::getBean($module, $record_id);

//Load the team relationship
$bean->load_relationship('teams');

//Add the teams
$bean->teams->add(
    array(
        $team_id_1,
        $team_id_2
    )
);
```

---

## Considerations

- If adding teams in a logic hook, the recommended approach is to use an `after_save` hook rather than a `before_save` hook as the `$_REQUEST` may reset any changes you make.

## Removing Teams

To remove a team from a bean, you will need to load the team's relationship and use the `remove()` method. This method accepts an array of team ids to remove. An example is shown below:

```
//Retrieve the bean
$bean = BeanFactory::getBean($module, $record_id);

//Load the team relationship
$bean->load_relationship('teams');

//Remove the teams
$bean->teams->remove(
    array(
        $team_id_1,
        $team_id_2
    )
);
```

## Considerations

- If removing teams in a logic hook, the recommended approach is to use an `after_save` hook rather than a `before_save` hook as the `$_REQUEST` may reset any changes you make.

## Replacing Team Sets

To replace all of the teams related to a bean, you will need to load the team's relationship and use the `replace()` method. This method accepts an array of team ids. An example is shown below:

```
//Retrieve the bean
$bean = BeanFactory::getBean($module, $record_id);
```

---

```
//Load the team relationship
$bean->load_relationship('teams');

//Set the primary team
$bean->team_id = $team_id_1

//Replace the teams
$bean->teams->replace(
    array(
        $team_id_1,
        $team_id_2
    )
);

//Save to update primary team
$bean->save()
```

## Considerations

- If replacing teams in a logic hook, the recommended approach is to use an `after_save` hook rather than a `before_save` hook as the `$_REQUEST` or workflow may reset any changes you make.
- This method does not replace (or set) the primary team for the record. When replacing teams, you need to also make sure that the primary team, determined by the `team_id` field, is set appropriately and included in the replacement ids. If this is being done in a logic hook you should set the primary team in a `before_save` hook and replace the team set in the `after_save` hook.
- When using an `after_save` hook, be sure to call `$bean->teams->setSaved(false)` to explicitly reset the save state. This ensures that the updates to the team sets are applied.

### Example:

```
//before save function

public function before_save_hook($bean, $event, $arguments)
{
    $bean->team_id = $team_id_1;
}

//after save function
public function after_save_hook($bean, $event, $arguments)
{
    $bean->teams->setSaved(false); // Manually reset TeamSet state for sa
```

---

ve

```
$bean->teams->replace(
    array(
        $team_id_1,
        $team_id_2
    )
);
}
```

## Creating and Retrieving Team Set IDs

To create or retrieve the `team_set_id` for a group of teams, you will need to retrieve an instance of a `TeamSet` object and use the `addTeams()` method. If a team set does not exist, this method will create it and return an id. An example is below:

```
//Create a TeamSet bean - no BeanFactory
require_once 'modules/Teams/TeamSet.php';
$teamSetBean = new TeamSet();

//Retrieve/create the team_set_id
$team_set_id = $teamSetBean->addTeams(
    array(
        $team_id_1,
        $team_id_2
    )
);
```

## Adding Additional Access

To enable additional access for a record, you can either set the team id or team set to the beans `acl_team_set_id` field. An example of this is shown below:

```
require_once 'modules/Teams/TeamSet.php';
// Create a new teamset or fetch the id of an existing teamset
$teamSetBean = new TeamSet();
$teamSetId = $teamSetBean->addTeams([
    'East', // Demo Team ID
    'West', // Demo Team ID
]);

$bean = BeanFactory::getBean('Accounts', '15bcf01c-1e1e-11e8-9e13-f45c89a8598f');
```



---

```
// Set additional access
$bean->acl_team_set_id = $teamSetId; // if set to NULL, this will remove any existing value
$bean->save();
```

**Last Modified:** 2021-02-17 02:44:13

## Visibility Framework

### Overview

The visibility framework provides the capability to alter the queries Sugar uses to retrieve records from the database. This framework can allow for additional restrictions or specific logic to meet business requirements of hiding or showing only specific records. Visibility classes only apply to certain aspects of Sugar record retrieval, e.g. List Views, Dashlets, and Filter Lookups.

### Custom Row Visibility

Custom visibility class files are stored under `./custom/data/visibility/`. The files in this directory can be enabled or disabled by modifying a module's visibility property located in `./custom/Extension/modules/<module>/Ext/Vardefs/`. Every enabled visibility class is merged into the module's definition, allowing multiple layers of logic to be added to a module.

### Visibility Class

To add custom row visibility, you must create a visibility class that will extend the core `SugarVisibility` class `./data/SugarVisibility.php`. The visibility class has the ability to override the following methods:

| Name                            | Description  |
|---------------------------------|--|
| <code>addVisibilityQuery</code> | Add visibility clauses to a <code>SugarQuery</code> object.  |
| <code>addVisibilityFrom</code>  | [Deprecated] Add visibility clauses to the FROM part of the query. This method should still be implemented, as |

|                         |  |
|-------------------------|--|
|                         | not all objects have been switched over to use addVisibilityQuery() method.  |
| addVisibilityFromQuery  | [Deprecated] Add visibility clauses to the FROM part of SugarQuery. This method should still be implemented, as not all objects have been switched over to use addVisibilityQuery() method.  |
| addVisibilityWhere      | [Deprecated] Add visibility clauses to the WHERE part of the query. This method should still be implemented, as not all objects have been switched over to use addVisibilityQuery() method.  |
| addVisibilityWhereQuery | [Deprecated] Add visibility clauses to the WHERE part of SugarQuery. This method should still be implemented, as not all objects have been switched over to use addVisibilityQuery() method. |

The visibility class should also implement Sugarcrm\Sugarcrm\Elasticsearch\Provider\Visibility\StrategyInterface so that the visibility rules are also applied to the global search. StrategyInterface has the following functions that should be implemented:

| <b>Name</b>                    | <b>Description</b>  |
|--------------------------------|---|
| elasticBuildAnalysis           | Build Elasticsearch analysis settings. This function can be empty if you do not need any special analyzers.   |
| elasticBuildMapping            | Build Elasticsearch mapping. This function should contain a mapping of fields that should be analyzed.  |
| elasticProcessDocumentPreIndex | Process document before it's being indexed. This function should perform any actions to the document that needs to be completed before it is indexed. |
| elasticGetBeanIndexFields      | Bean index fields to be indexed. This function should return an array of the fields that need to be indexed as part of your custom visibility.        |
| elasticAddFilters              | Add visibility filters. This function should apply the Elastic filters.   |

---

## Example

The following example creates a custom visibility filter that determines whether Opportunity records should be displayed based on their Sales Stage. Opportunity records with Sales Stage set to Closed Won or Closed Lost will not be displayed in the Opportunities module or global search for users with the Demo Visibility role.

/custom/data/visibility/FilterOpportunities.php:

```
<?php

use Sugarcrm\Sugarcrm\Elasticsearch\Provider\Visibility\StrategyInterface as ElasticStrategyInterface;
use Sugarcrm\Sugarcrm\Elasticsearch\Provider\Visibility\Visibility;
use Sugarcrm\Sugarcrm\Elasticsearch\Analysis\AnalysisBuilder;
use Sugarcrm\Sugarcrm\Elasticsearch\Mapping\Mapping;
use Sugarcrm\Sugarcrm\Elasticsearch\Adapter\Document;

/**
 *
 * Custom visibility class for Opportunities module:
 *
 * This demo allows to restrict access to opportunity records based on the
 * user's role and configured filtered sales stages.
 *
 * The following $sugar_config parameters are available:
 *
 * $sugar_config['custom']['visibility']['opportunities']['target_role']
 * This parameter takes a string containing the role name for which the filtering should apply.
 *
 * $sugar_config['custom']['visibility']['opportunities']['filter_sales_stages']
 * This parameters takes an array of filtered sales stages. If current user is
 * member of the above configured role, then the opportunities with the sale
 * stages as configured in this array will be inaccessible.
 *
 * Example configuration given that 'Demo Visibility' role exists (config_override.php):
 *
 * $sugar_config['custom']['visibility']['opportunities']['target_role
```

---

```

'] = 'Demo Visibility';
* $sugar_config['custom']['visibility']['opportunities']['filter_sales_stages'] = array('Closed Won', 'Closed Lost');
*
*/
class FilterOpportunities extends SugarVisibility implements ElasticStrategyInterface
{
    /**
     * The target role name
     * @var string
     */
    protected $targetRole = '';
    /**
     * Filtered sales stages
     * @var array
     */
    protected $filterSalesStages = array();

    /**
     * {@inheritdoc}
     */
    public function __construct(SugarBean $bean, $params = null)
    {
        parent::__construct($bean, $params);
        $config = SugarConfig::getInstance();
        $this->targetRole = $config->get(
            'custom.visibility.opportunities.target_role',
            $this->targetRole
        );
        $this->filterSalesStages = $config->get(
            'custom.visibility.opportunities.filter_sales_stages',
            $this->filterSalesStages
        );
    }

    /**
     * {@inheritdoc}
     */
    public function addVisibilityWhere(&$query)
    {
        if (!$this->isSecurityApplicable()) {
            return $query;
        }
        $whereClause = sprintf(
            "%s.sales_stage NOT IN (%s)",

```

---

```

        $this->getTableAlias(),
        implode(',', array_map(array($this->bean->db, 'quoted'), $
this->filterSalesStages))
    );
    if (!empty($query)) {
        $query .= " AND $whereClause ";
    } else {
        $query = $whereClause;
    }
    return $query;
}

/**
 * {@inheritdoc}
 */
public function addVisibilityWhereQuery(SugarQuery $sugarQuery, $o
ptions = array())
{
    $where = null;
    $this->addVisibilityWhere($where, $options);
    if (!empty($where)) {
        $sugarQuery->where()->addRaw($where);
    }
    return $sugarQuery;
}

/**
 * Check if we can apply our security model
 * @param User $user
 * @return false|User
 */
protected function isSecurityApplicable(User $user = null)
{
    $user = $user ?: $this->getCurrentUser();
    if (!$user) {
        return false;
    }
    if (empty($this->targetRole) || empty($this->filterSalesStages
)) {
        return false;
    }
    if (!is_string($this->targetRole) || !is_array($this->filterSa
lesStages)) {
        return false;
    }
    if (!$this->isUserMemberOfRole($this->targetRole, $user)) {

```

---

```

        return false;
    }
    if ($user->isAdminForModule("Opportunities")) {
        return false;
    }
    return $user;
}

/**
 * Get current user
 * @return false|User
 */
protected function getCurrentUser()
{
    return empty($GLOBALS['current_user']) ? false : $GLOBALS['current_user'];
}

/**
 * Check if given user has a given role assigned
 * @param string $targetRole Name of the role
 * @param User $user
 * @return boolean
 */
protected function isUserMemberOfRole($targetRole, User $user)
{
    $roles = ACLRole::getUserRoleNames($user->id);
    return in_array($targetRole, $roles) ? true : false;
}

/**
 * Get table alias
 * @return string
 */
protected function getTableAlias()
{
    $tableAlias = $this->getOption('table_alias');
    if (empty($tableAlias)) {
        $tableAlias = $this->bean->table_name;
    }
    return $tableAlias;
}

/**
 * {@inheritdoc}
 */

```

---

```

    public function elasticBuildAnalysis(AnalysisBuilder $analysisBuilder, Visibility $provider)
    {
        // no special analyzers needed
    }

    /**
     * {@inheritdoc}
     */
    public function elasticBuildMapping(Mapping $mapping, Visibility $provider)
    {
        $mapping->addNotAnalyzedField('visibility_sales_stage');
    }

    /**
     * {@inheritdoc}
     */
    public function elasticProcessDocumentPreIndex(Document $document, \SugarBean $bean, Visibility $provider)
    {
        // populate the sales_stage into our explicit filter field
        $sales_stage = isset($bean->sales_stage) ? $bean->sales_stage
: '';
        $document->setDataField('visibility_sales_stage', $sales_stage);
    }

    /**
     * {@inheritdoc}
     */
    public function elasticGetBeanIndexFields($module, Visibility $provider)
    {
        // make sure to pull sales_stage regardless of search
        return array('sales_stage');
    }

    /**
     * {@inheritdoc}
     */
    public function elasticAddFilters(User $user, Elastica\Query\BoolQuery $filter,
                                     Sugarcrm\Sugarcrm\Elasticsearch\Provider\Visibility\Visibility $provider)
    {

```

---

```

        if (!$this->isSecurityApplicable($user)) {
            return;
        }
        // apply elastic filter to exclude the given sales stages
        $filter->addMustNot($provider->createFilter(
            'OpportunitySalesStages',
            array(
                'filter_sales_stages' => $this->filterSalesStages,
            )
        ));
    }
}

```

./custom/Extension/modules/Opportunities/Ext/Vardefs/opp\_visibility.php

```
<?php
```

```

if (!defined('sugarEntry') || !sugarEntry) {
    die('Not A Valid Entry Point');
}

```

```

$dictionary['Opportunity']['visibility']['FilterOpportunities'] = true
;

```

./custom/src/Elasticsearch/Provider/Visibility/Filter/OpportunitySalesStagesFilter.php

```
<?php
```

```

namespace Sugarcrm\Sugarcrm\custom\Elasticsearch\Provider\Visibility\F
ilter;

```

```

use Sugarcrm\Sugarcrm\Elasticsearch\Provider\Visibility\Filter\F
ilterI
nterface;

```

```

use Sugarcrm\Sugarcrm\Elasticsearch\Provider\Visibility\Visibility;

```

```
/**
```

```

 *
 * Custom opportunity filter by sales_stage
 *
 * This logic can exist directly in the FilterOpportunities visibility
class.

```

```

 * However by abstracting the (custom) filters makes it possible to re-
use

```

```

 * them in other places as well.

```

```
*/
```



---

```

class OpportunitySalesStagesFilter implements FilterInterface
{
    /**
     * @var Visibility
     */
    protected $provider;

    /**
     * {@inheritdoc}
     */
    public function setProvider(Visibility $provider)
    {
        $this->provider = $provider;
    }

    /**
     * {@inheritdoc}
     */
    public function buildFilter(array $options = array())
    {
        return new \Elastica\Query\Terms(
            'visibility_sales_stage',
            $options['filter_sales_stages']
        );
    }
}

```

After creating the above files, log in to your Sugar instance as an administrator and navigate to **Administration > Repair > Quick Repair and Rebuild**.

Next, perform a full reindex by navigating to **Administration > Search** and selecting the "delete existing data" option.

Execute a cron to process all of the queued records into Elasticsearch by doing the following:

1. Open a command line client and navigate to your Sugar directory.
2. Execute `chmod +x bin/sugarcrm` to ensure bin/sugarcrm is executable.
3. Execute `php cron.php` to consume the queue.
4. Execute `bin/sugarcrm elastic:queue` to see if the queue has finished.

Repeat steps 3 and 4 until the queue has 0 records.

This example requires the Sales Stage field to be part of the Opportunities module. Navigate to **Administration > Opportunities** and ensure the **Opportunities** radio button is selected.

---

Create a new role named "Demo Visibility" and assign a user to this role. Note: if you are using the sample data, do NOT use Jim as he has admin permission on the Opportunities module and will be able to view all records. We recommend using Max.

Configure your instance to filter opportunities for a given sales stages for this role by adding the following to `./config_override.php`:

```
<?php

$sugar_config['custom']['visibility']['opportunities']['target_role']
= 'Demo Visibility';
$sugar_config['custom']['visibility']['opportunities']['filter_sales_s
tages'] = array('Closed Won', 'Closed Lost');
```

Log in as the user to whom you assigned the Demo Visibility role. Observe that opportunity records in the sales stages "Closed Won" and "Closed Lost" are no longer accessible.

You can download a module loadable package of this example [here](#).

**Last Modified:** 2021-02-17 02:44:13

## Tags

### Overview

The tagging feature allows a user to apply as many "tags" as they choose on any record they want to categorize. This allows the user to effectively group records together from any source within the application and relate them together. Please note that the tag field and Tags module do not support customization at this time.

### The Tags Module

The Tags module is a very simple module based on the Basic SugarObject template. It is not studio editable, is part of the default module list, and is available to the application upon installation. By default, the Tags module is set up such that only an Administrator can perform any administrative tasks with the Tags module. In other words, a regular user will have a very restrictive set of permissions inside the Tags module, namely: create, export, view, and share. All other actions within

---

the Tags modules must be carried out by an Administrative user.

## The "tag" Field Type

The back end utilizes two new field types: the relatecollection field and the tag field. The tag field is a relatecollection type field with a few added enhancements specific to the tagging implementation:

1. Enforces uniqueness of a tag when created
2. Establishes the necessary relationship between the Tags module and the module record being tagged
3. Collects and formats a tag collection in a way the client understands
4. Format the tag field for consumption by and from the import process
5. Handles proper query setting for a search that is filtered by tags

## The Taggable Implementation

The taggable implementation is applied to all SugarObject templates so that it is available on all custom modules created and is also applied to all sidecar enabled modules. Any module that implements a SugarObject template will be taggable by default. Any module that doesn't implement a SugarObject template can easily apply it using the uses property of the module vardefs:

```
$dictionary[$module] = array(
    ...
    'uses' => array(
        'taggable',
    ),
    ...
);
```

There may be instances where a module should not implement tagging yet implements the SugarObject template. To remove tagging from a module you can use the module vardefs ignore\_templates property:

```
$dictionary[$module] = array(
    ...
    'ignore_templates' => array(
        'taggable',
    ),
    ...
);
```

---

## The Tagging Relationship Structure

The tagging relationship schema is similar in nature to the `email_addresses` relationship schema in that it is used to represent a collection of 0-N Tags module records related to a module:

| Column                     | Description   |
|----------------------------|---|
| <code>id</code>            | The GUID for the relationship between the tag record and the module record                  |
| <code>tag_id</code>        | The id of the tag record used in this relationship  |
| <code>bean_id</code>       | The id of the module record used in this relationship                                       |
| <code>bean_module</code>   | The module for the record being tagged  |
| <code>date_modified</code> | The date the relationship was created/modified  |
| <code>deleted</code>       | A <code>tinyint(1)</code> boolean value that indicates whether this relationship is deleted |

## Tagging in Action

For adding tags from the UI, please refer to the [Tags](#) documentation.

## Tagging Records from the API

Tagging a record via the API is done by sending a PUT request to the [/<module>/<record>](#) API endpoint with a `tag` property set to an array of key/value pairs that include a tag id (optional) and a tag name:

```
{
  "name": "Record Name",
  "tag": [
    {"id": "Test Tag", "name": "Test Tag"},
    {"name": "Test Tag 2"},
    {"id": "1234-56-7890", "name": "Test Tag 3"}
  ]
}
```

After the record is created/modified and the tag values are applied, the response will contain the returned collection of tags for that record complete with their ids:

---

```
{
  "name": "Record Name",
  "tag": [
    { "id": "9876-54-3210", "name": "Test Tag" },
    { "id": "4321-56-0987", "name": "Test Tag 2" },
    { "id": "1234-56-7890", "name": "Test Tag 3" }
  ]
}
```

You can visit [How to Manipulate Tags \(CRUD\)](#) for a full example demonstrating CRUD actions for tags.

### Mass Updating Tags on Records Via the API

Mass updating records with tags are as simple as sending a MassUpdate PUT request to `/<module>/MassUpdate` with a payload similar to:

```
{
  "massupdate_params": {
    "uid": ["12345-67890", "09876-54321"],
    "tag": [
      { "id": "23456-78901", "name": "MyTag1" },
      { "id": "34567-89012", "name": "MyTag2" }
    ]
  }
}
```

This request will override all existing tags on the named records. To append tags to a record, send the "tag\_type" request argument set to a value of 1:

```
{
  "massupdate_params": {
    "uid": ["12345-67890", "09876-54321"],
    "tag": [
      { "id": "23456-78901", "name": "MyTag1" },
      { "id": "34567-89012", "name": "MyTag2" }
    ],
    "tag_type": "1"
  }
}
```

More information on this API endpoint can be found in the [/<module>/MassUpdate PUT](#) documentation.

---

## Fetching Tags on a Record

By default, the tag field is added to all Sidecar module record views. That means when a request is made for a single record through the API, that single record will return the "tag" field, which will be a collection of key:value pair objects.

For example, when a request is made to the `/Accounts/:record` GET endpoint, the tags associated with the Accountrecord will be returned in the tag field as an array of objects:

```
{
  "id": "<record>",
  "name": "Record Name",
  "tag": [
    { "id": "9876-54-3210", "name": "Test Tag" },
    { "id": "4321-56-0987", "name": "Test Tag 2" },
    { "id": "1234-56-7890", "name": "Test Tag 3" }
  ]
}
```

## Filtering a Record List by Tags

Filtering a list of records by tags can be done simply by sending a filter request to the `ModuleApi` endpoint for a module. For example, to filter the Accounts list where the tag field has a tag by the name of "Tradeshow", you can send a request to the [/Accounts GET](#) endpoint with the following request arguments:

```
{
  "view": "list",
  "filter": [
    {
      "tag": {
        "$in": [
          {
            "name": "Tradeshow"
          }
        ]
      }
    }
  ]
}
```

Currently, the tag field filter definitions support the following filter operators:

- Is any of (\$in)

- 
- Is not any of (`$not_in`)
  - Is empty (`$empty`)
  - Is not empty (`$not_empty`)

## Fetching a list of Tags from the Tags module

Fetch a list of tag records from the Tags module is done the same way as fetch a list of records from any other module, namely by sending a GET request to the `/Tags ModuleApi` endpoint. More information can be found in the [/ <module> GET](#) documentation.

## Manipulating Tags Programmatically

### Getting Tags Related to a Record

Here is an example that demonstrates how to get all the tags and its ids related to a contact record:

```
// Creating a Bean for Contacts
$bean = BeanFactory::getBean("Contacts");
// Creating a Bean for Tags
$tagBean = BeanFactory::newBean('Tags');
// Get all the tags related to Contacts Bean by givin Contact ID. You
// can provide more than one Record ID.
$tags = $tagBean->getRelatedModuleRecords($bean, [ "<CONTACT_RECORD_ID>
"]);
```

### Creating a New Tag and Adding to a Record

Here is an example that demonstrates how to add create a tag and add to a contact record.

In order to add a new tag first, we will create the tag bean. Then using `load_relationship` function we will add the newly created tag id to the contacts

```
// Creating new Tag Bean
$tagBean = BeanFactory::newBean("Tags");

// Setting its name
$tagBean->name = "New Tag";
$tagBean->save();
```

---

```
// Retrieving the Contacts Bean
$bean = BeanFactory::getBean("Contacts", "<RECORD_ID>");

// Getting tag field and its properties
$tagField = $bean->getTagField();
$tagFieldProperties = $bean->field_defs[$tagField];

// Identifying relation link
$link = $tagFieldProperties['link'];

// Loading relationship
if ($bean->load_relationship($link)) {
    // Adding newly created Tag Bean
    $bean->$link->add($tagBean->id);
}
```

## Removing Tags from a Record

Here is an example that demonstrates how to remove a tag from a contact record:

```
// Getting the Contacts Bean
$bean = BeanFactory::getBean("Contacts", "<RECORD_ID>");

// Getting tag field and its properties
$tagField = $bean->getTagField();
$tagFieldProperties = $bean->field_defs[$tagField];

// Identifying relation link
$link = $tagFieldProperties['link'];

// Loading relationship
if($bean->load_relationship($link)){
    // Removing the Tag ID
    $bean->$link->delete($bean->id, "<TAG_RECORD_ID>");
}
```

## Synchronizing Tags by Name With API Helpers

If you have multiple tags that you need to add and delete at the same time, then you can use `SugarFieldTag->apiSave` method. Here is an example that demonstrates how to sync tags by using `SugarFieldTag` Class for a Contact record.

It is important to know that since this is a sync; you will need to keep the existing



---

tags if you want them to still exist in the record.

```
// Getting the Contacts Bean
$bean = BeanFactory::getBean("Contacts", "<RECORD_ID>");

// Getting Tag Field ID
$tagField = $bean->getTagField();

// Getting Tag Field Properties
$tagFieldProperties = $bean->field_defs[$tagField];

// Preparing the latest Tags to be sync with the record
$tags = [
    // Note: Already attached tags will be automatically removed from
the record
    // If you want to keep some of the existing tags then you will need
to keep them in the array
    "tag" => [
        // Since this tag is already added, it will be preserved
        'already added tag' => 'Already Added Tag',

        // The new tags to add - All other tags that previously existed
will be deleted
        'new tag' => 'New Tag',
        'new tag2' => 'New Tag2',
    ],
];
// Building SugarFieldTag instance
$SugarFieldTag = new SugarFieldTag();

// Passing the arguments to save the Tags
$SugarFieldTag->apiSave($bean, $tags, $tagField, $tagFieldProperties);
```

**Last Modified:** 2021-02-17 02:44:13

## TinyMCE

### Overview

This article demonstrates how to work with the TinyMCE rich-editor field and customize its settings.

---

## TinyMCE Field Type (`htmleditable_tinymce`)

Sugar provides a rich-text editor field using TinyMCE. This editor is used available when customizing templates and composing emails. As Sugar does not provide a way to create and use these field in Studio, we will demonstrate how to convert a text area field into a TinyMCE editor in the following sections.

### Converting a Text Area to a TinyMCE Editor

As an example, we will use the Accounts' description field. The description fields type is by default text area. First of all, you will need to change the type of the field to `htmleditable_tinymce` using the `displayParams` [vardef](#) key.

```
$dictionary['Account']['fields']['description']['displayParams']['type'] = 'htmleditable_tinymce';
```

Additionally, having a rich-text editor will require you to have a longer database field to store the HTML content. You will need to change the `dbType` to `longtext` and its length to `4294967295`.

```
$dictionary['Account']['fields']['description']['dbType'] = 'longtext';
$dictionary['Account']['fields']['description']['len'] = '4294967295';
```

After making these changes, the `vardef` definition will look as follows:

```
./custom/Extension/modules/Accounts/Ext/Vardefs/tinymce_description.php
```

```
<?php
$dictionary['Account']['fields']['description']['displayParams']['type'] = 'htmleditable_tinymce';
$dictionary['Account']['fields']['description']['dbType'] = 'longtext';
$dictionary['Account']['fields']['description']['len'] = '4294967295';
```

Last, you will need to navigate Admin > Repairs and Perform Quick Repair and Rebuild.

### Configuring the TinyMCE Editor

Configuring the TinyMCE editors can be done using the `tinyConfig` `vardef` key. The `tinyConfig` key maps to the [TinyMCE configuration options](#). For example, if you

---

would add a plugin into TinyMCE editor, you would modify the `tinyConfig.plugins` vardef key. An example of a vardef definition that will change the accounts description field to a custom TinyMCE Editor and modify its default TinyMCE settings is shown below.

```
./custom/Extension/modules/Accounts/Ext/Vardefs/tinymce_description.php
```

```
<?php
$dictionary['Account']['fields']['description']['displayParams']['type'] = 'htmleditable_tinymce';
$dictionary['Account']['fields']['description']['dbType'] = 'longtext';
;
$dictionary['Account']['fields']['description']['len'] = '4294967295';
$dictionary['Account']['fields']['description']['tinyConfig'] = array(
    'plugins' => 'paste,autoresize,visualblocks,textcolor,table,emoticons,autolink',
    'table_default_attributes' => array(
        'border' => '1',
    ),
    'target_list' => array(
        array(
            'title' => 'New page',
            'value' => '_blank',
        ),
    ),
    'default_link_target' => '_blank',
    'extended_valid_elements' => "a[href|target|data-mce-href]",
    'codesample_languages' => array(
        array('text' => 'HTML/XML', 'value' => 'markup'),
        array('text' => 'JavaScript', 'value' => 'javascript'),
        array('text' => 'CSS', 'value' => 'css'),
        array('text' => 'PHP', 'value' => 'php'),
    ),
    'toolbar1' => 'formatselect | bold italic underline strikethrough | bullist numlist | forecolor backcolor ',
    'toolbar2' => 'table tabledelete emoticons codesample | tableprops tablerowprops tablecellprops | tableinsertrowbefore tableinsertrowafter tabledeleterow | tableinsertcolbefore tableinsertcolafter tabledeletocol | visualblocks removeformat',
);
```

Since you are making changes in the vardef, you will need to navigate **Admin > Repairs** and run **Quick Repair and Rebuild**. Once you perform **Quick Repair and Rebuild**, the description of the Account records will have TinyMCE Editor that allows you to write rich-text content.

---

## Plugins

Sugar is using TinyMCE v4. Most of the settings that you can define in tinyConfig are exist in [TinyMCE documentation](#). However, it is important to know that plugins are limited with plugins that are provided by Sugar. These plugins can be found in `./include/javascript/tinymce4/plugins`.

## Configuring the TinyMCE Editors used in BWC Modules

If you are looking for a solution with older TinyMCE that Sugar uses. You can try to create an override file and modify default settings. There are two different overrides that can be applied to buttons and default settings.

### Overriding Buttons

The first override file is for the toolbar buttons. To do this, you must create `./custom/include/tinyButtonConfig.php`. Within this file, you will be able to override the button layout for the TinyMCE editor.

There are 3 different layouts you can change:

- **default** : Used when creating an email template
- **email\_compose** : Used when composing an email from the full form under the Emails module
- **email\_compose\_light** : Used when doing a quick compose from a listview or subpanel

### Example File

`./custom/include/tinyButtonConfig.php`

```
<?php

    //create email template
    $buttonConfigs['default'] = array(
        'buttonConfig' => "code,help,separator,bold,italic,underline,s
trikethrough,separator,justifyleft,justifycenter,justifyright,justifyf
ull,separator,forecolor,backcolor,separator,styleselect,formatselect,f
ontselect,fontsizeselect,",
        'buttonConfig2' => "cut,copy,paste,pastetext,pasteword,selecta
ll,separator,search,replace,separator,bullist,numlist,separator,outden
t,indent,separator,ltr,rtl,separator,undo,redo,separator, link,unlink,
```



---

```
'theme_advanced_toolbar_align' => "left",
'theme_advanced_toolbar_location' => "top",
'theme_advanced_buttons1' => "",
'theme_advanced_buttons2' => "",
'theme_advanced_buttons3' => "",
'strict_loading_mode' => true,
'mode' => 'exact',
'language' => 'en',
'plugins' => 'advhr,insertdatetime,table,preview,paste,searchr
eplace,directionality',
'elements' => '',
'extended_valid_elements' => 'style[dir|lang|media|title|type]
,hr[class|width|size|noshade],@[class|style]',
'content_css' => 'include/javascript/tiny_mce/themes/advanced/
skins/default/content.css',
);
```

## Creating Plugins

Another alternative to customizing the TinyMCE is to create a plugin. Your plugins will be stored in `./include/javascript/tiny_mce/plugins/`. You can find more information on creating plugins on the [TinyMCE website](#).

the use and customization of TinyMCE.

**Last Modified:** 2021-02-17 02:44:13

## Modifying the TinyMCE Editor

### Overview

This article is a brief overview on how to modify the default settings for the TinyMCE editor by creating an override file. There are two different overrides that can be applied to buttons and default settings.

### Overriding Buttons

The first override file is for the toolbar buttons. To do this, you must create `./custom/include/tinyButtonConfig.php`. Within this file, you will be able to override

---

the button layout for the TinyMCE editor.

There are 3 different layouts you can change:

- **default** : Used when creating an email template
- **email\_compose** : Used when composing an email from the full form under the Emails module
- **email\_compose\_light** : Used when doing a quick compose from a listview or subpanel

## Example File

./custom/include/tinyButtonConfig.php

```
<?php
```

```
    //create email template
    $buttonConfigs['default'] = array(
        'buttonConfig' => "code,help,separator,bold,italic,underline,s
trikethrough,separator,justifyleft,justifycenter,justifyright,justifyf
ull,separator,forecolor,backcolor,separator,styleselect,formatselect,f
ontselect,fontsizeselect,",
        'buttonConfig2' => "cut,copy,paste,pastetext,pasteword,selecta
ll,separator,search,replace,separator,bullist,numlist,separator,outden
t,indent,separator,ltr,rtl,separator,undo,redo,separator, link,unlink,
anchor,image,separator,sub,sup,separator,charmap,visualaid",
        'buttonConfig3' => "tablecontrols,separator,advhr,hr,removefor
mat,separator,insertdate,inserttime,separator,preview"
    );

    //Standard email compose
    $buttonConfigs['email_compose'] = array(
        'buttonConfig' => "code,help,separator,bold,italic,underline,s
trikethrough,separator,bullist,numlist,separator,justifyleft,justifyce
nter,justifyright,justifyfull,separator,forecolor,backcolor,separator,
styleselect,formatselect,fontselect,fontsizeselect,",
        'buttonConfig2' => "", //empty
        'buttonConfig3' => "" //empty
    );

    //Quick email compose
    $buttonConfigs['email_compose_light'] = array(
        'buttonConfig' => "code,help,separator,bold,italic,underline,s
trikethrough,separator,bullist,numlist,separator,justifyleft,justifyce
nter,justifyright,justifyfull,separator,forecolor,backcolor,separator,
```

---

```
styleselect,formatselect,fontselect,fontsizeselect,",
    'buttonConfig2' => "", //empty
    'buttonConfig3' => "" //empty
);
```

## Overriding Default Settings

The second override file is for basic TinyMCE functionality. To do this, you must create `./custom/include/tinyMCEDefaultConfig.php`. TinyMCE has quite a few settings that can be altered, so the best reference for configuration settings can be found in the [TinyMCE Configuration Documentation](#).

### Example File

`./custom/include/tinyMCEDefaultConfig.php`

```
<?php

$defaultConfig = array(
    'convert_urls' => false,
    'valid_children' => '+body[style]',
    'height' => 300,
    'width' => '100%',
    'theme' => 'advanced',
    'theme_advanced_toolbar_align' => "left",
    'theme_advanced_toolbar_location' => "top",
    'theme_advanced_buttons1' => "",
    'theme_advanced_buttons2' => "",
    'theme_advanced_buttons3' => "",
    'strict_loading_mode' => true,
    'mode' => 'exact',
    'language' => 'en',
    'plugins' => 'advhr,insertdatetime,table,preview,paste,searchr
eplace,directionality',
    'elements' => '',
    'extended_valid_elements' => 'style[dir|lang|media|title|type]
,hr[class|width|size|noshade],@[class|style]',
    'content_css' => 'include/javascript/tiny_mce/themes/advanced/
skins/default/content.css',
);
```

## Creating Plugins



---

Another alternative to customizing the TinyMCE is to create a plugin. Your plugins will be stored in `./include/javascript/tiny_mce/plugins/`. You can find more information on creating plugins on the [TinyMCE website](#).

**Last Modified:** 2021-02-17 02:44:13

## SugarPDF

### Overview

An overview of SugarPDF and how it relates to TCPDF. As of version 6.7.x, Sugar includes a Smarty template engine called [PDF Manager](#) that is accessible by navigating to Admin > PDF Manager. The PDF Manager allows administrators to create and manage templates for deployed modules without having to write custom code. The following sections are only specific to developers looking to create their own custom TCPDF templates using PHP.

### PDF Classes

The various classes used in generating PDFs within Sugar.

### TCPDF

Sugar uses the [TCPDF](#) 4.6.013 library, located in `./vendor/tcpdf/`, as the core engine to generate PDFs. This library is extended by [Sugarpdf](#) which is used by the core application to generate PDFs.

### Sugarpdf

The Sugarpdf class, located in `./include/Sugarpdf/Sugarpdf.php`, extends the [TCPDF](#) class. Within this class, we have overridden certain functions to integrate sugar features. Some key methods that were overridden are listed below:

| Method  | Description                            |
|---------|--|
| Header  | Overridden to enable custom logos.     |
| SetFont | Overridden to allow for the loading of |

|      |   |
|------|---|
|      | custom fonts. The custom fonts direction is defined by the <code>K_PATH_CUSTOM_FONTS</code> var. By default, this value is set to <code>./custom/vendor/tcpdf/fonts/</code> |
| Cell | Overridden to apply the <code>prepare_string()</code> function. This allows for the ability to clean the string before sending to PDF.                                      |

Some key additional methods that were added are listed below:

| Method                      | Description   |
|-----------------------------|---|
| <code>predisplay</code>     | Preprocessing before the display method is called. Is intended to setup general PDF document properties like margin, footer, header, etc. |
| <code>display</code>        | Performs the actual PDF content generation. This is where the logic to display output to the PDF should be placed.                        |
| <code>process</code>        | Calls <code>predisplay</code> and <code>display</code> .  |
| <code>writeCellTable</code> | Method to print a table using the cell print method of TCPDF  |
| <code>writeHTMLTable</code> | Method to print a table using the <code>writeHTML</code> print method of TCPDF  |

Custom PDF classes that extend Sugarpdf can be located in the following directories:

- `./include/Sugarpdf/sugarpdf/sugarpdf.<pdf view>.php`
- `./modules/<module>/sugarpdf/sugarpdf.<pdf view>.php`
- `./custom/modules/<module>/sugarpdf/sugarpdf.<pdf view>.php`

PDF Manager classes that extend Sugarpdf are located in the following directories:

- `./include/Sugarpdf/sugarpdf/sugarpdf.smarty.php`
- `./include/Sugarpdf/sugarpdf/sugarpdf.pdfmanager.php`
- `./custom/include/Sugarpdf/sugarpdf/sugarpdf.pdfmanager.php`

Each extended class will define a specific PDF view that is accessible with the following URL parameters:

- `module=<module>`

- 
- action=sugarpdf
  - sugarpdf=<pdf view>

Within each custom PDF class, the display method will need to be redefined. If you would like, it is also possible to override other methods like Header. The process method of this class will be called from [ViewSugarpdf](#). When a PDF is being generated, the most relevant sugarpdf.<pdf action>.pdf class is determined by the [SugarpdfFactory](#).

## ViewSugarpdf

The ViewSugarpdf class, located in ./include/MVC/View/views/view.sugarpdf.php, is used to create the SugarViews that generate PDFs. These views can be found and/or created in one of the following directory paths:

- ./modules/<module>/views/view.sugarpdf.php
- ./custom/modules/<module>/views/view.sugarpdf.php

SugarViews can be called by navigating to a URL in the format of:

```
http://<url>/index.php?module=<module>&action=sugarpdf&sugarpdf=<pdf action>
```

As of 6.7, PDFs are mainly generated using the PDF Manager templating system. To generate the PDF stored in the PDF Manager, you would call a URL in the format of:

```
http://<url>/index.php?module<module>&record=<record id>&action=sugarpdf&sugarpdf=pdfmanager&pdf_template_id=<template id>
```

## SugarpdfFactory

The [ViewSugarpdf](#) class uses the SugarpdfFactory class, located in ./include/Sugarpdf/SugarpdfFactory.php, to find the most relevant sugarpdf.<pdf action>.pdf class which generates the PDF document for a given PDF view and module. If one is not found, then the core Sugarpdf class is used.

The SugarpdfFactory class loads the first class found for the specified PDF action as determined by the following order:

- ./custom/modules/<module>/sugarpdf/sugarpdf.<pdf view>.php
- ./modules/<module>/sugarpdf/sugarpdf.<pdf view>.php
- ./custom/include/Sugarpdf/sugarpdf/sugarpdf.<pdf view>.php

- 
- `./include/Sugarpdf/sugarpdf/sugarpdf.<pdf view>.php`
  - `./include/Sugarpdf/sugarpdf.php`

## SugarpdfHelper

The SugarpdfHelper, located in `./include/Sugarpdf/SugarpdfHelper.php`, is included by [Sugarpdf](#). This is a utility file that contains many of the functions we use to generate PDFs.

Available functions are:

- **wrapTag, wrapTD, wrapTable, etc.** : These functions help to create an HTML code.
- **prepare\_string** : This function prepare a string to be ready for the PDF printing.
- **format\_number\_sugarpdf** : This function is a copy of `format_number()` from currency with a fix for sugarpdf.

## PdfManagerHelper

The PdfManagerHelper, located in `./modules/PdfManager/PdfManagerHelper.php`, is primarily utilized by the pdfmanager [Sugarpdf](#) view. This class file contains methods useful for accessing PDF Manager templates. Some of the primary methods are:

- **getAvailableModules** : Returns an array of available modules for use with PdfManager.
- **getFields** : Takes an module name and returns a list of fields and links available for this module in PdfManager.
- **getPublishedTemplatesForModule** : Returns an array of the available templates for a specific module.

## FontManager

The FontManagerclass, located in `./include/Sugarpdf/FontManager.php`, is a stand-alone class that manages all the fonts for TCPDF. More information can be found in the [PDF Fonts](#) section below.

Functionality:

- List all the available fonts from the OOB font directory and the custom font directory (it can create a well-formatted list for select tag).
- Get the details of each listed font (Type, size, encoding,...) by reading the

---

font php file.

- Add a new font to the custom font directory from a font file and a metric file.
- Delete a font from the custom font directory.

## Generating a PDF

To generate a custom PDF in Sugar, you will need to create a PDF view that extends the Sugarpdf class. To accomplish this, create the file:

```
./custom/modules/<module>/sugarpdf/sugarpdf.<pdf view>.php
```

```
<?php

if(!defined('sugarEntry') || !sugarEntry) die('Not A Valid Entry Point
');

require_once('include/Sugarpdf/Sugarpdf.php');

class <module>Sugarpdf<pdf view> extends Sugarpdf
{
    /**
     * Override
     */
    function process(){
        $this->preDisplay();
        $this->display();
        $this->buildFileName();
    }

    /**
     * Custom header
     */
    public function Header()
    {
        $this->SetFont(PDF_FONT_NAME_MAIN, 'B', 16);
        $this->MultiCell(0, 0, 'TCPDF Header',0,'C');
        $this->drawLine();
    }

    /**
     * Custom header
     */
    public function Footer()
```

---

```

{
    $this->SetFont(PDF_FONT_NAME_MAIN, '', 8);
    $this->MultiCell(0,0,'TCPDF Footer', 0, 'C');
}

/**
 * Predisplay content
 */
function preDisplay()
{
    //Adds a predisplay page
    $this->AddPage();
    $this->SetFont(PDF_FONT_NAME_MAIN, '', PDF_FONT_SIZE_MAIN);
    $this->Ln();
    $this->MultiCell(0,0,'Predisplay Content',0,'C');
}

/**
 * Main content
 */
function display()
{
    //add a display page
    $this->AddPage();
    $this->SetFont(PDF_FONT_NAME_MAIN, '', PDF_FONT_SIZE_MAIN);
    $this->Ln();
    $this->MultiCell(0,0,'Display Content',0,'C');
}

/**
 * Build filename
 */
function buildFileName()
{
    $this->fileName = 'example.pdf';
}

/**
 * This method draw an horizontal line with a specific style.
 */
protected function drawLine()
{
    $this->SetLineStyle(array('width' => 0.85 / $this->getScaleFactor(), 'cap' => 'butt', 'join' => 'miter', 'dash' => 0, 'color' => array(220, 220, 220)));
    $this->MultiCell(0, 0, '', 'T', 0, 'C');
}

```

---

```
}  
}
```

This file will contain the markup for the PDF. The main things to note are the Header(), Footer() and display() methods as they contain most of the styling and display logic. The method buildFileName() will generate the document's name when downloaded by the user.

Once in place, navigate to Admin > Repair > Quick Repair and Rebuild. The PDF will now be accessible by navigating to the following url in your browser:

```
http://{sugar url}/index.php?module=<module>&action=sugarpdf&sugarpdf=  
<pdf action>
```

## PDF Settings

This section will outline how to configure the PDF settings. These settings determine the widths, heights, images, pdf metadata, and the UI configurations found in:

```
Admin > PDF Manager > Edit Report PDF Template
```

## Settings

The default PDF settings for TCPDF can be found in ./include/Sugarpdf/sugarpdf\_default.php. You can add additional custom settings by creating the following file:

```
./custom/include/Sugarpdf/sugarpdf_default.php
```

```
<?php
```

```
$sugarpdf_default["PDF_NEW_SETTING"] = "Value";
```

You should note that values specified here will be the default values. Once edited, the updated values are stored in the database config table under the category "sugarpdf" and a name matching the setting name.

```
category: sugarpdf  
name: pdf_new_setting  
value: Value
```

---

## Displaying and Editing Settings

A select set of settings can be edited within the Sugar UI by navigating to:

Admin > PDF Manager > Edit Report PDF Template

The settings here are managed in the file `./modules/Configurator/metadata/SugarpdfSettingsdefs.php`. A brief description of the settings parameters are listed below:

- **label** : This is the display label for the setting.
- **info\_label** : Hover info text for the display label.
- **value** : The PDF Setting.
- **class** : Determines which panel the setting resides in. Possible values are 'basic' and 'logo'. 'advanced' is not currently an available value.
- **type** : Determines the settings display widget. Possible values are: 'image', 'text', 'percent', 'multiselect', 'bool', 'password', and 'file'.

Custom settings can be added to this page by creating `./custom/modules/Configurator/metadata/SugarpdfSettingsdefs.php` and specifying a new setting index. An example is below:

`./custom/modules/Configurator/metadata/SugarpdfSettingsdefs.php`

```
<?php

//Retrieve setting info from db
defineFromConfig("PDF_NEW_SETTING", $sugarpdf_default["PDF_NEW_SETTING"]);

//Add setting display
$SugarpdfSettings['sugarpdf_pdf_new_setting'] = array(
    "label" => $mod_strings["LBL_PDF_NEW_SETTING_TITLE"],
    "info_label" => $mod_strings["LBL_PDF_NEW_SETTING_INFO"],
    "value" => PDF_NEW_SETTING,
    "class" => "basic",
    "type" => "text",
);
```

You should note that the `$SugarpdfSettings` index should follow the format `sugarpdf_pdf_<setting name>`. If your setting does not follow this format, it will not be saved or retrieved from the database correctly.

Once the setting is defined, you will need to define the display text for the UI setting.



---

`./custom/modules/Configurator/language/en_us.lang.php`

Once finished, navigate to Admin > Repair > Quick Repair and Rebuild. This will rebuild the language files for your display text.

## PDF Fonts

The stock fonts for TCPDF are stored in the directory `./vendor/tcpdf/fonts/`. If you would like to add additional fonts to the system, they should be added to the `./custom/vendor/tcpdf/fonts/` directory.

## Font Cache

The font list is built by the font manager with the `listFontFiles()` or `getSelectFontList()` methods. The list is then saved in the cache as `./cache/Sugarpdf/cachedFontList.php`. This caching process prevents unnecessary parsing of the fonts folder. The font cache is automatically cleared when the `delete()` or `add()` methods are used. When you create a module loader package to install fonts you will have to call the `clearCachedFile()` method in a `post_execute` and `post_uninstall` action in the `manifest.php` to clear the font cache.

**Last Modified:** 2021-02-17 02:44:13

## DateTime

### Overview

The `SugarDateTime` class, located in, `./include/SugarDateTime.php`, extends PHP's built in `DateTime` class and can be used to perform common operations on date and time values.

### Setting

With existing `SugarDateTime` objects, it is recommended to clone the object before modifying or performing operations on it.

```
$new_datetime = clone $datetime;
```

---

Another option is to instantiate a new `SugarDateTime` object.

```
// defaults to now
$due_date_time = new SugarDateTime();

$due_date_time->setDate($dueYear, $dueMonth, $dueDay);
$due_date_time->setTime($dueHour, $dueMin);
$due_date_time->setTimezone($dueTZ);
```

**Note :** When creating a new `SugarDateTime` object, the date and time will default to the current date and time in the timezone configured in PHP.

`SugarDateTime` Objects can also be modified by passing in common English textual date/time strings to manipulate the value.

```
$due_date = clone $date;
$end_of_the_month->modify("last day of this month");
$end_of_next_month->modify("last day of next month");
$thirty_days_later->modify("+30 days");
```

## Formatting

When formatting `SugarDateTime` objects into a string for display or logging purposes, there are a few options you can utilize through the `formatDateTime()` method.

Return the date/time formatted for the database:

```
$db_datetime_string = formatDateTime("datetime", "db");
```

Return the date/time formatted using a user's preference:

```
global $current_user;
$user_datetime_string = formatDateTime("datetime", "user", $current_user);
```

Return the date/time formatted following ISO-8601 standards:

```
$iso_datetime_string = formatDateTime("datetime", "iso");
```

There are times when it is needed to return only certain parts of a date or time. The `format()` method accepts a string parameter to define what parts or information about the date/time should be returned.

```
// 28 Dec 2016
```

---

```
echo $due_date_time->format("j M Y");

// 2016-12-28 19:01:09
echo $due_date_time->asDb();

// The date/time 2016-12-28T11:01:09-08:00 is set in the timezone of A
merica/Los_Angeles
echo "The date/time " . $due_date_time->format("c") . " is set in the
timezone of " . $due_date_time->format("e");

// The time when this date/time object was created is 11:01:09 AM -080
0
echo "The time when this date/time object was created is " . $due_date
_time->format("H:i:s A O");

// There are 31 days in the month of December
echo "There are " . $due_date_time->format("t") . " days in the month
of " . $due_date_time->format("F");

// There are 366 days in the year of 2016
echo "There are " . $due_date_time->__get("days_in_year") . " days in
the year of " . $due_date_time->format("Y");

// Between Wed, 28 Dec 2016 11:01:09 -0800 and the end of the year, th
ere are 4 days.
echo "Between " . $due_date_time . " and the end of the year, there ar
e " . ($due_date_time->__get("days_in_year") - $due_date_time->format(
"z")) . " days.";
```

For more information on the available options, please refer to  
<http://php.net/manual/en/function.date.php>

## TimeDate Class

The TimeDate class, located in `./include/TimeDate.php`, utilizes the SugarDateTime class to provide an extended toolset of methods for date/time usage.

## Setting

With existing TimeDate objects, it is recommended to clone the object before modifying or performing operations on it.

```
$new_timedate = clone $timedate;
```

---

Another option is to instantiate a new `TimeDate` object.

```
// current time in UTC
$timedate = new TimeDate();
$now_utcTZ = $timedate->getNow();

// current time in user's timezone
$timedate = new TimeDate($current_user);
$now_userTZ = $timedate->getNow(true);
```

**Note :** When creating a new `TimeDate` object, the date and time will default to the current date and time in the UTC timezone unless a user object is passed in.

## Formatting

`TimeDate` objects can return the Date/Time in either a string format or in a `SugarDateTime` object. The `TimeDate` object has many formatting options; some of the most common ones are :

|   |  |
|---|--|
| <a href="#">getNow</a>                  | Get the current date/time as a <i>SugarDateTime</i> object   |
| <a href="#">fromUser</a>                | Get <i>SugarDateTime</i> object from user's date/time string |
| <a href="#">asUser</a>                  | Format <i>DateTime</i> object as user's date/time string     |
| <a href="#">fromDb</a>                  | Get <i>SugarDateTime</i> object from a DB date/time string   |
| <a href="#">fromString</a>              | Create a <i>SugarDateTime</i> object from a string           |
| <a href="#">get_db_date_time_format</a> | Gets the current database date and time format               |
| <a href="#">to_display_date_time</a>    | Format a string as user's display date/time                  |

### **getNow**

returns *SugarDateTime* object

### **Parameters**

---

|  |  |  |
|--|--|--|
|  |  |  |
|--|--|--|

| <b>Name</b> | <b>Data Type</b> | <b>Default</b> | <b>Description</b>  |
|-------------|------------------|----------------|---|
| \$userTz    | <i>bool</i>      | false          | Whether to use the user's timezone or not. False will use UTC |

Returns a SugarDateTime object set to the current date/time. If there is a user object associate to the TimeDate object, passing true to the \$userTz parameter will return the object in user's timezone. If no user is associated or false is passed, the timezone returned will be in UTC.

### Example

```
$timedate = new TimeDate($current_user);

// returns current date/time in UTC
$now_utcTZ = $timedate->getNow();

// returns current date/time in the user's timezone
$now_userTZ = $timedate->getNow(true);
```

### fromUser

returns SugarDateTime object

### Parameters

| <b>Name</b> | <b>Data Type</b> | <b>Default</b> | <b>Description</b>                                |
|-------------|------------------|----------------|---|
| \$date      | <i>string</i>    | n/a            | Date/Time string to convert to an object          |
| \$user      | <i>User</i>      | null           | User to utilize formatting and timezone info from |

Returns a SugarDateTime object converted from the passed in string. If there is a user object passed in as a parameter will return the object in user's timezone. If no user is passed in, the timezone returned will be in UTC.

### Example

```
$date = "2016-12-28 13:09";
```

---

```
$timedate = new TimeDate();  
$datetime = $timedate->fromUser($date, $current_user);
```

## asUser

returns *string*

### Parameters

| Name   | Data Type     | Default | Description                                       |
|--------|---------------|---------|---|
| \$date | <i>string</i> | n/a     | Date/Time string to convert to an object          |
| \$user | <i>User</i>   | null    | User to utilize formatting and timezone info from |

Returns a string of the date and time formatted based on the user's profile settings. If there is a user object passed in as a parameter it will return the object in user's timezone. If no user is passed in, the timezone returned will be in UTC.

### Example

```
$datetime = new datetime("2016-12-28 13:09");  
$timedate = new TimeDate();  
$formattedDate = $timedate->asUser($datetime, $current_user);
```

## fromDb

returns *SugarDateTime*

### Parameters

| Name   | Data Type     | Default | Description   |
|--------|---------------|---------|---|
| \$date | <i>string</i> | n/a     | Date/Time string in database format to convert to an object |

Returns a SugarDateTime object converted from the passed in database formatted string.

---

**Note** : If the string does not match the database format exactly, this function will return *boolean* false.

### Example

```
// Y-m-d H:i:s
$db_datetime = "2016-12-28 13:09:01";
$timeDate = new TimeDate();
$dateTime = $timeDate->fromDb($db_datetime);

// returns bool(false)
$wrong_datetime = "2016-12-28 13:09";
$timeDate = new TimeDate();
$dateTime = $timeDate->fromDb($timeDate);
```

### fromString

returns *SugarDateTime*

#### Parameters

| Name   | Data Type     | Default | Description                              |
|--------|---------------|---------|--|
| \$date | <i>string</i> | n/a     | Date/Time string to convert to an object |
| \$user | <i>User</i>   | null    | User to utilize timezone info from       |

Returns a *SugarDateTime* object converted from the passed in database formatted string. If there is a user object passed in as a parameter it will return the object in user's timezone. If no user is passed in, the timezone returned will be in UTC.

### Example

```
$datetime_str = "December 28th 2016 13:09";
$timeDate = new TimeDate();
$dateTime = $timeDate->fromString($datetime_str);
```

### get\_db\_date\_time\_format

returns *string*

---

## Parameters

N/a

Returns a string of the current database date and time format settings.

**Note :** For just the date format use `get_db_date_format()` and for just the time format use `get_db_time_format()`.

## Example

```
$timedate = new TimeDate();  
  
// Y-m-d H:i:s  
$db_format = $timedate->get_db_date_time_format();
```

## to\_display\_date\_time

returns *string*

## Parameters

| Name         | Data Type      | Default | Description  |
|--------------|----------------|---------|--|
| \$date       | <i>string</i>  | n/a     | Date/Time string in database format                    |
| \$meridiem   | <i>boolean</i> | true    | Deprecated -- Remains for backwards compatibility only |
| \$convert_tz | <i>boolean</i> | true    | Convert to user's timezone                             |
| \$user       | <i>User</i>    | null    | User to utilize formatting and timezone info from      |

Returns a string of the date and time formatted based on the user's profile settings. If no user is passed in, the current user's default will be used. If `$convert_tz` is true the string returned will be in the passed in user's timezone. If no user is passed in, the timezone returned will be in UTC.

**Note :** If the string does not match the database format exactly, this function will return boolean false.



---

## Example

```
$datetime_str = "2016-12-28 13:09:01";

// 12-28-2016 07:09
$timedate = new TimeDate();
$datetime = $timedate->to_display_date_time($datetime_str);

// 2016-12-28 13:09
$timedate = new TimeDate();
$datetime = $timedate->to_display_date_time($datetime_str, true, false
, $diff_user);
```

## Parsing

In addition to formatting, TimeDate objects can also return Date/Time values based on special parameters. The TimeDate object has many date parsing options; some of the most common ones are :

|                |   |
|----------------|---|
| parseDateRange | Gets the start and end date/time from a range keyword |
|----------------|---|

### parseDateRange

returns *array*

#### Parameters

| Name                | Data Type      | Default | Description  |
|---------------------|----------------|---------|--|
| \$range             | <i>string</i>  | n/a     | String from a predetermined list of available ranges |
| \$user              | <i>User</i>    | null    | User to utilize formatting and timezone info from    |
| \$adjustForTimezone | <i>boolean</i> | true    | Convert to user's timezone                           |

Returns an array of SugarDateTime objects containing the start and Date/Time values calculated based on the entered parameter. If no user is passed in, the

---

current user's default will be used. If \$adjustForTimezone is true the string returned will be in the passed in user's timezone. If NULL is passed in as the user, the timezone returned will be in UTC. The available values for \$range are :

| <b>Range String</b> | <b>Description</b>                              |
|---------------------|---|
| yesterday           | Yesterday's start and end date/time             |
| today               | Today's start and end date/time                 |
| tomorrow            | Tomorrows's start and end date/time             |
| last_7_days         | Start and end date/time of the last seven days  |
| next_7_days         | Start and end date/time of the next seven days  |
| last_30_days        | Start and end date/time of the last thirty days |
| next_30_days        | Start and end date/time of the next thirty days |
| next_month          | Start and end date/time of next month           |
| last_month          | Start and end date/time of last month           |
| this_month          | Start and end date/time of the current month    |
| last_year           | Start and end date/time of last year            |
| this_year           | Start and end date/time of the current year     |
| next_year           | Start and end date/time of next year            |

### **Example**

```
$timedate = new TimeDate($current_user);  
  
// returns today's start and end date/time in UTC  
$today_utcTZ = $timedate->parseDateRange("today", NULL, false);  
  
// returns today's start and end date/time in the user's timezone  
$today_userTZ = $timedate->parseDateRange("today", $current_user, true  
);
```

**Last Modified:** 2021-02-17 02:44:13

---

# Shortcuts

## Overview

Shortcuts is a framework to add shortcut keys to the application. When shortcut keys are registered, they are registered to a particular shortcut session. Shortcut sessions group shortcut keys, and they can be activated, deactivated, saved, and restored. Global shortcut keys can be registered, but they are not tied to a particular shortcut session. They are rather applied everywhere in the application and can only be applied once.

The Shortcut framework is implemented on top of [Mousetrap library](#).

## Shortcut Sessions

In order to register a shortcut in Sugar, a shortcut session must first be created by adding `ShortcutSession` plugin to the top-level layout JavaScript controller.

```
plugins: ['ShortcutSession']
```

Then, the top-level layout needs to list which shortcuts are allowed in the shortcut session. Shortcuts can be listed in the top-level layout JavaScript controller :

```
./custom/clients/layout/my-layout/my-layout.js
```

```
shortcuts: [  
    'Sidebar:Toggle',  
    'Record:Save',  
    'Record:Cancel',  
    'Record:Action:More'  
]
```

Shortcuts can also be listed in the metadata :

```
./custom/clients/layout/my-layout/my-layout.php
```

```
'shortcuts' => array(  
    'Sidebar:Toggle',  
    'Record:Save',  
    'Record:Cancel',  
    'Record:Action:More'  
) ,
```

---

## Register

Once a shortcut session is created, shortcut keys can be registered by adding the following in your JavaScript code :

```
app.shortcuts.register('<unique shortcut ID>', '<shortcut keys>', <callback function>, <current component>, <call on focus?>);
```

Since shortcut keys should only be registered once in your component, they should be registered inside `initialize()` or someplace where re-rendering the component would not register more than once.

## Shortcut IDs

Shortcut IDs should be unique across the application. They should be namespaced by convention, for example `Record:Next`, `Sidebar:Toggle`, `List>Edit`. If the namespace starts with `Global:`, it assumes that the shortcut is global.

## Global shortcuts

Global shortcuts are shortcut keys that are applied once and are available everywhere in the application.

```
app.shortcuts.register(app.shortcuts.GLOBAL + 'Footer:Help', '?', function() {}, this, false);
```

## Shortcut Keys

There are only certain keys that are supported under the Shortcut framework. The following keyboard keys can be used :

- All alphanumeric characters and symbols
- shift, ctrl, alt, option, meta, command
- backspace, tab, enter, return, capslock, esc, escape, space, pageup, pagedown, end, home, ins, del
- left, up, right, down

## Additional Features

In addition to standard keys, the Shortcut framework also supports some

---

additional features :

- **Key combinations** : 'ctrl+s'
- **Multiple keys** : ['ctrl+a', 'command+a']
- **Key sequences** : 'f a'

## Input Focus

The fifth parameter in the register method specifies whether or not the shortcut key should be fired when the user is focused in an input field. It is false by default.

```
app.shortcuts.register('Record:Save', ['ctrl+s', 'command+s'], function  
( ) {}, this, true);
```

## Limitations

Shortcut keys do not work on side panels, like dashboards and previews.

## Shortcuts Help

Anytime a new shortcut is created, a help text should be provided in `./clients/base/layouts/shortcuts/shortcuts.php` with a shortcut ID and a language string.

```
'List:Favorite' => 'LBL_SHORTCUT_FAVORITE_RECORD',
```

Shortcuts help is displayed when Shortcuts button is clicked.

## Advanced Features

### Enable/disable dynamically

Shortcuts feature can be enabled and disabled dynamically via code by calling `app.shortcuts.enable()` and `app.shortcuts.disable()`.

### Dynamically saving, creating new, and restoring sessions

A new shortcut session is created when a user visits a top-level layout with `ShortcutSession` plugin. A new session can be created dynamically:

---

```
app.shortcuts.createSession(<array of shortcut IDs>, <component>);
```

But before creating a new session, the current session should be saved first.

```
app.shortcuts.saveSession();
app.shortcuts.createSession(<array of shortcut IDs>, <component>);
```

Once a new session is created, shortcut keys can be registered to it. When the need for the session is done, the previous shortcut session can be restored.

```
app.shortcuts.restoreSession();
```

## Example

The following example will be to add some custom shortcuts onto a custom layout. For more information on how to create a custom layout, please refer to the [Creating Layouts](#) documentation.

First, on our custom JavaScript controller for our layout, we must enable the ShortcutSession plugin as well as list the shortcuts we will be enabling :

```
./custom/clients/base/layouts/my-layout/my-layout.js
```

```
({
  plugins: ['ShortcutSession'],
  shortcuts: [
    'Global:MyLayout:MyCallback',
  ],
})
```

Next, on the custom view being rendered on our layout, we will register the new shortcuts as well as define a callback method :

```
./custom/clients/base/views/my-view/my-view.js
```

```
...
initialize: function(options){
  this._super('initialize', [options]);

  // call myCallback method when command + a is pressed
  app.shortcuts.register(app.shortcuts.GLOBAL + 'MyLayout:MyCallback',
    'command+a', this.myCallback, this, false);

  app.shortcuts.saveSession();
}
```

---

```

app.shortcuts.createSession([
    'MyLayout:InlineCall'
], this);

// call inline code when control + m or command + m is pressed
app.shortcuts.register('MyLayout:InlineCall', ['ctrl+m', 'command+m
'], function() {
    console.log("Ctrl or Command m has been pressed");
    }, this, false);
},
myCallback: function(){
    console.log("MyCallback called from Command a");
},
...

```

The last step will be to create a new label for our shortcut help text and register the help so it displays when "Shortcuts" is click in the footer of the page :

```
./custom/Extension/application/Ext/Language/en_us.LBL_MYLAYOUT_SHORTCUT_HELP.php
```

```
<?php
```

```

$app_strings['LBL_MYLAYOUT_MYCALLBACK_HELP'] = "Activates my Callback Method";
$app_strings['LBL_MYLAYOUT_MYINLINECALL_HELP'] = "Activates Inline Code";

```

```
./custom/Extension/application/Ext/clients/base/layouts/shortcuts/shortcuts.php
```

```
<?php
```

```

$viewdefs['base']['layout']['shortcuts']['help']['Global:MyLayout:MyCallback'] = 'LBL_MYLAYOUT_MYCALLBACK_HELP';
$viewdefs['base']['layout']['shortcuts']['help']['MyLayout:InlineCall'] = 'LBL_MYLAYOUT_MYINLINECALL_HELP';

```

Navigate to Admin > Repair > Quick Repair and Rebuild. The system will then rebuild the extensions and add the new shortcut to the custom layout.

**Last Modified:** 2021-02-17 02:44:13

---

# Themes

## Overview

How to customize the Sugar theme.

## Theme Variables

Sugar's theme variables, defined in `./styleguide/themes/clients/base/default/variables.php`, determine the color of the borders, primary action buttons, links, and header navigation. An example of the definition is shown below:

`./styleguide/themes/clients/base/default/variables.php`

```
$lessdefs = array(
    'colors' => array(
        /**
         * Primary Color:
         * 3 pixel line on the navbar
         * -----
         * was @primary
         */
        'BorderColor' => '#d3dbel',
        /**
         * Secondary Color:
         * color of the navbar
         * -----
         * was @secondary
         */
        'NavigationBar' => '#fff',
        /**
         * Primary Button Color:
         * color of the primary button
         * -----
         * was @primaryBtn
         */
        'PrimaryButton' => '#0679c8',
    ),
);
```

## Custom Themes



---

Modifications to the theme can be made by creating `./custom/themes/clients/base/default/variables.php`. Within this file, you can define the custom hex codes for the colors you would like to use. You should note that this is limited to the `@BorderColor`, `@NavigationBar`, and `@PrimaryButton` less variables. An example is shown below.

```
./custom/themes/clients/base/default/variables.php
```

```
<?php

if (!defined('sugarEntry') || !sugarEntry) die('Not A Valid Entry Point');

$lessdefs = array(

    'colors' => array(
        /**
         * Primary Color:
         * 3 pixel line on the navbar
         * -----
         * was @primary
         */
        'BorderColor' => '#E61718',

        /**
         * Secondary Color:
         * color of the navbar
         * -----
         * was @secondary
         */
        'NavigationBar' => '#282828',

        /**
         * Primary Button Color:
         * color of the primary button
         * -----
         * was @primaryBtn
         */
        'PrimaryButton' => '#176de5',
    ),
);
```

**Note:** Developers cannot override existing bootstrap less variables using this file.

---

## Adding CSS

Sugar allows you to customize CSS using the less language in `./custom/themes/custom.less`. As Sugar makes use of the Bootstrap library, you have access to the features of Bootstrap and can make use of its variables to create your own CSS. An example is shown below.

```
./custom/themes/custom.less

//You can import any less file you want and define your own file structure
//@import 'anyotherfile.less'

@myCustomBgColor: lighten(@NavigationBar,10%); //variable defined on a custom variable.

.myCustomClass {
    color:@linkColor; //bootstrap variable
    background-color: @myCustomBgColor;
}
```

## Overriding CSS Definitions

You can use the `./custom/themes/custom.less` file to override CSS classes. The following example overrides the record label font size.

```
./custom/themes/custom.less

/*
 * Changes record field label sizes to 13px;
 */
.record-cell .record-label{
    font-size:13px;
}
```

## Overriding the MegaMenu

As the MegaMenu has limited color customization within `./custom/themes/clients/base/default/variables.php`, you may want to customize the look and feel further. The following example will automatically set the menu's link color to a contrasting color based on the `@NavigationBar` variable and determine the hover and active colors for the tabs.

---

## ./custom/themes/custom.less

```
// Workaround for luminance calculation
// Use luma() function once Sugar upgraded Lessphp to 1.7+ (see: http:
//lesscss.org/functions/#color-channel-luminance)
@luma: 1 - ( (0.299 * red(@NavigationBar)) + (0.587 * green(@Navigatio
nBar)) + (0.114 * blue(@NavigationBar)))/255;

/**
 * LESS GUARDS
 */
// General Nav Colors
.mixin-color() {
  // Darker Colors
  & when (@luma > 0.5) {
    color: darken(contrast(@NavigationBar), 10%) !important;
  }
  // Bright Colors
  & when (@luma <= 0.5) {
    color: lighten(contrast(@NavigationBar), 10%) !important;
    // color: darken(@NavigationBar, 30%) !important;
  }
}

// Nav Fa Icon Colors
.mixin-fa-color(){
  // Darker Colors
  & when (@luma > 0.5) {
    color: darken(contrast(@NavigationBar), 10%) !important;
  }
  // Bright Colors
  & when (@luma <= 0.5) {
    // color: lighten(@NavigationBar, 30%);
    color: lighten(contrast(@NavigationBar), 10%) !important;
    // color: darken(@NavigationBar, 30%) !important;
  }
}

// Hover Button Groups Background colors
.mixin-background-color-hover(){
  // Dark Colors
  & when (@luma > 0.5) {
    background-color: lighten(@NavigationBar, 15%) !important;
  }
  // Bright Colors
  & when (@luma <= 0.5) {
```

---

```
        background-color: darken(@NavigationBar, 15%) !important;
    }
}

// Hover Button Groups colors
.mixin-color-hover(){
    // Dark Colors
    & when (@luma > 0.5) {
        color: darken(contrast(@NavigationBar), 10%) !important;
    }
    // Bright Colors
    & when (@luma <= 0.5) {
        // color: lighten(@NavigationBar, 20%) !important;
        color: lighten(contrast(@NavigationBar), 10%) !important;
    }
}

// Active Button Group Background Colors
.mixin-background-color-active(){
    // Dark Colors
    & when (@luma > 0.5) {
        background-color: lighten(@NavigationBar, 10%) !important;
    }
    // Bright Colors
    & when (@luma <= 0.5) {
        background-color: darken(@NavigationBar, 10%) !important;
    }
}

// Active Button Group Hover Colors
.mixin-color-active-hover(){
    // Dark Colors
    & when (@luma > 0.5) {
        color: darken(contrast(@NavigationBar), 5%) !important;
    }
    // Bright Colors
    & when (@luma <= 0.5) {
        color: lighten(contrast(@NavigationBar), 5%) !important;
    }
}

// Open Button Group Background Colors
.mixin-background-color-open(){
    // Dark Colors
    & when (@luma > 0.5) {
        background-color: lighten(@NavigationBar, 20%) !important;
    }
    // Bright Colors
```

---

```

    & when (@luma <= 0.5) {
        background-color: darken(@NavigationBar, 20%) !important;
    }
}
// Open Button Group Hover Colors
.mixin-color-open-hover(){
    // Dark Colors
    & when (@luma > 0.5) {
        color: darken(contrast(@NavigationBar), 15%) !important;
    }
    // Bright Colors
    & when (@luma <= 0.5) {
        color: lighten(contrast(@NavigationBar), 15%) !important;
    }
}

// Background/Foreground Dropdown Menu Hover
.mixin-background-foreground-dropdown-menu-hover(){
    // Dark Colors
    & when (@luma > 0.5) {
        background-color: lighten(@NavigationBar, 15%) !important;
        color: darken(contrast(@NavigationBar), 15%) !important;
        .fa {
            color: darken(contrast(@NavigationBar), 15%) !important;
        }
    }
    // Bright Colors
    & when (@luma <= 0.5) {
        background-color: @NavigationBar !important;
        color: lighten(contrast(@NavigationBar), 5%) !important;
        .fa {
            color: lighten(contrast(@NavigationBar), 5%) !important;
        }
    }
}

/**
 * LESS Definitions
 */
// Nav Button Group
.module-list .megamenu > .dropdown .module-name{
    .mixin-color;
}
// Home Button Caret
.navbar .megamenu > .dropdown.active .btn-group:not(.open).home .fa-
caret-down,

```

---

```
// More Button Caret
.module-list .megamenu > .dropdown.more .fa,

// Module Toggle caret
.navbar .megamenu > .dropdown .btn-group > .dropdown-toggle .fa {
  .mixin-fa-color;
}

// Nav Button Group Hover
.megamenu .dropdown .btn-group{
  &:hover, &:focus{
    .mixin-background-color-hover;
    .btn,
    > .dropdown-toggle .fa{
      .mixin-color-hover;
    }
  }
}

// Active Button Group
.navbar .megamenu > .dropdown.active .btn-group{
  .mixin-background-color-active;
  > .dropdown-toggle .fa,
  > a.btn{
    .mixin-fa-color;
  }
}

// Active Button Group Hover
.navbar .megamenu > .dropdown.active .btn-group:hover{
  .mixin-color-active-hover;
  > .dropdown-toggle .fa,
  > a.btn{
    .mixin-color-active-hover;
  }
}

// Open Nav Button Group
.navbar .megamenu > .dropdown .btn-group.open{
  .mixin-background-color-open;
  > .dropdown-toggle .fa,
  > a.btn{
    .mixin-fa-color;
  }
}

// Open Nav Button Group Hover
```

---

```
.navbar .megamenu > .dropdown .btn-group.open:hover{
  .mixin-color-open-hover;
  > .dropdown-toggle .fa,
  > a.btn{
    .mixin-color-open-hover;
  }
}

// Nav Button Group Dropdown Menu
.navbar .megamenu > .dropdown .dropdown-menu li a{
  &:hover, &:focus{
    .mixin-background-foreground-dropdown-menu-hover;
  }
}
```

**Last Modified:** 2021-02-17 02:44:13

## Web Accessibility

### Overview

Learn about the Sugar Accessibility Plugin for Sidecar.

### Introduction

Making your application accessible -- per the standards defined by the W3C's [WAI specifications](#) -- is a hard thing to do and even harder to maintain. The goal of the **Sugar Accessibility Plugin for Sidecar** is to automatically apply rules to your rendered HTML, so that you don't have to be concerned with all of the intricacies of accessibility.

With respect to programmatically applying accessibility rules, you can generally assume that the rules fall into one of three categories:

1. Rules that are dependent on the context of the element's use and cannot be applied programmatically because the context is never clear.
2. Rules that can be applied programmatically, but only when the context is clear.
3. Rules that can always be applied programmatically.

---

We plan to continue to develop this plugin to address more and more accessibility concerns in an abstract way, with the intention of completely covering the latter two cases. In the meantime, the plugin handles two very specific cases: and (2) One from the third category.

## How It Works

The plugin listens to the render event for all `View.Component` objects that are created. Anytime a component is rendered, the plugin runs its own plugins (hereinafter referred to as "helpers") on the component. Each of these helpers is responsible for determining if any modifications are necessary in order for the component's HTML to meet accessibility standards and then carrying out those changes in the DOM. This behavior is done automatically as a part of the sidecar framework, so you do not need to do anything to start using it.

Sometimes, a component that you write will modify the HTML after it has been rendered. The plugin has no means of becoming aware of these changes to the HTML and you will have to tell it to look for rules to apply. One example is found in `inView.Fields.Base.ActionmenuField`.

When the user selects all records in a list view, an alert is flashed indicating that all visible records are now selected. Within this alert, a link can be clicked to select all records, even those that are not currently visible. A new onclick event listener is registered for this link. And because this link is added to the DOM after the component is rendered, the author of the component must make sure that the new HTML meets accessibility requirements. Here is how that is done:

```
var $el = $('#select-all');
$el.on('click', function() {...});
app.accessiblity.run($el, 'click');
```

This will only run the click helper. If you want to run all helpers, then call `app.accessiblity.run($el)` (without the second parameter). But be aware that some helpers only support `View.Component` objects, while others support either `View.Component` objects or jQuery DOM elements. So running all helpers on a jQuery DOM element may fail, or at least fail to apply some accessibility rules as expected.

When the logger is configured for debug mode, messages are logged indicating which helpers are being run and which helpers could not be run when intended.

## Plugins



---

A plugin (or helper) is a module that applies an accessibility rule to a `View.Component` (or jQuery DOM element). At runtime, these helpers can be found in `app.accessibility.helpers` and implement a `run` method. The `run` method takes a `View.Component` (or jQuery DOM element) and then checks its HTML to determine if anything needs to be done in order to make the HTML compliant with accessibility standards related to the rule or task with which the helper is concerned. If any changes are necessary, the helper then modifies the HTML to comply.

## Click

The click helper is responsible for making an element compliant with accessibility standards when click events are bound to said element. Since this helper only deals with `onclick` events, it only inspects elements within the component that include `onclick` event listeners.

If the tag name cannot be determined for an element being inspected, then there is no way of knowing whether or not the element is accessible. Thus, the element is assumed to be compliant.

Inherently focusable elements are those elements that require no intervention. These elements include:

- `button`
- `input`
- `select`
- `textarea`

Conditionally focusable elements are those elements that require intervention under certain circumstances. In the case of `<a>` and `<area>` tags, these elements are compliant as long as they contain an `href` attribute. These elements include:

- `a`
- `area`

All other elements are not inherently focusable and require a `tabindex` attribute of `-1` if a `tabindex` attribute does not already exist. This helper adds `tabindex="-1"` to any elements within the component that are not compliant.

When the logger is configured for debug mode, messages are logged...

1. In the event that no `onclick` events were found within the component. Thus, no action is taken.
2. In the event that an element being inspected has no tag name.
3. To report the type of element being made compliant.

---

4. To report the type of element that is already found to be compliant.

## Label

The label helper adds an aria-label to the form element found within the component. This helper only inspects elements that can be found via the component's fieldTag selector and is considered a "best effort" approach.

This helper will only work on View.Field components since it is extremely unlikely for the fieldTag selector for View.Layout or View.View components to match form elements.

A form element is considered to be compliant if the aria-label attribute is already present or if its tag is not one that requires a label. These elements include:

- button
- input
- select
- textarea

This helper adds aria-label="{label}" to the element that needs to be made compliant. View.Field.label is the label that is assigned to the attribute. The component must be a View.Component. Plain jQuery DOM elements are not sufficient since they do not include a label property.

## API

### **SUGAR.accessibility.init()**

Initializes the accessibility module to execute all accessibility helpers on components as they are rendered. This is called by the application during bootstrapping.

### **SUGAR.accessibility.run()**

Loads the accessibility helpers that are to be run and executes them on the component.

## Arguments

|  |  |  |  |
|--|--|--|--|
|  |  |  |  |
|--|--|--|--|

| <b>Name</b> | <b>Type</b>           | <b>Required</b> | <b>Description</b>  |
|-------------|-----------------------|-----------------|---|
| component   | View.Component/jQuery | true            | The element to test for accessibility compliance.   |
| helper      | String/Array          | false           | One or more names of specified helpers to run. All registered helpers will be run if undefined. |

## Returns

*Void*

## **SUGAR.accessibility.whichHelpers()**

Get the helpers registered on a specific element.

| <b>Name</b> | <b>Type</b>  | <b>Required</b> | <b>Description</b>                             |
|-------------|--------------|-----------------|--|
| helper      | String/Array | true            | One or more names of specified helpers to run. |

## Returns

*Array* - The accessibility helpers that were requested. Filters out any named helpers that are not registered. All registered helpers are returned if no helper names are provided as a parameter.

## **SUGAR.accessibility.getElementTag()**

Generates a human-readable string for identifying an element. For example, a[name="link"][class="btn btn-link"][href="http://www.sugarcrm.com/"]. Primarily used for logging purposes, this method is useful for debugging.

## Arguments

---

| Name | Type   | Required | Description  |
|------|--------|----------|--|
| \$el | jQuery | true     | The element for which the tag should be generated. |

## Returns

*String* - A string representing an element's tag, with all attributes. The element's selector, if one exists, is returned when a representation cannot be reasonably generated.

**Last Modified:** 2021-02-17 02:44:13

# Validation Constraints

## Overview

This article will cover how to add validation constraints to your custom code.

## Constraints

Validation constraints allow developers to validate user input

## Symfony Validation Constraints

The Symfony's Validation library, located in `./vendor/symfony/validator/`, contains many open source constraints. You can find the full list of constraints documented in Symfony's [Validation Constraints](#). They are listed below for your reference.

### Basic Constraints

- [NotBlank](#)
- [Blank](#)

- 
- [NotNull](#)
  - [IsNull](#)
  - [IsTrue](#)
  - [IsFalse](#)
  - [Type](#)

## **String Constraints**

- [Email](#)
- [Length](#)
- [Url](#)
- [Regex](#)
- [Ip](#)
- [Uuid](#)

## **Number Constraints**

- [Range](#)

## **Comparison Constraints**

- [EqualTo](#)
- [NotEqualTo](#)
- [IdenticalTo](#)
- [NotIdenticalTo](#)
- [LessThan](#)
- [LessThanOrEqual](#)
- [GreaterThan](#)
- [GreaterThanOrEqual](#)

## **Date Constraints**

- [Date](#)
- [DateTime](#)

- 
- [Time](#)

## Collection Constraints

- [Choice](#)
- [Collection](#)
- [Count](#)
- [UniqueEntity](#)
- [Language](#)
- [Locale](#)
- [Country](#)

## File Constraints

- [File](#)
- [Image](#)

## Financial and other Number Constraints

- [Bic](#)
- [CardScheme](#)
- [Currency](#)
- [Luhn](#)
- [Iban](#)
- [Isbn](#)
- [Issn](#)

## Other Constraints

- [Callback](#)
- [Expression](#)
- [All](#)
- [UserPassword](#)
- [Valid](#)

---

## Sugar Constraints

Sugar contains its own set of validation constraints. These constraints extend from Symfony's validation constraints and are located in `./src/Security/Validator/Constraints` of your Sugar installation.

|   |  |
|---|--|
| <ul style="list-style-type: none"><li>• Bean/ModuleName</li><li>• Bean/ModuleNameValidator</li><li>• ComponentName</li><li>• ComponentNameValidator</li><li>• Delimited</li><li>• DelimitedValidator</li><li>• DropDownList</li><li>• DropDownListValidator</li><li>• File</li><li>• FileValidator</li><li>• Guid</li><li>• GuidValidator</li><li>• InputParameters</li><li>• InputParametersValidator</li><li>• JSON</li></ul> | <ul style="list-style-type: none"><li>• JSONValidator</li><li>• Language</li><li>• LanguageValidator</li><li>• LegacyCleanString</li><li>• LegacyCleanStringValidator</li><li>• Mvc/ModuleName</li><li>• Mvc/ModuleNameValidator</li><li>• PhpSerialized</li><li>• PhpSerializedValidator</li><li>• Sql/OrderBy</li><li>• Sql/OrderByValidator</li><li>• Sql/OrderDirection</li><li>• Sql/OrderDirectionValidator</li><li>• SugarLogic/FunctionName</li><li>• SugarLogic/FunctionNameValidator</li></ul> |
|---|--|

## Custom Constraints

If you find that the existing constraints do not meet your needs, you can also create your own. These constraints exist under `./custom/src/Security/Validator/Constraints/`. The following section will outline the details. The example below will demonstrate how to create a phone number validation constraint.

The constraint file will contain your validations error message.

```
./custom/src/Security/Validator/Constraints/Phone.php
```

```
<?php
```

```
namespace Sugarcrm\Sugarcrm\custom\Security\Validator\Constraints;
```

```
use Symfony\Component\Validator\Constraint;
```

---

```

/**
 *
 * @see PhoneValidator
 *
 */
class Phone extends Constraint
{
    public $message = 'Phone number violation: %msg%';
}

```

The validator file will contain the logic to determine whether the value meets the requirements.

`./custom/src/Security/Validator/Constraints/PhoneValidator.php`

```

<?php

namespace Sugarcrm\Sugarcrm\custom\Security\Validator\Constraints;

use Symfony\Component\Validator\Constraint;
use Symfony\Component\Validator\ConstraintValidator;
use Symfony\Component\Validator\Exception\UnexpectedTypeException;

/**
 *
 * Phone validator
 *
 */
class PhoneValidator extends ConstraintValidator
{
    /**
     * Phone Pattern Examples;
     * +1 12 3456789
     * +1.12.3456789
     */
    const PHONE_PATTERN = '/^([+]?\d+(?:[ \.]\d+)*)$/';

    /**
     * {@inheritdoc}
     */
    public function validate($value, Constraint $constraint)
    {
        if (!$constraint instanceof Phone) {
            throw new UnexpectedTypeException($constraint, __NAMESPACE__ . '\Phone');
        }
    }
}

```



---

```

    }

    if (null === $value || '' === $value) {
        return;
    }

    if (!is_scalar($value) && !(is_object($value) && method_exists(
($value, '__toString')))) {
        throw new UnexpectedTypeException($value, 'string');
    }

    $value = (string) $value;

    // check for allowed characters
    if (!preg_match(self::PHONE_PATTERN, $value)) {
        $this->context->buildViolation($constraint->message)
            ->setParameter('%msg%', 'invalid format')
            ->setInvalidValue($value)
            ->addViolation();
        return;
    }
}
}

```

Once the files are in place, navigate to Admin > Repairs and run a Quick Repair and Rebuild. Once completed, your constraint will be ready for use.

## Using Constraints in API End Points

In this section, we will create a custom endpoint and trigger the custom [phone constraint](#) we created above. The code below will create a REST API endpoint path of /phoneCheck:

```
./custom/clients/base/api/MyEndpointsApi.php
```

```

<?php

if (!defined('sugarEntry') || !sugarEntry) {
    die('Not A Valid Entry Point');
}

use Sugarcrm\Sugarcrm\Security\Validator\ConstraintBuilder;
use Sugarcrm\Sugarcrm\Security\Validator\Validator;

class MyEndpointsApi extends SugarApi

```

---

```

{
    public function registerApiRest()
    {
        return array(
            //POST
            'MyEndpointsApi' => array(
                //request type
                'reqType' => 'POST',
                //endpoint path
                'path' => array('phoneCheck'),
                //endpoint variables
                'pathVars' => array(''),
                //method to call
                'method' => 'phoneCheck',

                //minimum api version
                'minVersion' => 10,
                //short help string to be displayed in the help docume
ntation
                'shortHelp' => 'An example of a POST endpoint to valid
ate phone numbers',
                //long help to be displayed in the help documentation
                'longHelp' => 'custom/clients/base/api/help/MyEndPoint
_phoneCheck_help.html',
            ),
        );
    }

    /**
     * Method to be used for my MyEndpointsApi/phoneCheck endpoint
     */
    public function phoneCheck($api, $args)
    {
        $validator = Validator::getService();
        /**
         * Validating Phone Number
         */
        $phoneConstraintBuilder = new ConstraintBuilder();
        $phoneConstraints = $phoneConstraintBuilder->build(
            array(
                'Assert\Phone',
            )
        );
        $errors = $validator->validate($args['phone'], $phoneConstrain
ts);
        if (count($errors) > 0) {

```

---

```
        /*
        * Uses a __toString method on the $errors variable which
is a
        * ConstraintViolationList object. This gives us a nice st
ring
        * for debugging.
        */
$errorsString = (string) $errors;

// include/api/SugarApiException.php
throw new SugarApiExceptionInvalidParameter($errorsString)
;
    }

    //custom logic
    return $args;
}
}
```

After creating the endpoint, navigate to Admin > Repairs and run a Quick Repair and Rebuild. The API will then be ready to use.

### **Valid Payload - POST to /phoneCheck**

The example below demonstrates a valid phone number post the /phoneCheck endpoint.

```
{
  phone: "+1.23.456.789"
}
```

### **Result**

```
{
  phone: "+1.23.456.789"
}
```

### **Invalid Payload - POST to /phoneCheck**

The example below demonstrates an invalid phone number post the /phoneCheck endpoint.

```
{
```

---

```
    phone: "Invalid+1.23.456.789"
}
```

## Result

```
{
  "error": "invalid_parameter",
  "error_message": "Invalid+1.23.456.789:\n    Phone number violation
: invalid format\n"
}
```

**Last Modified:** 2021-02-17 02:44:13

# CLI

## Overview

Sugar includes a beta command-line interface tool built using the [Symfony Console Framework](#). Sugar's CLI is intended to be an administrator or developer-level power tool to execute PHP code in the context of Sugar's codebase. These commands are version-specific and can be executed on a preinstalled Sugar instance or on an installed Sugar instance. Sugar's CLI is not intended to be used as a tool to interact remotely with an instance nor is it designed to interact with multiple instances.

## Commands

Sugar Commands are an implementation of [Console Commands](#). They extend the base console classes to execute Sugar specific actions. Each instance of Sugar is shipped with a list of predefined commands. The current list of commands is shown below.

| Command       | Description   |
|---------------|---|
| help          | Displays help for a command                         |
| list          | Lists commands                                      |
| aclcache:dump | Dumps ACL cache contents into cache/acldumps folder |
|               |   |

|                          |   |
|--------------------------|---|
| elastic:explain          | Execute global search explain queries for debugging purposes. As this will generate a lot of output in JSON format, it is recommended to redirect the output to a file for later processing |
| elastic:indices          | Show Elasticsearch index statistics   |
| elastic:queue            | Show Elasticsearch queue statistics   |
| elastic:queue_cleanup    | Cleanup records from Elasticsearch queue  |
| elastic:refresh_enable   | Enable refresh on all indices   |
| elastic:refresh_status   | Show Elasticsearch index refresh status   |
| elastic:refresh_trigger  | Perform a manual refresh on all indices   |
| elastic:replicas_enable  | Enable replicas on all indices  |
| elastic:replicas_status  | Show Elasticsearch index refresh status   |
| elastic:routing          | Show Elasticsearch index routing  |
| idm-mode:manage          | enable, disable IDM mode, or move config data to DB   |
| password:config          | Show password hash configuration  |
| password:reset           | Reset user password for local user authentication   |
| password:weak            | Show users having weak or non-compliant password hashes   |
| search:fields            | Show search engine enabled fields   |
| search:module            | Enable/disable given module for search  |
| search:reindex           | Schedule SearchEngine reindex   |
| search:silent_reindex    | Create mappings and index the data  |
| search:silent_reindex_mp | Create mappings and index the data using multi-processing   |
| search:status            | Show search engine availability and enabled modules   |
| team-security:rebuild    | Rebuild denormalized team security data   |
| team-security:status     | Display the status of the denormalized data   |
| teamset:backup           | Backs up the team_sets related tables   |
| teamset:prune            | Prune all team set tables of unused team sets. Original tables will be backed up  |

|                             |  |
|-----------------------------|--|
|                             | automatically. DO NOT USE while users are logged into the system                             |
| teamset:restore_from_backup | Restores all team set tables from backups. DO NOT USE while users are logged into the system |
| teamset:scan                | Scan all module tables for unused team sets and report the number found                      |
| teamset:sql                 | Print the sql query used to search for unused teamsets                                       |

**Note:** For advanced users, a bash autocompletion script for CLI is located at `./src/Console/Resources/sugarcrm-bash-completion` for inclusion in `~/.bashrc`. More details on using the script can be found in the file's header comments.

## Usage

The command executable, located at `./bin/sugarcrm`, is executed from the root of the Sugar instance. The command signature is shown below:

```
php bin/sugarcrm <command> [options] [arguments]
```

## Help

The command console has built-in help documentation. If you pass in a command that isn't found, you will be shown the default help documentation.

```
SugarCRM Console version <version>
```

Usage:

```
command [options] [arguments]
```

Options:

```
-h, --help           Display this help message
-q, --quiet          Do not output any message
-V, --version        Display this application version
  --ansi             Force ANSI output
  --no-ansi          Disable ANSI output
-n, --no-interaction Do not ask any interactive question
  --profile          Display timing and memory usage information
-v|vv|vvv, --verbose Increase the verbosity of messages: 1 for normal output, 2 for more verbose output and 3 for debug
```

---

Available commands:

|  |  |
|--|--|
| help                                   | Displays help for a command  |
| list                                   | Lists commands   |
| aclcache                               |  |
| aclcache:dump                          | Dumps ACL cache contents into cache/acl  |
| dumps folder.                          |  |
| elastic                                |  |
| elastic:explain                        | Execute global search explain queries for debugging purposes. As this will generate a lot of output in JSON format, it is recommended to redirect the output to a file for later processing. |
| elastic:indices                        | Show Elasticsearch index statistics  |
| elastic:queue                          | Show Elasticsearch queue statistics  |
| elastic:queue_cleanup                  | Cleanup records from Elasticsearch queue.  |
| elastic:refresh_enable                 | Enable refresh on all indices  |
| elastic:refresh_status                 | Show Elasticsearch index refresh status  |
| elastic:refresh_trigger                | Perform a manual refresh on all indices  |
| elastic:replicas_enable                | Enable replicas on all indices   |
| elastic:replicas_status                | Show Elasticsearch index refresh status  |
| elastic:routing                        | Show Elasticsearch index routing   |
| idm-mode                               |  |
| idm-mode:manage                        | enable, disable IDM mode, or move config data to DB  |
| password                               |  |
| password:config                        | Show password hash configuration   |
| password:reset                         | Reset user password for local user authentication.   |
| password:weak                          | Show users having weak or non-compliant password hashes  |
| search                                 |  |
| search:fields                          | Show search engine enabled fields  |
| search:module                          | Enable/disable given module for search   |
| search:reindex                         | Create mappings and schedule a reindex   |
| search:silent_reindex                  | Create mappings and index the data   |
| search:silent_reindex_multi-processing | Create mappings and index the data using multi-processing  |
| search:status                          | Show search engine availability and enabled modules  |
| team-security                          |  |
| team-security:rebuild                  | Rebuild denormalized team security data  |
| team-security:status                   | Display the status of the denormalized data  |
| teamset                                |  |
| teamset:backup                         | Backs up the team_sets related tables.   |
| teamset:prune                          | Prune all team set tables of unused team sets.   |

---

m sets. Original tables will be backed up automatically. DO NOT USE while users are logged into the system!

teamset:restore\_from\_backup Restores all team set tables from backups. DO NOT USE while users are logged into the system!

teamset:scan Scan all module tables for unused team sets and report the number found.

teamset:sql Print the sql query used to search for unused teamsets

Additional help documentation is also available for individual commands. Some examples of accessing the help are shown below.

Passing the word "help" before a command name:

```
php bin/sugarcrm help <command>
```

Passing the "-h" option:

```
php bin/sugarcrm <command> -h
```

An example of the list help documentation is shown below.

Usage:

```
list [options] [--] []
```

Arguments:

```
namespace          The namespace name
```

Options:

```
--xml              To output list as XML
```

```
--raw             To output raw command list
```

```
--format=FORMAT  The output format (txt, xml, json, or md) [default: "txt"]
```

Help:

The list command lists all commands:

```
php bin/sugarcrm list
```

You can also display the commands for a specific namespace:

```
php bin/sugarcrm list test
```

You can also output the information in other formats by using the --format option:



---

```
php bin/sugarcrm list --format=xml
```

It's also possible to get raw list of commands (useful for embedding command runner):

```
php bin/sugarcrm list --raw
```

## Custom Commands

Sugar allows developers the ability to create custom commands. These commands are registered using the [Extension Framework](#). Each custom command will extend the stock Command class and implement a specific mode interface. The file system location of the command code can exist anywhere in the instance's file system including a separate composer-loaded repository.

## Best Practices

The following are some common best practices developers should keep in mind when adding new commands :

- Do not extend from existing commands
- Do not duplicate an already existing command
- Pick the correct mode for the command
- Limit the logic in the command
- Do not put reusable components in the command itself

Each command requires specific sections of code in order to properly create the command. These requirements are listed in the sections below.

## Command Namespace

It is recommended to name any custom commands using a proper "command namespace". These namespaces are different than PHP namespaces and reduce the chances of collisions occurring between vendors. An example of this would be to prefix any commands with a namespace format of vendor:category:command E.g. MyDevShop:repairs:fixMyModule

**Note:** The CLI framework does not allow overriding of existing commands.

## PHP Namespace

---

The header of the PHP command file will need to define the following namespace:

```
namespace Sugarcrm\Sugarcrm\custom\Console\Command;
```

In addition to the namespace, the following use commands are required for different operations :

| <b>Name</b>          | <b>Description</b>  | <b>Example</b>   |
|----------------------|---|--|
| Command              | Every command will extend the Command class                   | use Symfony\Component\Console\Command\Command;   |
| <a href="#">Mode</a> | Whether the command is an Instance or Standalone Mode command | use Sugarcrm\Sugarcrm\Console\CommandRegistry\Mode\InstanceModeInterface;<br><br>use Sugarcrm\Sugarcrm\Console\CommandRegistry\Mode\StandaloneModeInterface; |
| Input                | Accepts Input from the command                                | use Symfony\Component\Console\Input\InputInterface;  |
| Output               | Sends Output from the command                                 | use Symfony\Component\Console\Output\OutputInterface;  |

## Mode

When creating Sugar commands, developers will need to specify the mode or set of modes for the command. These modes help prepare the appropriate resources for execution of the command.

| <b>Mode</b>     | <b>Description</b>  |
|-----------------|---|
| Instance Mode   | Commands that require an installed Sugar instance.        |
| Standalone Mode | Commands that do not require an installed Sugar instance. |

**Note:** Multiple modes can be selected.

---

## Class Definition

The custom command class definition should extend the stock command class as well as implement a [mode's interface](#).

```
// Instance Mode Class Definition
class <classname> extends Command implements InstanceModeInterface
{
    //protected methods
}

// Standalone Mode Class Definition
class <classname> extends Command implements StandaloneModeInterface
{
    //protected methods
}

// Implementing both Modes
class <classname> extends Command implements InstanceModeInterface, StandaloneModeInterface
{
    //protected methods
}
```

## Methods

Each command class implements two protected methods :

| Method  | Description  |
|---|--|
| configure()   | Runs on the creation of the command. Useful to set the name, description, and help on the command. |
| execute(InputInterface \$input, OutputInterface \$output) | The code to run for executing the command. Accepts an input and output parameter.                  |

An example of implementing the protected methods is shown below:

```
protected function configure()
{
    $this->setName('sugardev:helloworld')
        ->setDescription('Hello World')
        ->setHelp('This command accepts no paramters and returns "Hel
```

---

```
lo World".')
    ;
}
```

```
protected function execute(InputInterface $input, OutputInterface $output)
{
    $output->writeln("Hello world -> " . $this->getApplication()->getMode());
}
```

## Registering Command

After creating the custom command file, register it with the [Extension Framework](#). This file will be located in `./custom/Extension/application/Ext/Console/`. An example of registering a command is below:

```
<?php
```

```
Sugarcrm\Sugarcrm\Console\CommandRegistry\CommandRegistry::getInstance()
    ->addCommand(new Sugarcrm\Sugarcrm\custom\Console\Command\<Command
Class Name>());
```

Next, navigate to Admin > Repair > Quick Repair and Rebuild. The custom command will now be available.

## Example

The following sections demonstrate how to create a "Hello World" example. This command does not alter the Sugar system and will only output display text. First, create the command class under the appropriate namespace.

```
./custom/src/Console/Command/HelloWorldCommand.php
```

```
<?php
```

```
namespace Sugarcrm\Sugarcrm\custom\Console\Command;

use Sugarcrm\Sugarcrm\Console\CommandRegistry\Mode\InstanceModeInterface;
use Symfony\Component\Console\Command\Command;
use Symfony\Component\Console\Input\InputInterface;
```

---

```

use Symfony\Component\Console\Output\OutputInterface;

/**
 *
 * Hello World Example
 *
 */
class HelloWorldCommand extends Command implements InstanceModeInterface
{

    protected function configure()
    {
        $this
            ->setName('sugardev:helloworld')
            ->setDescription('Hello World')
            ->setHelp('This command accepts no paramters and returns "
Hello World".');
    }

    protected function execute(InputInterface $input, OutputInterface
$output)
    {
        $output->writeln("Hello world -> " . $this->getApplication()->
getMode());
    }
}

```

Next, register the new command:

```
./custom/Extension/application/Ext/Console/RegisterHelloWorldCommand.php
```

```
<?php
```

```

// Register HelloWorldCommand
Sugarcrm\Sugarcrm\Console\CommandRegistry\CommandRegistry::getInstance
()
    ->addCommand(new Sugarcrm\Sugarcrm\custom\Console\Command\HelloWor
ldCommand());

```

Navigate to Admin > Repair > Quick Repair and Rebuild. The new command will be executable from the root of the Sugar instance. It can be executed by running the following command:

```
php bin/sugarcrm sugardev:helloworld
```

---

## Result:

```
Hello world -> InstanceMode
```

Help text can be displayed by executing the following command:

```
php bin/sugarcrm help sugardev:helloworld
```

## Result:

Usage:

```
sugardev:helloworld
```

Options:

```
-h, --help           Display this help message
-q, --quiet          Do not output any message
-V, --version        Display this application version
    --ansi           Force ANSI output
    --no-ansi        Disable ANSI output
-n, --no-interaction Do not ask any interactive question
    --profile         Display timing and memory usage information
-v|vv|vvv, --verbose Increase the verbosity of messages: 1 for normal output, 2 for more verbose output and 3 for debug
```

Help:

This command accepts no parameters and returns "Hello World".

Download the module loadable example package [here](#).

**Last Modified:** 2022-03-25 17:39:05

## Performance Tuning

The following sections detail ways to enhance the performance of your Sugar instance.

**Last Modified:** 2021-02-17 02:44:13

## Sugar Performance

---

## Overview

As your company uses Sugar over time, the size of your database will naturally grow and, without the proper maintenance, performance will inevitably begin to degrade. The purpose of this article is to review some of the most common recommendations for increasing the performance in Sugar to help increase the system's efficiency for your users.

**Note:** This guide is intended for on-site installations. Customers hosted on Sugar's cloud service should file a support case for any performance issues.

## General Settings in Sugar

The following recommendations can be modified in the Sugar admin interface

- **Do Not Set Listview and Subpanel Items Per Page to Excessive Settings.** Under Admin > System Settings, there are two settings 'Listview items per page' and 'Subpanel items per page'. The defaults for these settings are 20 and 10 respectively. When increasing these values, it should be expected that general system wide performance will be impacted. We generally recommend keeping listview settings to 100 or less and subpanel settings to be set to 10 or less to keep system performance optimal.
- **Make sure 'Developer Mode' is disabled under Admin > System Settings.** This setting should never be enabled in a production environment as it causes cached files to be rebuilt on every page load.
- **Set the 'Log Level' to 'Fatal' and 'Maximum log size' to '10M' under Admin > System Settings.** The log level should only be set to more verbose levels when troubleshooting the application as it will cause a performance degradation as user activity increases.
- **Ensure the scheduled job, 'Prune Database on the 1st of Month', is set to 'Active'.** This will go through your database and delete any records that have been deleted by your users. Sugar only soft deletes records when a user deletes a record and over time, this will cause performance degradation if these records are not removed from the database.
- **Make sure 'Tracker Performance' and 'Tracker Queries' are disabled under Admin > Tracker.** These settings are intended to help diagnose performance issues and should never be left enabled in a production environment.
- **Ensure large scheduler jobs are running at slower intervals under Admin > Scheduler.** Jobs such as 'Check Inbound Mailboxes' can decrease overall performance if they are running every minute and polling a lot of data. It is important to set these jobs to every 5 or 10 minutes to help offset the performance impacts for your users.

---

# Sugar Performance Settings

## General Settings

**Disable client IP verification** : Eliminates the system checking to see if the user is accessing Sugar from the IP address of their last page load.

```
$sugar_config['verify_client_ip'] = false;
```

## BWC Modules

For modules running in Backward Compatibility mode, the following settings can be used to speed up performance:

**Drop the absolute totals from listviews** : Eliminates performing expensive count queries on the database when populating listviews and subpanels.

```
$sugar_config['disable_count_query'] = true;
```

**Disable automatic searches on listviews** : Forces a user to perform a search when they access a listview rather than loading the results from their last search.

```
$sugar_config['save_query'] = 'populate_only';
```

**Hide all subpanels** : Increases performance by collapsing all subpanels when accessing a detailview every time and not querying for data until a user explicitly expands a subpanel

```
$sugar_config['hide_subpanels'] = true;
```

**Hide subpanels per session** : Increases performance by collapsing all subpanels when accessing a detailview when the user logs in but any subpanels expanded during the user's session will remain expanded until the user logs out

```
$sugar_config['hide_subpanels_on_login'] = true;
```

## General Environment Checks

Depending on your environment and version of Sugar, there may be additional changes your system administrator can make to improve performance.

- **If your instance is running Sugar 6.3.x or lower, we highly**



---

**recommend upgrading to 6.4.x or 6.5.x.** Beginning in 6.4.x, we made a number of query improvement to address overall application performance. With 6.5.x, we drastically improved the UI to improve the speed of page loads.

- **If your instance of Sugar is version 6.3.x or higher with a MySQL database, we highly recommend upgrading the MySQL 5.5.** MySQL 5.5 offers performance improvements in a number of areas over 5.1 such as subselects in queries.
- **If you are using MySQL as your database, we strongly recommend using InnoDB.** InnoDB is tested to be better performing than MyISAM and should be the default configuration for using MySQL with Sugar.
- **If you are running PHP 5.2.x, we strongly recommend upgrading to a supported version of PHP 5.3.** Our current list of supported PHP versions can be found on our [Supported Platforms](#) page.
- **If you are using a single server setup (web server and database on the same server), we have the following recommendations.**
  - The server should have a minimum of 8 GB of RAM and roughly follow the 60/40 rule (60% for database / 40% for web server). On a 8 GB server, this would mean 4.8 GB for database and 3.2 GB for web server.
  - Make sure the following parameters are set for MySQL (assumption is that the engine is InnoDB)
    - `innodb_buffer_pool_size` = 4294967296 (4 GB in size)
    - `innodb_log_buffer_size` = anywhere from 10485760 (10 MB - Minimal writes) to 104857600 (100 MB - Lots of writes)
- **If you are using IE 8 or lower, we recommend upgrading to IE 9 or using Google Chrome.** Earlier versions of IE 8 exhibit poor performance with our application and we recommend updating your browser to IE 9 or changing to Chrome.

## PHP Caching

Whether your instance of Sugar is deployed on a Linux or Windows server, you should utilize opcode caching to ensure optimal performance. For Linux servers, APC is the recommended opcode cache for PHP with the following guidelines and settings:

- Use the latest stable version.
- `apc.shm` size should be close to your program size. For Sugar, that's at least 150 MB (default for `apc.shm` is 32 MB). When in doubt, more is always better.
- `apc.stat_ctime` should be enabled. This will ensure file changes are noticed. You should note that this may increase the `stat()` activity to your NFS.
- `apc.file_update_protection` should be enabled. This helps the system when

---

trying to add multiple files to the cache at the same time.

- If your installation of Sugar is located on a network filesystem such as NFS or CIFS, make sure `apc.stat` is enabled.
- `apc.ttl` should be set to 0. This parameter disables garbage collection and can cause fragmentation. Earlier APC releases had locking issues that made caches with many entries take forever to be garbage collected.
- `apc.shm_segments` should be set to the default of 1. If you think you really need multiple `shm_segments`, you must also read the documentation on `apc.mmap_file_mask` as well and understand and set that value accordingly. If you don't understand `apc.mmap_file_mask`, you should leave `apc.shm_segments` at the default value.
- APC ships with an additional `apc.php` file that when hit with a browser, will show settings, cache information, and fragmentation. If you suspect APC problems, this is a great tool to start checking things out.

**Last Modified:** 2021-02-17 02:44:13

## PHP Profiling

### Overview

As of the 6.6.2 release, Sugar introduced the ability to profile via [XHProf](#), which is an easy-to-use, hierarchical profiler for PHP. This allows developers to better manage and understand customer performance issues introduced by their customizations. This tool enables quick and accurate identification of the sources of performance sinks within the code by generating profiling logs. Profiling gives you the ability to see the call stack for the entire page load with timing details around function and method calls as well as statistics on call frequency.

Assuming XHProf is installed and enabled in your PHP configuration (which you can learn how to do in the [PHP Manual](#)), you can enable profiling in Sugar by adding the following parameters to the `./config_override.php` file:

```
$sugar_config['xhprof_config']['enable'] = true;
$sugar_config['xhprof_config']['log_to'] = '{instance server path}/cache/xhprof';
// x where x is a number and 1/x requests are profiled. So to sample a
// ll requests set it to 1
$sugar_config['xhprof_config']['sample_rate'] = 1;
// array of function names to ignore from the profile (pass into xhprof_enable)
```

---

```
$sugar_config['xhprof_config']['ignored_functions'] = array();  
// flags for xhprof  
$sugar_config['xhprof_config']['flags'] = XHPROF_FLAGS_CPU + XHPROF_FLAGS_MEMORY;
```

Please note that with the above 'log\_to' parameter, you would need to create the `./cache/xhprof/` directory in your instance directory with proper permissions and ownership for the Apache user. You can also opt to leave the `xhprof_config.log_to` parameter empty and set the logging path via the `xhprof.output_dir` parameter in the `php.ini` file.

Once the above parameters are set, XHProf profiling will log all output to the indicated directory and allow you to research any performance related issues encountered in the process of developing and maintaining the application.

**Last Modified:** 2021-02-17 02:44:13

## Integrating Sugar With New Relic APM for Performance Management

### Overview

Sugar 7 includes support for New Relic APM™, a third-party Application Performance Management (APM) tool that can facilitate deep insight into your Sugar instance in order to troubleshoot sluggish response times. This article explains how to set up and use New Relic in conjunction with Sugar for powerful performance management capabilities.

**Note:** This article pertains to on-site installations of Sugar only. SugarCloud customers who are experiencing performance-related issues should [contact the Sugar Support team](#) for assistance.

### Prerequisites

- To install and configure New Relic for use with your Sugar instance, you must have Sugar hosted on-site and have access to the root directory.
- You must be a New Relic account holder. To sign up for New Relic, please visit [newrelic.com](https://newrelic.com) to find the subscription level best suited for your needs.

---

## Steps to Complete

New Relic can provide useful information outside of the Sugar integration, but the feedback it provides will be limited to the instance's PHP file structure, which could make troubleshooting your instance a challenge. Follow these instructions to set up and use New Relic for PHP with your Sugar instance.

### Installing the New Relic for PHP Agent

First, install the New Relic for PHP agent. For the most current installation steps, please refer to the [Getting Started Guide](#) on the documentation site for New Relic for PHP.

### Configuring Sugar to Work With New Relic for PHP

Enable the Sugar integration with New Relic by editing the `./config_override.php` file. Add the following lines to the end of the file contents (explanation follows):

```
$sugar_config['metrics_enabled'] = 1;
$sugar_config['metric_providers']['SugarMetric_Provider_Newrelic'] = '
include/SugarMetric/Provider/Newrelic.php';
$sugar_config['metric_settings']['SugarMetric_Provider_Newrelic']['app
licationname'] = "SugarCRM New Relic";
```

- The first line of the configuration enables metrics collection for your Sugar instance.
- The second line specifies the path where the New Relic provider files can be found.  
**Note:** When overwriting the New Relic provider, this path must be changed to the location where the files are located in the `./custom/` directory.
- The last line allows you to configure a custom application name so that you may make a distinction between production, staging and development environments. This name will be displayed in your New Relic application list. Simply replace the text inside the double quotes with your desired application name. In the example above, we name the application, "SugarCRM New Relic".


### Using New Relic for PHP

New Relic integrated with Sugar enables you to view the exact functions that cause unusual performance behavior in your instance, such as unexpected triggering of logic hooks, database queries that should be optimized, or

---


customizations that are responding slower than expected.

Shortly after completing the configuration steps above, a new application will appear in the New Relic APM interface's application list. Click on the appropriate application's name to view the overview dashboard.

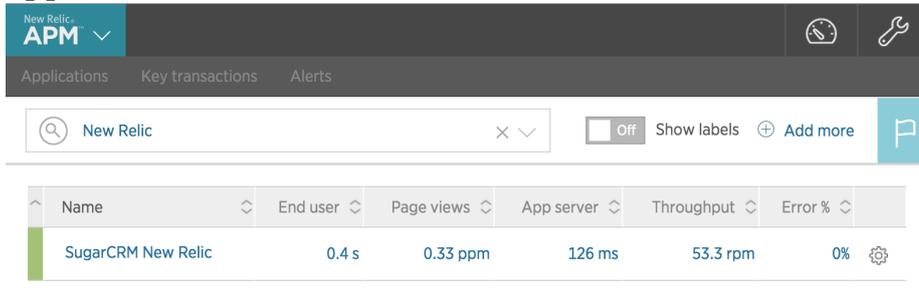


## Overview Dashboard

The dashboard gives you a quick overview of server response times over a selected period. By default, it will show data collected within the last 30 minutes. To the right of this chart is the Apdex (short for application performance index) chart. Apdex provides an easy way to measure whether performance meets user expectations.

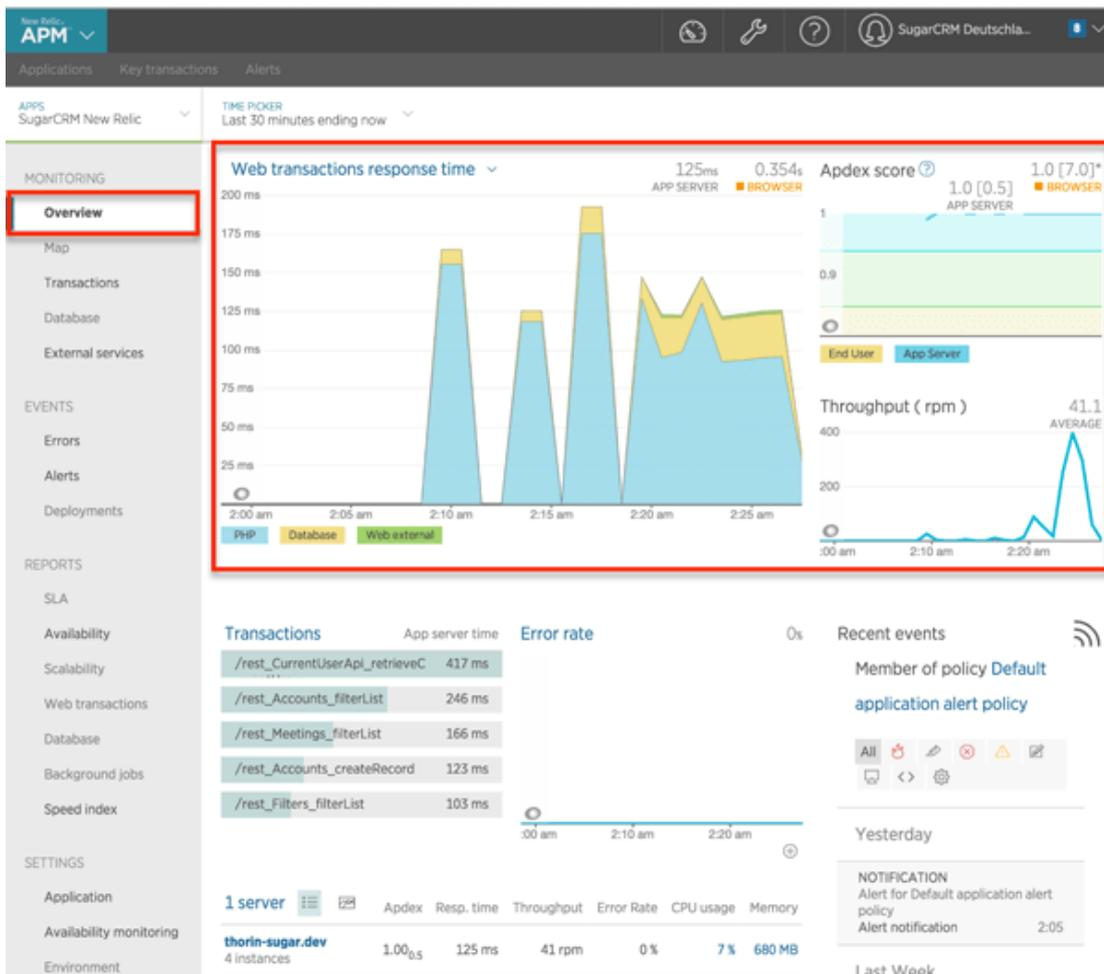


In this instance, the Apdex threshold, or T-value, is configured to 0.5 seconds. This means that an app server response time of 0.5 seconds or less is satisfactory for the users, a response time between 0.5 seconds and 2.0 seconds is tolerable, and any value higher than 2.0 seconds becomes frustrating.

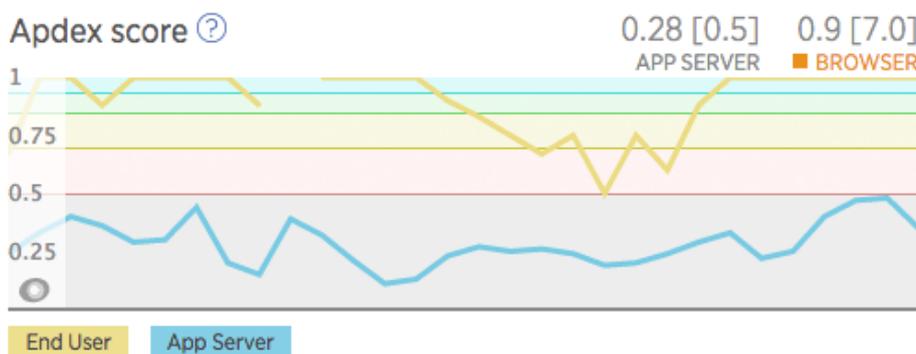


The default Apdex T-value for New Relic is 0.5 seconds but it can be configured to match your current environment and user expectations. For information on changing the Apdex T-value, please refer to the [Change Your Apdex Settings](#) article in the New Relic documentation.

## Transactions

The Transactions listing is one of the most powerful tools available in New Relic. It will reveal the specific calls or actions that are taking the most time and resources from the server, and speculate as to why. Select "Transactions" in the menu on the left to see a full overview of all the calls done in sugar, sorted by the most time consuming.

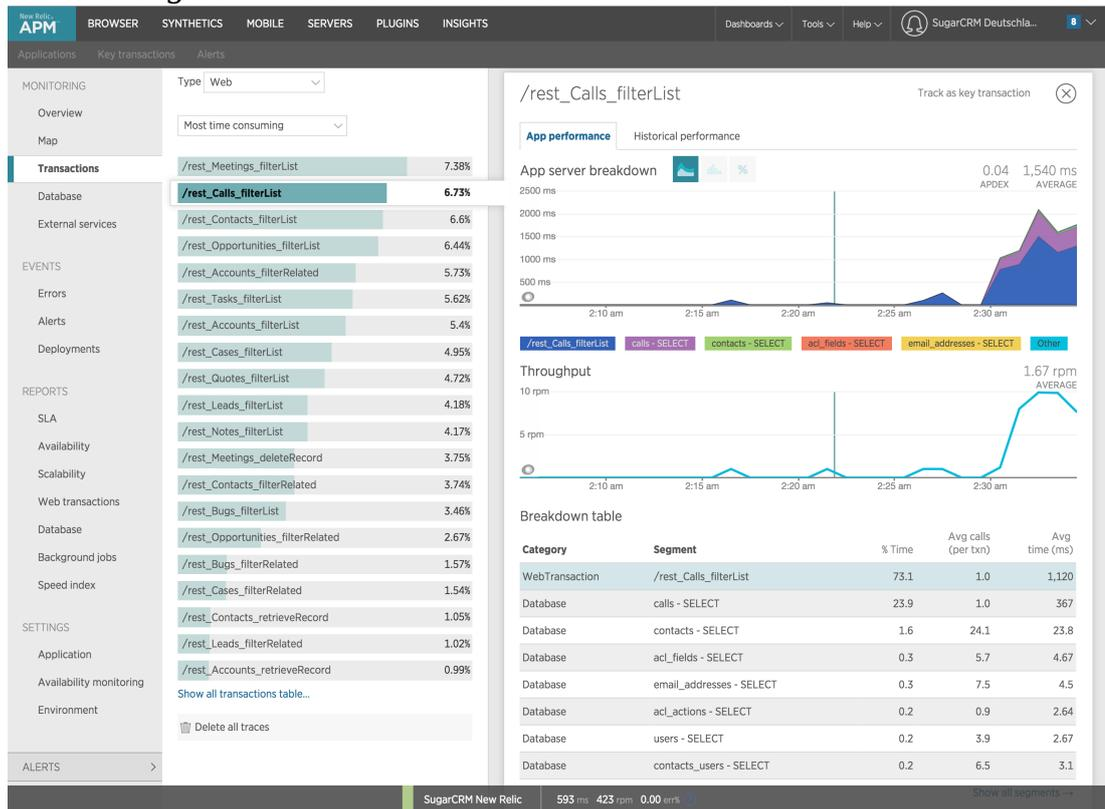

In this case, `rest_Calls_filterList` is selected, which monitors the length of time that it takes to call the Calls module's list view. The performance data for this transaction is displayed on the right. As you can see at the top of the chart, calling the Calls listview has an average response time of 1.5 seconds.

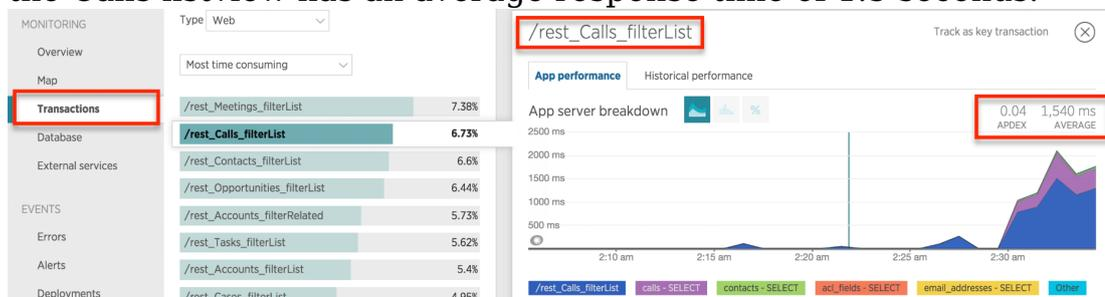

Refer to the breakdown table in the lower part of the screen to see which part of the call is taking the most time, with a representation of the performed actions on

---

the database per segment.

| Category       | Segment                  | % Time | (per txn) | time (ms) |
|----------------|--------------------------|--------|-----------|-----------|
| WebTransaction | /rest_Calls_filterList   | 73.1   | 1.0       | 1,120     |
| Database       | calls - SELECT           | 23.9   | 1.0       | 367       |
| Database       | contacts - SELECT        | 1.6    | 24.1      | 23.8      |
| Database       | acl_fields - SELECT      | 0.3    | 5.7       | 4.67      |
| Database       | email_addresses - SELECT | 0.3    | 7.5       | 4.5       |
| Database       | acl_actions - SELECT     | 0.2    | 0.9       | 2.64      |
| Database       | users - SELECT           | 0.2    | 3.9       | 2.67      |
| Database       | contacts_users - SELECT  | 0.2    | 6.5       | 3.1       |

[Show all segments →](#)

Below the breakdown table is a list of transaction traces. New Relic will automatically generate a transaction trace when a response time is in the frustrating zone of the Apdex or slower. Click on the transaction trace to learn what is having the negative impact on the performance for this activity.


#### Transaction traces

| Sample performance details | App server | Browser |
|----------------------------|------------|---------|
| 02:32 – 4 minutes ago      | 3,491 ms   |         |
| 02:27 – 9 minutes ago      | 98 ms      |         |

The transaction trace shows how long various components took to load. In this case, the SELECT query on the Calls table took a significant amount of time.



2015-02-19 02:32:54    3,490ms    **1,920ms (54.9%)**    29ms (0.83%)  
 TRACE TIME    RESP. TIME    USER CPU BURN    SYSTEM CPU BURN

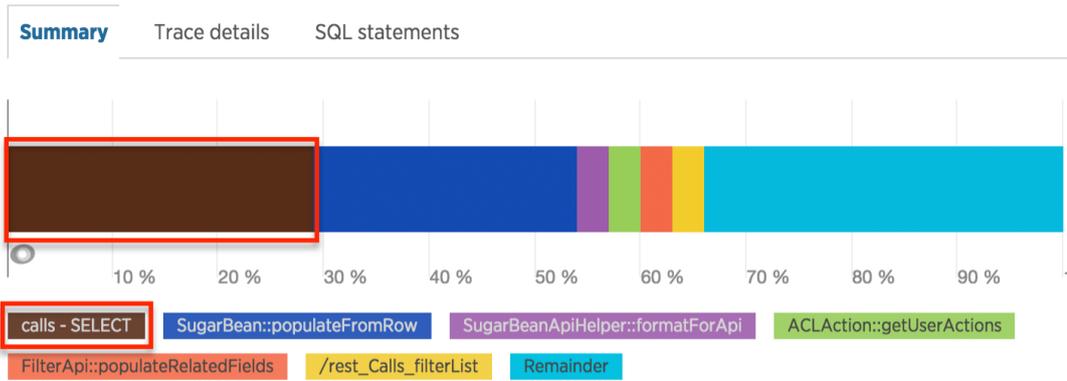

**Slowest components**

|                            | Count | Duration | %   |
|----------------------------|-------|----------|-----|
| calls - SELECT             | 1     | 1,000 ms | 29% |
| SugarBean::populateFromRow | 102   | 860 ms   | 25% |

Click on the Trace Details tab above the chart to investigate further. The details page displays specific functions that are being called and how long they took to execute. By drilling down in the tree to the child functions, it is possible to find the root cause of the impaired performance.

Summary    **Trace details**    SQL statements

Expand performance problems    Collapse all

| Duration (ms) | Duration (%) | Segment                | Drilldown | Timestamp |
|---------------|--------------|------------------------|-----------|-----------|
| 3,490         | 100.00%      | /rest_Calls_filterList |           | 0.000 s   |
| 3,400         | 97.39%       | RestService::execute   |           | 0.001 s   |

Scroll down to find the SELECT query on calls took 1 second to load.

|              |               |                             |  |         |
|--------------|---------------|-----------------------------|--|---------|
| 1,000        | 28.76%        | Mysqli Manager ::queryMulti |  | 0.431 s |
| <b>1,000</b> | <b>28.70%</b> | calls - SELECT              |  | 0.432 s |
| 17.0         | 0.49%         | SugarBean::populateFromRow  |  | 1.437 s |

Click on the database icon next to the action to reveal the SQL query called by Sugar.

1,000  28.70%

calls - SELECT

0.432 s

#### SQL query

```
SELECT case when jt?_favorite_link.id IS NOT NULL then ? else ? end my_favorite, case when j
t?_following_link.id IS NOT NULL then ? else ? end following, calls.name name, calls.status
status, jt?_contacts.salutation contact_name__salutation, jt?_contacts.first_name contact_na
me__first_name, jt?_contacts.last_name contact_name__last_name, calls.parent_type parent_typ
e, calls.parent_id parent_id, calls.date_start date_start, calls.date_end date_end, jt?_assi
gned_user_link.first_name assigned_user_name__first_name, jt?_assigned_user_link.last_name a
ssigned_user_name__last_name, jt?_contacts.id contact_id, calls.assigned_user_id assigned_us
er_id, calls.id id, calls.date_modified date_modified, calls.created_by created_by FROM call
s INNER JOIN (select tst.team_set_id from team_sets_teams tst INNER JOIN team_memberships te
am_memberships ON tst.team_id = team_memberships.team_id AND team_memberships.user_id = ? AN
D team_memberships.deleted=? group by tst.team_set_id) calls_tf on calls_tf.team_set_id = ca
lls.team_set_id LEFT JOIN sugarfavorites sf_calls ON (calls.id = sf_calls.record_id AND sf_c
alls.deleted = ? AND sf_calls.module = ? AND sf_calls.created_by = ?) LEFT JOIN subscrip
tion s jt?_subscriptions ON (calls.id = jt?_subscriptions.parent_id AND jt?_subscriptions.deleted
= ? AND jt?_subscriptions.parent_type = ? AND jt?_subscriptions.created_by = ?) LEFT JOIN us
ers jt?_following_link ON (jt?_following_link.id = jt?_subscriptions.created_by AND jt?_follo
wing_link.deleted = ?) LEFT JOIN calls_contacts jt?_calls_contacts ON (calls.id = jt?_calls
_contacts.call_id AND jt?_calls_contacts.deleted = ?) LEFT JOIN contacts jt?_contacts ON (jt
?_contacts.id = jt?_calls_contacts.contact_id AND jt?_contacts.deleted = ?) LEFT JOIN users
jt?_assigned_user_link ON (calls.assigned_user_id = jt?_assigned_user_link.id AND jt?_assign
ed_user_link.deleted = ?) LEFT JOIN users jt?_favorite_link ON (jt?_favorite_link.id = sf_ca
lls.modified_user_id AND jt?_favorite_link.deleted = ?) WHERE calls.deleted = ? ORDER BY cal
ls.date_modified DESC LIMIT ?, ?
```

To view all SQL queries at once, click on the SQL Statements tab.

## Summary

For critical business applications like CRM, an APM tool can you help keep your system running fast so end users stay productive and your organization sees a maximum return on investment. An integrated APM will monitor, analyze, and visualize the response times of your application to identify bottlenecks so that your team can proactively address them.

To learn more about using New Relic for PHP, please visit the [New Relic](#) documentation website.

**Last Modified:** 2021-02-17 02:44:13

## Backward Compatibility

### Overview

---

As of Sugar 7, modules are built using the Sidecar framework. Any modules that still use the MVC architecture and have not yet migrated to the Sidecar framework are set in what Sugar refers to as "backward compatibility" (BWC) mode.

For the list of Studio-enabled modules in backward compatibility for your version of Sugar, please refer to the [User Interface \(Legacy Modules\)](#) documentation for your version of Sugar.

## URL Differences

There are some important differences between the legacy MVC and Sidecar URLs. When a module is set in backward compatibility, the URL will contain `"/#bwc/"` in the path and use query string parameters to identify the module and action. An example of the Sidecar BWC URL is shown below.

```
http://{site url}/#bwc/index.php?module=<module>&action=<action>
```

You can see that this differs from the standard route of:

```
http://{site url}/#<module>/<record id>
```

## Studio Differences

There are some important differences between the legacy MVC modules and Sidecar modules. When a module is in backward compatibility mode, an asterisk is placed next to the modules name in Studio. Modules in backward compatibility will use the legacy MVC metadata layouts, located in `./modules/<module>/metadata/`, as follows:

- Layouts
  - Edit View
  - Detail View
  - List View
- Search
  - Basic Search
  - Advanced Search

These layouts differ from Sidecar in many ways. The underlying metadata is very different and you should notice that the MVC layouts have a separation between the Edit View and Detail View whereas the Sidecar layouts make use of the Record View. The Sidecar metadata for Sugar is located in `./modules/<module>/clients/base/views/`.

- 
- Layouts
    - Record View
    - List View
  - Search
    - Search

**Last Modified:** 2021-04-05 17:28:45

## Enabling Backward Compatibility

### Overview

How to enable backward compatibility for a module.

### Enabling Backward Compatibility

Backward Compatibility Mode is not a permanent solution for modules with legacy customizations. If you should need to temporarily get a module working due to legacy customizations, you can follow the steps below to enable the legacy MVC framework. Please note that switching stock Sugar modules from the Sidecar framework to backward compatibility mode is not supported and may result in unexpected behaviors in the application.

### Enabling BWC

To enable backward compatibility, you must first create a file in `./custom/Extension/application/Ext/Include/` for the module. If the module is custom, there will already be an existing file in this folder pertaining to the module that you can edit.

```
./custom/Extension/application/Ext/Include/<file>.php
```

```
<?php
```

```
$bwcModules[] = '<module key>';
```

Once the file is in place, you will need to navigate to Admin > Repair > Quick Repair and Rebuild. The Quick Repair can wait until you have completed the following sections for this customization.

---

## Updating the MegaMenu Module Link

Once you have enabled backward compatibility for a module, you will then need to manually update the module's link in the [MegaMenu](#). This will control the navigation when a user clicks the actual module name on the MegaMenu.

```
./custom/modules/<module>/clients/base/layouts/records/records.php
```

```
<?php

$viewdefs['<module key>']['base']['layout']['records'] = array(
    'name' => 'bwc',
    'type' => 'bwc',
    'components' =>
    array(
        array(
            'view' => 'bwc',
        ),
    ),
);
```

Once the file is in place, you will need to navigate to Admin > Repair > Quick Repair and Rebuild. The Quick Repair can wait until you have completed the following section for this customization.

## Updating the MegaMenu Sub-Navigation Links

Once you have updated the MegaMenu module link, you will then need to manually update the module's MegaMenu [action links](#).

The module's deployed sub-navigation links for a module will be similar to the file shown below:

```
./modules/<module>/clients/base/menus/header/header.php
```

```
<?php

$moduleName = '<module key>';

$viewdefs[$moduleName]['base']['menu']['header'] = array(
    array(
        'route' => "#$moduleName/create",
        'label' => 'LNK_NEW_RECORD',
        'acl_action' => 'create',
```

---

```

        'acl_module' => $moduleName,
        'icon' => 'icon-plus',
    ),
    array(
        'route' => "#$moduleName",
        'label' => 'LNK_LIST',
        'acl_action' => 'list',
        'acl_module' => $moduleName,
        'icon' => 'icon-reorder',
    ),
    array(
        'route' => "#bwc/index.php?module=Import&action=Step1&import_m
odule=$moduleName&return_module=$moduleName&return_action=index",
        'label' => 'LBL_IMPORT',
        'acl_action' => 'import',
        'acl_module' => $moduleName,
        'icon' => '',
    ),
);

```

This file should be duplicated to the custom directory and edited to adjust the URLs to the BWC format. The example below demonstrates the changes needed to the duplicated file.

`./custom/modules/<module>/clients/base/menus/header/header.php`

```

<?php

$moduleName = '<module key>';

$viewdefs[$moduleName]['base']['menu']['header'] = array(
    array(
        'route' => "#bwc/index.php?module=$moduleName&action=EditView"
    ,
        'label' => 'LNK_NEW_RECORD',
        'acl_action' => 'create',
        'acl_module' => $moduleName,
        'icon' => 'icon-plus',
    ),
    array(
        'route' => "#bwc/index.php?module=$moduleName&action=ListView"
    ,
        'label' => 'LNK_LIST',
        'acl_action' => 'list',
        'acl_module' => $moduleName,
        'icon' => 'icon-reorder',
    )
);

```

---

```
),
array(
    'route' => "#bwc/index.php?module=Import&action=Step1&import_m
odule=$moduleName&return_module=$moduleName&return_action=index",
    'label' => 'LBL_IMPORT',
    'acl_action' => 'import',
    'acl_module' => $moduleName,
    'icon' => '',
),
);
```

Once the file is in place, you will need to navigate to Admin > Repair > Quick Repair and Rebuild.

## Verifying BWC Is Enabled

To verify that backward compatibility is enabled, you can inspect `App.metadata.get().modules` after running a Quick Repair and Rebuild in your browser's console window:

### Using Developer Tools in Google Chrome

1. Open Developer Tools
  - This can be done in the following ways:
    1. Command + Option + i
    2. View > Developer > Developer Tools
    3. Right-click on the web page and selecting "Inspect Element"
2. Select the "Console" tab
3. Run the following command, replacing `<module key>` and verify that it returns true:

```
App.metadata.get().modules.<module key>.isBwcEnabled
```

### Using Firebug in Google Chrome or Mozilla Firefox

- 
1. Open Firebug
  2. Select the "Console" tab
  3. Run the following command, replacing <module key>, and verify that it returns true:

```
App.metadata.get().modules.<module key>.isBwcEnabled
```

**Last Modified:** 2021-02-17 02:44:13

## Converting Legacy Modules To Sidecar

### Overview

After upgrading your instance to Sugar 7.x, some custom modules may be left in the legacy backward compatible format. This is normally due to the module containing a custom view or file that Sugar does not recognize as being a supported customization for Sidecar. To get your module working with Sidecar, you will need to remove the unsupported customization and run the UpgradeModule.php script.

**Note:** The following commands should be run on a sandbox instance before being applied to any production environment. It is also important to note that this script should only be run against custom modules. Stock modules in backward compatibility should remain in backward compatibility.

### Steps to Complete

The following steps require access to both the Sugar filesystem as well as an administrative user.

**Note:** As of Sugar 10.0, the UpgradeModule.php script has been removed from the codebase. We are providing a zip of the files that were removed so that it is still possible to run the upgrade.

1. Begin by downloading [this zip file](#) that contains the previously removed code



- 
2. Unzip the file and move the contents into your Sugar application at `./modules/UpgradeWizard/`
  3. To upgrade a custom module, identify the module's unique key. This key can be easily found by identifying the module's folder name in `./modules/<module key name>/`. The module's key name will be in the format of `abc_module`.
  4. Next, change to the `./modules/UpgradeWizard/` path relative to your Sugar root directory in your terminal or command line application:

```
cd <sugar root>/modules/UpgradeWizard/
```

5. Run the `UpgradeModule.php` script, passing in the sugar root directory and the unique key of the legacy module:

```
php UpgradeModule.php <sugar root> <module key>
```

An example is shown below:

```
php UpgradeModule.php /var/www/html/sugarcrm/ abc_module
```

6. The script will then output a series of messages identifying issues that need to be corrected. Once the issues have been addressed, you can then run the `UpgradeModule.php` script again to confirm no errors have been found.
7. Once completed, log into your instance and navigate to `Admin > Repair > Quick Repair and Rebuild`. Test the custom module to ensure it is working as expected. There is no guarantee that the module will be fully functional in Sidecar and may therefore require additional development effort to ensure compatibility.

**Last Modified:** 2021-02-17 02:44:13

## Integration

### Overview

How to integrate with Sugar APIs

# Best Practices

## Overview

Best practices when integrating and migrating Sugar.

## Latency When Posting Data To Sugar

When integrating with Sugar, it is best to avoid long-running web requests. While performance-draining requests are not always obvious, once an issue has been identified, it is best to move the processing to the backend.

By default, we expect a request to an endpoint such as POST /Accounts to be straightforward, however, adding Workflows, Logic Hooks, and Sugar Logic may stress the otherwise simple process and cause issues with webheads and other resources being used in the process. If you are experiencing these symptoms, the following sections may help you.

## Disabling Related Calculation Fields

When a calculated field in Sugar uses the related function in the Sugar Logic, this will cause the calculated field to be executed when the related module is updated. This can cause a cascading effect through the system to update related calculated fields. When this happens you may receive a 502 Gateway Error. You can disable the related calculation field updates temporarily or permanently by adding the following line to the config\_override.php file:

```
$sugar_config['disable_related_calc_fields'] = true;
```

**Note :** This is a global setting that will affect all modules. If you have a calculated field in Accounts that sums up all Opportunities for the account, setting this value to true will no longer update the opportunity account sum in Accounts until the account record itself is modified. However, if this setting is left disabled, the sum would update any time a related opportunity or the account is modified.

More information on this setting can be found in the [core configuration settings](#).

---

## Disabling Logic Hooks

When data is being migrated into Sugar, [logic hooks](#) may be adding unnecessary time to your API requests. It is highly recommended for you to disable any unnecessary logic hooks from your system during an initial import. Logic hook definitions may be located in the following files and/or directories:

- ./custom/modules/logic\_hooks.php
- ./custom/modules/<module>/logic\_hooks.php
- ./custom/Extension/application/Ext/LogicHooks/
- ./custom/Extension/modules/<module>/Ext/LogicHooks/

## Disabling Workflows

When data is being migrated into Sugar, workflows may be adding unnecessary time to your API requests. It is highly recommended for you to disable any unnecessary workflows from your system during an initial import in Admin > Workflows.

## Queuing Data in the Job Queue

One solution for long running requests is to send the data to the Job Queue to be processed by the cron. To accomplish this, make a file customization to add to the target processing function. For this article's use case, create ./custom/Extension/modules/Schedulers/Ext/ScheduledTasks/CustomCreateAccountJob.php and send any stored data to it for processing. Enter the following code in the php file:

```
<?php

function CustomCreateAccountJob($job)
{
    if (!empty($job->data)) {
        $account = BeanFactory::newBean('Accounts');
        $fields = json_decode($job->data, true);

        foreach($fields as $field => $value) {
            $account->$field = $value;
        }

        $account->save();

        if (!empty($account->id)) {
            return true;
        }
    }
}
```

---

```
}  
}  
  
return false;  
}
```

Next, modify the request to pass the new account data to the SchedulerJobs module in the data field and specify the new function in the target field, as follows:

```
curl -v -H "oauth-token: 4afd4aea-df99-7cec-4d94-560a97cda9f8" -H "Content-Type: application/json" -X POST -d '{"assigned_user_id": "1", "name": "Queue Create Account", "status": "queued", "data": {"\name\": \Example Account\"}, "target": "function::CustomCreateAccountJob"}' http://<site_url>rest/v10/SchedulersJobs
```

This solution will queue data for processing and free up system resources to send more requests. For more information, please refer to the [Scheduler Jobs](#) documentation.

**Last Modified:** 2021-02-17 02:44:13

## Web Services

### Overview

Web Services allow for communication between different applications and platforms. Sugar currently supports REST and SOAP APIs. The following sections will outline how to interact with the APIs and what versions of the API we recommend for use.

### Versioning

API versioning is the process of creating a new set of API endpoints for new functionality while leaving pre-existing endpoints available for third-party applications and integrations to continue using. This helps to extend the application in an upgrade-safe manner.

### Quick Reference

When working with the Web Service API, you should be using the latest REST API specific to your release. A quick reference of this can be found below:

| <b>Release<sup>1</sup></b> | <b>REST Version</b> | <b>REST URL</b> | <b>SOAP Version<sup>2</sup></b> | <b>SOAP URL</b>        |
|----------------------------|---------------------|-----------------|---------------------------------|------------------------|
| 11.0.x                     | v11.12              | /rest/v11_12/   | v4.1                            | /service/v4_1/soap.php |
| 10.3.x                     | v11.11              | /rest/v11_11/   | v4.1                            | /service/v4_1/soap.php |
| 10.2.x                     | v11.10              | /rest/v11_10/   | v4.1                            | /service/v4_1/soap.php |
| 10.1.x                     | v11.9               | /rest/v11_9/    | v4.1                            | /service/v4_1/soap.php |
| 10.0.x                     | v11.8               | /rest/v11_8/    | v4.1                            | /service/v4_1/soap.php |
| 9.3.x                      | v11.7               | /rest/v11_7/    | v4.1                            | /service/v4_1/soap.php |
| 9.2.x                      | v11.6               | /rest/v11_6/    | v4.1                            | /service/v4_1/soap.php |
| 9.1.x                      | v11.5               | /rest/v11_5/    | v4.1                            | /service/v4_1/soap.php |
| 9.0.x                      | v11.4               | /rest/v11_4/    | v4.1                            | /service/v4_1/soap.php |
| 8.3.x                      | v11.4               | /rest/v11_4/    | v4.1                            | /service/v4_1/soap.php |
| 8.2.x                      | v11.3               | /rest/v11_3/    | v4.1                            | /service/v4_1/soap.php |
| 8.1.x                      | v11.2               | /rest/v11_2/    | v4.1                            | /service/v4_1/soap.php |
| 8.0.x                      | v11.1               | /rest/v11_1/    | v4.1                            | /service/v4_1/soap.php |
| 7.11.x                     | v11                 | /rest/v11/      | v4.1                            | /service/v4_1/soap.php |
| 7.10.x                     | v11                 | /rest/v11/      | v4.1                            | /service/v4_1/soap.php |
| 7.9.x                      | v10                 | /rest/v10/      | v4.1                            | /service/v4_1/soap.php |
| 7.8.x                      | v10                 | /rest/v10/      | v4.1                            | /service/v4_1/soap.php |

|       |      |                        |      |                        |
|-------|------|------------------------|------|------------------------|
| 7.7.x | v10  | /rest/v10/             | v4.1 | /service/v4_1/soap.php |
| 6.5.x | v4.1 | /service/v4_1/rest.php | v4.1 | /service/v4_1/soap.php |

<sup>1</sup> Some of the releases in this table may no longer be officially-supported Sugar versions, but we have included them for archival purposes. For more information, please refer to the [Supported Versions](#) resource page.

<sup>2</sup> As of Sugar 7.0, SOAP support is no longer offered with the new APIs. The legacy APIs will remain accessible in the product, however, any existing integrations should be updated to use the latest REST endpoints.

**Last Modified:** 2021-07-08 15:53:23

## REST API

### Overview

v10 - v11.12 API documentation.

### What Is REST?

REST stands for 'Representational State Transfer'. As of 7.x, REST is a core component of Sugar that defines how all information is exchanged within the application. The v10+ API is separate from the [v1 - v4\\_1](#) REST APIs in that it has been rebuilt with the latest REST standards. Most functionality in the system, whether fetching or posting data, is interacting with the API in some way.

### Getting Started

#### How to Access the REST Service

The base endpoint for the REST service can be found at [https://<site\\_url>/rest/v{version}/](https://<site_url>/rest/v{version}/).

**Note:** version refers to the version of the API you are accessing.

For your reference, the help documentation for all versioned endpoints can be

---

found by navigating to [https://<site\\_url>/rest/v{version}/help](https://<site_url>/rest/v{version}/help). Once you have identified your instance's base endpoint, we can begin by authenticating.

## Authentication

Sugar uses two-legged OAuth2 for authentication. You simply need to do a POST to </rest/<version>/oauth2/token> with the following parameters:

|                      |        |  |
|----------------------|--------|--|
| <b>grant_type</b>    | String | Type of request. Available grant types are "password" and "refresh_token".   |
| <b>client_id</b>     | String | The client_id of "sugar" will automatically create an OAuth Key in the system and can be used for "password" authentication. The client_id of "support_portal" will create an OAuth Key if the portal system is enabled and will allow for portal authentication. Other client_id's can be created by the administrator in the OAuthKeys section in the Administration section and can be used in the future for additional grant types, if the client secret is filled in, it will be checked to validate the use of the client id. |
| <b>client_secret</b> | String | The client's secret key.   |
| <b>username</b>      | String | The username of the user authenticating to the system.   |
| <b>password</b>      | String | The plaintext password the user authenticating to the system.  |
| <b>platform</b>      | String | Defaults to "base" allows  |

---

|   |
|---|
| you to have custom meta-data per platform. If using a value other than "base", you should make sure it is registered using the <a href="#">Platform extension</a> or <a href="#">configure an API platform</a> in Administration panel. |
|---|

First, we are going to log in using a `grant_type` of "password" and a platform of "custom". Normally, when logging into Sugar, users log in with a platform type of "base". We are using "custom" to avoid any potential [login conflicts](#).

```
curl -X POST -H Cache-Control:no-cache -H "Content-Type: application/json" -d '{
  "grant_type":"password",
  "client_id":"sugar",
  "client_secret":"",
  "username":"<username>",
  "password":"<password>",
  "platform":"custom"
}' https://<site_url>/rest/<version>/oauth2/token
```

Once you get the response you'll need to hold onto the `access_token` and the `refresh_token`. Anytime the `access_token` is invalidated, you'll want to make another request to the token endpoint with a `grant_type` of "refresh\_token". Store just the `refresh_token` in long-term storage - not the username and password. The response from the server will be as follows:

```
{
  "access_token": "5ee48ec7-023e-ecff-5184-530bd0358868",
  "expires_in": 3600,
  "token_type": "bearer",
  "scope": null,
  "refresh_token": "5f197357-0167-f7a6-7912-530bd03275b6",
  "refresh_expires_in": 1209600,
  "download_token": "5f531625-e301-e3ea-1b11-530bd098be41"
}
```

## Avoiding Login Conflicts

Login conflicts often occur when building integrations or running data migrations with the platform of "base" or any other client type that is in use. This is due to the fact that Sugar uses the same REST API to power all the various clients such as



---

Sugar, Portal, Mobile, and even the Outlook Plugin. Due to this, you need to let the API know you aren't conflicting with another client that may be in use. The way to accomplish this is the `/rest/<version>/oauth2/token` call by changing the platform parameter to something other than "base", "mobile", or "portal". It is best to name it something that describes and identifies your current integration.

## Input / Output Data Types

The default input / output datatype for REST is JSON.

## Date Handling

Date and date time inputs should be formatted following the ISO 8601 format. If the time zone is not included in a request, Sugar will assume the time zone of the user making the request.

Filter on a specific date:

```
{
  "date_start": "2015-08-12"
}
```

Filter on a date keyword using `$dateRange`:

```
{
  "date_start": {
    "$dateRange": "today"
  }
}
```

Filter on date range using manual time zones:

```
{
  "date_start": {
    "$dateBetween": [
      "2015-09-10T00:00:00+10:00",
      "2015-09-10T23:59:59+10:00"
    ]
  }
}
```

**Last Modified:** 2021-04-02 16:04:56

---

## Endpoints

The following sections contain the in-app help documentation for the REST endpoints.

**Last Modified:** 2021-02-17 02:44:13

### **/Accounts/:record/link/:link\_name/filter GET**

#### Overview

Lists related filtered records.

#### Summary

This endpoint will return a set of related records filtered by an expression. The filter can be applied to multiple fields and have multiple and/or conditions in it. Care will need to be taken to make sure this filter has appropriate indexes on the server side otherwise the runtime of the endpoint will be very long. Related fields can be searched by specifying the field name as: "link\_name.remote\_field", so if you wished to search the Accounts module by a related member account you would use "members.sic\_code".

#### Request Arguments

| Name    | Type    | Description  | Required |
|---------|---------|--|----------|
| filter  | String  | The filter expression. Filter expressions are explained below. | False    |
| max_num | Integer | A maximum number of records to return. Default is 20.          | False    |
| offset  | Integer | The number of  | False    |

| Name     | Type   | Description  | Required |
|----------|--------|--|----------|
|          |        | records to skip over before records are returned. Default is 0.  |          |
| fields   | String | Comma delimited list of fields to return. The field date_modified will always be returned. This argument can be combined with the view argument. Example: name,account_type,description  | False    |
| view     | String | Instead of defining the fields argument, the view argument can be used instead. The field list is constructed at the server side based on the view definition which is requested. This argument can be used in combination with the fields argument. Common views are "record" and "list". Example: record | False    |
| order_by | String | How to sort the returned records, in a comma delimited list with the direction appended to the column name after a colon. Example: name:DE   | False    |

---

| Name | Type | Description                                    | Required |
|------|------|--|----------|
|      |      | SC,account_type:D<br>ESC,date_modified:<br>ASC |          |

## Filter Expressions

There are four types of filters:

### Basic

This will filter the results by checking the field "name" for value "Nelson Inc". This will only find exact matches.

### Example

```
{
  "filter":[
    {
      "name":"Nelson Inc"
    }
  ]
}
```

### Full

This expression allows you to specify what operation you want to use for filtering on the field. In the example you would match any record where the field "name" starts with the value "Nelson".

### Example

```
{
  "filter":[
    {
      "name":{
        "$starts":"Nelson"
      }
    }
  ]
}
```

```
]
}
```

Below is a list of operation types:

| Operation    | Description   |
|--------------|---|
| \$equals     | Performs an exact match on that field.  |
| \$not_equals | Performs an exact match on that field.  |
| \$not_equals | Matches on non-matching values.   |
| \$starts     | Matches on anything that starts with the value.   |
| \$ends       | Matches anything that ends with the value.  |
| \$contains   | Matches anything that contains the value  |
| \$in         | Finds anything where field matches one of the values as specified as an array.          |
| \$not_in     | Finds anything where field does not matches any of the values as specified as an array. |
| \$is_null    | Checks if the field is null. This operation does not need a value specified.            |
| \$not_null   | Checks if the field is not null. This operation does not need a value specified.        |
| \$lt         | Matches when the field is less than the value.  |
| \$lte        | Matches when the field is less than or equal to the value.                              |
| \$gt         | Matches when the field is greater than the value.                                       |
| \$gte        | Matches when the field is greater than or equal to the value.                           |

## Sub-expressions

This allows you to group filter expressions into or/and groupings. By default all

---

expressions are and'ed together. The example expression would match if the field "name" was either "Nelson Inc" or "Nelson LLC". The only currently accepted sub-expression types are "\$and" and "\$or".

### Example

```
{
  "filter":[
    {
      "$or":[
        {
          "name":"Nelson Inc"
        },
        {
          "name":"Nelson LLC"
        }
      ]
    }
  ]
}
```

### Modules

There are two module expressions, they operate on modules instead of fields. The current module can be specified by either using the module name "\_this" or by leaving the module name as a blank string. The example expression would filter the records in the current module to only your favorites. The only currently accepted module expressions are "\$favorite" and "\$owner".

### Example

```
{
  "filter":[
    {
      "$favorite":"_this"
    }
  ]
}
```

---

## Response Arguments

| Name        | Type    | Description   |
|-------------|---------|---|
| next_offset | Integer | Displays the next offset for retrieval of additional results. -1 will be returned when there are no more records. |
| records     | Array   | An array of results containing matched records.   |

## Response

```
{
  "next_offset":-1,
  "records":[
    {
      "id":"fa300a0e-0ad1-b322-9601-512d0983c19a",
      "name":"Dale Spivey",
      "date_entered":"2013-02-26T19:12:00+00:00",
      "date_modified":"2013-02-28T05:03:00+00:00",
      "modified_user_id":"1",
      "modified_by_name":"Administrator",
      "created_by":"1",
      "created_by_name":"Administrator",
      "description":"",
      "img":"",
      "deleted":false,
      "assigned_user_id":"seed_sally_id",
      "assigned_user_name":"Sally Bronsen",
      "team_name":[
        {
          "id":"East",
          "name":"East",
          "name_2":"",
          "primary":false
        },
        {
          "id":1,
          "name":"Global",
          "name_2":"",

```

---

```
        "primary":false
    },
    {
        "id":"West",
        "name":"West",
        "name_2": "",
        "primary":true
    }
],
"salutation": "",
"first_name": "Dale",
"last_name": "Spivey",
"full_name": "Dale Spivey",
"title": "VP Operations",
"linkedin": "",
"facebook": "",
"twitter": "",
"googleplus": "",
"department": "",
"do_not_call": false,
"phone_home": "(523) 825-4311",
"email": [
    {
        "email_address": "sugar.dev.sugar@example.co.jp",
        "opt_out": "0",
        "invalid_email": "0",
        "primary_address": "1"
    },
    {
        "email_address": "the.support@example.biz",
        "opt_out": "0",
        "invalid_email": "0",
        "primary_address": "0"
    }
],
"phone_mobile": "(373) 861-0757",
"phone_work": "(212) 542-9596",
"phone_other": "",
"phone_fax": "",
"email1": "sugar.dev.sugar@example.co.jp",
"email2": "the.support@example.biz",
"invalid_email": false,
"email_opt_out": false,
"primary_address_street": "345 Sugar Blvd.",
"primary_address_street_2": "",
"primary_address_street_3": "",
```



---

```
"primary_address_city": "Denver",
"primary_address_state": "CA",
"primary_address_postalcode": "87261",
"primary_address_country": "USA",
"alt_address_street": "",
"alt_address_street_2": "",
"alt_address_street_3": "",
"alt_address_city": "",
"alt_address_state": "",
"alt_address_postalcode": "",
"alt_address_country": "",
"assistant": "",
"assistant_phone": "",
"picture": "",
"email_and_name1": "",
"lead_source": "Campaign",
"account_name": "Smallville Resources Inc",
"account_id": "d5db6292-5c24-eb61-e202-512d09f0134e",
"opportunity_role_fields": "",
"opportunity_role_id": "",
"opportunity_role": "",
"reports_to_id": "",
"report_to_name": "",
"portal_name": "DaleSpivey97",
"portal_active": true,
"portal_password": "$1$yKMAONHM$Y5S.8CY.WZCZCwfGD1a1Q\/",
"portal_password1": "",
"portal_app": "",
"preferred_language": "en_us",
"campaign_id": "",
"campaign_name": "",
"c_accept_status_fields": "",
"m_accept_status_fields": "",
"accept_status_id": "",
"accept_status_name": "",
"sync_contact": "",
"my_favorite": false,
"_acl": {
  "fields": {
    }
  }
},
{
  "id": "95e17367-9b3d-0e26-22dc-512d0961fedf",
  "name": "Florence Haddock",
```

---

```
"date_entered": "2013-02-26T19:12:00+00:00",
"date_modified": "2013-02-26T19:12:00+00:00",
"modified_user_id": "1",
"modified_by_name": "Administrator",
"created_by": "1",
"created_by_name": "Administrator",
"description": "",
"img": "",
"deleted": false,
"assigned_user_id": "seed_sally_id",
"assigned_user_name": "Sally Bronsen",
"team_name": [
  {
    "id": "East",
    "name": "East",
    "name_2": "",
    "primary": false
  },
  {
    "id": 1,
    "name": "Global",
    "name_2": "",
    "primary": false
  },
  {
    "id": "West",
    "name": "West",
    "name_2": "",
    "primary": true
  }
],
"salutation": "",
"first_name": "Florence",
"last_name": "Haddock",
"full_name": "Florence Haddock",
"title": "Director Sales",
"linkedin": "",
"facebook": "",
"twitter": "",
"googleplus": "",
"department": "",
"do_not_call": false,
"phone_home": "(729) 845-3137",
"email": [
  {
    "email_address": "dev.vegan@example.de",
```

---

```
        "opt_out": "1",
        "invalid_email": "0",
        "primary_address": "0"
    },
    {
        "email_address": "section71@example.it",
        "opt_out": "0",
        "invalid_email": "0",
        "primary_address": "1"
    }
],
"phone_mobile": "(246) 233-1382",
"phone_work": "(565) 696-6981",
"phone_other": "",
"phone_fax": "",
"email1": "section71@example.it",
"email2": "dev.vegan@example.de",
"invalid_email": false,
"email_opt_out": false,
"primary_address_street": "111 Silicon Valley Road",
"primary_address_street_2": "",
"primary_address_street_3": "",
"primary_address_city": "Denver",
"primary_address_state": "CA",
"primary_address_postalcode": "79900",
"primary_address_country": "USA",
"alt_address_street": "",
"alt_address_street_2": "",
"alt_address_street_3": "",
"alt_address_city": "",
"alt_address_state": "",
"alt_address_postalcode": "",
"alt_address_country": "",
"assistant": "",
"assistant_phone": "",
"picture": "",
"email_and_name1": "",
"lead_source": "Support Portal User Registration",
"account_name": "Smallville Resources Inc",
"account_id": "d5db6292-5c24-eb61-e202-512d09f0134e",
"opportunity_role_fields": "",
"opportunity_role_id": "",
"opportunity_role": "",
"reports_to_id": "",
"report_to_name": "",
"portal_name": "FlorenceHaddock169",
```

```

"portal_active":true,
"portal_password":"$1$nWFhTbK6$JF9BCGSqL\NCRbhueX5ia0",
"portal_password1":"","
"portal_app":"","
"preferred_language":"en_us",
"campaign_id":"","
"campaign_name":"","
"c_accept_status_fields":"","
"m_accept_status_fields":"","
"accept_status_id":"","
"accept_status_name":"","
"sync_contact":"","
"my_favorite":false,
"_acl":{
  "fields":{
    }
  }
}
]
}

```

## Change Log

| Version | Change   |
|---------|--|
| v10     | Added<br>/<module>/:record/link/:link_name/filter<br>GET endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /Activities GET

Activities on the home page

---

## Summary:

This endpoint lists activities across the entire system. It uses a subscription model, and can be queried like a normal bean collection, but without search, ordering or filtering.

## Query Parameters:

| Param   | Description   | Optional |
|---------|---|----------|
| max_num | A maximum number of records to return                     | Optional |
| offset  | How many records to skip over before records are returned | Optional |

## Input Example:

This endpoint does not accept any input

## Output Example:

```
{
  "next_offset": 20,
  "records": [{
    "id": "22fb8b16-de1d-f1dc-b15b-51240efde177",
    "date_entered": "2013-02-19T23:47:11+00:00",
    "date_modified": "2013-02-19T23:47:11+00:00",
    "created_by": "1",
    "deleted": "0",
    "parent_id": "f5bb0331-2c0f-5c7c-b4db-5123caac0056",
    "parent_type": "Contacts",
    "activity_type": "post",
  ]
}
```

This will be set to -1 when there are no more records after this "page".

---

This will be the type of activity performed.

```
    "data": {
      "value": "This is a test post on a contact I'm subscribed
to."
    },
    "comment_count": 0,
```

This will be set to the total number of comments on the post.

```
    "last_comment": {
This will be the last comment on the post, which can be used to create
a comment model on the frontend.
```

```
      "deleted": 0,
      "data": []
    },
    "fields": [],
    "first_name": null,
    "last_name": "Administrator",
    "created_by_name":
  " Administrator" This will be the locale-
formatted full name of the user.
  }, ... ]
}
```

**Last Modified:** 2021-02-17 02:44:13

## **/Activities/filter GET**

Activities on the home page

### **Summary:**

This endpoint lists activities across the entire system. It uses a subscription model, and can be queried like a normal bean collection, but without search, ordering or filtering.

### **Query Parameters:**

---

| Param   | Description   | Optional |
|---------|---|----------|
| max_num | A maximum number of records to return                     | Optional |
| offset  | How many records to skip over before records are returned | Optional |

## Input Example:

This endpoint does not accept any input

## Output Example:

```
{
  "next_offset": 20,
  "records": [{
    "id": "22fb8b16-de1d-f1dc-b15b-51240efde177",
    "date_entered": "2013-02-19T23:47:11+00:00",
    "date_modified": "2013-02-19T23:47:11+00:00",
    "created_by": "1",
    "deleted": "0",
    "parent_id": "f5bb0331-2c0f-5c7c-b4db-5123caac0056",
    "parent_type": "Contacts",
    "activity_type": "post",
    "comment_count": 0,
    "last_comment": {
      "deleted": 0,
      "value": "This is a test post on a contact I'm subscribed to."
    }
  }],
  "next_offset": -1
}
```

This will be set to -1 when there are no more records after this "page".

This will be the type of activity performed.

This will be set to the total number of comments on the post.

This will be the last comment on the post, which can be used to create a comment model on the frontend.

---

```
        "data": []
      },
      "fields": [],
      "first_name": null,
      "last_name": "Administrator",
      "created_by_name":
" Administrator" This will be the locale-
formatted full name of the user.
    }, ... ]
  }
```

**Last Modified:** 2021-02-17 02:44:13

## **/Administration/aws GET**

### **Overview**

[ADMIN] Gets Amazon Web Services configs from Sugar Serve.

### **Summary**

This endpoint gets configuration values for Amazon Web Services. This endpoint is only available to administrators of Sugar Serve.

### **Request Arguments**

This endpoint does not accept any arguments.

### **Response**

```
{
  "aws_connect_instance_name": "my-aws-instance",
  "aws_connect_region": "us-east-2"
}
```



---

## Change Log

| Version | Change                                  |
|---------|---|
| v11_10  | Added /Administration/aws GET endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /Administration/aws POST

### Overview

[ADMIN] Set Amazon Web Services configs in Sugar Serve.

### Summary

This endpoint sets configuration values for Amazon Web Services. This endpoint is only available to administrators of Sugar Serve.

### Request Arguments

| Name                      | Type   | Description                                     | Required |
|---------------------------|--------|---|----------|
| aws_connect_instance_name | String | The name of the AWS Connect instance            | False    |
| aws_connect_region        | String | The region assigned to the AWS Connect instance | False    |

### Response

```
{
```

---

```
"aws_connect_instance_name": "my-aws-instance",
"aws_connect_region": "us-east-2"
}
```

## Change Log

| Version | Change                                   |
|---------|--|
| v11_10  | Added /Administration/aws POST endpoint. |

**Last Modified:** 2021-02-17 02:44:13

# /Administration/elasticsearch/indices GET

## Overview

[ADMIN] Elasticsearch index statistics

## Summary

This endpoint returns the index statistics for the Elasticsearch backend. This endpoint is only available to administrators.

## Response

```
{
  "autobr2583_shared": {
    "_shards": {
      "total": 1,
      "successful": 1,
      "failed": 0
    },
    "indices": {
      "autobr2583_shared": {
        "index": {
          "primary_size_in_bytes": 1134148,

```

---

```
    "size_in_bytes":1134148
  },
  "translog":{
    "operations":1100
  },
  "docs":{
    "num_docs":1100,
    "max_doc":1100,
    "deleted_docs":0
  },
  "merges":{
    "current":0,
    "current_docs":0,
    "current_size_in_bytes":0,
    "total":1,
    "total_time_in_millis":103,
    "total_docs":1000,
    "total_size_in_bytes":1138070
  },
  "refresh":{
    "total":13,
    "total_time_in_millis":177
  },
  "flush":{
    "total":0,
    "total_time_in_millis":0
  },
  "shards":[[ {
    "routing":{
      "state":"STARTED",
      "primary":true,
      "node":"4rjVEVuYQQqKl4sT1FUxNA",
      "relocating_node":null,
      "shard":0,
      "index":"autobr2583_shared"
    },
    "state":"STARTED",
    "index":{
      "size_in_bytes":1134148
    },
    "translog":{
      "id":1427003304006,
      "operations":1100
    },
    "docs":{
      "num_docs":1100,
```

---

```
        "max_doc":1100,
        "deleted_docs":0
    },
    "merges":{
        "current":0,
        "current_docs":0,
        "current_size_in_bytes":0,
        "total":1,
        "total_time_in_millis":103,
        "total_docs":1000,
        "total_size_in_bytes":1138070
    },
    "refresh":{
        "total":13,
        "total_time_in_millis":177
    },
    "flush":{
        "total":0,
        "total_time_in_millis":0
    }
}]]]
}
}
}
```

## Change Log

| Version | Change  |
|---------|---|
| v10     | Added<br>/Administration/elasticsearch/indices<br>GET endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /Administration/elasticsearch/mapping GET

---

## Overview

[ADMIN] Elasticsearch mapping

## Summary

This endpoint returns the mapping for every available index. This endpoint is only available to administrators.

## Response

```
{
  "autobr2583_shared": {
    "KBDocuments": {
      "dynamic": "false",
      "_all": {
        "enabled": false
      },
      "properties": {
        "kbdocument_name": {
          "type": "string",
          "index": "not_analyzed",
          "fields": {
            "gs_string_default": {
              "type": "string",
              "analyzer": "gs_analyzer_default"
            },
            "gs_string_ngram": {
              "type": "string",
              "index_analyzer": "gs_analyzer_ngram",
              "search_analyzer": "gs_analyzer_default"
            }
          }
        }
      }
    },
    "RevenueLineItems": {
      "dynamic": "false",
      "_all": {
        "enabled": false
      },
      "properties": {
        "date_modified": {
```



---

# /Administration/elasticsearch/queue GET

## Overview

[ADMIN] Elasticsearch queue statistics

## Summary

This endpoint returns the queue statistics for the Elasticsearch backend. This endpoint is only available to administrators.

## Response

```
{
  "total": 2238,
  "queued": {
    "Cases": "250",
    "KBDocuments": "5",
    "Notes": "50",
    "Quotes": "2",
    "Accounts": "51",
    "Contacts": "201",
    "Leads": "201",
    "Opportunities": "150",
    "RevenueLineItems": "578",
    "Bugs": "50",
    "Contracts": "2",
    "Manufacturers": "2",
    "ProductCategories": "43",
    "Tasks": "200",
    "Calls": "50",
    "Emails": "200",
    "Meetings": "200",
    "Products": "3"
  }
}
```

## Change Log

| Version | Change |
|---------|--------|
|---------|--------|

---

|     |   |
|-----|---|
| v10 | Added<br>/Administration/elasticsearch/queue<br>GET endpoint. |
|-----|---|

**Last Modified:** 2021-02-17 02:44:13

## **/Administration/elasticsearch/refresh/enable POST**

### **Overview**

[ADMIN] Elasticsearch enable refresh\_interval

### **Summary**

Enable refresh\_interval for all indices managed by SugarCRM. This endpoint is only available to administrators.

### **Response**

```
{  
  "aabbcc_contactsleads": 200,  
  "aabbcc_accountonly": 200,  
  "aabbcc_shared": 200  
}
```

### **Change Log**

| Version | Change  |
|---------|---|
| v10     | Added /Administration/elasticsearch/refresh/enable POST endpoint. |



---

Last Modified: 2021-02-17 02:44:13

## **/Administration/elasticsearch/refresh/status GET**

### **Overview**

[ADMIN] Elasticsearch index refresh interval status

### **Summary**

This endpoint returns the current refresh\_interval for every index managed by SugarCRM. This endpoint is only available to administrators.

### **Response**

```
{  
  "aabbcc_contactsleads": "1s",  
  "aabbcc_accountonly": "1s",  
  "aabbcc_shared": "1s"  
}
```

### **Change Log**

| Version | Change   |
|---------|--|
| v10     | Added /Administration/elasticsearch/refresh/status GET endpoint. |

Last Modified: 2021-02-17 02:44:13

## **/Administration/elasticsearch/refresh/trigger**

---

# POST

## Overview

[ADMIN] Elasticsearch trigger explicit index refresh on all indices

## Summary

Trigger an explicit index refresh for all indices managed by SugarCRM. This endpoint is only available to administrators.

## Response

```
{
  "aabbcc_contactsleads": 200,
  "aabbcc_accountonly": 200,
  "aabbcc_shared": 200
}
```

## Change Log

| Version | Change   |
|---------|--|
| v10     | Added /Administration/elasticsearch/refresh/trigger POST endpoint. |

**Last Modified:** 2021-02-17 02:44:13

# /Administration/elasticsearch/replicas/enable POST

## Overview

---

[ADMIN] Elasticsearch enable replicas

## Summary

Enable replicas for all indices managed by SugarCRM. This endpoint is only available to administrators. This requires `reindex_zero_replica` to be enabled.

## Response

```
{
  "aabbcc_contactsleads": 200,
  "aabbcc_accountonly": 200,
  "aabbcc_shared": 200
}
```

## Change Log

| Version | Change  |
|---------|---|
| v10     | Added <code>/Administration/elasticsearch/replicas/enable</code> POST endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## `/Administration/elasticsearch/replicas/status` GET

### Overview

[ADMIN] Elasticsearch index replica status

### Summary

This endpoint returns the number of replicas for every index managed by SugarCRM. This endpoint is only available to administrators.

---

## Response

```
{
  "aabbcc_contactsleads": "4",
  "aabbcc_accountsonly": "2",
  "aabbcc_shared": "1"
}
```

## Change Log

| Version | Change  |
|---------|---|
| v10     | Added /Administration/elasticsearch/replicas/status GET endpoint. |

Last Modified: 2021-02-17 02:44:13

# /Administration/elasticsearch/routing GET

## Overview

[ADMIN] Elasticsearch index routing

## Summary

This endpoint returns an overview of the current read and write indices per module. This routing information is based on the configured index routing strategies and the index configuration per module. Note that this output shows the default routing only as no context is available to determine dynamic routing strategies. This endpoint is only available to administrators.

## Response

```
{
  "Contacts": {
```

```

    "strategy": "static",
    "routing": {
      "write_index": "autobr2583_contacts",
      "read_indices": [
        "autobr2583_contacts"
      ]
    }
  },
  "Accounts": {
    "strategy": "static",
    "routing": {
      "write_index": "autobr2583_shared",
      "read_indices": [
        "autobr2583_shared"
      ]
    }
  },
  "Emails": {
    "strategy": "rolling",
    "routing": {
      "write_index": "autobr2583_emails_201503",
      "read_indices": [
        "autobr2583_emails_201503",
        "autobr2583_emails_201502",
        "autobr2583_emails_201501"
      ]
    }
  }
}

```

## Change Log

| Version | Change  |
|---------|---|
| v10     | Added<br>/Administration/elasticsearch/routing<br>GET endpoint. |

**Last Modified:** 2021-02-17 02:44:13

---

# **/Administration/idm/migration/disable POST**

## **Overview**

[ADMIN] Disable Idm migrations

## **Summary**

This endpoint disables Idm migrations. This endpoint is only available to administrators.

## **Request Arguments**

This endpoint does not accept any arguments.

## **Response**

```
{  
  "success": true  
}
```

## **Change Log**

| Version | Change  |
|---------|---|
| v11_2   | Added Administration/idm/migration/disable POST endpoint. |

**Last Modified:** 2021-02-17 02:44:13

# **/Administration/idm/migration/enable POST**

---

## Overview

[ADMIN] Enable Idm migrations

## Summary

This endpoint enables Idm migrations. This endpoint is only available to administrators.

## Request Arguments

This endpoint does not accept any arguments.

## Response

```
{
  "success": true
}
```

## Change Log

| Version | Change   |
|---------|--|
| v11_2   | Added Administration/idm/migration/enable POST endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /Administration/idm/users GET

### Overview

Lists filtered user records.

---

## Summary

This endpoint will return a set of user records with raw password hashes filtered by an expression. The filter can be applied to multiple fields and have multiple and/or conditions in it. Alternatively, you may use an existing filter by specifying its id. If both a filter definition and a filter id are passed, the two filters will be joined with an AND. Care will need to be taken to make sure that any filters used have appropriate indexes on the server side otherwise the runtime of the endpoint will be very long. Related fields can be searched by specifying the field name as: "link\_name.remote\_field", so if you wished to search the Accounts module by a related member account you would use "members.sic\_code".

## Request Arguments

| Name   | Type   | Description  | Required |
|--------|--------|--|----------|
| filter | String | <p>The filter expression. Filter expressions are explained below. Note that JSON-encoded filters can be specified as query parameters in one of two ways for GET requests:</p> <ol style="list-style-type: none"><li>1. By specifying individual filter arguments as distinct parameters. Example: filter[0][id]=1</li><li>2. By specifying the whole filter as a single JSON-encoded string. Note that this</li></ol> | False    |



| Name      | Type    | Description  | Required |
|-----------|---------|--|----------|
|           |         | <p>syntax is currently not supported on certain modules.<br/> Example: filter=[{"id": "1"}].</p>   |          |
| filter_id | String  | Identifier for a preexisting filter. If filter is also set, the two filters are joined with an AND.  | False    |
| max_num   | Integer | A maximum number of records to return. Default is 20.  | False    |
| offset    | Integer | The number of records to skip over before records are returned. Default is 0.  | False    |
| fields    | String  | <p>Comma delimited list of fields to return. Each field may be represented either by string, or by map containing field name and additional field parameters (applicable to link and collection fields). The fields id and date_modified will always be returned.<br/> Example: name,account_type,description,{"name": "opportunities", "fields": ["id</p> | False    |

| Name     | Type   | Description   | Required |
|----------|--------|---|----------|
|          |        | <pre>","name","sales_status"],"order_by":{"date_closed:desc"}</pre> For more details on additional field parameters, see <a href="#">Relate API</a> and <a href="#">Collection API</a> .  |          |
| view     | String | Instead of defining the fields argument, the view argument can be used instead. The field list is constructed at the server side based on the view definition which is requested. This argument can be used in combination with the fields argument. Common views are "record" and "list".<br>Example: record | False    |
| order_by | String | How to sort the returned records, in a comma delimited list with the direction appended to the column name after a colon.<br>Example: name:DESC,account_type:DESC,date_modified:ASC   | False    |
| q        | String | A search expression, will search on this module. Cannot be  | False    |

---

| Name    | Type    | Description   | Required |
|---------|---------|---|----------|
|         |         | used at the same time as a filter expression or id. |          |
| deleted | Boolean | Boolean to show deleted records in the result set.  | False    |

## Filter Expressions

There are four types of filters:

### Basic

This will filter the results by checking the field "name" for value "Nelson Inc". This will only find exact matches.

### Example

```
{
  "filter": [
    {
      "name": "Nelson Inc"
    }
  ]
}
```

### Full

This expression allows you to specify what operation you want to use for filtering on the field. In the example you would match any record where the field "name" starts with the value "Nelson".

### Example

```
{
  "filter": [
    {
```

```

    "name": {
      "$starts": "Nelson"
    }
  ]
}

```

Below is a list of operation types:

| Operation    | Description   |
|--------------|---|
| \$equals     | Performs an exact match on that field.  |
| \$not_equals | Performs an exact match on that field.  |
| \$not_equals | Matches on non-matching values.   |
| \$starts     | Matches on anything that starts with the value.   |
| \$ends       | Matches anything that ends with the value.  |
| \$contains   | Matches anything that contains the value  |
| \$in         | Finds anything where field matches one of the values as specified as an array.          |
| \$not_in     | Finds anything where field does not matches any of the values as specified as an array. |
| \$is_null    | Checks if the field is null. This operation does not need a value specified.            |
| \$not_null   | Checks if the field is not null. This operation does not need a value specified.        |
| \$lt         | Matches when the field is less than the value.  |
| \$lte        | Matches when the field is less than or equal to the value.                              |
| \$gt         | Matches when the field is greater than the value.                                       |
| \$gte        | Matches when the field is greater than or equal to the value.                           |

---

## Sub-expressions

This allows you to group filter expressions into or/and groupings. By default all expressions are and'ed together. The example expression would match if the field "name" was either "Nelson Inc" or "Nelson LLC". The only currently accepted sub-expression types are "\$and" and "\$or".

### Example

```
{
  "filter":[
    {
      "$or":[
        {
          "name":"Nelson Inc"
        },
        {
          "name":"Nelson LLC"
        }
      ]
    }
  ]
}
```

## Modules

There are two module expressions, they operate on modules instead of fields. The current module can be specified by either using the module name "\_this" or by leaving the module name as a blank string. The example expression would filter the records in the current module to only your favorites. The only currently accepted module expressions are "\$favorite" and "\$owner".

### Example

```
{
  "filter":[
    {
      "$favorite": "_this"
    }
  ]
}
```

---

## Response Arguments

| Name        | Type    | Description   |
|-------------|---------|---|
| next_offset | Integer | Displays the next offset for retrieval of additional results. -1 will be returned when there are no more records. |
| records     | Array   | An array of results containing matched records.   |

## Response

```
{
  "next_offset": -1,
  "records": [
    {
      "id": "1",
      "user_name": "admin",
      "user_hash": "$2y$10$PXY1UPZHjcm.t6ZArbia0uVzjCNEDm0XcGu/w
hGGk2xaPzAEKrKLa",
      "system_generated_password": false,
      "pwd_last_changed": "",
      "authenticate_id": "",
      "sugar_login": true,
      "picture": "7772d3b4-5779-11e8-835a-6a00025a7f70",
      "first_name": "",
      "last_name": "Administrator",
      "full_name": "Administrator",
      "name": "Administrator",
      "is_admin": true,
      "external_auth_only": false,
      "receive_notifications": true,
      "description": "",
      "date_entered": "2018-05-14T16:19:36+03:00",
      "date_modified": "2018-05-14T16:27:43+03:00",
      "last_login": "2018-05-16T12:12:43+03:00",
      "modified_user_id": "1",
      "modified_by_name": ""
    }
  ]
}
```

---

```
"created_by": "",
"created_by_name": "",
"created_by_link": {
  "full_name": "",
  "id": "",
  "_acl": {
    "fields": [],
    "_hash": "654d337e0e912edaa00dbb0fb3dc3c17"
  }
},
"title": "Administrator",
"department": "",
"phone_home": "",
"phone_mobile": "",
"phone_work": "",
"phone_other": "",
"phone_fax": "",
"status": "Active",
"address_street": "",
"address_city": "",
"address_state": "",
"address_country": "",
"address_postalcode": "",
"UserType": "",
"default_team": "1",
"team_count": "",
"team_count_link": {
  "team_count": "",
  "id": "",
  "_acl": {
    "fields": [],
    "_hash": "654d337e0e912edaa00dbb0fb3dc3c17"
  }
},
"team_name": [
  {
    "id": "1",
    "name": "Global",
    "name_2": "",
    "primary": false,
    "selected": false
  }
],
"deleted": false,
"portal_only": false,
"show_on_employees": true,
```

---

```
"employee_status": "Active",
"messenger_id": "",
"messenger_type": "",
"reports_to_id": "",
"reports_to_name": "",
"reports_to_link": {
  "name": "",
  "id": "",
  "_acl": {
    "fields": [],
    "_hash": "654d337e0e912edaa00dbb0fb3dc3c17"
  }
},
"email1": "",
"email": [
  {
    "email_address": "admin@ex.com",
    "primary_address": true,
    "reply_to_address": false,
    "invalid_email": false,
    "opt_out": false,
    "email_address_id": "93634e90-577a-11e8-a2f0-6a000
25a7f70"
  }
],
"email_link_type": "",
"is_group": false,
"c_accept_status_fields": "",
"calls": {
  "id": ""
},
"m_accept_status_fields": "",
"meetings": {
  "id": ""
},
"accept_status_id": "",
"accept_status_name": "",
"accept_status_calls": "",
"accept_status_meetings": "",
"preferred_language": "",
"acl_role_set_id": "",
"my_favorite": false,
"_acl": {
  "delete": "no",
  "fields": {
    "pwd_last_changed": {
```



```
        "write": "no",
        "create": "no"
    },
    "last_login": {
        "write": "no",
        "create": "no"
    }
}
},
"_module": "Users"
]
}
```

## Change Log

| Version | Change  |
|---------|---|
| v11_2   | Added /Administration/idm/users GET endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /Administration/license/limits GET

### Overview

[ADMIN] Get License Limits.

### Summary

This endpoint gets the license limits, the number of unused licensed seats for each license type. This endpoint is only available to administrators.

### Request Arguments

---

This endpoint does not accept any arguments.

## Response

```
{
  "default_limit": 100,
  "limit_enforced": 1,
  "default_license_type" : "CURRENT",
  "seats": {
    "CURRENT": 100,
    "SUGAR_SERVE": 10
  },
  "available_seats": {
    "CURRENT": 25,
    "SUGAR_SERVE": 1,
    "SUGAR_SELL": 0
  }
}
```

## Change Log

| Version | Change   |
|---------|--|
| v11_2   | Added /Administration/license/limits GET endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /Administration/packages GET

### Overview

[ADMIN] PackageManager list packages.

### Summary

---

Lists all packages in the system.

## Response

```
{
  "packages": [
    {
      "name": "project_P3",
      "version": "1580885734",
      "type": "module",
      "published_date": "2020-02-06 12:51:17",
      "description": "",
      "uninstallable": true,
      "file_install": "cd590eb069a73b2eeb6c107776fd60dc",
      "file": "cd590eb069a73b2eeb6c107776fd60dc",
      "enabled": "ENABLED",
      "id": "66172e0e-48df-11ea-9f1f-acde48001122",
      "installed": true
    },
    {
      "name": "project_P1",
      "version": 1580885419,
      "published_date": "2020-02-05 06:50:19",
      "description": "None",
      "uninstallable": "Yes",
      "type": "Module",
      "file": "0ef4dd8b237f4358bdb246a744eb2b38",
      "file_install": "5d4b4614421586fd2111714abf622392",
      "unFile": "5d4b4614421586fd2111714abf622392",
      "installed": false
    }
  ]
}
```

## Change Log

| Version | Change                                       |
|---------|--|
| v11.8   | Added /Administration/packages GET endpoint. |

**Last Modified:** 2021-02-17 02:44:13

---

# **/Administration/packages POST**

## **Overview**

[ADMIN] PackageManager upload package.

## **Summary**

Uploads a module loadable package via a multi-part form request. The only parameter is 'upgrade\_zip' which must contain a valid module loadable zip file.

## **Sample Request**

```
POST /rest/v11_1/Administration/packages HTTP/1.1
Host: null
Content-Type: multipart/form-data
Accept: application/json
OAuth-Token: 3bbd6227-cfd0-45c7-8a6e-3c737e3c73ff
Content-Type: multipart/form-data; boundary=-----
-9051914041544843365972754266
Content-Length: 554

-----9051914041544843365972754266
Content-Disposition: form-
data; name="upgrade_zip"; filename="module.zip"
Content-Type: application/zip

{content-data}
-----9051914041544843365972754266--
```

## **Response**

Returns status 200 OK and file hashes for install and delete package if request is successful.

```
{
"file_install": "5d4b4614421586fd2111714abf622392",
```

---

```
"unFile": "5d4b4614421586fd2111714abf622392"
}
```

Otherwise returns status 4xx with errors.

```
{
"error": "upload_package_error",
"error_message": "Issue with the manifest",
"error_description": "The uploaded file is not compatible with this ve
rsion of Sugar: 11.0.0"
}
```

## Change Log

| Version | Change  |
|---------|---|
| v11.8   | Added /Administration/packages POST endpoint. |

**Last Modified:** 2022-02-02 22:14:07

# **/Administration/packages/:file\_install/install GET**

## **Overview**

[ADMIN] PackageManager install a package.

## **Summary**

Installs the specified package. Package 'file\_install' hash must be provided. file\_install hash could be found in staging package list.

## **Response**

Returns http status 200 OK and newly installed package ID if request is successful.

```
{
```

---

```
"id": "56365210-4cce-11ea-a7bf-acde48001122"
}
```

Otherwise returns http status 4xx with errors.

```
{
"error": "not_found",
"error_message": "Could not find package by ID."
}
```

## Change Log

| Version | Change   |
|---------|--|
| v11.8   | Added /Administration/packages/:file_install/install GET endpoint. |

**Last Modified:** 2021-02-17 02:44:13

# **/Administration/packages/:id/disable GET**

## **Overview**

[ADMIN] PackageManager disable a package.

## **Summary**

Disable the specified package. Package id hash must be provided. Package id could be found in installed package list.

## **Response**

Returns http status 200 OK and disabled package ID if request is successful.

```
{
"id": "56365210-4cce-11ea-a7bf-acde48001122"
}
```

---

Otherwise returns http status 4xx with errors.

```
{  
"error": "not_found",  
"error_message": "Could not find package by ID."  
}
```

## Change Log

| Version | Change   |
|---------|--|
| v11.8   | Added<br>/Administration/packages/:id/disable<br>GET endpoint. |

**Last Modified:** 2021-02-17 02:44:13

# /Administration/packages/:id/enable GET

## Overview

[ADMIN] PackageManager enable a package.

## Summary

Enable the specified package. Package id hash must be provided. Package id could be found in installed package list.

## Response

Returns http status 200 OK and enabled package ID if request is successful.

```
{  
"id": "56365210-4cce-11ea-a7bf-acde48001122"  
}
```

Otherwise returns http status 4xx with errors.

---

```
{
"error": "not_found",
"error_message": "Could not find package by ID."
}
```

## Change Log

| Version | Change  |
|---------|---|
| v11.8   | Added<br>/Administration/packages/:id/enable<br>GET endpoint. |

**Last Modified:** 2021-02-17 02:44:13

# /Administration/packages/:id/uninstall GET

## Overview

[ADMIN] PackageManager uninstall a package.

## Summary

Uninstalls the specified package. Package id hash must be provided. Package id could be found in installed package list.

## Response

Returns http status 200 OK and newly installed package ID if request is successful. Otherwise returns http status 4xx with errors.

```
{
"error": "not_found",
"error_message": "Could not find package by ID."
}
```

## Change Log



---

| Version | Change   |
|---------|--|
| v11.8   | Added<br>/Administration/packages/:id/uninstall<br>GET endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /Administration/packages/installed GET

### Overview

[ADMIN] PackageManager lists installed packages.

### Summary

Lists installed packages in the system.

### Response

```
{
  "packages": [
    {
      "name": "project_P3",
      "version": "1580885734",
      "type": "module",
      "published_date": "2020-02-06 12:51:17",
      "description": "",
      "uninstallable": true,
      "file_install": "cd590eb069a73b2eeb6c107776fd60dc",
      "file": "cd590eb069a73b2eeb6c107776fd60dc",
      "enabled": "ENABLED",
      "id": "66172e0e-48df-11ea-9f1f-acde48001122"
    }
  ]
}
```

---

## Change Log

| Version | Change   |
|---------|--|
| v11.8   | Added<br>/Administration/packages/installed GET<br>endpoint. |

**Last Modified:** 2021-02-17 02:44:13

# /Administration/packages/staged GET

## Overview

[ADMIN] PackageManager lists staged packages.

## Summary

Lists staged packages in the system.

## Response

```
{
  "packages": [
    {
      "name": "project_P1",
      "version": 1580885419,
      "published_date": "2020-02-05 06:50:19",
      "description": "None",
      "uninstallable": "Yes",
      "type": "Module",
      "file": "0ef4dd8b237f4358bdb246a744eb2b38",
      "file_install": "5d4b4614421586fd2111714abf622392",
      "unFile": "5d4b4614421586fd2111714abf622392"
    }
  ]
}
```

---

## Change Log

| Version | Change  |
|---------|---|
| v11.8   | Added /Administration/packages/staged GET endpoint. |

**Last Modified:** 2021-02-17 02:44:13

# **/Administration/packages/:unFile DELETE**

## **Overview**

[ADMIN] PackageManager delete a package.

## **Summary**

Delete the specified package. Package 'unFile' hash must be provided. Package 'unFile' hash could be found in staging package list.

## **Response**

Returns http status 200 OK if request is successful. Otherwise returns http status 4xx with errors.

```
{  
  "error": "delete_package_error",  
  "error_message": "Could not find package file."  
}
```

## Change Log

| Version | Change  |
|---------|---|
| v11.8   | Added /Administration/packages/:unFile DELETE endpoint. |

---

Last Modified: 2021-02-17 02:44:13

## /Administration/search/fields GET

### Overview

[ADMIN] Search field configuration

### Summary

This endpoint lists the full text search configuration of all fields for the full text search enabled modules. This endpoint is only available to administrators.

### Request Arguments

| Name           | Type    | Description  | Required |
|----------------|---------|--|----------|
| module_list    | String  | Comma delimited list of modules to return. If omitted, all search enabled modules will be returned.<br>Example:<br>Accounts,Contacts | False    |
| search_only    | Boolean | When set, only searchable fields are returned.<br>Defaults to false.   | False    |
| order_by_boost | Boolean | When set, a flat list of searchable fields is returned ordered by boost value.   | False    |

---

## Response

```
{
  "Accounts": {
    "name": {
      "name": "name",
      "type": "name",
      "searchable": true,
      "boost": 1
    },
    "date_modified": {
      "name": "date_modified",
      "type": "datetime",
      "searchable": false
    }
  }
}
```

## Response using order\_by\_boost

```
{
  "Quotes.quote_num": 1.5,
  "Manufacturers.name": 1,
  "Bugs.name": 0.9,
  "ProjectTask.name": 0.5,
}
```

## Change Log

| Version | Change  |
|---------|---|
| v10     | Added /Administration/search/fields GET endpoint. |

**Last Modified:** 2021-02-17 02:44:13

---

## **/Administration/search/reindex POST**

### **Overview**

[ADMIN] Search schedule reindex

### **Summary**

This endpoint schedules a reindex. This endpoint is only available to administrators.

### **Request Arguments**

| Name        | Type    | Description   | Required |
|-------------|---------|---|----------|
| module_list | String  | Comma delimited list of modules to be reindexed. If omitted, all search enabled modules will be reindexed. Example: Accounts,Contacts   | False    |
| clear_data  | Boolean | If set the records of the selected modules will be removed from the search backend and the schema will be recreated. All records from given modules will be queued to be reindexed which is orchestrated by the job queue. If not set, nothing is dropped from the search backend and all records of the selected modules are | False    |

---

| Name | Type | Description   | Required |
|------|------|---|----------|
|      |      | queued for reindexing. This is the default behavior.<br>Example:<br>Accounts,Contacts |          |

## Response

```
{  
  "success": true  
}
```

## Change Log

| Version | Change  |
|---------|---|
| v10     | Added /Administration/search/reindex POST endpoint. |

**Last Modified:** 2021-02-17 02:44:13

# /Administration/search/status GET

## Overview

[ADMIN] Search status

## Summary

This endpoint returns the status of the search backend including a list of the activated full text search modules. This endpoint is only available to administrators.

---

## Response

```
{
  "available":true,
  "enabled_modules":
  [
    "Accounts",
    "Bugs",
    "Calls",
    "Campaigns",
  ]
}
```

## Change Log

| Version | Change  |
|---------|---|
| v10     | Added /Administration/search/status GET endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /Administration/settings/auth GET

### Overview

[ADMIN] Fetch auth settings.

### Summary

This endpoint will return auth settings. This endpoint is only available to administrators when IDM migration is turned on.

### Response if enabled only local auth provider



---

```
{
  "enabledProviders": [
    "local"
  ],
  "local": {
    "password_requirements": {
      "minimum_length": 6,
      "maximum_length": 0,
      "require_upper": true,
      "require_lower": true,
      "require_number": true,
      "require_special": false,
      "password_regex": "",
      "regex_description": ""
    },
    "password_expiration": {
      "time": 0,
      "attempt": 0
    }
  }
}
```

## Response if enabled local and ldap auth providers

```
{
  "enabledProviders": [
    "local",
    "ldap"
  ],
  "local": {
    "password_requirements": {
      "minimum_length": 6,
      "maximum_length": 0,
      "require_upper": true,
      "require_lower": true,
      "require_number": true,
      "require_special": false,
      "password_regex": "",
      "regex_description": ""
    },
    "password_expiration": {
      "time": 0,
      "attempt": 0
    }
  }
}
```

---

```

    }
  },
  "ldap": {
    "user": {
      "mapping": {
        "givenName": "first_name",
        "sn": "last_name",
        "mail": "email1",
        "telephoneNumber": "phone_work",
        "facsimileTelephoneNumber": "phone_fax",
        "mobile": "phone_mobile",
        "street": "address_street",
        "l": "address_city",
        "st": "address_state",
        "postalCode": "address_postalcode",
        "c": "address_country"
      }
    },
    "adapter_config": {
      "host": "127.0.0.1",
      "port": "389",
      "options": {
        "network_timeout": 60,
        "timelimit": 60
      },
      "encryption": "none"
    },
    "adapter_connection_protocol_version": 3,
    "baseDn": "dc=openldap,dc=com",
    "uidKey": "uid",
    "filter": "({uid_key}={username})",
    "dnString": null,
    "entryAttribute": null,
    "autoCreateUser": "1",
    "searchDn": "cn=admin,ou=admins,dc=openldap,dc=com",
    "searchPassword": "admin&password"
  }
}

```

## Response if enabled local and saml auth providers

```

{
  "enabledProviders": [
    "local",

```

---

```

        "saml"
    ],
    "local": {
        "password_requirements": {
            "minimum_length": 6,
            "maximum_length": 0,
            "require_upper": true,
            "require_lower": true,
            "require_number": true,
            "require_special": false,
            "password_regex": "",
            "regex_description": ""
        },
        "password_expiration": {
            "time": 0,
            "attempt": 0
        }
    },
    "saml": {
        "strict": true,
        "debug": false,
        "sp": {
            "entityId": "logoutFlowWithRedirectBinding",
            "assertionConsumerService": {
                "url": "http://localhost/index.php?module=Users&action
=Authenticate",
                "binding": "urn:oasis:names:tc:SAML:2.0:bindings:HTTP-
POST"
            },
            "singleLogoutService": {
                "url": "http://localhost/index.php?module=Users&action
=Logout",
                "binding": "urn:oasis:names:tc:SAML:2.0:bindings:HTTP-
Redirect"
            },
            "NameIDFormat": "urn:oasis:names:tc:SAML:1.1:nameid-
format:emailAddress",
            "x509cert": "",
            "privateKey": "",
            "provisionUser": true,
            "sugarCustom": []
        },
        "idp": {
            "entityId": "http://localhost:8080/simplesaml/saml2/idp/me
tadata.php",
            "singleSignOnService": {

```

```

        "url": "http://localhost:8080/simplesaml/saml2/idp/SSO
Service.php",
        "binding": "urn:oasis:names:tc:SAML:2.0:bindings:HTTP-
Redirect"
    },
    "singleLogoutService": {
        "url": "http://localhost:8080/simplesaml/saml2/idp/Sin
gleLogoutService.php",
        "binding": "urn:oasis:names:tc:SAML:2.0:bindings:HTTP-
Redirect"
    },
    "x509cert": "-----BEGIN CERTIFICATE-----\n --x509cert-- \n
-----END CERTIFICATE-----"
},
"security": {
    "authnRequestsSigned": false,
    "logoutRequestSigned": false,
    "logoutResponseSigned": false,
    "signatureAlgorithm": "http://www.w3.org/2001/04/xmldsig-
more#rsa-sha256",
    "validateRequestId": false
}
}
}
}

```

## Change Log

| Version | Change  |
|---------|---|
| v11_2   | Added /Administration/settings/auth GET endpoint. |

Last Modified: 2021-02-17 02:44:13

## /Administration/settings/idmMode DELETE

### Overview

---

[ADMIN] Turn IDM-mode off.

## Summary

This endpoint switches IDM mode off. This is only available to administrators when IDM migration is turned on and intended for internal use for IDM integration.

## Response when IDM mode has been disabled

[ ]

## Change Log

| Version | Change  |
|---------|---|
| v11_2   | Added<br>/Administration/settings/idmMode<br>DELETE endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /Administration/settings/idmMode POST

### Overview

[ADMIN] Turn IDM-mode on.

### Summary

This endpoint switches IDM mode on. This endpoint is only available to administrators when IDM migration is turned on and intended for internal use for IDM integration.

---

## Request to enable IDM-mode.

```
{ "idmMode":
  {
    "enabled": true,
    "clientId": "mangoOIDCClientid",
    "clientSecret": "mangoOIDCClientSecret",
    "stsUrl": "http://sts.sugarcrm.local",
    "idpUrl": "http://login.sugarcrm.local",
    "stsKeySetId": "mangoOIDCKeySet",
    "tid": "srn:cloud:idp:eu:0000000001:tenant",
    "crmOAuthScope": "https://apis.sugarcrm.com/auth/crm",
    "requestedOAuthScopes": ["offline", "https://apis.sugarcrm.com
/auth/crm", "profile", "email", "address", "phone"],
    "cloudConsoleUrl": "http://console.sugarcrm.local",
    "allowedSAs": ["srn:cloud:iam:us-west-2:9999999999:sa:user-
sync"]
  }
}
```

Refer to multiverse documentation for parameters explanation.

## Response when IDM mode has been enabled

```
{
  "tid": "srn:cloud:idp:eu:0000000001:tenant",
  "clientId": "mangoOIDCClientid",
  "clientSecret": "mangoOIDCClientSecret",
  "stsUrl": "http://sts.sugarcrm.local",
  "idpUrl": "http://login.sugarcrm.local",
  "redirectUri": "http://sugar",
  "urlAuthorize": "http://sts.sugarcrm.local/oauth2/auth",
  "urlAccessToken": "http://sts.sugarcrm.local/oauth2/token",
  "urlResourceOwnerDetails": "http://sts.sugarcrm.local/oauth2/intro
spect",
  "urlUserInfo": "http://sts.sugarcrm.local/userinfo",
  "http_client": [],
  "cloudConsoleUrl": "http://console.sugarcrm.local",
  "cloudConsoleRoutes": [],
  "caching": [],
  "crmOAuthScope": "https://apis.sugarcrm.com/auth/crm",
  "requestedOAuthScopes": [
    "offline",
```

```
        "https://apis.sugarcrm.com/auth/crm",
        "profile",
        "email",
        "address",
        "phone"
    ],
    "keySetId": "mangoOIDCKeySet",
    "urlKeys": "http://sts.sugarcrm.local/keys/mangoOIDCKeySet",
    "allowedSAs": ["srn:cloud:iam:us-west-2:9999999999:sa:user-sync"]
}
```

## Change Log

| Version | Change  |
|---------|---|
| v11_2   | Added<br>/Administration/settings/idmMode POST<br>endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /Calendar/invitee\_search GET

### Overview

Temporary API - Do Not Use! This endpoint will be removed in an upcoming release. Use /search endpoint instead. Searches for people to invite to an event (meeting or call).

### Request Arguments

| Name        | Type   | Description                          | Required |
|-------------|--------|--------------------------------------|----------|
| q           | String | The search text to match records on. | True     |
| module_list | String | Comma delimited                      | True     |

| Name          | Type   | Description   | Required |
|---------------|--------|---|----------|
|               |        | list of modules to search.  |          |
| search_fields | String | Comma delimited list of fields to search.   | True     |
| fields        | String | Comma delimited list of fields to return. Search fields will automatically be added to return list. | True     |

## Response Arguments

| Name        | Type    | Description   |
|-------------|---------|---|
| next_offset | Integer | Currently only returns -1 as paging is not supported yet. |
| records     | Array   | An array of results containing matched records.           |

## Response

```
{
  "next_offset": -1,
  "records": [
    {
      "id": "17283aad-8d15-c545-fc5a-5422fe3d8ef8",
      "date_modified": "2014-09-24T13:25:28-04:00",
      "email": [
        {
          "email_address": "hr.phone.support@example.cn",
          "invalid_email": false,
          "opt_out": true,
          "primary_address": false,
          "reply_to_address": false
        }
      ]
    }
  ]
}
```



```

    },
    {
        "email_address": "section.section.phone@example.ed
u",
        "invalid_email": false,
        "opt_out": false,
        "primary_address": true,
        "reply_to_address": true
    }
],
"full_name": "Renaldo Cuffee",
"account_name": "EEE Endowments LTD",
"_acl": {
    "fields": {}
},
"_module": "Contacts",
"_search": {
    "highlighted": {
        "account_name": {
            "text": "EEE Endowments LTD",
            "module": "Contacts",
            "label": "LBL_ACCOUNT_NAME"
        }
    }
}
},
{
    "id": "19c0fa4a-a6c0-940f-7ad6-5422fe62a00a",
    "date_modified": "2014-09-24T13:25:28-04:00",
    "email": [
        {
            "email_address": "qa.beans@example.com",
            "invalid_email": false,
            "opt_out": true,
            "primary_address": false,
            "reply_to_address": false
        },
        {
            "email_address": "the.phone.sales@example.de",
            "invalid_email": false,
            "opt_out": false,
            "primary_address": true,
            "reply_to_address": true
        }
    ],
    "full_name": "Noble Canto",

```

---

```
    "account_name": "EEE Endowments LTD",
    "_acl": {
      "fields": {}
    },
    "_module": "Contacts",
    "_search": {
      "highlighted": {
        "account_name": {
          "text": "EEE Endowments LTD",
          "module": "Contacts",
          "label": "LBL_ACCOUNT_NAME"
        }
      }
    }
  }
]
}
```

## Change Log

| Version | Change                                     |
|---------|--|
| v10     | Added /<module>/send_invites GET endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /Calls POST

### Overview

Create a single event or a series of event records.

### Request Arguments

| Name           | Type                | Description                                | Required |
|----------------|---------------------|--|----------|
| <record field> | <record field type> | The name value list of fields to populate. | True     |

## Request

```
{
  "name": "Department Meeting",
  "description": "Weekly Department Meeting",
  "date_start": "yyyy-mm-ddThh:mm:ss-00:00",
  "date_end": "yyyy-mm-ddThh:mm:ss-00:00",
  "repeat_type": "Weekly",
  "repeat_interval": "1", /* Every Week */
  "repeat_dow": "25", /* Tue and Fri */
  "repeat_count": "4", /* 4 Recurrences */
  "repeat_until": "",
}
```

## Response Arguments

| Name           | Description                                      | Start Date | End Date |
|----------------|--|------------|----------|
| <record field> | Returns the fields for the newly created record. |            |          |

## Response

```
{
}
```

## Change Log

| Version | Change |
|---------|--------|
|         |        |

---

v10

Added /<module> POST endpoint.

**Last Modified:** 2021-02-17 02:44:13

## **/Calls/:record DELETE**

### **Overview**

Deletes either a single event record or a series of event records

### **Request Arguments**

| Name            | Type    | Description                            | Required |
|-----------------|---------|--|----------|
| all_recurrences | Boolean | Flag to delete all events in a series. | False    |

### **Request**

`http://{site_url}/rest/v10/Meetings/2c9e5c09-6824-0d14-f5cb-5130321ac3cf?all_recurrences=true`

### **Response Arguments**

| Name | Type   | Description                           |
|------|--------|---------------------------------------|
| id   | String | Returns the ID of the deleted record. |

### **Response**

{

---

```
  "id": "11cf0d0a-40af-8cb1-9da0-5057a5f511f9"
}
```

## Change Log

| Version | Change                                   |
|---------|--|
| v10     | Added /<module>/:record DELETE endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /Calls/:record PUT

### Overview

Update a calendar event record of the specified type.

### Request Arguments

| Name            | Type    | Description                            | Required |
|-----------------|---------|--|----------|
| all_recurrences | Boolean | Flag to update all events in a series. | False    |

### Request

```
http://{site_url}/rest/v10/Meetings/2c9e5c09-6824-0d14-f5cb-5130321ac3cf?all_recurrences=true
{
  "name": "Department Meeting",
  "description": "Weekly Department Meeting",
  "date_start": "yyyy-mm-ddThh:mm:ss-00:00",
  "date_end": "yyyy-mm-ddThh:mm:ss-00:00",
```

---

```
"repeat_type": "Weekly",
"repeat_interval": "1", /* Every Week */
"repeat_dow": "25", /* Tue and Fri */
"repeat_count": "4", /* 4 Recurrences */
"repeat_until": "",
}
```

## Response Arguments

| Name           | Description                                | Start Date | End Date |
|----------------|--|------------|----------|
| <record field> | Returns the fields for the updated record. |            |          |

## Response

```
{
}
```

## Change Log

| Version | Change                                |
|---------|---------------------------------------|
| v10     | Added /<module>/:record PUT endpoint. |

Last Modified: 2021-02-17 02:44:13

## /Cases/clients/portal PUT

### Overview

---

[ADMIN] Set a case as 'Requested For Close'

## Summary

This endpoint sets a case as 'Requested for Close' in the portal on a Sugar Serve instance.

## Request Arguments

This endpoint does not accept any arguments.

## Response Arguments

| Name           | Type                | Description                                      |
|----------------|---------------------|--|
| <record field> | <record field type> | Returns the fields for the updated Cases record. |

## Response

```
{
  "id": "d6582610-d69b-11ea-afe4-acde48001122",
  "name": "Need to purchase additional licenses",
  "date_entered": "2020-08-04T21:44:16+00:00",
  "date_modified": "2020-08-04T21:56:03+00:00",
  "modified_user_id": "19dc0582-d69c-11ea-95e6-acde48001122",
  "modified_by_name": "Sugar Customer Support Portal ",
  "created_by": "1",
  "created_by_name": "Administrator",
  "description": "",
  "deleted": false,
  "case_number": 150,
  "type": "Product",
  "status": "Pending Input",
  "priority": "P2",
  "resolution": "",
  "work_log": "",
  "follow_up_datetime": "",
  "widget_follow_up_datetime": "",
  "resolved_datetime": ""
}
```

```

"hours_to_resolution":null,
"business_hours_to_resolution":null,
"pending_processing":false,
"account_name":"Gifted Holdings AG",
"business_center_id":"","
"source":"","
"request_close":true,
"request_close_date":"2020-08-04T21:56:03+00:00",
"portal_viewable":true,
"widget_status":"","
"primary_contact_name":"","
"team_count":"","
"team_name":[{"id":"West","name":"West","name_2":"","primary":true
,"selected":false}],
"first_response_target_datetime":"","
"first_response_actual_datetime":"","
"hours_to_first_response":null,
"business_hrs_to_first_response":null,
"first_response_var_from_target":null,
"first_response_sla_met":"","
"first_response_user_id":"","
"first_response_user_name":"","
"first_response_sent":false,
"_acl":{"edit":"no","create":"no","fields":{}},"_module":"Cases"
}

```

## Change Log

| Version | Change                                    |
|---------|---|
| v11_10  | Added /Cases/clients/portal PUT endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /CommentLog/:record GET

### Overview

Retrieves a record.



---

## Request Arguments

This endpoint does not accept any request arguments.

## Response Arguments

| Name           | Type                | Description                                 |
|----------------|---------------------|---|
| <record field> | <record field type> | Returns the fields for the selected record. |

## Response

```
{
  "id": "bdd59d85-687b-1739-b00a-512d09f6db9e",
  "name": "Insight Marketing Inc",
  "date_entered": "2013-02-26T19:12:00+00:00",
  "date_modified": "2013-02-26T19:12:00+00:00",
  "modified_user_id": "1",
  "modified_by_name": "Administrator",
  "created_by": "1",
  "created_by_name": "Administrator",
  "description": "",
  "img": "",
  "last_activity_date": "2013-02-26T19:12:00+00:00",
  "deleted": false,
  "assigned_user_id": "seed_max_id",
  "assigned_user_name": "Max Jensen",
  "team_name": [
    {
      "id": "East",
      "name": "East",
      "name_2": "",
      "primary": false
    },
    {
      "id": 1,
      "name": "Global",
      "name_2": "",
      "primary": false
    },
    {
      "id": "West",
```

---

```
        "name": "West",
        "name_2": "",
        "primary": true
    }
],
"linkedin": "",
"facebook": "",
"twitter": "",
"googleplus": "",
"account_type": "Customer",
"industry": "Electronics",
"annual_revenue": "",
"phone_fax": "",
"billing_address_street": "345 Sugar Blvd.",
"billing_address_street_2": "",
"billing_address_street_3": "",
"billing_address_street_4": "",
"billing_address_city": "San Mateo",
"billing_address_state": "CA",
"billing_address_postalcode": "56019",
"billing_address_country": "USA",
"rating": "",
"phone_office": "(927) 136-9572",
"phone_alternate": "",
"website": "www.sectionvegan.de",
"ownership": "",
"employees": "",
"ticker_symbol": "",
"shipping_address_street": "345 Sugar Blvd.",
"shipping_address_street_2": "",
"shipping_address_street_3": "",
"shipping_address_street_4": "",
"shipping_address_city": "San Mateo",
"shipping_address_state": "CA",
"shipping_address_postalcode": "56019",
"shipping_address_country": "USA",
"email1": "kid.support.vegan@example.info",
"parent_id": "",
"sic_code": "",
"parent_name": "",
"email_opt_out": false,
"invalid_email": false,
"email": [
    {
        "email_address": "kid.support.vegan@example.info",
        "opt_out": "0",
```

---

```
    "invalid_email": "0",
    "primary_address": "1"
  },
  {
    "email_address": "phone.kid@example.cn",
    "opt_out": "0",
    "invalid_email": "0",
    "primary_address": "0"
  }
],
"campaign_id": "",
"campaign_name": "",
"my_favorite": false,
"_acl": {
  "fields": {
    }
  }
}
```

## Change Log

| Version | Change                                |
|---------|---------------------------------------|
| v10     | Added /<module>/:record GET endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /ConsoleConfiguration/config POST

### Overview

Saves configuration changes in the database.

### Request Arguments

---

This endpoint does not accept any request arguments.

## URL Example

/rest/v11\_9/ConsoleConfiguration/config

## Request Payload Example

```
{
  "is_setup":true,
  "enabled_modules":{
    "c108bb4a-775a-11e9-b570-f218983a1c3e":[
      "Cases"
    ],
    "da438c86-df5e-11e9-9801-3c15c2c53980":[
      "Accounts",
      "Opportunities"
    ]
  },
  "order_by_primary":{
    "c108bb4a-775a-11e9-b570-f218983a1c3e":{
      "Cases":"follow_up_datetime:asc"
    },
    "da438c86-df5e-11e9-9801-3c15c2c53980":{
      "Accounts":"next_renewal_date:asc",
      "Opportunities":"date_closed:asc"
    }
  },
  "order_by_secondary":{
    "c108bb4a-775a-11e9-b570-f218983a1c3e":{
      "Cases":""
    },
    "da438c86-df5e-11e9-9801-3c15c2c53980":{
      "Accounts":"","
      "Opportunities":""
    }
  },
  "filter_def":{
    "c108bb4a-775a-11e9-b570-f218983a1c3e":{
      "Cases":[
        {
          "status":{
            "$not_in":[

```

```

        "Closed",
        "Rejected",
        "Duplicate"
    ]
    },
    {
        "$owner": ""
    }
]
},
"da438c86-df5e-11e9-9801-3c15c2c53980":{
    "Accounts":[
        {
            "$owner": ""
        }
    ],
    "Opportunities":[
        {
            "sales_status":{
                "$not_in":[
                    "Closed Won",
                    "Closed Lost"
                ]
            }
        },
        {
            "$owner": ""
        }
    ]
}
},
"defaults":{
    "is_setup":0,
    "enabled_modules":{
        "c108bb4a-775a-11e9-b570-f218983a1c3e":[
            "Cases"
        ],
        "da438c86-df5e-11e9-9801-3c15c2c53980":[
            "Accounts",
            "Opportunities"
        ]
    }
},
"order_by_primary":{
    "c108bb4a-775a-11e9-b570-f218983a1c3e":{
        "Cases":"follow_up_datetime:asc"
    }
}

```

---

```

    },
    "da438c86-df5e-11e9-9801-3c15c2c53980":{
        "Accounts":"next_renewal_date:asc",
        "Opportunities":"date_closed:asc"
    }
},
"order_by_secondary":{
    "c108bb4a-775a-11e9-b570-f218983a1c3e":{
        "Cases":""
    },
    "da438c86-df5e-11e9-9801-3c15c2c53980":{
        "Accounts":"","
        "Opportunities":""
    }
},
"filter_def":{
    "c108bb4a-775a-11e9-b570-f218983a1c3e":{
        "Cases":[
            {
                "status":{
                    "$not_in":[
                        "Closed",
                        "Rejected",
                        "Duplicate"
                    ]
                }
            },
            {
                "$owner":""
            }
        ]
    },
    "da438c86-df5e-11e9-9801-3c15c2c53980":{
        "Accounts":[
            {
                "$owner":""
            }
        ],
        "Opportunities":[
            {
                "sales_status":{
                    "$not_in":[
                        "Closed Won",
                        "Closed Lost"
                    ]
                }
            }
        ]
    }
}

```

```

        },
        {
            "$owner": ""
        }
    ]
}
},
"labels":{
"Cases":[
{
"label":"LBL_LIST_PRIORITY/LBL_STATUS",
"labelValue":"Priority/Status"
},
{
"label":"LBL_LIST_SUBJECT/LBL_SERVICE_LEVEL",
"labelValue":"Subject/Service Level"
}
]
},
"viewdefs":{
"Cases":{
"base":{
"view":{
"multi-line-list":{
"panels":[
{
"label":"LBL_LABEL_1",
"fields":[
{
"name":"case_number",
"label":"LBL_AGENT_WORKBENCH_NUMBER",
"subfields":[
{
"default":true,
"enabled":true,
"name":"case_number",
"label":"LBL_AGENT_WORKBENCH_NUMB
ER"
}
]
},
{
"name":"Priority/Status",
"label":"LBL_LIST_PRIORITY/LBL_STATUS",
"subfields":[

```

```

        {
            "default":true,
            "enabled":true,
            "name":"priority",
            "label":"LBL_LIST_PRIORIT
Y",
            "type":"enum"
        },
        {
            "default":true,
            "enabled":true,
            "name":"status",
            "label":"LBL_STATUS",
            "type":"case-status",
            "widget_name":"widget_sta
tus"
        }
    ],
    {
        "name":"Subject/Service Level",
        "label":"LBL_LIST_SUBJECT/LBL_SERVICE_L
EVEL",
        "subfields":[
            {
                "default":true,
                "enabled":true,
                "name":"name",
                "label":"LBL_LIST_SUBJECT
",
                "link":false
            },
            {
                "default":true,
                "enabled":true,
                "name":"service_level",
                "label":"LBL_SERVICE_LEVE
L",
                "type":"enum",
                "enum_module":"Accounts",
                "link":false
            }
        ]
    }
]
}

```





---

```
"c108bb4a-775a-11e9-b570-f218983a1c3e":{
  "Cases":"follow_up_datetime:asc"
},
"da438c86-df5e-11e9-9801-3c15c2c53980":{
  "Accounts":"next_renewal_date:asc",
  "Opportunities":"date_closed:asc"
}
},
"order_by_secondary":{
"c108bb4a-775a-11e9-b570-f218983a1c3e":{
  "Cases":""
},
"da438c86-df5e-11e9-9801-3c15c2c53980":{
  "Accounts":"","
  "Opportunities":""
}
},
"filter_def":{
"c108bb4a-775a-11e9-b570-f218983a1c3e":{
  "Cases":[
    {
      "status":{
        "$not_in":[
          "Closed",
          "Rejected",
          "Duplicate"
        ]
      }
    },
    {
      "$owner":""
    }
  ]
},
"da438c86-df5e-11e9-9801-3c15c2c53980":{
  "Accounts":[
    {
      "$owner":""
    }
  ],
  "Opportunities":[
    {
      "sales_status":{
        "$not_in":[
          "Closed Won",
          "Closed Lost"
        ]
      }
    }
  ]
}
}
```

```

        ]
    }
},
{
    "$owner": ""
}
]
}
},
"defaults": {
"setup": 0,
"enabled_modules": {
    "c108bb4a-775a-11e9-b570-f218983a1c3e": [
        "Cases"
    ],
    "da438c86-df5e-11e9-9801-3c15c2c53980": [
        "Accounts",
        "Opportunities"
    ]
},
"order_by_primary": {
    "c108bb4a-775a-11e9-b570-f218983a1c3e": {
        "Cases": "follow_up_datetime:asc"
    },
    "da438c86-df5e-11e9-9801-3c15c2c53980": {
        "Accounts": "next_renewal_date:asc",
        "Opportunities": "date_closed:asc"
    }
},
"order_by_secondary": {
    "c108bb4a-775a-11e9-b570-f218983a1c3e": {
        "Cases": ""
    },
    "da438c86-df5e-11e9-9801-3c15c2c53980": {
        "Accounts": "",
        "Opportunities": ""
    }
},
"filter_def": {
    "c108bb4a-775a-11e9-b570-f218983a1c3e": {
        "Cases": [
            {
                "status": {
                    "$not_in": [
                        "Closed",
                        "Rejected",

```



---

| Version | Change  |
|---------|---|
| v11.9   | Added /ConsoleConfiguration/config POST endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## **/ConsoleConfiguration/default-metadata GET**

### **Overview**

Gets the request metadata in JSON format.

### **Request Arguments**

This endpoint does not accept any request arguments.

### **URL Parameters**

| <b>Parameter</b> | <b>Description</b>   | <b>Required?</b> |
|------------------|--|------------------|
| modules          | String. Comma-separated module names. Example: 'Accounts,Opportunities'.   | Yes              |
| type             | String. The type of the desired metadata. The following types are supported: 'filter', 'layout', 'menu', 'view'. | Yes              |
| name             | String. The name of the metadata. Examples: 'list', 'record', or 'multi-line-list'.                              | Yes              |

### **URL Example**

---

/rest/v11\_9/ConsoleConfiguration/default-metadata?modules=Cases&type=view&name=multi-line-list

## Result Arguments

### Response

```
{
  "Cases": {
    "panels": [
      {
        "label": "LBL_PANEL_1",
        "fields": [
          {
            "name": "case_number",
            "label": "LBL_AGENT_WORKBENCH_NUMBER",
            "width": "xsmall",
            "subfields": [
              {
                "name": "case_number",
                "label": "LBL_AGENT_WORKBENCH_NUMBER",
                "default": true,
                "enabled": true,
                "readonly": true
              }
            ]
          },
          {
            "name": "status",
            "label": "LBL_AGENT_WORKBENCH_PRIORITY_STATUS",
            "width": "small",
            "subfields": [
              {
                "name": "priority",
                "label": "LBL_LIST_PRIORITY",
                "default": true,
                "enabled": true,
                "type": "enum"
              },
              {
                "name": "status",
                "label": "LBL_STATUS",
                "default": true,
                "enabled": true,

```

---

```

        "type": "case-status",
        "widget_name": "widget_status"
    }
]
},
{
    "name": "follow_up_datetime",
    "label": "LBL_AGENT_WORKBENCH_FOLLOW_UP",
    "width": "medium",
    "subfields": [
        {
            "name": "follow_up_datetime",
            "label": "LBL_FOLLOW_UP_DATETIME",
            "default": true,
            "enabled": true,
            "readonly": true,
            "type": "follow-up-datetime-colorcoded",
            "widget_name": "widget_follow_up_datetime",
            "color_code_classes": {
                "overdue": "expired",
                "in_a_day": "soon-expired",
                "more_than_a_day": "white black-text"
            }
        },
        {
            "name": "follow_up_datetime",
            "label": "LBL_FOLLOW_UP_DATETIME",
            "default": true,
            "enabled": true,
            "readonly": true,
            "type": "datetimecombo"
        }
    ]
},
{
    "name": "name",
    "label": "LBL_AGENT_WORKBENCH_SUBJECT_DESCRIPTION",
    "width": "xlarge",
    "subfields": [
        {
            "name": "name",
            "label": "LBL_LIST_SUBJECT",
            "link": false,
            "default": true,
            "enabled": true,
            "readonly": true
        }
    ]
}

```

---

```

    },
    {
        "name": "description",
        "default": true,
        "enabled": true,
        "readonly": true,
        "sortable": false
    }
]
},
{
    "name": "business_center",
    "label": "LBL_BUSINESS_CENTER",
    "width": "small",
    "subfields": [
        {
            "name": "business_center_name",
            "label": "LBL_BUSINESS_CENTER",
            "link": false,
            "default": true,
            "enabled": true,
            "readonly": true
        }
    ]
},
{
    "name": "account_name",
    "label": "LBL_ACCOUNT",
    "width": "medium",
    "subfields": [
        {
            "name": "account_name",
            "label": "LBL_LIST_ACCOUNT_NAME",
            "module": "Accounts",
            "id": "ACCOUNT_ID",
            "ACLTag": "ACCOUNT",
            "related_fields": [
                "account_id"
            ],
            "link": false,
            "default": true,
            "enabled": true
        },
        {
            "name": "service_level",
            "label": "LBL_SERVICE_LEVEL",

```



---

```

        "type": "enum",
        "enum_module": "Accounts",
        "link": false,
        "default": true,
        "enabled": true,
        "readonly": true
    }
]
},
{
    "name": "assigned_user_name",
    "label": "LBL_ASSIGNED_TO_NAME",
    "width": "small",
    "subfields": [
        {
            "name": "assigned_user_name",
            "label": "LBL_ASSIGNED_TO_NAME",
            "id": "ASSIGNED_USER_ID",
            "link": false,
            "default": true,
            "enabled": true
        }
    ]
}
]
}
],
"collectionOptions": {
    "limit": 100,
    "params": {
        "max_num": 100,
        "order_by": "follow_up_datetime",
        "nulls_last": true
    }
},
"filterDef": [
    {
        "status": {
            "$not_in": [
                "Closed",
                "Rejected",
                "Duplicate"
            ]
        },
        "$owner": ""
    }
]
}

```

---

```
]
}
}
```

## Response Codes and Error Messages

All successful responses return 200.

The following error responses are possible:

- **403 (SugarAPIExceptionNotAuthorized)** : Sent if the user attempts to access a module that they are forbidden to access.
- **422 (SugarApiExceptionInvalidParameter)** : Sent if the user specifies an invalid type or module.

## Change Log

| Version | Change   |
|---------|--|
| v11.9   | Added /ConsoleConfiguration/default-metadata GET endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /Contact/:record/Cases GET

### Overview

Get a contact's related cases, filtered by an expression, which are accessible to a contact with portal visibility.

### Summary

This endpoint will return a set of cases filtered by an expression which are accessible to a contact with portal visibility. The filter can be applied to multiple

---

fields and have multiple and/or conditions in it. Alternatively, you may use an existing filter by specifying its ID. If both a filter definition and a filter ID are passed, the two filters will be joined with an AND. Care will need to be taken to make sure that any filters used have appropriate indexes on the server side, otherwise the runtime of the endpoint will be very long.

## Request

GET /Contact/:id/Cases

### Request Arguments

| Name      | Type    | Description   | Required |
|-----------|---------|---|----------|
| filter    | String  | See the Filter API for details.   | False    |
| filter_id | String  | Identifier for a pre-existing filter. See the Filter API for details.   | False    |
| max_num   | Integer | Max number of records that can be returned. Default is 20, unless overruled by your Sugar configuration.                      | False    |
| offset    | Integer | The number of records to skip over before records are returned. Default is 0.   | False    |
| fields    | String  | Comma delimited list of fields to return. Each field may be represented either by string, or by map containing field name and | False    |

|          |         |   |       |
|----------|---------|---|-------|
|          |         | additional field parameters (applicable to link and collection fields). The field's ID and date_modified will always be returned. For more details on additional field parameters, see the Relate API and Collection API. |       |
| order_by | String  | See the Filter API.   | False |
| deleted  | Boolean | Boolean to show deleted records in the result set.  | False |

## Response

```
{
  "next_offset": -1,
  "records": [
    {
      "id": "d509b3da-29f6-7b23-7cce-56fab1a6335b",
      "name": "Need help",
      "date_modified": "2016-03-29T09:46:00-07:00",
      "_acl": {
        "fields": {}
      },
      "_module": "Cases"
    },
    {
      "id": "cc4982cd-0bdf-bad4-d079-56fab4bddd1",
      "name": "Having trouble",
      "date_modified": "2016-03-29T09:57:58-07:00",
      "_acl": {
        "fields": {}
      },
      "_module": "Cases"
    }
  ]
}
```

---

## Response Arguments

| Name        | Type    | Description   |
|-------------|---------|---|
| next_offset | Integer | Displays the next offset for retrieval of additional results. -1 will be returned when there are no more records. |
| records     | Array   | An array of results containing matched records.   |

## Change Log

| Version | Change                                     |
|---------|--|
| v11     | Added /Contact/:record/Cases GET endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /Contacts/:record/freebusy GET

Get a contact's FreeBusy schedule

### Summary:

This endpoint returns a list of time slots for which the specified person is busy.

### Request

---

GET /Contacts/:id/freebusy

## Response

```
{
  "id": "foo"
  "module": "Users",
  "freebusy": [
    {
      "start": "2014-08-24T08:45:00-04:00",
      "end": "2014-08-24T09:15:00-04:00"
    },
    {
      "start": "2014-08-30T05:45:00-04:00",
      "end": "2014-08-30T06:15:00-04:00"
    },
    {
      "start": "2014-09-12T15:45:00-04:00",
      "end": "2014-09-12T16:15:00-04:00"
    }
  ]
}
```

**Last Modified:** 2021-02-17 02:44:13

## /Currencies GET

Returns a collection of Currency models

### Summary:

This end point is used to return the Currencies defined in the application

---

## Url Parameters:

| Param | Description | Optional |
|-------|-------------|----------|
|-------|-------------|----------|

## Possible Errors

| Error | Description |
|-------|-------------|
|-------|-------------|

## Url Example:

/rest/v10/Currencies

## Output Example:

```
{ "next_offset": -1, "records": [ { "id": "-99", "name": "US Dollars", "symbol": "$",  
"iso4217": "USD", "conversion_rate": 1, "status": "Active", "_acl": { "fields": {} },  
"_module": "Currencies" }, { "id": "a3cba348-756c-935c-66ad-55d772c7960f",  
"name": "Euro", "symbol": "€", "iso4217": "EUR", "conversion_rate": 0.9, "status":  
"Active", "date_modified": "2015-08-21T11:47:51-07:00", "created_by": "1", "_acl":  
{ "fields": {} }, "_module": "Currencies" } ] }
```

Last Modified: 2021-02-17 02:44:13

## /Dashboards/Activities GET

### Overview

List current user's filtered Activity Stream dashboards.

---

## Summary

This endpoint will return a set of Activity Stream dashboards filtered by an expression. The filter can be applied to multiple fields and have multiple and/or conditions in it. Alternatively, you may use an existing filter by specifying its id. If both a filter definition and a filter id are passed, the two filters will be joined with an AND. Care will need to be taken to make sure that any filters used have appropriate indexes on the server side otherwise the runtime of the endpoint will be very long.

## Notice

**The behavior of this endpoint has changed in v11.** If you continue to use v10 of the API, your REST calls should behave as below. But, it is advisable to upgrade to v11.

### Migrating to v11:

For more information on behavior in v11, refer to [GET /<module>](#).

Recommended Replacement: GET /Dashboards

The module name is no longer part of the path. To specify a module name, include it as a filter parameter, use

**v11:** GET /Dashboards?filter[0][dashboard\_module]=Activities

name, id. etc. are no longer specified as default fields. To retain the default fields, use

**v11:** GET

/Dashboards?filter[0][dashboard\_module]=Activities&fields=id,name,view\_name

## Request Arguments

| Name      | Type    | Description   | Required |
|-----------|---------|---|----------|
| filter    | String  | See <a href="#">Filter API</a> .  | False    |
| filter_id | String  | Identifier for a preexisting filter. See <a href="#">the Filter API</a> for details.      | False    |
| max_num   | Integer | Max number of records that can be returned. Default is 20, unless overruled by your Sugar | False    |



| Name     | Type    | Description   | Required |
|----------|---------|---|----------|
|          |         | configuration.  |          |
| offset   | Integer | The number of records to skip over before records are returned. Default is 0.   | False    |
| fields   | String  | Comma delimited list of fields to return. Each field may be represented either by string, or by map containing field name and additional field parameters (applicable to link and collection fields). The fields id and date_modified will always be returned. For more details on additional field parameters, see <a href="#">Relate API</a> and <a href="#">Collection API</a> . | False    |
| order_by | String  | See <a href="#">Filter API</a> .  | False    |
| deleted  | Boolean | Boolean to show deleted records in the result set.  | False    |

## Response Arguments

| Name        | Type    | Description   |
|-------------|---------|---|
| next_offset | Integer | Displays the next offset for retrieval of additional results. -1 will be returned when there are no more records. |
| records     | Array   | An array of results   |

| Name | Type | Description                 |
|------|------|-----------------------------|
|      |      | containing matched records. |

## Response

```
{
  "next_offset": -1,
  "records": [
    {
      "id": "d509b3da-29f6-7b23-7cce-56fab1a6335b",
      "name": "Activity Stream Dashboard",
      "date_modified": "2016-03-29T09:46:00-07:00",
      "view_name": "activities",
      "_acl": {
        "fields": {}
      },
      "view": "activities",
      "_module": "Dashboards"
    },
    {
      "id": "cc4982cd-0bdf-bad4-d079-56fab4bddd1",
      "name": "Activity Stream Dashboard 2",
      "date_modified": "2016-03-29T09:57:58-07:00",
      "view_name": "activities",
      "_acl": {
        "fields": {}
      },
      "view": "activities",
      "_module": "Dashboards"
    }
  ]
}
```

## Change Log

| Version | Change   |
|---------|--|
| v11     | No longer supported. Please use <a href="#">GET /Dashboards</a> instead. |
| v10     | Added /Dashboards/Activities GET   |

---

| Version | Change    |
|---------|-----------|
|         | endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /Dashboards GET

### Overview

List current user's filtered Home dashboards.

### Summary

This endpoint will return a set of Home dashboards filtered by an expression. The filter can be applied to multiple fields and have multiple and/or conditions in it. Alternatively, you may use an existing filter by specifying its id. If both a filter definition and a filter id are passed, the two filters will be joined with an AND. Care will need to be taken to make sure that any filters used have appropriate indexes on the server side otherwise the runtime of the endpoint will be very long.

### Notice

**The behavior of this endpoint has changed in v11.** For a description of behavior in v11, refer to [GET /<module>](#). If you continue to use v10 of the API, your REST calls should behave as before. But, it is advisable to upgrade to v11. Slight differences exist in the GET method of v10 vs v11.

**Migrating to v11:**

Recommended Replacement: GET /Dashboards

The Home module is no longer the default dashboard\_module. To get the Home module dashboard, include the following filter parameter.

**v11:** GET /Dashboards?filter[0][dashboard\_module]=Home

name, id. etc. are no longer specified as default fields. To retain the default fields, use

**v11:** GET

---

/Dashboards?filter[0][dashboard\_module]=Home&fields=id,name,view\_name

## Request Arguments

| Name      | Type    | Description   | Required |
|-----------|---------|---|----------|
| filter    | String  | See <a href="#">Filter API</a> .  | False    |
| filter_id | String  | Identifier for a preexisting filter. See <a href="#">the Filter API</a> for details.  | False    |
| max_num   | Integer | Max number of records that can be returned. Default is 20, unless overruled by your Sugar configuration.  | False    |
| offset    | Integer | The number of records to skip over before records are returned. Default is 0.   | False    |
| fields    | String  | Comma delimited list of fields to return. Each field may be represented either by string, or by map containing field name and additional field parameters (applicable to link and collection fields). The fields id and date_modified will always be returned. For more details on additional field parameters, see <a href="#">Relate API</a> and <a href="#">Collection API</a> . | False    |

| Name     | Type    | Description  | Required |
|----------|---------|--|----------|
| order_by | String  | See <a href="#">Filter API</a> .                   | False    |
| deleted  | Boolean | Boolean to show deleted records in the result set. | False    |

## Response Arguments

| Name        | Type    | Description   |
|-------------|---------|---|
| next_offset | Integer | Displays the next offset for retrieval of additional results. -1 will be returned when there are no more records. |
| records     | Array   | An array of results containing matched records.   |

## Response

```
{
  "next_offset": -1,
  "records": [
    {
      "id": "c630c772-faca-2051-6a42-56fab2e73e42",
      "name": "New Home Dashboard",
      "date_modified": "2016-03-29T09:49:06-07:00",
      "view_name": "",
      "_acl": {
        "fields": {}
      },
      "view": "",
      "_module": "Dashboards"
    },
    {
      "id": "15677f2c-f00d-c59a-6fbe-56fab1f33732",
      "name": "Home Dashboard2",
      "date_modified": "2016-03-29T09:47:25-07:00",
      "view_name": "",

```

```

    "_acl": {
      "fields": {}
    },
    "view": "",
    "_module": "Dashboards"
  },
  {
    "id": "d509b3da-29f6-7b23-7cce-56fab1a6335b",
    "name": "Accounts Dashboard",
    "date_modified": "2016-03-29T09:46:00-07:00",
    "view_name": "records",
    "_acl": {
      "fields": {}
    },
    "view": "records",
    "_module": "Dashboards"
  },
  {
    "id": "cc4982cd-0bdf-bad4-d079-56fab4bddd1",
    "name": "Activity Stream Dashboard",
    "date_modified": "2016-03-29T09:57:58-07:00",
    "view_name": "activities",
    "_acl": {
      "fields": {}
    },
    "view": "activities",
    "_module": "Dashboards"
  }
]
}

```

## Change Log

| Version | Change   |
|---------|--|
| v11     | Behavior has changed. Please see <a href="#">GET /Dashboards</a> for the designated replacement. |
| v10     | Added /Dashboards GET endpoint.  |

**Last Modified:** 2021-02-17 02:44:13

---

## /Dashboards POST

Create a new Home dashboard.

### Notice

**The behavior of this endpoint has changed in v11.** For a description of behavior in v11, refer to [POST /<module>](#). If you continue to use v10 of the API, your REST calls should behave as below. But, it is advisable to upgrade to v11.

#### Migrating to v11:

Recommended Replacement: POST /Dashboards

The Home module is no longer the default dashboard\_module. To specify the Home module, include it in the Request Body.

**v11:** POST /Dashboards with the following in the Request Body:

```
{"dashboard_module":"Home"}
```

### Request Arguments

| Name           | Type                | Description                                | Required |
|----------------|---------------------|--|----------|
| <record field> | <record field type> | The name value list of fields to populate. | True     |

### Request

```
{
  "name": "New Home Dashboard",
  "dashboard_module": "Home",
  "view_name": "",
  "metadata": {
    "components": [{
      "rows": [{
        "width": 12,
        "view": {
          "limit": 10,
          "visibility": "user",
          "label": "Active Tasks",
          "type": "active-tasks",
```

```

        "module": null,
        "template": "tabbed-dashlet"
    }
}]]],
"width": 12
}]
}
}

```

## Response Arguments

| Name           | Type                | Description   |
|----------------|---------------------|---|
| <record field> | <record field type> | Returns the fields for the newly created dashboard. |

## Response

```

{
  "id": "4ccda6fa-fa02-9c8e-215f-56cf72f98fcb",
  "name": "New Home Dashboard",
  "date_entered": "2016-02-25T13:30:51-08:00",
  "date_modified": "2016-02-25T13:30:51-08:00",
  "modified_user_id": "1",
  "modified_by_name": "Administrator",
  "created_by": "1",
  "created_by_name": "Administrator",
  "description": "",
  "deleted": false,
  "dashboard_module": "Home",
  "view_name": "",
  "metadata": {
    "components": [
      {
        "rows": [
          [
            {
              "width": 12,
              "view": {
                "limit": 10,
                "visibility": "user",
                "label": "Active Tasks",

```



```
        "type": "active-tasks",
        "module": null,
        "template": "tabbed-dashlet"
    }
}
],
"width": 12
}
]
},
"following": "",
"my_favorite": false,
"tag": [],
"assigned_user_id": "1",
"assigned_user_name": "Administrator",
"_acl": {
    "fields": {}
},
"view": "",
"_module": "Dashboards"
}
```

## Change Log

| Version | Change  |
|---------|---|
| v11     | Behavior has changed. Please see <a href="#">POST /Dashboards</a> for the designated replacement. |
| v10     | Added /Dashboards POST endpoint.  |

**Last Modified:** 2021-02-17 02:44:13

## /Dashboards/<module> GET

### Overview

---

List current user's filtered dashboards.

## Summary

This endpoint will return a set of dashboards filtered by an expression. The filter can be applied to multiple fields and have multiple and/or conditions in it. Alternatively, you may use an existing filter by specifying its id. If both a filter definition and a filter id are passed, currently the definition will override the id, **but please do not rely on this behavior as it is subject to change**. Care will need to be taken to make sure that any filters used have appropriate indexes on the server side otherwise the runtime of the endpoint will be very long.

## Notice

**This endpoint is not supported in v11.** If you continue to use v10 of the API, your REST calls should behave as below. But, it is advisable to upgrade to v11.

### Migrating to v11:

For more information on behavior in v11, refer to [GET /<module>](#).

Recommended Replacement: GET /Dashboards

The module name is no longer part of the path. To specify a module name, include it as a filter parameter. For example, to retrieve all dashboards from the Accounts module, use

**v11:** GET /Dashboards?filter[0][dashboard\_module]=Accounts

name, id. etc. are no longer specified as default fields. To retain the default fields, use

**v11:** GET

/Dashboards?filter[0][dashboard\_module]=Accounts&fields=id,name,view\_name

## Request Arguments

| Name      | Type    | Description  | Required |
|-----------|---------|--|----------|
| filter    | String  | See <a href="#">Filter API</a> .   | False    |
| filter_id | String  | Identifier for a preexisting filter. See <a href="#">the Filter API</a> for details. | False    |
| max_num   | Integer | Max number of records that can be returned. Default is                               | False    |

| Name     | Type    | Description   | Required |
|----------|---------|---|----------|
|          |         | 20.   |          |
| offset   | Integer | The number of records to skip over before records are returned. Default is 0.   | False    |
| fields   | String  | Comma delimited list of fields to return. Each field may be represented either by string, or by map containing field name and additional field parameters (applicable to link and collection fields). The fields id and date_modified will always be returned. For more details on additional field parameters, see <a href="#">Relate API</a> and <a href="#">Collection API</a> . | False    |
| order_by | String  | See <a href="#">Filter API</a> .  | False    |
| deleted  | Boolean | Boolean to show deleted records in the result set.  | False    |

## Response Arguments

| Name        | Type    | Description   |
|-------------|---------|---|
| next_offset | Integer | Displays the next offset for retrieval of additional results. -1 will be returned when there are no more records. |
| records     | Array   | An array of results   |

| Name | Type | Description                 |
|------|------|-----------------------------|
|      |      | containing matched records. |

## Response

```
{
  "next_offset": -1,
  "records": [
    {
      "id": "d509b3da-29f6-7b23-7cce-56fab1a6335b",
      "name": "Accounts Dashboard",
      "date_modified": "2016-03-29T09:46:00-07:00",
      "view_name": "records",
      "_acl": {
        "fields": {}
      },
      "view": "records",
      "_module": "Dashboards"
    },
    {
      "id": "cc4982cd-0bdf-bad4-d079-56fab4bddd1",
      "name": "Contacts Dashboard",
      "date_modified": "2016-03-29T09:57:58-07:00",
      "view_name": "records",
      "_acl": {
        "fields": {}
      },
      "view": "records",
      "_module": "Dashboards"
    }
  ]
}
```

## Change Log

| Version | Change   |
|---------|--|
| v11     | No longer supported. Please use <a href="#">GET /Dashboards</a> instead. |
| v10     | Added /Dashboards/<module> GET   |

---

|         |           |
|---------|-----------|
| Version | Change    |
|         | endpoint. |

Last Modified: 2021-02-17 02:44:13

## /Dashboards/<module> POST

Create a new dashboard.

### Notice

**This endpoint is not supported in v11.** If you continue to use v10 of the API, your REST calls should behave as below. But, it is advisable to upgrade to v11.

#### Migrating to v11:

For more information on behavior in v11, refer to [POST /<module>](#).

Recommended Replacement: POST /Dashboards

The module name is no longer part of the path. To specify a module name, include it in the Request Body. For example, to create an Accounts module dashboard, use **v11**: POST /Dashboards with the following in the Request Body:

```
{"dashboard_module":"Accounts"}
```

### Request Arguments

| Name           | Type                | Description                                | Required |
|----------------|---------------------|--|----------|
| <record field> | <record field type> | The name value list of fields to populate. | True     |

### Request

```
{  
  "name": "New Dashboard for Accounts Module",  
  "dashboard_module": "Accounts",  
  "view_name": "records",  
  "metadata": {
```

```

    "components": [{
      "rows": [{
        "view": {
          "type": "dashablelist",
          "label": "TPL_DASHLET_MY_MODULE",
          "display_columns": ["name", "billing_address_city"]
        },
        "context": {"module": "Accounts"},
        "width": 12
      }],
      "width": 12
    }]
  }
}

```

## Response Arguments

| Name           | Type                | Description   |
|----------------|---------------------|---|
| <record field> | <record field type> | Returns the fields for the newly created dashboard. |

## Response

```

{
  "id": "8f9cd3d1-ce5d-e8d4-12d8-56cf674d2600",
  "name": "New Dashboard for Accounts Module",
  "date_entered": "2016-02-25T12:44:27-08:00",
  "date_modified": "2016-02-25T12:44:27-08:00",
  "modified_user_id": "1",
  "modified_by_name": "Administrator",
  "created_by": "1",
  "created_by_name": "Administrator",
  "description": "",
  "deleted": false,
  "dashboard_module": "Accounts",
  "view_name": "records",
  "metadata": {
    "components": [
      {
        "rows": [

```

```

        {
            "view": {
                "type": "dashablelist",
                "label": "TPL_DASHLET_MY_MODULE",
                "display_columns": [
                    "name",
                    "billing_address_city"
                ]
            },
            "context": {
                "module": "Accounts"
            },
            "width": 12
        }
    ],
    "width": 12
}
]
},
"following": "",
"my_favorite": false,
"tag": [],
"assigned_user_id": "1",
"assigned_user_name": "Administrator",
"_acl": {
    "fields": {}
},
"view": "records",
"_module": "Dashboards"
}

```

## Change Log

| Version | Change  |
|---------|---|
| v11     | No longer supported. Please use <a href="#">POST /Dashboards</a> instead. |
| v10     | Added /Dashboards/<module> POST endpoint.                                 |

---

Last Modified: 2021-02-17 02:44:13

## **/DataArchiver/:id/run POST**

### **Overview**

[ADMIN] Performs the archiving process.

### **Summary**

Performs the archiving process for the given archive definition. This endpoint is only available to administrators.

### **Request Arguments**

This endpoint does not accept any request arguments.

### **Response**

This API returns the ID of the created ArchiveRun bean.

### **Change Log**

| Version | Change                                     |
|---------|--|
| v11_11  | Added /DataArchiver/:id/run POST endpoint. |

Last Modified: 2021-02-17 02:44:13



---

## **/Documents/:record/file/:field POST**

### **Overview**

Attaches a file to a field on a record.

### **Request Arguments**

| Name               | Type    | Description   | Required                                     |
|--------------------|---------|---|--|
| format             | String  | The data format. Currently accepts 'sugar-html-json'.                                 | True   |
| delete_if_fails    | Boolean | Indicates whether the API is to mark related record deleted if the file upload fails. | False  |
| oauth_token        | String  | The oauth_token value.  | False - Required if delete_if_fails is true. |
| <attachment field> | String  | The field and file to populate. Example: {"": "@\path\to\ExampleDocument.txt"}        | True   |

### **Request**

```
{  
  "format": "sugar-html-json",  
  "delete_if_fails": true,  
  "oauth_token": "43b6b327-cc70-c301-3299-512ffb99ad97",  
  "<attachment field>": "@\path\to\ExampleDocument.txt"  
}
```

### **Response Arguments**

| Name           | Type    | Description               |
|----------------|---------|---------------------------|
| content-type   | String  | The files content type.   |
| content-length | Integer | The files content length. |
| name           | String  | The files name.           |
| uri            | String  | The URI of the file.      |

## Response

```
{
  "content-type": "text/plain",
  "content-length": 16,
  "name": "ExampleDocument.txt",
  "uri": "http://sugarcrm/rest/v10/Notes/ca66c92f-5a8b-28b4-4fc8-512d099b790b/file/<attachment field>?format=sugar-html-json&delete_if_fails=1&oauth_token=6ec91cf3-1f97-25b9-e0b1-512f8971b2d4"
}
```

## Change Log

| Version | Change   |
|---------|--|
| v10     | Added /<module>/:record/file/:field POST endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /Documents/:record/file/:field PUT

### Overview

This endpoint takes a file or image and saves it to a record that already contains an attachment in the specified field. The PUT method is very similar to the POST method but differs slightly in how the request is constructed. PUT requests should

---

send the file data as the body of the request. Optionally, a filename query parameter can be sent with the request to assign a name. Additionally, the PUT method can accept base64 encoded file data which will be decoded by the endpoint if the `content_transfer_encoding` parameter is set to 'base64'.

**NOTE:** In lieu of the `content_transfer_encoding` parameter, a request header of `X-Content-Transfer-Encoding` can also be sent with a value of 'base64'. In the event both the content transfer encoding header and request parameter are sent, the header will be used.

## Request Arguments

| Name                      | Type   | Description   | Required |
|---------------------------|--------|---|----------|
| filename                  | String | Filename to save the document as  | False    |
| content_transfer_encoding | String | When set to 'base64', indicates the file contents are base64 encoded and will result in the file contents being base64 decoded before being saved | False    |

## Request

PUT /rest/v10/Notes/abcd-1234/file/field/ HTTP/1.1 Host: localhost Connection: keep-alive Content-Length: 23456 Content-Type: application/document-doc ...This is where the bin data would be

## Response Arguments

| Name                 | Type    | Description                            |
|----------------------|---------|--|
| field                | Array   | The fields containing file properties. |
| field.content-type   | String  | The files content type.                |
| field.content-length | Integer | The files content length.              |
| field.name           | String  | The files name.                        |

| Name         | Type    | Description              |
|--------------|---------|--------------------------|
| field.width  | Integer | The width of the image.  |
| field.height | Integer | The height of the image. |
| field.uri    | String  | The URI of the file.     |

## Response

```
{
  "picture": {
    "content-type": "image/png",
    "content-length": 72512,
    "name": "1a7b8f5c-b11c-0094-c8d8-512e9daaa983",
    "width": 933,
    "height": 519,
    "uri": "http://sugarcrm/rest/v10/Contacts/fa300a0e-0ad1-b32
2-9601-512d0983c19a/file/picture"
  }
  "attachment": {
    "content-type": "application/document-doc",
    "content-length": "873921",
    "name": "myFile.doc",
    "uri": "http://sugarcrm/rest/v10/Contacts/f2f9aa4d-99a8-
e86e-f4d5-512d0986effa/file/attachment"
  }
}
```

## Change Log

| Version | Change  |
|---------|---|
| v10     | Added /<module>/:record/file/:field PUT endpoint. |

**Last Modified:** 2021-02-17 02:44:13

---

## /EmailAddresses POST

### Overview

Create a new email address.

### Summary

In the event that the email address already exists, that record will be returned without making any changes.

### Request Arguments

| Name          | Type    | Description   | Required |
|---------------|---------|---|----------|
| email_address | String  | The email address.  | True     |
| invalid_email | Boolean | <b>true</b> if the email address is invalid. <b>false</b> is the default.   | False    |
| opt_out       | Boolean | <b>true</b> if the email address is opted out. <b>false</b> is the default. | False    |

### Request

```
{
  "email_address": "eharmon@example.com",
  "invalid_email": false,
  "opt_out": false
}
```

### Response Arguments

| Name           | Type                | Description                                      |
|----------------|---------------------|--|
| <record field> | <record field type> | Returns the fields for the newly created record. |

---

## Response

```
{
  "id": "a028341c-ba92-9343-55e7-56cf5beda121",
  "date_created": "2016-02-25T11:53:07-08:00",
  "date_modified": "2016-02-25T11:53:07-08:00",
  "deleted": false,
  "email_address": "eharmon@example.com",
  "email_address_caps": "EHARMON@EXAMPLE.COM",
  "invalid_email": false,
  "opt_out": false,
  "_acl": {
    "fields": {}
  },
  "_module": "EmailAddresses"
}
```

## Change Log

| Version | Change                               |
|---------|--------------------------------------|
| v10     | Added /EmailAddresses POST endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /EmailAddresses/:record PUT

### Overview

Update an existing email address.

### Summary

---

The **email\_address** parameter is not supported as email addresses are immutable.

## Request Arguments

| Name          | Type    | Description                                    | Required |
|---------------|---------|--|----------|
| invalid_email | Boolean | <b>true</b> if the email address is invalid.   | False    |
| opt_out       | Boolean | <b>true</b> if the email address is opted out. | False    |

## Request

```
{  
  "opt_out": true  
}
```

## Response Arguments

| Name           | Type                | Description                                |
|----------------|---------------------|--|
| <record field> | <record field type> | Returns the fields for the updated record. |

## Response

```
{  
  "id": "a028341c-ba92-9343-55e7-56cf5beda121",  
  "date_created": "2016-02-25T11:53:07-08:00",  
  "date_modified": "2016-02-25T11:53:07-08:00",  
  "deleted": false,  
  "email_address": "eharmon@example.com",  
  "email_address_caps": "EHARMON@EXAMPLE.COM",  
  "invalid_email": false,  
  "opt_out": true,  
  "_acl": {
```

---

```
    "fields": {}
  },
  "_module": "EmailAddresses"
}
```

## Change Log

| Version | Change                                      |
|---------|---|
| v10     | Added /EmailAddresses/:record PUT endpoint. |

Last Modified: 2021-02-17 02:44:13

## /Emails GET

### Overview

Lists filtered emails.

### Summary

Adds additional operators to [Filter API](#) that are specific to Emails. A special macro, **\$current\_user\_id**, is a convenience that allows for finding emails involving the current user.

### Filter By Sender

This will return all emails sent by the current user, by the contact whose ID is fa300a0e-0ad1-b322-9601-512d0983c19a, using the email address sam@example.com, which is referenced by the ID b0701501-1fab-8ae7-3942-540da93f5017, or by the lead whose ID is 73b1087e-4bb6-11e7-aaaa-3c15c2d582c6 using the email address wally@example.com, which is referenced by the ID b651d834-4bb6-11e7-bfcf-3c15c2d582c6.



---

```
{
  "filter": [{
    "$from": [{
      "parent_type": "Users",
      "parent_id": "$current_user_id"
    }, {
      "parent_type": "Contacts",
      "parent_id": "fa300a0e-0ad1-b322-9601-512d0983c19a"
    }, {
      "email_address_id": "b0701501-1fab-8ae7-3942-540da93f5017"
    }, {
      "parent_type": "Leads",
      "parent_id": "73b1087e-4bb6-11e7-aaaa-3c15c2d582c6",
      "email_address_id": "b651d834-4bb6-11e7-bfcf-3c15c2d582c6"
    }
  ]
}]
}
```

Equivalent to:

```
{
  "filter": [{
    "from_collection": {
      "$in": [{
        "parent_type": "Users",
        "parent_id": "$current_user_id"
      }, {
        "parent_type": "Contacts",
        "parent_id": "fa300a0e-0ad1-b322-9601-512d0983c19a"
      }, {
        "email_address_id": "b0701501-1fab-8ae7-3942-540da93f5017"
      }, {
        "parent_type": "Leads",
        "parent_id": "73b1087e-4bb6-11e7-aaaa-3c15c2d582c6",
        "email_address_id": "b651d834-4bb6-11e7-bfcf-3c15c2d582c6"
      }
    ]
  }
}]
}
```

**Filter By Recipients**

---

This would return all archived emails received by the current user.

```
{
  "filter": [{
    "$or": [{
      "$to": [{
        "parent_type": "Users",
        "parent_id": "$current_user_id"
      }],
      "$cc": [{
        "parent_type": "Users",
        "parent_id": "$current_user_id"
      }],
      "$bcc": [{
        "parent_type": "Users",
        "parent_id": "$current_user_id"
      }]
    }]
  }, {
    "state": {
      "$in": [
        "Archived"
      ]
    }
  }]
}
```

Equivalent to:

```
{
  "filter": [{
    "$or": [{
      "to_collection": {
        "$in": [{
          "parent_type": "Users",
          "parent_id": "$current_user_id"
        }]
      },
      "cc_collection": {
        "$in": [{
          "parent_type": "Users",
          "parent_id": "$current_user_id"
        }]
      },
      "bcc_collection": {
```

---

```
    "$in": [{
      "parent_type": "Users",
      "parent_id": "$current_user_id"
    }]
  }
}]
}, {
  "state": {
    "$in": [
      "Archived"
    ]
  }
}]
}
```

## Filter By Sender and Recipients

This would return all archived emails sent by a contact to the current user.

```
{
  "filter": [{
    "$from": [{
      "parent_type": "Contacts",
      "parent_id": "fa300a0e-0ad1-b322-9601-512d0983c19a"
    }]
  }, {
    "$or": [{
      "$to": [{
        "parent_type": "Users",
        "parent_id": "$current_user_id"
      }],
      "$cc": [{
        "parent_type": "Users",
        "parent_id": "$current_user_id"
      }],
      "$bcc": [{
        "parent_type": "Users",
        "parent_id": "$current_user_id"
      }]
    }]
  }, {
    "state": {
      "$in": [
```

---

```
        "Archived"
      ]
    }
  }
}
```

Equivalent to:

```
{
  "filter": [{
    "from_collection": {
      "$in": [{
        "parent_type": "Contacts",
        "parent_id": "fa300a0e-0ad1-b322-9601-512d0983c19a"
      }]
    }
  }, {
    "$or": [{
      "to_collection": {
        "$in": [{
          "parent_type": "Users",
          "parent_id": "$current_user_id"
        }]
      },
      "cc_collection": {
        "$in": [{
          "parent_type": "Users",
          "parent_id": "$current_user_id"
        }]
      },
      "bcc_collection": {
        "$in": [{
          "parent_type": "Users",
          "parent_id": "$current_user_id"
        }]
      }
    ]
  }, {
    "state": {
      "$in": [
        "Archived"
      ]
    }
  }
}]
}
```

---

## Change Log

| Version | Change  |
|---------|---|
| v10     | Added the \$from, \$to, \$cc, and \$bcc operators to /Emails/filter GET endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /Emails POST

### Overview

Create a new Emails record.

### Summary

Used for creating an archived email, creating a draft to send later, or creating and sending an email.

### Creating an Archived Email

#### Request Arguments

| Name  | Type   | Description   | Required |
|-------|--------|---|----------|
| state | String | Use "Archived" to create an archived email. "Archived" is the default value if this argument is not provided. | False    |
| name  | String | The email's   | False    |

| Name             | Type   | Description  | Required |
|------------------|--------|--|----------|
|                  |        | subject.   |          |
| description_html | String | The email's HTML body.   | False    |
| description      | String | The email's plain text body. This field is not necessary unless the text body is different from the HTML body. | False    |
| raw_source       | String | The complete raw source of the email showing the headers and content in one document.                          | False    |
| date_sent        | String | The date that the email was sent/received.   | False    |
| message_id       | String | The email's unique identifier.   | False    |
| message_uid      | String | Only use this field for importing emails downloaded from an IMAP server, as this is the email's IMAP UID.      | False    |
| assigned_user_id | String | The assigned user's ID.  | False    |
| parent_type      | String | The parent record's module.  | False    |
| parent_id        | String | The parent record's ID.  | False    |
| team_name        | List   | List of teams that can access the email.   | False    |
| from             | Object | The email's sender. Existing EmailParticipants   | True     |

| Name | Type | Description   | Required |
|------|------|---|----------|
|      |      | <p>records cannot be used; only the <b>create</b> action is supported.</p> <p>Metadata about the sender is required to link the record.</p> <ul style="list-style-type: none"> <li>• <b>parent_type</b> and <b>parent_id</b> can be Accounts, Contacts, Employees, Leads, Prospects, or Users, out of the box. These fields are not necessary if only an email address is known for the sender.</li> <li>• <b>email_address_id</b> is the ID of the email address the sender used to send the email. To get the ID of the email address, first make a request to /EmailAddresses POST. If this</li> </ul> |          |

| Name | Type   | Description   | Required |
|------|--------|---|----------|
|      |        | <p>argument is not provided, then the primary email address of the parent record is used.</p>   |          |
| to   | Object | <p>The email's recipients found in the TO field. Existing EmailParticipants records cannot be used; only the <b>create</b> action is supported. Metadata about each recipient is required to link the records.</p> <ul style="list-style-type: none"> <li>• <b>parent_type</b> and <b>parent_id</b> can be Accounts, Contacts, Employees, Leads, Prospects, or Users, out of the box. These fields are not necessary if only an email address is known for the</li> </ul> | False    |



| Name | Type   | Description   | Required |
|------|--------|---|----------|
|      |        | <p>recipient.</p> <ul style="list-style-type: none"> <li>• <b>email_address_id</b> is the ID of the email address the recipient used in the email. To get the ID of the email address, first make a request to / EmailAddresses POST. If this argument is not provided, then the primary email address of the parent record is used.</li> </ul> |          |
| cc   | Object | <p>The email's recipients found in the CC field. Existing EmailParticipants records cannot be used; only the <b>create</b> action is supported. Metadata about each recipient is required to link the records.</p> <ul style="list-style-type: none"> <li>• <b>parent_type</b> and <b>parent_id</b></li> </ul>                                  | False    |

| Name | Type | Description  | Required |
|------|------|--|----------|
|      |      | <p>can be Accounts, Contacts, Employees, Leads, Prospects, or Users, out out of the box. These fields are not necessary if only an email address is known for the recipient.</p> <ul style="list-style-type: none"> <li>• <b>email_address_id</b> is the ID of the email address the recipient used in the email. To get the ID of the email address, first make a request to / EmailAddresses POST. If this argument is not provided, then the primary email address of the parent record is used.</li> </ul> |          |

| Name | Type   | Description  | Required |
|------|--------|--|----------|
| bcc  | Object | <p>The email's recipients found in the BCC field. Existing EmailParticipants records cannot be used; only the <b>create</b> action is supported. Metadata about each recipient is required to link the records.</p> <ul style="list-style-type: none"> <li>• <b>parent_type</b> and <b>parent_id</b> can be Accounts, Contacts, Employees, Leads, Prospects, or Users, out out of the box. These fields are not necessary if only an email address is known for the recipient.</li> <li>• <b>email_address_id</b> is the ID of the email address the recipient used in the email. To get the ID</li> </ul> | False    |

| Name        | Type   | Description  | Required |
|-------------|--------|--|----------|
|             |        | <p>of the email address, first make a request to / EmailAddresses POST. If this argument is not provided, then the primary email address of the parent record is used.</p>   |          |
| attachments | Object | <p>The email's attachments. Existing Notes records cannot be used as email attachments; only the <b>create</b> action is supported. Metadata about each attachment is required to link the records.</p> <ul style="list-style-type: none"> <li>• <b>filename_guid</b> is the temporary file ID for an uploaded file to attach as a Notes record.</li> <li>• <b>upload_id</b> is the ID of an existing file that the Notes</li> </ul> | False    |

| Name | Type | Description   | Required |
|------|------|---|----------|
|      |      | <p>record should reference as the attachment. This allows files to be shared by multiple Notes records, to preserve space.</p> <ul style="list-style-type: none"> <li>• When using <b>upload_id</b>, <b>file_source</b> should be provided to indicate from where the file originated. The value should be the module of the record that shares its ID with the file. So when an attachment comes from an email template, <b>file_source</b> should be <b>EmailTemplates</b>. And when an attachment comes from a document, <b>file_source</b></li> </ul> |          |

| Name | Type | Description                                 | Required |
|------|------|---|----------|
|      |      | should be<br><b>Document<br/>Revisions.</b> |          |

## Request

```
{
  "state": "Archived",
  "name": "Re: Discuss Proposal",
  "description": "Now is a good time",
  "description_html": "<p>Now is a good time</p>",
  "date_sent": "2012-02-17T06:53:00-08:00",
  "message_id": "<d9c165d0-8863-ba61-dc85-51ed8016c476@example.com>",
  "assigned_user_id": "9c61c46a-a7c5-df71-481c-51d48232f820",
  "parent_type": "Leads",
  "parent_id": "f6a0611a-7d27-11e7-9d70-3c15c2d582c6",
  "team_name": [{
    "id": "1",
    "display_name": "Global",
    "name": "Global",
    "name_2": "",
    "primary": true,
    "selected": false
  }],
  "from": {
    "create": [{
      "parent_type": "Leads",
      "parent_id": "f6a0611a-7d27-11e7-9d70-3c15c2d582c6"
    }]
  },
  "to": {
    "create": [{
      "parent_type": "Users",
      "parent_id": "9c61c46a-a7c5-df71-481c-51d48232f820"
    }]
  },
  "cc": {
    "create": [{
      "parent_type": "Contacts",
      "parent_id": "79b9c194-7d79-11e7-8fc5-3c15c2d582c6"
    }],
    {
      "parent_type": "Users",

```

---

```
    "parent_id": "79c2e800-7d79-11e7-84af-3c15c2d582c6"
    "email_address_id": "79cc341e-7d79-11e7-8748-3c15c2d582c6"
  }]
},
"bcc": {
  "create": [{
    "email_address_id": "ac804842-7d78-11e7-a809-3c15c2d582c6"
  }]
},
"attachments": {
  "create": [{
    "filename_guid": "afe9702e-53a3-0efb-6bbe-56c3580885ef",
    "name": "Quote.pdf",
    "filename": "Quote.pdf"
  }]
}
}
```

## Response

```
{
  "id": "a028341c-ba92-9343-55e7-56cf5beda121",
  "date_entered": "2016-02-25T11:53:07-08:00",
  "created_by": "9c61c46a-a7c5-df71-481c-51d48232f820",
  "created_by_name": "Sarah Smith",
  "date_modified": "2016-02-25T11:53:07-08:00",
  "modified_by_name": "Sarah Smith",
  "modified_user_id": "9c61c46a-a7c5-df71-481c-51d48232f820",
  "deleted": false,
  "assigned_user_id": "9c61c46a-a7c5-df71-481c-51d48232f820",
  "assigned_user_name": "Sarah Smith",
  "state": "Archived",
  "name": "Re: Discuss Proposal",
  "description": "Now is a good time",
  "description_html": "<p>Now is a good time</p>",
  "date_sent": "2012-02-17T06:53:00-08:00",
  "message_id": "",
  "message_uid": "",
  "reply_to_status": false,
  "total_attachments": 1,
  "parent_name": "Tom Davis",
  "parent_type": "Leads",
  "parent_id": "f6a0611a-7d27-11e7-9d70-3c15c2d582c6"
  "team_count": "",
}
```

```

"team_name": [{
  "id": 1,
  "name": "Global",
  "name_2": "",
  "primary": true,
  "selected": false
}],
"my_favorite": false,
"_acl": {
  "fields": {}
},
"_module": "Emails"
}

```

## Creating a Draft

### Request Arguments

| Name              | Type   | Description  | Required |
|-------------------|--------|--|----------|
| state             | String | Use "Draft" to save a draft.   | True     |
| outbound_email_id | String | The ID of the chosen SMTP configuration for sending an email. Only use this field when saving a draft or sending an email. The user's default SMTP configuration is used if one hasn't been chosen prior to sending. | False    |
| name              | String | The email's subject.   | False    |
| description_html  | String | The email's HTML body.   | False    |
| description       | String | The email's plain text body. This field is not necessary unless the text   | False    |



| Name        | Type   | Description  | Required |
|-------------|--------|--|----------|
|             |        | body is different from the HTML body.  |          |
| reply_to_id | String | Only use this field when saving a draft or sending an email that is a reply to another email. This is the ID of that other email.  | False    |
| parent_type | String | The parent record's module.  | False    |
| parent_id   | String | The parent record's ID.  | False    |
| to          | Object | <p>The email's recipients found in the TO field. Existing EmailParticipants records cannot be used; only the <b>create</b> action is supported. Metadata about each recipient is required to link the records.</p> <ul style="list-style-type: none"> <li>• <b>parent_type</b> and <b>parent_id</b> can be Accounts, Contacts, Employees, Leads, Prospects, or Users, out of the box. These fields are not necessary if</li> </ul> | False    |

| Name | Type   | Description   | Required |
|------|--------|---|----------|
|      |        | <p>only an email address is known for the recipient.</p> <ul style="list-style-type: none"> <li>• <b>email_address_id</b> is the ID of the email address the recipient used in the email. To get the ID of the email address, first make a request to /EmailAddresses POST. If this argument is not provided, then the primary email address of the parent record is used.</li> </ul> |          |
| cc   | Object | <p>The email's recipients found in the CC field. Existing EmailParticipants records cannot be used; only the <b>create</b> action is supported. Metadata about each recipient is required to link the</p>   | False    |

| Name | Type | Description   | Required |
|------|------|---|----------|
|      |      | <p>records.</p> <ul style="list-style-type: none"> <li>• <b>parent_type</b> and <b>parent_id</b> can be Accounts, Contacts, Employees, Leads, Prospects, or Users, out of the box. These fields are not necessary if only an email address is known for the recipient.</li> <li>• <b>email_address_id</b> is the ID of the email address the recipient used in the email. To get the ID of the email address, first make a request to /EmailAddresses POST. If this argument is not provided, then the primary</li> </ul> |          |

| Name | Type   | Description   | Required |
|------|--------|---|----------|
|      |        | email address of the parent record is used.   |          |
| bcc  | Object | <p>The email's recipients found in the BCC field. Existing EmailParticipants records cannot be used; only the <b>create</b> action is supported. Metadata about each recipient is required to link the records.</p> <ul style="list-style-type: none"> <li>• <b>parent_type</b> and <b>parent_id</b> can be Accounts, Contacts, Employees, Leads, Prospects, or Users, out out of the box. These fields are not necessary if only an email address is known for the recipient.</li> <li>• <b>email_address_id</b> is the ID of the email</li> </ul> | False    |

| Name        | Type   | Description   | Required |
|-------------|--------|---|----------|
|             |        | <p>address the recipient used in the email. To get the ID of the email address, first make a request to / EmailAddresses POST. If this argument is not provided, then the primary email address of the parent record is used.</p>   |          |
| attachments | Object | <p>The email's attachments. Existing Notes records cannot be used as email attachments; only the <b>create</b> action is supported. Metadata about each attachment is required to link the records.</p> <ul style="list-style-type: none"> <li>• <b>filename_guid</b> is the temporary file ID for an uploaded file to attach as a Notes record.</li> </ul> | False    |

| Name | Type | Description   | Required |
|------|------|---|----------|
|      |      | <ul style="list-style-type: none"> <li data-bbox="890 259 1136 972">• <b>upload_id</b> is the ID of an existing file that the Notes record should reference as the attachment. This allows files to be shared by multiple Notes records, to preserve space.</li> <li data-bbox="890 972 1136 2011">• When using <b>upload_id</b>, <b>file_source</b> should be provided to indicate from where the file originated. The value should be the module of the record that shares its ID with the file. So when an attachment comes from an email template, <b>file_source</b> should be <b>EmailTemplates</b>. And</li> </ul> |          |

| Name | Type | Description  | Required |
|------|------|--|----------|
|      |      | when an attachment comes from a document, <b>file_source</b> should be <b>Document Revisions</b> . |          |

### Request

```
{
  "state": "Draft",
  "outbound_email_id": "b80adf1a-7d78-11e7-855a-3c15c2d582c6",
  "name": "Re: Discuss Proposal",
  "description_html": "<p>Calling you now.</p>",
  "reply_to_id": "a028341c-ba92-9343-55e7-56cf5beda121",
  "parent_type": "Leads",
  "parent_id": "f6a0611a-7d27-11e7-9d70-3c15c2d582c6",
  "to": {
    "create": [{
      "parent_type": "Leads",
      "parent_id": "f6a0611a-7d27-11e7-9d70-3c15c2d582c6"
    }]
  },
  "cc": {
    "create": [{
      "parent_type": "Contacts",
      "parent_id": "79b9c194-7d79-11e7-8fc5-3c15c2d582c6"
    }, {
      "parent_type": "Users",
      "parent_id": "79c2e800-7d79-11e7-84af-3c15c2d582c6"
      "email_address_id": "79cc341e-7d79-11e7-8748-3c15c2d582c6"
    }]
  },
  "bcc": {
    "create": [{
      "email_address_id": "ac804842-7d78-11e7-a809-3c15c2d582c6"
    }]
  },
  "attachments": {
    "create": [{
```

---

```
    "upload_id": "a028341c-ba92-9343-55e7-56cf5beda121",
    "name": "Contract.pdf",
    "filename": "Contract.pdf",
    "file_source": "DocumentRevisions"
  }, {
    "upload_id": "18a72782-4514-11e6-a5f7-3c15c2d582c6",
    "name": "survey.doc",
    "filename": "survey.doc",
    "file_source": "EmailTemplates"
  }
]
```

## Response

```
{
  "id": "f3c85966-7d27-11e7-9e9e-3c15c2d582c6",
  "date_entered": "2016-02-25T11:53:07-08:00",
  "created_by": "9c61c46a-a7c5-df71-481c-51d48232f820",
  "created_by_name": "Sarah Smith",
  "date_modified": "2016-02-25T11:53:07-08:00",
  "modified_by_name": "Sarah Smith",
  "modified_user_id": "9c61c46a-a7c5-df71-481c-51d48232f820",
  "deleted": false,
  "assigned_user_id": "9c61c46a-a7c5-df71-481c-51d48232f820",
  "assigned_user_name": "Sarah Smith",
  "state": "Draft",
  "outbound_email_id": "b80adf1a-7d78-11e7-855a-3c15c2d582c6",
  "name": "Re: Discuss Proposal",
  "description": "Now is a good time",
  "description_html": "<p>Now is a good time</p>",
  "date_sent": "2012-02-17T11:53:07-08:00",
  "message_id": "",
  "message_uid": "",
  "reply_to_id": "a028341c-ba92-9343-55e7-56cf5beda121",
  "reply_to_status": false,
  "total_attachments": 2,
  "parent_name": "Tom Davis",
  "parent_type": "Leads",
  "parent_id": "f6a0611a-7d27-11e7-9d70-3c15c2d582c6"
  "team_count": "",
  "team_name": [{
    "id": 1,
    "name": "Global",
```



```

    "name_2": "",
    "primary": true,
    "selected": false
  }],
  "my_favorite": false,
  "_acl": {
    "fields": {}
  },
  "_module": "Emails"
}

```

## Sending an Email

### Request Arguments

| Name              | Type   | Description  | Required |
|-------------------|--------|--|----------|
| state             | String | Use "Ready" to send an email.  | True     |
| outbound_email_id | String | The ID of the chosen SMTP configuration for sending an email. Only use this field when saving a draft or sending an email. The user's default SMTP configuration is used if one hasn't been chosen prior to sending. | False    |
| name              | String | The email's subject.   | False    |
| description_html  | String | The email's HTML body.   | False    |
| description       | String | The email's plain text body. This field is not necessary unless the text body is different from the HTML body.   | False    |

| Name        | Type   | Description   | Required |
|-------------|--------|---|----------|
| reply_to_id | String | Only use this field when saving a draft or sending an email that is a reply to another email. This is the ID of that other email.   | False    |
| parent_type | String | The parent record's module.   | False    |
| parent_id   | String | The parent record's ID.   | False    |
| to          | Object | <p>The email's recipients found in the TO field. Existing EmailParticipants records cannot be used; only the <b>create</b> action is supported. Metadata about each recipient is required to link the records.</p> <ul style="list-style-type: none"> <li>• <b>parent_type</b> and <b>parent_id</b> can be Accounts, Contacts, Employees, Leads, Prospects, or Users, out of the box. These fields are not necessary if only an email address is</li> </ul> | False    |

| Name | Type   | Description  | Required |
|------|--------|--|----------|
|      |        | <p>known for the recipient.</p> <ul style="list-style-type: none"> <li>• <b>email_address_id</b> is the ID of the email address the recipient used in the email. To get the ID of the email address, first make a request to /EmailAddresses POST. If this argument is not provided, then the primary email address of the parent record is used.</li> </ul> |          |
| cc   | Object | <p>The email's recipients found in the CC field. Existing EmailParticipants records cannot be used; only the <b>create</b> action is supported. Metadata about each recipient is required to link the records.</p> <ul style="list-style-type: none"> <li>• <b>parent_type</b></li> </ul>  | False    |

| Name | Type | Description   | Required |
|------|------|---|----------|
|      |      | <p>e and <b>parent_id</b> can be Accounts, Contacts, Employees, Leads, Prospects, or Users, out out of the box. These fields are not necessary if only an email address is known for the recipient.</p> <ul style="list-style-type: none"> <li>• <b>email_address_id</b> is the ID of the email address the recipient used in the email. To get the ID of the email address, first make a request to / EmailAddresses POST. If this argument is not provided, then the primary email address of the parent</li> </ul> |          |

| Name | Type   | Description   | Required |
|------|--------|---|----------|
|      |        | record is used.   |          |
| bcc  | Object | <p>The email's recipients found in the BCC field. Existing EmailParticipants records cannot be used; only the <b>create</b> action is supported. Metadata about each recipient is required to link the records.</p> <ul style="list-style-type: none"> <li>• <b>parent_type</b> and <b>parent_id</b> can be Accounts, Contacts, Employees, Leads, Prospects, or Users, out of the box. These fields are not necessary if only an email address is known for the recipient.</li> <li>• <b>email_address_id</b> is the ID of the email address the recipient used in the</li> </ul> | False    |

| Name        | Type   | Description  | Required |
|-------------|--------|--|----------|
|             |        | <p>email. To get the ID of the email address, first make a request to / EmailAddresses POST. If this argument is not provided, then the primary email address of the parent record is used.</p>  |          |
| attachments | Object | <p>The email's attachments. Existing Notes records cannot be used as email attachments; only the <b>create</b> action is supported. Metadata about each attachment is required to link the records.</p> <ul style="list-style-type: none"> <li>• <b>filename_guid</b> is the temporary file ID for an uploaded file to attach as a Notes record.</li> <li>• <b>upload_id</b> is the ID of an existing</li> </ul> | False    |

| Name | Type | Description  | Required |
|------|------|--|----------|
|      |      | <p>file that the Notes record should reference as the attachment. This allows files to be shared by multiple Notes records, to preserve space.</p> <ul style="list-style-type: none"> <li>• When using <b>upload_id</b>, <b>file_source</b> should be provided to indicate from where the file originated. The value should be the module of the record that shares its ID with the file. So when an attachment comes from an email template, <b>file_source</b> should be <b>EmailTemplates</b>. And when an attachment comes from</li> </ul> |          |

| Name | Type | Description  | Required |
|------|------|--|----------|
|      |      | a document,<br><b>file_source</b><br>should be<br><b>Document</b><br><b>Revisions.</b> |          |

## Request

```
{
  "state": "Ready",
  "outbound_email_id": "b80adf1a-7d78-11e7-855a-3c15c2d582c6",
  "name": "Discuss Proposal",
  "description_html": "<p>When is a good time for us to chat?</p>",
  "parent_type": "Leads",
  "parent_id": "f6a0611a-7d27-11e7-9d70-3c15c2d582c6",
  "to": {
    "create": [{
      "parent_type": "Leads",
      "parent_id": "f6a0611a-7d27-11e7-9d70-3c15c2d582c6"
    }]
  },
  "cc": {
    "create": [{
      "parent_type": "Users",
      "parent_id": "79c2e800-7d79-11e7-84af-3c15c2d582c6",
      "email_address_id": "79cc341e-7d79-11e7-8748-3c15c2d582c6"
    }]
  },
  "attachments": {
    "create": [{
      "upload_id": "a028341c-ba92-9343-55e7-56cf5beda121",
      "name": "Contract.pdf",
      "filename": "Contract.pdf",
      "file_source": "DocumentRevisions"
    }, {
      "upload_id": "18a72782-4514-11e6-a5f7-3c15c2d582c6",
      "name": "survey.doc",
      "filename": "survey.doc",
      "file_source": "EmailTemplates"
    }]
  }
}
```



---

## Response

```
{
  "id": "a7795664-7def-11e7-8add-3c15c2d582c6",
  "date_entered": "2016-02-25T08:53:07-08:00",
  "created_by": "9c61c46a-a7c5-df71-481c-51d48232f820",
  "created_by_name": "Sarah Smith",
  "date_modified": "2016-02-25T08:53:07-08:00",
  "modified_by_name": "Sarah Smith",
  "modified_user_id": "9c61c46a-a7c5-df71-481c-51d48232f820",
  "deleted": false,
  "assigned_user_id": "9c61c46a-a7c5-df71-481c-51d48232f820",
  "assigned_user_name": "Sarah Smith",
  "state": "Archived",
  "outbound_email_id": "b80adf1a-7d78-11e7-855a-3c15c2d582c6",
  "name": "Discuss Proposal",
  "description": "When is a good time for us to chat?",
  "description_html": "<p>When is a good time for us to chat?</p>",
  "date_sent": "2012-02-17T08:53:07-08:00",
  "message_id": "<a7795664-7def-11e7-8add-3c15c2d582c6@example.com>",
  "message_uid": "",
  "reply_to_id": "",
  "reply_to_status": false,
  "total_attachments": 2,
  "parent_name": "Tom Davis",
  "parent_type": "Leads",
  "parent_id": "f6a0611a-7d27-11e7-9d70-3c15c2d582c6",
  "team_count": "",
  "team_name": [{
    "id": 1,
    "name": "Global",
    "name_2": "",
    "primary": true,
    "selected": false
  }],
  "my_favorite": false,
  "_acl": {
    "fields": {}
  },
  "_module": "Emails"
}
```

---

## Change Log

| Version | Change                       |
|---------|------------------------------|
| v10     | Added /Emails POST endpoint. |

Last Modified: 2021-02-17 02:44:13

## /Emails/count GET

### Overview

Lists filtered emails.

### Summary

Adds additional operators to [Filter API](#) that are specific to Emails. A special macro, `$current_user_id`, is a convenience that allows for finding emails involving the current user.

### Filter By Sender

This will return all emails sent by the current user, by the contact whose ID is `fa300a0e-0ad1-b322-9601-512d0983c19a`, using the email address `sam@example.com`, which is referenced by the ID `b0701501-1fab-8ae7-3942-540da93f5017`, or by the lead whose ID is `73b1087e-4bb6-11e7-acaa-3c15c2d582c6` using the email address `wally@example.com`, which is referenced by the ID `b651d834-4bb6-11e7-bfcf-3c15c2d582c6`.

```
{
  "filter": [{
    "$from": [{
      "parent_type": "Users",
      "parent_id": "$current_user_id"
    }, {
      "parent_type": "Contacts",
      "parent_id": "fa300a0e-0ad1-b322-9601-512d0983c19a"
    }
  ]
}
```

---

```
    }, {
      "email_address_id": "b0701501-1fab-8ae7-3942-540da93f5017"
    }, {
      "parent_type": "Leads",
      "parent_id": "73b1087e-4bb6-11e7-aaaa-3c15c2d582c6",
      "email_address_id": "b651d834-4bb6-11e7-bfcf-3c15c2d582c6"
    }
  ]
}
```

Equivalent to:

```
{
  "filter": [{
    "from_collection": {
      "$in": [{
        "parent_type": "Users",
        "parent_id": "$current_user_id"
      }, {
        "parent_type": "Contacts",
        "parent_id": "fa300a0e-0ad1-b322-9601-512d0983c19a"
      }, {
        "email_address_id": "b0701501-1fab-8ae7-3942-540da93f5017"
      }, {
        "parent_type": "Leads",
        "parent_id": "73b1087e-4bb6-11e7-aaaa-3c15c2d582c6",
        "email_address_id": "b651d834-4bb6-11e7-bfcf-3c15c2d582c6"
      }
    ]
  }
}]
}
```

## Filter By Recipients

This would return all archived emails received by the current user.

```
{
  "filter": [{
    "$or": [{
      "$to": [{
        "parent_type": "Users",
        "parent_id": "$current_user_id"
      }
    ]
  }
}]
}
```

---

```

    }],
    "$cc": [{
      "parent_type": "Users",
      "parent_id": "$current_user_id"
    }],
    "$bcc": [{
      "parent_type": "Users",
      "parent_id": "$current_user_id"
    }]
  }],
}, {
  "state": {
    "$in": [
      "Archived"
    ]
  }
}]
}

```

Equivalent to:

```

{
  "filter": [{
    "$or": [{
      "to_collection": {
        "$in": [{
          "parent_type": "Users",
          "parent_id": "$current_user_id"
        }]
      },
      "cc_collection": {
        "$in": [{
          "parent_type": "Users",
          "parent_id": "$current_user_id"
        }]
      },
      "bcc_collection": {
        "$in": [{
          "parent_type": "Users",
          "parent_id": "$current_user_id"
        }]
      }
    ]
  }],
}, {
  "state": {

```

---

```
    "$in": [
      "Archived"
    ]
  }
}]
}
```

## Filter By Sender and Recipients

This would return all archived emails sent by a contact to the current user.

```
{
  "filter": [{
    "$from": [{
      "parent_type": "Contacts",
      "parent_id": "fa300a0e-0ad1-b322-9601-512d0983c19a"
    }]
  }, {
    "$or": [{
      "$to": [{
        "parent_type": "Users",
        "parent_id": "$current_user_id"
      }],
      "$cc": [{
        "parent_type": "Users",
        "parent_id": "$current_user_id"
      }],
      "$bcc": [{
        "parent_type": "Users",
        "parent_id": "$current_user_id"
      }]
    }]
  }, {
    "state": {
      "$in": [
        "Archived"
      ]
    }
  }
}]
}
```

Equivalent to:

```

{
  "filter": [{
    "from_collection": {
      "$in": [{
        "parent_type": "Contacts",
        "parent_id": "fa300a0e-0ad1-b322-9601-512d0983c19a"
      }]
    }
  }, {
    "$or": [{
      "to_collection": {
        "$in": [{
          "parent_type": "Users",
          "parent_id": "$current_user_id"
        }]
      },
      "cc_collection": {
        "$in": [{
          "parent_type": "Users",
          "parent_id": "$current_user_id"
        }]
      },
      "bcc_collection": {
        "$in": [{
          "parent_type": "Users",
          "parent_id": "$current_user_id"
        }]
      }
    ]
  }, {
    "state": {
      "$in": [
        "Archived"
      ]
    }
  }
]}

```

## Change Log

| Version | Change                                  |
|---------|---|
| v10     | Added the \$from, \$to, \$cc, and \$bcc |

Last Modified: 2021-02-17 02:44:13

## /Emails/filter GET

### Overview

Lists filtered emails.

### Summary

Adds additional operators to [Filter API](#) that are specific to Emails. A special macro, `$current_user_id`, is a convenience that allows for finding emails involving the current user.

### Filter By Sender

This will return all emails sent by the current user, by the contact whose ID is `fa300a0e-0ad1-b322-9601-512d0983c19a`, using the email address `sam@example.com`, which is referenced by the ID `b0701501-1fab-8ae7-3942-540da93f5017`, or by the lead whose ID is `73b1087e-4bb6-11e7-aaa-3c15c2d582c6` using the email address `wally@example.com`, which is referenced by the ID `b651d834-4bb6-11e7-bfcf-3c15c2d582c6`.

```
{
  "filter": [{
    "$from": [{
      "parent_type": "Users",
      "parent_id": "$current_user_id"
    }, {
      "parent_type": "Contacts",
      "parent_id": "fa300a0e-0ad1-b322-9601-512d0983c19a"
    }, {
      "email_address_id": "b0701501-1fab-8ae7-3942-540da93f5017"
    }, {
```

---

```
    "parent_type": "Leads",
    "parent_id": "73b1087e-4bb6-11e7-aaaa-3c15c2d582c6",
    "email_address_id": "b651d834-4bb6-11e7-bfcf-3c15c2d582c6"
  }]
}]
}
```

Equivalent to:

```
{
  "filter": [{
    "from_collection": {
      "$in": [{
        "parent_type": "Users",
        "parent_id": "$current_user_id"
      }, {
        "parent_type": "Contacts",
        "parent_id": "fa300a0e-0ad1-b322-9601-512d0983c19a"
      }, {
        "email_address_id": "b0701501-1fab-8ae7-3942-540da93f5017"
      }, {
        "parent_type": "Leads",
        "parent_id": "73b1087e-4bb6-11e7-aaaa-3c15c2d582c6",
        "email_address_id": "b651d834-4bb6-11e7-bfcf-3c15c2d582c6"
      }
    ]
  }
}]
}
```

## Filter By Recipients

This would return all archived emails received by the current user.

```
{
  "filter": [{
    "$or": [{
      "$to": [{
        "parent_type": "Users",
        "parent_id": "$current_user_id"
      }],
      "$cc": [{
        "parent_type": "Users",
```



---

```

        "parent_id": "$current_user_id"
    }],
    "$bcc": [{
        "parent_type": "Users",
        "parent_id": "$current_user_id"
    }]
    }]
}, {
    "state": {
        "$in": [
            "Archived"
        ]
    }
}]
}

```

Equivalent to:

```

{
    "filter": [{
        "$or": [{
            "to_collection": {
                "$in": [{
                    "parent_type": "Users",
                    "parent_id": "$current_user_id"
                }]
            },
            "cc_collection": {
                "$in": [{
                    "parent_type": "Users",
                    "parent_id": "$current_user_id"
                }]
            },
            "bcc_collection": {
                "$in": [{
                    "parent_type": "Users",
                    "parent_id": "$current_user_id"
                }]
            }
        }]
    }, {
        "state": {
            "$in": [
                "Archived"
            ]
        }
    }
}

```

---

```
    }
  }]
}
```

## Filter By Sender and Recipients

This would return all archived emails sent by a contact to the current user.

```
{
  "filter": [{
    "$from": [{
      "parent_type": "Contacts",
      "parent_id": "fa300a0e-0ad1-b322-9601-512d0983c19a"
    }]
  }, {
    "$or": [{
      "$to": [{
        "parent_type": "Users",
        "parent_id": "$current_user_id"
      }],
      "$cc": [{
        "parent_type": "Users",
        "parent_id": "$current_user_id"
      }],
      "$bcc": [{
        "parent_type": "Users",
        "parent_id": "$current_user_id"
      }]
    }]
  }, {
    "state": {
      "$in": [
        "Archived"
      ]
    }
  }
]}]
```

Equivalent to:

```
{
  "filter": [{
```

```

"from_collection": {
  "$in": [{
    "parent_type": "Contacts",
    "parent_id": "fa300a0e-0ad1-b322-9601-512d0983c19a"
  }]
}
}, {
"$or": [{
  "to_collection": {
    "$in": [{
      "parent_type": "Users",
      "parent_id": "$current_user_id"
    }]
  },
  "cc_collection": {
    "$in": [{
      "parent_type": "Users",
      "parent_id": "$current_user_id"
    }]
  },
  "bcc_collection": {
    "$in": [{
      "parent_type": "Users",
      "parent_id": "$current_user_id"
    }]
  }
}]
}, {
"state": {
  "$in": [
    "Archived"
  ]
}
}]
}

```

## Change Log

| Version | Change  |
|---------|---|
| v10     | Added the \$from, \$to, \$cc, and \$bcc operators to /Emails/filter GET endpoint. |

---

Last Modified: 2021-02-17 02:44:13

## /Emails/filter POST

### Overview

Lists filtered records.

### Summary

This endpoint will return a set of records filtered by an expression. The filter can be applied to multiple fields and have multiple and/or conditions in it. Alternatively, you may use an existing filter by specifying its id. If both a filter definition and a filter id are passed, the two filters will be joined with an AND. Care will need to be taken to make sure that any filters used have appropriate indexes on the server side otherwise the runtime of the endpoint will be very long. Related fields can be searched by specifying the field name as: "link\_name.remote\_field", so if you wished to search the Accounts module by a related member account you would use "members.sic\_code".

### Request Arguments

| Name      | Type    | Description   | Required |
|-----------|---------|---|----------|
| filter    | String  | The filter expression. Filter expressions are explained below.                                      | False    |
| filter_id | String  | Identifier for a preexisting filter. If filter is also set, the two filters are joined with an AND. | False    |
| max_num   | Integer | A maximum number of records to return. Default is   | False    |

| Name     | Type    | Description  | Required |
|----------|---------|--|----------|
|          |         | 20.  |          |
| offset   | Integer | The number of records to skip over before records are returned. Default is 0.  | False    |
| fields   | String  | Comma delimited list of fields to return. The field date_modified will always be returned. Example: name,account_type,description  | False    |
| view     | String  | Instead of defining the fields argument, the view argument can be used instead. The field list is constructed at the server side based on the view definition which is requested. This argument can be used in combination with the fields argument. Common views are "record" and "list". Example: record | False    |
| order_by | String  | How to sort the returned records, in a comma delimited list with the direction appended to the column name after a colon. Example: name:DESC,account_type:D  | False    |

---

| Name | Type | Description               | Required |
|------|------|---------------------------|----------|
|      |      | ESC,date_modified:<br>ASC |          |

## Filter Expressions

There are four types of filters:

### Basic

This will filter the results by checking the field "name" for value "Nelson Inc". This will only find exact matches.

#### Example

```
{
  "filter": [
    {
      "name": "Nelson Inc"
    }
  ]
}
```

### Full

This expression allows you to specify what operation you want to use for filtering on the field. In the example you would match any record where the field "name" starts with the value "Nelson".

#### Example

```
{
  "filter": [
    {
      "name": {
        "$starts": "Nelson"
      }
    }
  ]
}
```

}

Below is a list of operation types:

| Operation    | Description   |
|--------------|---|
| \$equals     | Performs an exact match on that field.  |
| \$not_equals | Performs an exact match on that field.  |
| \$not_equals | Matches on non-matching values.   |
| \$starts     | Matches on anything that starts with the value.   |
| \$ends       | Matches anything that ends with the value.  |
| \$contains   | Matches anything that contains the value  |
| \$in         | Finds anything where field matches one of the values as specified as an array.          |
| \$not_in     | Finds anything where field does not matches any of the values as specified as an array. |
| \$is_null    | Checks if the field is null. This operation does not need a value specified.            |
| \$not_null   | Checks if the field is not null. This operation does not need a value specified.        |
| \$lt         | Matches when the field is less than the value.  |
| \$lte        | Matches when the field is less than or equal to the value.                              |
| \$gt         | Matches when the field is greater than the value.                                       |
| \$gte        | Matches when the field is greater than or equal to the value.                           |

## Sub-expressions

This allows you to group filter expressions into or/and groupings. By default all expressions are and'ed together. The example expression would match if the field

---

"name" was either "Nelson Inc" or "Nelson LLC". The only currently accepted sub-expression types are "\$and" and "\$or".

### Example

```
{
  "filter": [
    {
      "$or": [
        {
          "name": "Nelson Inc"
        },
        {
          "name": "Nelson LLC"
        }
      ]
    }
  ]
}
```

### Modules

There are two module expressions, they operate on modules instead of fields. The current module can be specified by either using the module name "\_this" or by leaving the module name as a blank string. The example expression would filter the records in the current module to only your favorites. The only currently accepted module expressions are "\$favorite" and "\$owner".

### Example

```
{
  "filter": [
    {
      "$favorite": "_this"
    }
  ]
}
```



---

## Response Arguments

| Name        | Type    | Description   |
|-------------|---------|---|
| next_offset | Integer | Displays the next offset for retrieval of additional results. -1 will be returned when there are no more records. |
| records     | Array   | An array of results containing matched records.   |

## Response

```
{
  "next_offset":-1,
  "records":[
    {
      "id":"fa300a0e-0ad1-b322-9601-512d0983c19a",
      "name":"Dale Spivey",
      "date_entered":"2013-02-26T19:12:00+00:00",
      "date_modified":"2013-02-28T05:03:00+00:00",
      "modified_user_id":"1",
      "modified_by_name":"Administrator",
      "created_by":"1",
      "created_by_name":"Administrator",
      "description":"",
      "img":"",
      "deleted":false,
      "assigned_user_id":"seed_sally_id",
      "assigned_user_name":"Sally Bronsen",
      "team_name":[
        {
          "id":"East",
          "name":"East",
          "name_2":"",
          "primary":false
        },
        {
          "id":1,
          "name":"Global",
          "name_2":"",

```

---

```
        "primary":false
    },
    {
        "id":"West",
        "name":"West",
        "name_2":"",
        "primary":true
    }
],
"salutation":"",
"first_name":"Dale",
"last_name":"Spivey",
"full_name":"Dale Spivey",
"title":"VP Operations",
"linkedin":"",
"facebook":"",
"twitter":"",
"googleplus":"",
"department":"",
"do_not_call":false,
"phone_home":"(523) 825-4311",
"email":[
    {
        "email_address":"sugar.dev.sugar@example.co.jp",
        "opt_out":"0",
        "invalid_email":"0",
        "primary_address":"1"
    },
    {
        "email_address":"the.support@example.biz",
        "opt_out":"0",
        "invalid_email":"0",
        "primary_address":"0"
    }
],
"phone_mobile":"(373) 861-0757",
"phone_work":"(212) 542-9596",
"phone_other":"",
"phone_fax":"",
"email1":"sugar.dev.sugar@example.co.jp",
"email2":"the.support@example.biz",
"invalid_email":false,
"email_opt_out":false,
"primary_address_street":"345 Sugar Blvd.",
"primary_address_street_2":"",
"primary_address_street_3":"",
```

---

```
"primary_address_city": "Denver",
"primary_address_state": "CA",
"primary_address_postalcode": "87261",
"primary_address_country": "USA",
"alt_address_street": "",
"alt_address_street_2": "",
"alt_address_street_3": "",
"alt_address_city": "",
"alt_address_state": "",
"alt_address_postalcode": "",
"alt_address_country": "",
"assistant": "",
"assistant_phone": "",
"picture": "",
"email_and_name1": "",
"lead_source": "Campaign",
"account_name": "Smallville Resources Inc",
"account_id": "d5db6292-5c24-eb61-e202-512d09f0134e",
"opportunity_role_fields": "",
"opportunity_role_id": "",
"opportunity_role": "",
"reports_to_id": "",
"report_to_name": "",
"portal_name": "DaleSpivey97",
"portal_active": true,
"portal_password": "$1$yKMAONHM$Y5S.8CY.WZCZCwfGD1a1Q\/",
"portal_password1": "",
"portal_app": "",
"preferred_language": "en_us",
"campaign_id": "",
"campaign_name": "",
"c_accept_status_fields": "",
"m_accept_status_fields": "",
"accept_status_id": "",
"accept_status_name": "",
"sync_contact": "",
"my_favorite": false,
"_acl": {
  "fields": {
    }
  }
},
{
  "id": "95e17367-9b3d-0e26-22dc-512d0961fedf",
  "name": "Florence Haddock",
```

---

```
"date_entered": "2013-02-26T19:12:00+00:00",
"date_modified": "2013-02-26T19:12:00+00:00",
"modified_user_id": "1",
"modified_by_name": "Administrator",
"created_by": "1",
"created_by_name": "Administrator",
"description": "",
"img": "",
"deleted": false,
"assigned_user_id": "seed_sally_id",
"assigned_user_name": "Sally Bronsen",
"team_name": [
  {
    "id": "East",
    "name": "East",
    "name_2": "",
    "primary": false
  },
  {
    "id": 1,
    "name": "Global",
    "name_2": "",
    "primary": false
  },
  {
    "id": "West",
    "name": "West",
    "name_2": "",
    "primary": true
  }
],
"salutation": "",
"first_name": "Florence",
"last_name": "Haddock",
"full_name": "Florence Haddock",
"title": "Director Sales",
"linkedin": "",
"facebook": "",
"twitter": "",
"googleplus": "",
"department": "",
"do_not_call": false,
"phone_home": "(729) 845-3137",
"email": [
  {
    "email_address": "dev.vegan@example.de",
```

---

```
        "opt_out": "1",
        "invalid_email": "0",
        "primary_address": "0"
    },
    {
        "email_address": "section71@example.it",
        "opt_out": "0",
        "invalid_email": "0",
        "primary_address": "1"
    }
],
"phone_mobile": "(246) 233-1382",
"phone_work": "(565) 696-6981",
"phone_other": "",
"phone_fax": "",
"email1": "section71@example.it",
"email2": "dev.vegan@example.de",
"invalid_email": false,
"email_opt_out": false,
"primary_address_street": "111 Silicon Valley Road",
"primary_address_street_2": "",
"primary_address_street_3": "",
"primary_address_city": "Denver",
"primary_address_state": "CA",
"primary_address_postalcode": "79900",
"primary_address_country": "USA",
"alt_address_street": "",
"alt_address_street_2": "",
"alt_address_street_3": "",
"alt_address_city": "",
"alt_address_state": "",
"alt_address_postalcode": "",
"alt_address_country": "",
"assistant": "",
"assistant_phone": "",
"picture": "",
"email_and_name1": "",
"lead_source": "Support Portal User Registration",
"account_name": "Smallville Resources Inc",
"account_id": "d5db6292-5c24-eb61-e202-512d09f0134e",
"opportunity_role_fields": "",
"opportunity_role_id": "",
"opportunity_role": "",
"reports_to_id": "",
"report_to_name": "",
"portal_name": "FlorenceHaddock169",
```

---

```
"portal_active":true,
"portal_password":"$1$nWFhTbK6$JF9BCGSqL\NCRbhueX5ia0",
"portal_password1":"","
"portal_app":"","
"preferred_language":"en_us",
"campaign_id":"","
"campaign_name":"","
"c_accept_status_fields":"","
"m_accept_status_fields":"","
"accept_status_id":"","
"accept_status_name":"","
"sync_contact":"","
"my_favorite":false,
"_acl":{
  "fields":{
    }
  }
}
```

## Change Log

| Version | Change                                |
|---------|---------------------------------------|
| v10     | Added /<module>/filter POST endpoint. |

Last Modified: 2021-02-17 02:44:13

## /Emails/filter/count GET

### Overview

Lists filtered records.

---

## Summary

This endpoint will return a set of records filtered by an expression. The filter can be applied to multiple fields and have multiple and/or conditions in it. Alternatively, you may use an existing filter by specifying its id. If both a filter definition and a filter id are passed, the two filters will be joined with an AND. Care will need to be taken to make sure that any filters used have appropriate indexes on the server side otherwise the runtime of the endpoint will be very long. Related fields can be searched by specifying the field name as: "link\_name.remote\_field", so if you wished to search the Accounts module by a related member account you would use "members.sic\_code".

## Request Arguments

| Name      | Type    | Description   | Required |
|-----------|---------|---|----------|
| filter    | String  | The filter expression. Filter expressions are explained below.  | False    |
| filter_id | String  | Identifier for a preexisting filter. If filter is also set, the two filters are joined with an AND.                               | False    |
| max_num   | Integer | A maximum number of records to return. Default is 20.   | False    |
| offset    | Integer | The number of records to skip over before records are returned. Default is 0.   | False    |
| fields    | String  | Comma delimited list of fields to return. The field date_modified will always be returned. Example: name,account_type,description | False    |

| Name     | Type   | Description   | Required |
|----------|--------|---|----------|
| view     | String | Instead of defining the fields argument, the view argument can be used instead. The field list is constructed at the server side based on the view definition which is requested. This argument can be used in combination with the fields argument. Common views are "record" and "list".<br>Example: record | False    |
| order_by | String | How to sort the returned records, in a comma delimited list with the direction appended to the column name after a colon.<br>Example: name:DESC,account_type:DESC,date_modified:ASC   | False    |

## Filter Expressions

There are four types of filters:

### Basic

This will filter the results by checking the field "name" for value "Nelson Inc". This will only find exact matches.



---

## Example

```
{
  "filter": [
    {
      "name": "Nelson Inc"
    }
  ]
}
```

## Full

This expression allows you to specify what operation you want to use for filtering on the field. In the example you would match any record where the field "name" starts with the value "Nelson".

## Example

```
{
  "filter": [
    {
      "name": {
        "$starts": "Nelson"
      }
    }
  ]
}
```

Below is a list of operation types:

| Operation                 | Description                                     |
|---------------------------|---|
| <code>\$equals</code>     | Performs an exact match on that field.          |
| <code>\$not_equals</code> | Performs an exact match on that field.          |
| <code>\$not_equals</code> | Matches on non-matching values.                 |
| <code>\$starts</code>     | Matches on anything that starts with the value. |
| <code>\$ends</code>       | Matches anything that ends with the value.      |
| <code>\$contains</code>   | Matches anything that contains the value        |

| Operation  | Description   |
|------------|---|
| \$in       | Finds anything where field matches one of the values as specified as an array.          |
| \$not_in   | Finds anything where field does not matches any of the values as specified as an array. |
| \$is_null  | Checks if the field is null. This operation does not need a value specified.            |
| \$not_null | Checks if the field is not null. This operation does not need a value specified.        |
| \$lt       | Matches when the field is less than the value.  |
| \$lte      | Matches when the field is less than or equal to the value.                              |
| \$gt       | Matches when the field is greater than the value.                                       |
| \$gte      | Matches when the field is greater than or equal to the value.                           |

## Sub-expressions

This allows you to group filter expressions into or/and groupings. By default all expressions are and'ed together. The example expression would match if the field "name" was either "Nelson Inc" or "Nelson LLC". The only currently accepted sub-expression types are "\$and" and "\$or".

### Example

```
{
  "filter": [
    {
      "$or": [
        {
          "name": "Nelson Inc"
        },
        {
          "name": "Nelson LLC"
        }
      ]
    }
  ]
}
```

---

```
    }
  ]
}
}
```

## Modules

There are two module expressions, they operate on modules instead of fields. The current module can be specified by either using the module name "\_this" or by leaving the module name as a blank string. The example expression would filter the records in the current module to only your favorites. The only currently accepted module expressions are "\$favorite" and "\$owner".

### Example

```
{
  "filter":[
    {
      "$favorite":"_this"
    }
  ]
}
```

## Response Arguments

| Name        | Type    | Description   |
|-------------|---------|---|
| next_offset | Integer | Displays the next offset for retrieval of additional results. -1 will be returned when there are no more records. |
| records     | Array   | An array of results containing matched records.   |

---

## Response

```
{
  "next_offset":-1,
  "records":[
    {
      "id":"fa300a0e-0ad1-b322-9601-512d0983c19a",
      "name":"Dale Spivey",
      "date_entered":"2013-02-26T19:12:00+00:00",
      "date_modified":"2013-02-28T05:03:00+00:00",
      "modified_user_id":"1",
      "modified_by_name":"Administrator",
      "created_by":"1",
      "created_by_name":"Administrator",
      "description":"",
      "img":"",
      "deleted":false,
      "assigned_user_id":"seed_sally_id",
      "assigned_user_name":"Sally Bronsen",
      "team_name":[
        {
          "id":"East",
          "name":"East",
          "name_2":"",
          "primary":false
        },
        {
          "id":1,
          "name":"Global",
          "name_2":"",
          "primary":false
        },
        {
          "id":"West",
          "name":"West",
          "name_2":"",
          "primary":true
        }
      ],
      "salutation":"",
      "first_name":"Dale",
      "last_name":"Spivey",
      "full_name":"Dale Spivey",
      "title":"VP Operations",
      "linkedin":"",
      "facebook":""
    }
  ]
}
```

---

```
"twitter":"","  
"googleplus":"","  
"department":"","  
"do_not_call":false,  
"phone_home":"(523) 825-4311",  
"email":[  
  {  
    "email_address":"sugar.dev.sugar@example.co.jp",  
    "opt_out":"0",  
    "invalid_email":"0",  
    "primary_address":"1"  
  },  
  {  
    "email_address":"the.support@example.biz",  
    "opt_out":"0",  
    "invalid_email":"0",  
    "primary_address":"0"  
  }  
],  
"phone_mobile":"(373) 861-0757",  
"phone_work":"(212) 542-9596",  
"phone_other":"","  
"phone_fax":"","  
"email1":"sugar.dev.sugar@example.co.jp",  
"email2":"the.support@example.biz",  
"invalid_email":false,  
"email_opt_out":false,  
"primary_address_street":"345 Sugar Blvd.",  
"primary_address_street_2":"","  
"primary_address_street_3":"","  
"primary_address_city":"Denver",  
"primary_address_state":"CA",  
"primary_address_postalcode":"87261",  
"primary_address_country":"USA",  
"alt_address_street":"","  
"alt_address_street_2":"","  
"alt_address_street_3":"","  
"alt_address_city":"","  
"alt_address_state":"","  
"alt_address_postalcode":"","  
"alt_address_country":"","  
"assistant":"","  
"assistant_phone":"","  
"picture":"","  
"email_and_name1":"","  
"lead_source":"Campaign",
```

---

```

"account_name":"Smallville Resources Inc",
"account_id":"d5db6292-5c24-eb61-e202-512d09f0134e",
"opportunity_role_fields":"",
"opportunity_role_id":"",
"opportunity_role":"",
"reports_to_id":"",
"report_to_name":"",
"portal_name":"DaleSpivey97",
"portal_active":true,
"portal_password":"$1$yKMAONHM$Y5S.8CY.WZCZCwfGD1a1Q\/",
"portal_password1":"",
"portal_app":"",
"preferred_language":"en_us",
"campaign_id":"",
"campaign_name":"",
"c_accept_status_fields":"",
"m_accept_status_fields":"",
"accept_status_id":"",
"accept_status_name":"",
"sync_contact":"",
"my_favorite":false,
"_acl":{
  "fields":{
    }
  }
},
{
  "id":"95e17367-9b3d-0e26-22dc-512d0961fedf",
  "name":"Florence Haddock",
  "date_entered":"2013-02-26T19:12:00+00:00",
  "date_modified":"2013-02-26T19:12:00+00:00",
  "modified_user_id":"1",
  "modified_by_name":"Administrator",
  "created_by":"1",
  "created_by_name":"Administrator",
  "description":"",
  "img":"",
  "deleted":false,
  "assigned_user_id":"seed_sally_id",
  "assigned_user_name":"Sally Bronsen",
  "team_name":[
    {
      "id":"East",
      "name":"East",
      "name_2":""
    }
  ]
}

```

---

```
        "primary":false
    },
    {
        "id":1,
        "name":"Global",
        "name_2":"",
        "primary":false
    },
    {
        "id":"West",
        "name":"West",
        "name_2":"",
        "primary":true
    }
],
"salutation":"",
"first_name":"Florence",
"last_name":"Haddock",
"full_name":"Florence Haddock",
"title":"Director Sales",
"linkedin":"",
"facebook":"",
"twitter":"",
"googleplus":"",
"department":"",
"do_not_call":false,
"phone_home":"(729) 845-3137",
"email":[
    {
        "email_address":"dev.vegan@example.de",
        "opt_out":"1",
        "invalid_email":"0",
        "primary_address":"0"
    },
    {
        "email_address":"section71@example.it",
        "opt_out":"0",
        "invalid_email":"0",
        "primary_address":"1"
    }
],
"phone_mobile":"(246) 233-1382",
"phone_work":"(565) 696-6981",
"phone_other":"",
"phone_fax":"",
"email1":"section71@example.it",
```

---

```
"email2": "dev.vegan@example.de",
"invalid_email": false,
"email_opt_out": false,
"primary_address_street": "111 Silicon Valley Road",
"primary_address_street_2": "",
"primary_address_street_3": "",
"primary_address_city": "Denver",
"primary_address_state": "CA",
"primary_address_postalcode": "79900",
"primary_address_country": "USA",
"alt_address_street": "",
"alt_address_street_2": "",
"alt_address_street_3": "",
"alt_address_city": "",
"alt_address_state": "",
"alt_address_postalcode": "",
"alt_address_country": "",
"assistant": "",
"assistant_phone": "",
"picture": "",
"email_and_name1": "",
"lead_source": "Support Portal User Registration",
"account_name": "Smallville Resources Inc",
"account_id": "d5db6292-5c24-eb61-e202-512d09f0134e",
"opportunity_role_fields": "",
"opportunity_role_id": "",
"opportunity_role": "",
"reports_to_id": "",
"report_to_name": "",
"portal_name": "FlorenceHaddock169",
"portal_active": true,
"portal_password": "$1$nwFhTbK6$JF9BCGSqL\NCRbhueX5ia0",
"portal_password1": "",
"portal_app": "",
"preferred_language": "en_us",
"campaign_id": "",
"campaign_name": "",
"c_accept_status_fields": "",
"m_accept_status_fields": "",
"accept_status_id": "",
"accept_status_name": "",
"sync_contact": "",
"my_favorite": false,
"_acl": {
  "fields": {
```



---

```
}
  }
}
]
```

## Change Log

| Version | Change                                |
|---------|---------------------------------------|
| v10     | Added /<module>/filter POST endpoint. |

Last Modified: 2021-02-17 02:44:13

## /Emails/filter/count POST

### Overview

Lists filtered records.

### Summary

This endpoint will return a set of records filtered by an expression. The filter can be applied to multiple fields and have multiple and/or conditions in it. Alternatively, you may use an existing filter by specifying its id. If both a filter definition and a filter id are passed, the two filters will be joined with an AND. Care will need to be taken to make sure that any filters used have appropriate indexes on the server side otherwise the runtime of the endpoint will be very long. Related fields can be searched by specifying the field name as: "link\_name.remote\_field", so if you wished to search the Accounts module by a related member account you would use "members.sic\_code".

### Request Arguments

| Name      | Type    | Description  | Required |
|-----------|---------|--|----------|
| filter    | String  | The filter expression. Filter expressions are explained below.   | False    |
| filter_id | String  | Identifier for a preexisting filter. If filter is also set, the two filters are joined with an AND.  | False    |
| max_num   | Integer | A maximum number of records to return. Default is 20.  | False    |
| offset    | Integer | The number of records to skip over before records are returned. Default is 0.  | False    |
| fields    | String  | Comma delimited list of fields to return. The field date_modified will always be returned. Example: name,account_type,description  | False    |
| view      | String  | Instead of defining the fields argument, the view argument can be used instead. The field list is constructed at the server side based on the view definition which is requested. This argument can be used in combination with the fields | False    |

| Name     | Type   | Description   | Required |
|----------|--------|---|----------|
|          |        | argument. Common views are "record" and "list".<br>Example: record  |          |
| order_by | String | How to sort the returned records, in a comma delimited list with the direction appended to the column name after a colon.<br>Example: name:DESC,account_type:DESC,date_modified:ASC | False    |

## Filter Expressions

There are four types of filters:

### Basic

This will filter the results by checking the field "name" for value "Nelson Inc". This will only find exact matches.

### Example

```
{
  "filter":[
    {
      "name":"Nelson Inc"
    }
  ]
}
```

### Full

---

This expression allows you to specify what operation you want to use for filtering on the field. In the example you would match any record where the field "name" starts with the value "Nelson".

**Example**

```
{
  "filter": [
    {
      "name": {
        "$starts": "Nelson"
      }
    }
  ]
}
```

Below is a list of operation types:

| Operation    | Description   |
|--------------|---|
| \$equals     | Performs an exact match on that field.  |
| \$not_equals | Performs an exact match on that field.  |
| \$not_equals | Matches on non-matching values.   |
| \$starts     | Matches on anything that starts with the value.   |
| \$ends       | Matches anything that ends with the value.  |
| \$contains   | Matches anything that contains the value  |
| \$in         | Finds anything where field matches one of the values as specified as an array.          |
| \$not_in     | Finds anything where field does not matches any of the values as specified as an array. |
| \$is_null    | Checks if the field is null. This operation does not need a value specified.            |
| \$not_null   | Checks if the field is not null. This operation does not need a value specified.        |
| \$lt         | Matches when the field is less than the value.  |

---

| Operation | Description   |
|-----------|---|
| \$lte     | Matches when the field is less than or equal to the value.    |
| \$gt      | Matches when the field is greater than the value.             |
| \$gte     | Matches when the field is greater than or equal to the value. |

## Sub-expressions

This allows you to group filter expressions into or/and groupings. By default all expressions are and'ed together. The example expression would match if the field "name" was either "Nelson Inc" or "Nelson LLC". The only currently accepted sub-expression types are "\$and" and "\$or".

### Example

```
{
  "filter": [
    {
      "$or": [
        {
          "name": "Nelson Inc"
        },
        {
          "name": "Nelson LLC"
        }
      ]
    }
  ]
}
```

## Modules

There are two module expressions, they operate on modules instead of fields. The current module can be specified by either using the module name "\_this" or by leaving the module name as a blank string. The example expression would filter the records in the current module to only your favorites. The only currently

---

accepted module expressions are "\$favorite" and "\$owner".

### Example

```
{
  "filter":[
    {
      "$favorite":"_this"
    }
  ]
}
```

## Response Arguments

| Name        | Type    | Description   |
|-------------|---------|---|
| next_offset | Integer | Displays the next offset for retrieval of additional results. -1 will be returned when there are no more records. |
| records     | Array   | An array of results containing matched records.   |

## Response

```
{
  "next_offset":-1,
  "records":[
    {
      "id":"fa300a0e-0ad1-b322-9601-512d0983c19a",
      "name":"Dale Spivey",
      "date_entered":"2013-02-26T19:12:00+00:00",
      "date_modified":"2013-02-28T05:03:00+00:00",
      "modified_user_id":"1",
      "modified_by_name":"Administrator",
      "created_by":"1",
      "created_by_name":"Administrator",
      "description":""
    }
  ]
}
```

---

```
"img":"","  
"deleted":false,  
"assigned_user_id":"seed_sally_id",  
"assigned_user_name":"Sally Bronsen",  
"team_name":[  
  {  
    "id":"East",  
    "name":"East",  
    "name_2":"","  
    "primary":false  
  },  
  {  
    "id":1,  
    "name":"Global",  
    "name_2":"","  
    "primary":false  
  },  
  {  
    "id":"West",  
    "name":"West",  
    "name_2":"","  
    "primary":true  
  }  
],  
"salutation":"","  
"first_name":"Dale",  
"last_name":"Spivey",  
"full_name":"Dale Spivey",  
"title":"VP Operations",  
"linkedin":"","  
"facebook":"","  
"twitter":"","  
"googleplus":"","  
"department":"","  
"do_not_call":false,  
"phone_home":"(523) 825-4311",  
"email":[  
  {  
    "email_address":"sugar.dev.sugar@example.co.jp",  
    "opt_out":"0",  
    "invalid_email":"0",  
    "primary_address":"1"  
  },  
  {  
    "email_address":"the.support@example.biz",  
    "opt_out":"0",
```

---

```
        "invalid_email": "0",
        "primary_address": "0"
    }
],
"phone_mobile": "(373) 861-0757",
"phone_work": "(212) 542-9596",
"phone_other": "",
"phone_fax": "",
"email1": "sugar.dev.sugar@example.co.jp",
"email2": "the.support@example.biz",
"invalid_email": false,
"email_opt_out": false,
"primary_address_street": "345 Sugar Blvd.",
"primary_address_street_2": "",
"primary_address_street_3": "",
"primary_address_city": "Denver",
"primary_address_state": "CA",
"primary_address_postalcode": "87261",
"primary_address_country": "USA",
"alt_address_street": "",
"alt_address_street_2": "",
"alt_address_street_3": "",
"alt_address_city": "",
"alt_address_state": "",
"alt_address_postalcode": "",
"alt_address_country": "",
"assistant": "",
"assistant_phone": "",
"picture": "",
"email_and_name1": "",
"lead_source": "Campaign",
"account_name": "Smallville Resources Inc",
"account_id": "d5db6292-5c24-eb61-e202-512d09f0134e",
"opportunity_role_fields": "",
"opportunity_role_id": "",
"opportunity_role": "",
"reports_to_id": "",
"report_to_name": "",
"portal_name": "DaleSpivey97",
"portal_active": true,
"portal_password": "$1$yKMAONHM$Y5S.8CY.WZCZCwfGD1a1Q\\/",
"portal_password1": "",
"portal_app": "",
"preferred_language": "en_us",
"campaign_id": "",
"campaign_name": "",
```



---

```

    "c_accept_status_fields": "",
    "m_accept_status_fields": "",
    "accept_status_id": "",
    "accept_status_name": "",
    "sync_contact": "",
    "my_favorite": false,
    "_acl": {
      "fields": {
        }
      }
    },
    {
      "id": "95e17367-9b3d-0e26-22dc-512d0961fedf",
      "name": "Florence Haddock",
      "date_entered": "2013-02-26T19:12:00+00:00",
      "date_modified": "2013-02-26T19:12:00+00:00",
      "modified_user_id": "1",
      "modified_by_name": "Administrator",
      "created_by": "1",
      "created_by_name": "Administrator",
      "description": "",
      "img": "",
      "deleted": false,
      "assigned_user_id": "seed_sally_id",
      "assigned_user_name": "Sally Bronsen",
      "team_name": [
        {
          "id": "East",
          "name": "East",
          "name_2": "",
          "primary": false
        },
        {
          "id": 1,
          "name": "Global",
          "name_2": "",
          "primary": false
        },
        {
          "id": "West",
          "name": "West",
          "name_2": "",
          "primary": true
        }
      ]
    },
  ],

```

---

```
"salutation":"","  
"first_name":"Florence",  
"last_name":"Haddock",  
"full_name":"Florence Haddock",  
"title":"Director Sales",  
"linkedin":"","  
"facebook":"","  
"twitter":"","  
"googleplus":"","  
"department":"","  
"do_not_call":false,  
"phone_home":"(729) 845-3137",  
"email":[  
  {  
    "email_address":"dev.vegan@example.de",  
    "opt_out":"1",  
    "invalid_email":"0",  
    "primary_address":"0"  
  },  
  {  
    "email_address":"section71@example.it",  
    "opt_out":"0",  
    "invalid_email":"0",  
    "primary_address":"1"  
  }  
],  
"phone_mobile":"(246) 233-1382",  
"phone_work":"(565) 696-6981",  
"phone_other":"","  
"phone_fax":"","  
"email1":"section71@example.it",  
"email2":"dev.vegan@example.de",  
"invalid_email":false,  
"email_opt_out":false,  
"primary_address_street":"111 Silicon Valley Road",  
"primary_address_street_2":"","  
"primary_address_street_3":"","  
"primary_address_city":"Denver",  
"primary_address_state":"CA",  
"primary_address_postalcode":"79900",  
"primary_address_country":"USA",  
"alt_address_street":"","  
"alt_address_street_2":"","  
"alt_address_street_3":"","  
"alt_address_city":"","  
"alt_address_state":"","
```

```

"alt_address_postalcode": "",
"alt_address_country": "",
"assistant": "",
"assistant_phone": "",
"picture": "",
"email_and_name1": "",
"lead_source": "Support Portal User Registration",
"account_name": "Smallville Resources Inc",
"account_id": "d5db6292-5c24-eb61-e202-512d09f0134e",
"opportunity_role_fields": "",
"opportunity_role_id": "",
"opportunity_role": "",
"reports_to_id": "",
"report_to_name": "",
"portal_name": "FlorenceHaddock169",
"portal_active": true,
"portal_password": "$1$WfHtBk6$JF9BCGSqL\NCRbhueX5ia0",
"portal_password1": "",
"portal_app": "",
"preferred_language": "en_us",
"campaign_id": "",
"campaign_name": "",
"c_accept_status_fields": "",
"m_accept_status_fields": "",
"accept_status_id": "",
"accept_status_name": "",
"sync_contact": "",
"my_favorite": false,
"_acl": {
  "fields": {
    }
  }
}
]
}

```

## Change Log

| Version | Change                                |
|---------|---------------------------------------|
| v10     | Added /<module>/filter POST endpoint. |

---

Last Modified: 2021-02-17 02:44:13

## /Emails/:record GET

### Overview

Retrieves an Emails record.

### Fields

| Name                   | Type                | Description                                    |
|------------------------|---------------------|--|
| <record field>         | <record field type> | Returns the fields for the selected record.    |
| from_collection        | List                | The email's sender.                            |
| to_collection          | List                | The email's recipients found in the TO field.  |
| cc_collection          | List                | The email's recipients found in the CC field.  |
| bcc_collection         | List                | The email's recipients found in the BCC field. |
| attachments_collection | List                | The email's attachments.                       |

### Request

```
GET /Emails/a028341c-ba92-9343-55e7-56cf5beda121?fields=name,state,
{"name":"from_collection","fields":["email_address","email_address_id",
,
"parent_type","parent_id","parent_name"]},
{"name":"to_collection","fields":["email_address","email_address_id",
"parent_type","parent_id","parent_name"]},
{"name":"cc_collection","fields":["email_address","email_address_id",
"parent_type","parent_id","parent_name"]},
{"name":"bcc_collection","fields":["email_address","email_address_id",
"parent_type","parent_id","parent_name"]},
{"name":"attachments_collection","fields":["name","filename","file_siz
```

---

```
e",
"file_source", "file_mime_type", "file_ext", "upload_id"]}]}
```

## Response

```
{
  "id": "a028341c-ba92-9343-55e7-56cf5beda121",
  "state": "Archived",
  "name": "Re: Discuss Proposal",
  "from_collection": {
    "next_offset": {
      "from": -1
    },
    "records": [{
      "id": "ec113d14-7d27-11e7-a951-3c15c2d582c6",
      "email_address": "tdavis@example.com",
      "email_address_id": "ec05a896-7d27-11e7-a51e-3c15c2d582c6",
      "parent_type": "Leads",
      "parent_id": "f6a0611a-7d27-11e7-9d70-3c15c2d582c6",
      "parent_name": "Tom Davis",
      "_acl": {
        "fields": {}
      },
      "_link": "from",
      "_module": "EmailParticipants"
    }]
  },
  "to_collection": {
    "next_offset": {
      "to": -1
    },
    "records": [{
      "id": "ec0f1278-7d27-11e7-8d1f-3c15c2d582c6",
      "email_address": "ssmith@example.com",
      "email_address_id": "ec0fb516-7d27-11e7-b7ad-3c15c2d582c6",
      "parent_type": "Users",
      "parent_id": "9c61c46a-a7c5-df71-481c-51d48232f820",
      "parent_name": "Sarah Smith",
      "_acl": {
        "fields": {}
      },
      "_link": "to",
      "_module": "EmailParticipants"
    }]
  }
}
```

---

```
},
"cc_collection": {
  "next_offset": {
    "cc": -1
  },
  "records": [{
    "id": "eafa7e9a-7d27-11e7-aa2b-3c15c2d582c6",
    "email_address": "broland@example.com",
    "email_address_id": "ealcec7e-7d27-11e7-9845-3c15c2d582c6",
    "parent_type": "Users",
    "parent_id": "e087e79a-7d27-11e7-b02c-3c15c2d582c6",
    "parent_name": "Brian Roland",
    "_acl": {
      "fields": {}
    },
    "_link": "cc",
    "_module": "EmailParticipants"
  }, {
    "id": "df5eb204-7d27-11e7-b363-3c15c2d582c6",
    "email_address": "twallace@example.com",
    "email_address_id": "ddf1d9e6-7d27-11e7-bb17-3c15c2d582c6",
    "parent_type": "",
    "parent_id": "",
    "parent_name": "",
    "_acl": {
      "fields": {}
    },
    "_link": "cc",
    "_module": "EmailParticipants"
  }
  ]
},
"bcc_collection": {
  "next_offset": {
    "bcc": -1
  },
  "records": []
},
"attachments_collection": {
  "next_offset": {
    "attachments": -1
  },
  "records": [{
    "id": "afe9702e-53a3-0efb-6bbe-56c3580885ef",
    "name": "Quote.pdf",
    "filename": "Quote.pdf",
    "upload_id": ""
  }
  ]
}
```

---

```
"file_mime_type": "application/pdf",
"file_size": 158589,
"file_source": "DocumentRevisions",
"file_ext": "pdf"
"_acl": {
  "fields": {}
},
"_link": "attachments",
"_module": "Notes"
}]
}
"_acl": {
  "fields": [
  ]
},
"_module": "Emails"
}
```

## Change Log

| Version | Change                              |
|---------|-------------------------------------|
| v10     | Added /Emails/:record GET endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /Emails/:record PUT

### Overview

Update an existing Emails record.

### Summary

Used for updating an archived email, updating a draft to send later, or sending a draft.

---

# Updating an Archived Email

## Request Arguments

| Name             | Type   | Description  | Required |
|------------------|--------|--|----------|
| message_uid      | String | Only use this field for updating emails imported from an IMAP server, as this is the email's IMAP UID. | False    |
| assigned_user_id | String | The assigned user's ID.  | False    |
| parent_type      | String | The parent record's module.  | False    |
| parent_id        | String | The parent record's ID.  | False    |
| team_name        | List   | List of teams that can access the email.   | False    |

## Request

```
{
  "assigned_user_id": "9c61c46a-a7c5-df71-481c-51d48232f820",
  "parent_type": "Leads",
  "parent_id": "f6a0611a-7d27-11e7-9d70-3c15c2d582c6",
  "team_name": [{
    "id": "1",
    "display_name": "Global",
    "name": "Global",
    "name_2": "",
    "primary": true,
    "selected": false
  }]
}
```

## Response

```
{
```



---

```

"id": "a028341c-ba92-9343-55e7-56cf5beda121",
"date_entered": "2016-02-25T11:53:07-08:00",
"created_by": "9c61c46a-a7c5-df71-481c-51d48232f820",
"created_by_name": "Sarah Smith",
"date_modified": "2016-02-25T11:53:07-08:00",
"modified_by_name": "Sarah Smith",
"modified_user_id": "9c61c46a-a7c5-df71-481c-51d48232f820",
"deleted": false,
"assigned_user_id": "9c61c46a-a7c5-df71-481c-51d48232f820",
"assigned_user_name": "Sarah Smith",
"state": "Archived",
"name": "Re: Discuss Proposal",
"description": "Now is a good time",
"description_html": "<p>Now is a good time</p>",
"date_sent": "2012-02-17T06:53:00-08:00",
"message_id": "",
"message_uid": "",
"reply_to_status": false,
"total_attachments": 1,
"parent_name": "Tom Davis",
"parent_type": "Leads",
"parent_id": "f6a0611a-7d27-11e7-9d70-3c15c2d582c6"
"team_count": "",
"team_name": [{
  "id": 1,
  "name": "Global",
  "name_2": "",
  "primary": true,
  "selected": false
}],
"my_favorite": false,
"_acl": {
  "fields": {}
},
"_module": "Emails"
}

```

## Updating a Draft

### Request Arguments

| Name              | Type   | Description   | Required |
|-------------------|--------|---------------|----------|
| outbound_email_id | String | The ID of the | False    |

| Name             | Type   | Description  | Required |
|------------------|--------|--|----------|
|                  |        | chosen SMTP configuration for sending an email. Only use this field when saving a draft or sending an email. The user's default SMTP configuration is used if one hasn't been chosen prior to sending. |          |
| name             | String | The email's subject.   | False    |
| description_html | String | The email's HTML body.   | False    |
| description      | String | The email's plain text body. This field is not necessary unless the text body is different from the HTML body.   | False    |
| reply_to_id      | String | Only use this field when saving a draft or sending an email that is a reply to another email. This is the ID of that other email.  | False    |
| parent_type      | String | The parent record's module.  | False    |
| parent_id        | String | The parent record's ID.  | False    |
| to               | Object | The email's recipients found in the TO field. Existing EmailParticipants records cannot be used; only the <b>create</b> and <b>delete</b>  | False    |

| Name | Type | Description  | Required |
|------|------|--|----------|
|      |      | <p>actions are supported.<br/>Metadata about each recipient is required to link the records.</p> <ul style="list-style-type: none"> <li>• <b>parent_type</b> and <b>parent_id</b> can be Accounts, Contacts, Employees, Leads, Prospects, or Users, out out of the box. These fields are not necessary if only an email address is known for the recipient.</li> <li>• <b>email_address_id</b> is the ID of the email address the recipient used in the email. To get the ID of the email address, first make a request to / EmailAddresses POST. If this</li> </ul> |          |

| Name | Type   | Description   | Required |
|------|--------|---|----------|
|      |        | <p>argument is not provided, then the primary email address of the parent record is used.</p>   |          |
| cc   | Object | <p>The email's recipients found in the CC field. Existing EmailParticipants records cannot be used; only the <b>create</b> and <b>delete</b> actions are supported. Metadata about each recipient is required to link the records.</p> <ul style="list-style-type: none"> <li>• <b>parent_type</b> and <b>parent_id</b> can be Accounts, Contacts, Employees, Leads, Prospects, or Users, out out of the box. These fields are not necessary if only an email address is known for</li> </ul> | False    |

| Name | Type   | Description   | Required |
|------|--------|---|----------|
|      |        | <p>the recipient.</p> <ul style="list-style-type: none"> <li>• <b>email_address_id</b> is the ID of the email address the recipient used in the email. To get the ID of the email address, first make a request to / EmailAddresses POST. If this argument is not provided, then the primary email address of the parent record is used.</li> </ul> |          |
| bcc  | Object | <p>The email's recipients found in the BCC field. Existing EmailParticipants records cannot be used; only the <b>create</b> and <b>delete</b> actions are supported. Metadata about each recipient is required to link the records.</p> <ul style="list-style-type: none"> <li>• <b>parent_type</b></li> </ul>                                      | False    |

| Name | Type | Description   | Required |
|------|------|---|----------|
|      |      | <p>e and <b>parent_id</b> can be Accounts, Contacts, Employees, Leads, Prospects, or Users, out out of the box. These fields are not necessary if only an email address is known for the recipient.</p> <ul style="list-style-type: none"> <li>• <b>email_address_id</b> is the ID of the email address the recipient used in the email. To get the ID of the email address, first make a request to / EmailAddresses POST. If this argument is not provided, then the primary email address of the parent</li> </ul> |          |

| Name        | Type   | Description  | Required |
|-------------|--------|--|----------|
|             |        | record is used.  |          |
| attachments | Object | <p>The email's attachments. Existing Notes records cannot be used as email attachments; only the <b>create</b> and <b>delete</b> actions are supported. Metadata about each attachment is required to link the records.</p> <ul style="list-style-type: none"> <li>• <b>filename_guid</b> is the temporary file ID for an uploaded file to attach as a Notes record.</li> <li>• <b>upload_id</b> is the ID of an existing file that the Notes record should reference as the attachment. This allows files to be shared by multiple Notes records, to preserve space.</li> <li>• When using</li> </ul> | False    |

| Name | Type | Description   | Required |
|------|------|---|----------|
|      |      | <p><b>upload_id, file_source</b> should be provided to indicate from where the file originated. The value should be the module of the record that shares its ID with the file. So when an attachment comes from an email template, <b>file_source</b> should be <b>EmailTemplates</b>. And when an attachment comes from a document, <b>file_source</b> should be <b>DocumentRevisions</b>.</p> |          |

**Request**

```
{
  "outbound_email_id": "b80adf1a-7d78-11e7-855a-3c15c2d582c6",
  "name": "Re: Discuss Proposal (new time)",
  "description_html": "<p>I will call you in 10 minutes.</p>",
  "parent_type": "Contacts",
  "parent_id": "79b9c194-7d79-11e7-8fc5-3c15c2d582c6",
```



---

```
"to": {
  "create": [{
    "parent_type": "Contacts",
    "parent_id": "79b9c194-7d79-11e7-8fc5-3c15c2d582c6"
  }],
  "delete": [
    "ealcec7e-7d27-11e7-9845-3c15c2d582c6"
  ]
},
"cc": {
  "delete": [
    "eafa7e9a-7d27-11e7-aa2b-3c15c2d582c6"
  ]
},
"attachments": {
  "create": [{
    "upload_id": "a028341c-ba92-9343-55e7-56cf5beda121",
    "name": "Contract.pdf",
    "filename": "Contract.pdf",
    "file_source": "DocumentRevisions"
  }],
  "delete": [
    "e087e79a-7d27-11e7-b02c-3c15c2d582c6"
  ]
}
}
```

## Response

```
{
  "id": "f3c85966-7d27-11e7-9e9e-3c15c2d582c6",
  "date_entered": "2016-02-25T11:53:07-08:00",
  "created_by": "9c61c46a-a7c5-df71-481c-51d48232f820",
  "created_by_name": "Sarah Smith",
  "date_modified": "2016-02-25T12:53:07-08:00",
  "modified_by_name": "Sarah Smith",
  "modified_user_id": "9c61c46a-a7c5-df71-481c-51d48232f820",
  "deleted": false,
  "assigned_user_id": "9c61c46a-a7c5-df71-481c-51d48232f820",
  "assigned_user_name": "Sarah Smith",
  "state": "Draft",
  "outbound_email_id": "b80adf1a-7d78-11e7-855a-3c15c2d582c6",
  "name": "Re: Discuss Proposal (new time)",
  "description": "I will call you in 10 minutes.",
}
```

```

"description_html": "<p>I will call you in 10 minutes.</p>",
"date_sent": "2012-02-17T12:53:07-08:00",
"message_id": "",
"message_uid": "",
"reply_to_id": "a028341c-ba92-9343-55e7-56cf5beda121",
"reply_to_status": false,
"total_attachments": 1,
"parent_name": "Jack Horner",
"parent_type": "Contacts",
"parent_id": "79b9c194-7d79-11e7-8fc5-3c15c2d582c6"
"team_count": "",
"team_name": [{
  "id": 1,
  "name": "Global",
  "name_2": "",
  "primary": true,
  "selected": false
}],
"my_favorite": false,
"_acl": {
  "fields": {}
},
"_module": "Emails"
}

```

## Sending an Email

### Request Arguments

| Name              | Type   | Description  | Required |
|-------------------|--------|--|----------|
| state             | String | Use "Ready" to send an email.  | True     |
| outbound_email_id | String | The ID of the chosen SMTP configuration for sending an email. Only use this field when saving a draft or sending an email. The user's default SMTP configuration is used if one hasn't | False    |

| Name             | Type   | Description  | Required |
|------------------|--------|--|----------|
|                  |        | been chosen prior to sending.  |          |
| name             | String | The email's subject.   | False    |
| description_html | String | The email's HTML body.   | False    |
| description      | String | The email's plain text body. This field is not necessary unless the text body is different from the HTML body.   | False    |
| reply_to_id      | String | Only use this field when saving a draft or sending an email that is a reply to another email. This is the ID of that other email.  | False    |
| parent_type      | String | The parent record's module.  | False    |
| parent_id        | String | The parent record's ID.  | False    |
| to               | Object | <p>The email's recipients found in the TO field. Existing EmailParticipants records cannot be used; only the <b>create</b> and <b>delete</b> actions are supported. Metadata about each recipient is required to link the records.</p> <ul style="list-style-type: none"> <li>• <b>parent_type</b> and <b>parent_id</b></li> </ul> | False    |

| Name | Type | Description  | Required |
|------|------|--|----------|
|      |      | <p>can be Accounts, Contacts, Employees, Leads, Prospects, or Users, out out of the box. These fields are not necessary if only an email address is known for the recipient.</p> <ul style="list-style-type: none"> <li>• <b>email_address_id</b> is the ID of the email address the recipient used in the email. To get the ID of the email address, first make a request to / EmailAddresses POST. If this argument is not provided, then the primary email address of the parent record is used.</li> </ul> |          |

| Name | Type   | Description  | Required |
|------|--------|--|----------|
| cc   | Object | <p>The email's recipients found in the CC field. Existing EmailParticipants records cannot be used; only the <b>create</b> and <b>delete</b> actions are supported. Metadata about each recipient is required to link the records.</p> <ul style="list-style-type: none"> <li>• <b>parent_type</b> and <b>parent_id</b> can be Accounts, Contacts, Employees, Leads, Prospects, or Users, out of the box. These fields are not necessary if only an email address is known for the recipient.</li> <li>• <b>email_address_id</b> is the ID of the email address the recipient used in the email. To</li> </ul> | False    |

| Name | Type   | Description  | Required |
|------|--------|--|----------|
|      |        | <p>get the ID of the email address, first make a request to / EmailAddresses POST. If this argument is not provided, then the primary email address of the parent record is used.</p>  |          |
| bcc  | Object | <p>The email's recipients found in the BCC field. Existing EmailParticipants records cannot be used; only the <b>create</b> and <b>delete</b> actions are supported. Metadata about each recipient is required to link the records.</p> <ul style="list-style-type: none"> <li>• <b>parent_type</b> and <b>parent_id</b> can be Accounts, Contacts, Employees, Leads, Prospects, or Users, out out of</li> </ul> | False    |

| Name        | Type   | Description   | Required |
|-------------|--------|---|----------|
|             |        | <p>the box.<br/>           These fields are not necessary if only an email address is known for the recipient.</p> <ul style="list-style-type: none"> <li>• <b>email_address_id</b> is the ID of the email address the recipient used in the email. To get the ID of the email address, first make a request to /EmailAddresses POST. If this argument is not provided, then the primary email address of the parent record is used.</li> </ul> |          |
| attachments | Object | <p>The email's attachments. Existing Notes records cannot be used as email attachments; only the <b>create</b> and <b>delete</b> actions are</p>  | False    |

| Name | Type | Description  | Required |
|------|------|--|----------|
|      |      | <p>supported.<br/>Metadata about each attachment is required to link the records.</p> <ul style="list-style-type: none"> <li>• <b>filename_guid</b> is the temporary file ID for an uploaded file to attach as a Notes record.</li> <li>• <b>upload_id</b> is the ID of an existing file that the Notes record should reference as the attachment. This allows files to be shared by multiple Notes records, to preserve space.</li> <li>• When using <b>upload_id</b>, <b>file_source</b> should be provided to indicate from where the file originated. The value should be</li> </ul> |          |



| Name | Type | Description  | Required |
|------|------|--|----------|
|      |      | <p>the module of the record that shares its ID with the file. So when an attachment comes from an email template, <b>file_source</b> should be <b>EmailTemplates</b>. And when an attachment comes from a document, <b>file_source</b> should be <b>DocumentRevisions</b>.</p> |          |

### Request

```
{
  "state": "Ready"
}
```

### Response

```
{
  "id": "a7795664-7def-11e7-8add-3c15c2d582c6",
  "date_entered": "2016-02-25T08:53:07-08:00",
  "created_by": "9c61c46a-a7c5-df71-481c-51d48232f820",
  "created_by_name": "Sarah Smith",
  "date_modified": "2016-02-25T08:53:07-08:00",
  "modified_by_name": "Sarah Smith",
  "modified_user_id": "9c61c46a-a7c5-df71-481c-51d48232f820",
  "deleted": false,
}
```

---

```
"assigned_user_id": "9c61c46a-a7c5-df71-481c-51d48232f820",
"assigned_user_name": "Sarah Smith",
"state": "Archived",
"outbound_email_id": "b80adfla-7d78-11e7-855a-3c15c2d582c6",
"name": "Discuss Proposal",
"description": "When is a good time for us to chat?",
"description_html": "<p>When is a good time for us to chat?</p>",
"date_sent": "2012-02-17T08:53:07-08:00",
"message_id": "<a7795664-7def-11e7-8add-3c15c2d582c6@example.com>",
"message_uid": "",
"reply_to_id": "",
"reply_to_status": false,
"total_attachments": 2,
"parent_name": "Tom Davis",
"parent_type": "Leads",
"parent_id": "f6a0611a-7d27-11e7-9d70-3c15c2d582c6"
"team_count": "",
"team_name": [{
  "id": 1,
  "name": "Global",
  "name_2": "",
  "primary": true,
  "selected": false
}],
"my_favorite": false,
"_acl": {
  "fields": {}
},
"_module": "Emails"
}
```

## Change Log

| Version | Change                              |
|---------|-------------------------------------|
| v10     | Added /Emails/:record PUT endpoint. |

**Last Modified:** 2021-02-17 02:44:13

---

## /Emails/:record/link POST

### Overview

Creates a relationship to a pre-existing email.

### Summary

Cannot link existing Notes records as attachments (link: **attachments**) and existing EmailParticipants records as a sender (link: **from**) or recipients(links: **to**, **cc**, **bcc**). All other operations described in [Relate Record API](#) are supported.

### Change Log

| Version | Change                                    |
|---------|---|
| v10     | Added /Emails/:record/link POST endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /Emails/:record/link/:link\_name/add\_record\_list/:remote\_id POST

### Overview

Creates relationships to a pre-existing email from a record list.

### Summary

Cannot link existing Notes records as attachments (link: **attachments**) and existing EmailParticipants records as a sender (link: **from**) or recipients(links: **to**, **cc**, **bcc**). All other operations described in [Relate Record API](#) are supported.

---

## Change Log

| Version | Change  |
|---------|---|
| v10     | Added /Emails/:record/link/:link_name/add_record_list/:remote_id POST endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /Emails/:record/link/:link\_name/:remote\_id DELETE

### Overview

Deletes an existing relationship between an email and another record.

### Summary

The sender (link: **from**) cannot be removed. Replace the sender with a different sender instead. All other operations described in [Relate Record API](#) are supported.

## Change Log

| Version | Change  |
|---------|---|
| v10     | Added /Emails/:record/link/:link_name/:remote_id DELETE endpoint. |

**Last Modified:** 2021-02-17 02:44:13

---

## **/Emails/:record/link/:link\_name/:remote\_id POST**

### **Overview**

Creates a relationship to a pre-existing email.

### **Summary**

Cannot link existing Notes records as attachments (link: **attachments**) and existing EmailParticipants records as a sender (link: **from**) or recipients(links: **to**, **cc**, **bcc**). All other operations described in [Relate Record API](#) are supported.

### **Change Log**

| Version | Change  |
|---------|---|
| v10     | Added /Emails/:record/link/:link_name/:remote_id POST endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## **/EmbeddedFiles/:record/file/:field GET**

### **Overview**

Retrieves an attached file for a specific field on a record.

### **Request Arguments**

This endpoint does not accept any request arguments.

### **Response Arguments**

---

The response from this request is an HTTP response with a forced download. This can be used in rendering images through the API or in offering immediate file downloads.

## Response

Cache-Control: no-cache, must-revalidate Connection: keep-alive Content-Encoding: gzip Content-Type: application/octet-stream Date: Mon, 30 Jan 2012 17:00:46 GMT Expires: Mon, 30 Jan 2012 17:00:45 GMT Last-Modified: Thu, 10 Nov 2011 19:01:31 GMT Transfer-Encoding: chunked Vary: Accept-Encoding...

## Change Log

| Version | Change  |
|---------|---|
| v10     | Added /<module>/:record/file/:field GET endpoint. |

Last Modified: 2021-02-17 02:44:13

## /EmbeddedFiles/:record/file/:field POST

### Overview

Attaches a file to a field on a record.

### Request Arguments

| Name            | Type    | Description   | Required |
|-----------------|---------|---|----------|
| format          | String  | The data format. Currently accepts 'sugar-html-json'. | True     |
| delete_if_fails | Boolean | Indicates whether                                     | False    |

| Name               | Type   | Description   | Required   |
|--------------------|--------|---|--|
|                    |        | the API is to mark related record deleted if the file upload fails.               |  |
| oauth_token        | String | The oauth_token value.  | False - Required if only if delete_if_fails is true. |
| <attachment field> | String | The field and file to populate.<br>Example: {"": "@\path\to\ExampleDocument.txt"} | True   |

## Request

```
{
  "format": "sugar-html-json",
  "delete_if_fails": true,
  "oauth_token": "43b6b327-cc70-c301-3299-512ffb99ad97",
  "<attachment field>": "@\path\to\ExampleDocument.txt"
}
```

## Response Arguments

| Name           | Type    | Description               |
|----------------|---------|---------------------------|
| content-type   | String  | The files content type.   |
| content-length | Integer | The files content length. |
| name           | String  | The files name.           |
| uri            | String  | The URI of the file.      |

## Response

```
{
  "content-type": "text/plain",
```

---

```
"content-length":16,
"name":"ExampleDocument.txt",
"uri":"http://sugarcrm/rest/v10/Notes/ca66c92f-5a8b-28b4-4fc8-512d099b790b/file/<attachment field>?format=sugar-html-json&delete_if_fails=1&oauth_token=6ec91cf3-1f97-25b9-e0b1-512f8971b2d4"
}
```

## Change Log

| Version | Change   |
|---------|--|
| v10     | Added /<module>/:record/file/:field POST endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /EmbeddedFiles/:record/file/:field PUT

### Overview

This endpoint takes a file or image and saves it to a record that already contains an attachment in the specified field. The PUT method is very similar to the POST method but differs slightly in how the request is constructed. PUT requests should send the file data as the body of the request. Optionally, a filename query parameter can be sent with the request to assign a name. Additionally, the PUT method can accept base64 encoded file data which will be decoded by the endpoint if the `content_transfer_encoding` parameter is set to 'base64'.

**NOTE:** In lieu of the `content_transfer_encoding` parameter, a request header of `X-Content-Transfer-Encoding` can also be sent with a value of 'base64'. In the event both the content transfer encoding header and request parameter are sent, the header will be used.

### Request Arguments



| Name                      | Type   | Description   | Required |
|---------------------------|--------|---|----------|
| filename                  | String | Filename to save the document as  | False    |
| content_transfer_encoding | String | When set to 'base64', indicates the file contents are base64 encoded and will result in the file contents being base64 decoded before being saved | False    |

## Request

PUT /rest/v10/Notes/abcd-1234/file/field/ HTTP/1.1 Host: localhost Connection: keep-alive Content-Length: 23456 Content-Type: application/document-doc ...This is where the bin data would be

## Response Arguments

| Name                 | Type    | Description                            |
|----------------------|---------|--|
| field                | Array   | The fields containing file properties. |
| field.content-type   | String  | The files content type.                |
| field.content-length | Integer | The files content length.              |
| field.name           | String  | The files name.                        |
| field.width          | Integer | The width of the image.                |
| field.height         | Integer | The height of the image.               |
| field.uri            | String  | The URI of the file.                   |

## Response

```
{
  "picture": {
    "content-type": "image/png",
```

---

```
"content-length":72512,
"name":"1a7b8f5c-b11c-0094-c8d8-512e9daaa983",
"width":933,
"height":519,
"uri":"http://sugarcrm/rest/v10/Contacts/fa300a0e-0ad1-b32
2-9601-512d0983c19a/file/picture"
}
"attachment":{
  "content-type":"application/document-doc",
  "content-length":"873921",
  "name":"myFile.doc",
  "uri":"http://sugarcrm/rest/v10/Contacts/f2f9aa4d-99a8-
e86e-f4d5-512d0986effa/file/attachment"
}
}
```

## Change Log

| Version | Change  |
|---------|---|
| v10     | Added /<module>/:record/file/:field PUT endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /Employees GET

### Overview

Lists filtered records.

### Summary

This endpoint will return a set of records filtered by an expression. The filter can be applied to multiple fields and have multiple and/or conditions in it. Alternatively, you may use an existing filter by specifying its id. If both a filter

---

definition and a filter id are passed, the two filters will be joined with an AND. Care will need to be taken to make sure that any filters used have appropriate indexes on the server side otherwise the runtime of the endpoint will be very long. Related fields can be searched by specifying the field name as: "link\_name.remote\_field", so if you wished to search the Accounts module by a related member account you would use "members.sic\_code".

## Request Arguments

| Name   | Type   | Description   | Required |
|--------|--------|---|----------|
| filter | String | <p>The filter expression. Filter expressions are explained below. Note that JSON-encoded filters can be specified as query parameters in one of two ways for GET requests:</p> <ol style="list-style-type: none"><li>1. By specifying individual filter arguments as distinct parameters. Example: filter[0][id]=1</li><li>2. By specifying the whole filter as a single JSON-encoded string. Note that this syntax is currently not supported on certain</li></ol> | False    |

| Name      | Type    | Description   | Required |
|-----------|---------|---|----------|
|           |         | modules.<br>Example: filter=[{"id": "1"}].  |          |
| filter_id | String  | Identifier for a preexisting filter. If filter is also set, the two filters are joined with an AND.   | False    |
| max_num   | Integer | A maximum number of records to return. Default is 20.   | False    |
| offset    | Integer | The number of records to skip over before records are returned. Default is 0.   | False    |
| fields    | String  | Comma delimited list of fields to return. Each field may be represented either by string, or by map containing field name and additional field parameters (applicable to link and collection fields). The fields id and date_modified will always be returned.<br>Example: name,account_type,description,{"name": "opportunities", "fields": [{"id", "name", "sales_status"}, {"order_by": "date_closed:desc"}]<br>For more details on additional field | False    |

| Name     | Type    | Description   | Required |
|----------|---------|---|----------|
|          |         | parameters, see <a href="#">Relate API</a> and <a href="#">Collection API</a> .   |          |
| view     | String  | Instead of defining the fields argument, the view argument can be used instead. The field list is constructed at the server side based on the view definition which is requested. This argument can be used in combination with the fields argument. Common views are "record" and "list".<br>Example: record | False    |
| order_by | String  | How to sort the returned records, in a comma delimited list with the direction appended to the column name after a colon.<br>Example: name:DESC,account_type:DESC,date_modified:ASC   | False    |
| q        | String  | A search expression, will search on this module. Cannot be used at the same time as a filter expression or id.  | False    |
| deleted  | Boolean | Boolean to show deleted records in  | False    |

---

| Name       | Type    | Description   | Required |
|------------|---------|---|----------|
|            |         | the result set.   |          |
| nulls_last | Boolean | Boolean to return records with null values in order_by fields last in the result set. | False    |

## Filter Expressions

There are four types of filters:

### Basic

This will filter the results by checking the field "name" for value "Nelson Inc". This will only find exact matches.

### Example

```
{
  "filter": [
    {
      "name": "Nelson Inc"
    }
  ]
}
```

### Full

This expression allows you to specify what operation you want to use for filtering on the field. In the example you would match any record where the field "name" starts with the value "Nelson".

### Example

```
{
  "filter": [
    {
```

```

    "name": {
      "$starts": "Nelson"
    }
  ]
}

```

Below is a list of operation types:

| Operation    | Description   |
|--------------|---|
| \$equals     | Performs an exact match on that field.  |
| \$not_equals | Performs an exact match on that field.  |
| \$not_equals | Matches on non-matching values.   |
| \$starts     | Matches on anything that starts with the value.   |
| \$ends       | Matches anything that ends with the value.  |
| \$contains   | Matches anything that contains the value  |
| \$in         | Finds anything where field matches one of the values as specified as an array.          |
| \$not_in     | Finds anything where field does not matches any of the values as specified as an array. |
| \$is_null    | Checks if the field is null. This operation does not need a value specified.            |
| \$not_null   | Checks if the field is not null. This operation does not need a value specified.        |
| \$lt         | Matches when the field is less than the value.  |
| \$lte        | Matches when the field is less than or equal to the value.                              |
| \$gt         | Matches when the field is greater than the value.                                       |
| \$gte        | Matches when the field is greater than or equal to the value.                           |

---

## Sub-expressions

This allows you to group filter expressions into or/and groupings. By default all expressions are and'ed together. The example expression would match if the field "name" was either "Nelson Inc" or "Nelson LLC". The only currently accepted sub-expression types are "\$and" and "\$or".

### Example

```
{
  "filter":[
    {
      "$or":[
        {
          "name":"Nelson Inc"
        },
        {
          "name":"Nelson LLC"
        }
      ]
    }
  ]
}
```

## Modules

There are two module expressions, they operate on modules instead of fields. The current module can be specified by either using the module name "\_this" or by leaving the module name as a blank string. The example expression would filter the records in the current module to only your favorites. The only currently accepted module expressions are "\$favorite" and "\$owner".

### Example

```
{
  "filter":[
    {
      "$favorite":"_this"
    }
  ]
}
```



---

## Response Arguments

| Name        | Type    | Description   |
|-------------|---------|---|
| next_offset | Integer | Displays the next offset for retrieval of additional results. -1 will be returned when there are no more records. |
| records     | Array   | An array of results containing matched records.   |

## Response

```
{
  "next_offset":-1,
  "records":[
    {
      "id":"fa300a0e-0ad1-b322-9601-512d0983c19a",
      "name":"Dale Spivey",
      "date_modified":"2013-02-28T05:03:00+00:00",
      "description":"",
      "opportunities": [
        {
          _module: "Opportunities",
          "id": "b0701501-1fab-8ae7-3942-540da93f5017",
          "name": "360 Vacations - 228 Units",
          "date_modified": "2014-09-08T16:05:00+03:00",
          "sales_status": "New"
        },
      ],
      "_acl": {
        "fields": {
        }
      }
    },
    {
      "id":"95e17367-9b3d-0e26-22dc-512d0961fedf",
      "name":"Florence Haddock",
      "date_modified":"2013-02-26T19:12:00+00:00",
```

---

```
"description": "",
"opportunities": [
  {
    _module: "Opportunities"
    date_modified: "2014-09-08T16:05:00+03:00"
    id: "9ce7c088-8ee4-7cd3-18f1-540da944d4c0"
    name: "360 Vacations - 312 Units"
    sales_status: "New"
  },
],
"_acl": {
  "fields": {
  }
}
}
```

## Change Log

| Version | Change                               |
|---------|--------------------------------------|
| v10     | Added /<module>/filter GET endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /ExpressionEngine/:record/related GET

Retrieve a Forecasting Information In SugarChart Format

### Summary:

This endpoint is used to return the json Data for SugarCharts to use to display the needed chart.

---

## Query Parameters:

| Param           | Description  | Optional |
|-----------------|--|----------|
| timeperiod_id   | Show for a specific time period  |          |
| user_id         | Show for a specific user   |          |
| display_manager | Pipeline or Committed are valid values.  |          |
| dataset         | Which Forecast dataset to show, valid values are likely, best, worst. Defaults to likely if one is not specified     | Optional |
| group_by        | Show Which fields the y-axis shows on the chart. Can be any field in the opportunity module, defaults to Sales Stage | Optional |
| ranges          | Pipeline or Committed are valid values.  | Optional |

## Input Example:

```
{ 'user_id':'seed_max_id', 'timeperiod_id':'36f7085a-5889-ea75-84c8-50f42bd1a5ba', 'display_manager':'false', 'group_by': 'forecast', 'dataset': 'likely', 'ranges': 'include', }
```

## Output Example:

```
{ "color" : [ "#8c2b2b", "#468c2b", "#2b5d8c", "#cd5200", "#e6bf00", "#7f3acd", "#00a9b8", "#572323", "#004d00", "#000087", "#e48d30", "#9fba09", "#560066", "#009f92", "#b36262", "#38795c", "#3D3D99", "#99623d", "#998a3d", "#994e78", "#3d6899", "#CC0000", "#00CC00", "#0000CC", "#cc5200", "#ccaa00", "#6600cc", "#005fcc" ], "label" : [ "Include" ], "properties" : [ { "gauge_target_list" : "Array", "goal_marker_color" : [ "#000000", "#7D12B2" ], "goal_marker_label" : [ "Quota", "Likely Case" ], "goal_marker_type" : [ "group",
```

```

"pareto" ], "label_name" : "Include in Forecast", "labels" : "value", "legend" : "on",
"print" : "on", "subtitle" : "", "thousands" : "", "title" : null, "type" : "bar chart",
"value_name" : "Likely Case" } ], "values" : [ { "goalmarkervalue" : [ "111000.00",
"36000.00" ], "goalmarkervalue" : [ "$111,000.00", "$36,000.00" ], "gvalue" :
36000, "gvalue" : "$36,000.00", "label" : "January 2013", "links" : [ "" ],
"valuelabels" : [ "$36,000.00" ], "values" : [ 36000 ] }, { "goalmarkervalue" : [
"111000.00", "61500.00" ], "goalmarkervalue" : [ "$111,000.00", "$61,500.00"
], "gvalue" : 25500, "gvalue" : "$25,500.00", "label" : "February 2013", "links"
: [ "" ], "valuelabels" : [ "$25,500.00" ], "values" : [ 25500 ] }, { "goalmarkervalue" :
[ "111000.00", "61500.00" ], "goalmarkervalue" : [ "$111,000.00",
"$61,500.00" ], "gvalue" : 0, "gvalue" : "$0.00", "label" : "March 2013", "links"
: [ "" ], "valuelabels" : [ "$0.00" ], "values" : [ 0 ] } ] }

```

**Last Modified:** 2021-02-17 02:44:13

## **/ExpressionEngine/:record/related POST**

Retrieve a Forecasting Information In SugarChart Format

### **Summary:**

This endpoint is used to return the json Data for SugarCharts to use to display the needed chart.

### **Query Parameters:**

| <b>Param</b>    | <b>Description</b>                      | <b>Optional</b> |
|-----------------|---|-----------------|
| timeperiod_id   | Show for a specific time period         |                 |
| user_id         | Show for a specific user                |                 |
| display_manager | Pipeline or Committed are valid values. |                 |
| dataset         | Which Forecast dataset to               | Optional        |

|          |  |          |
|----------|--|----------|
|          | show, valid values are likely, best, worst. Defaults to likely if one is not specified                               |          |
| group_by | Show Which fields the y-axis shows on the chart. Can be any field in the opportunity module, defaults to Sales Stage | Optional |
| ranges   | Pipeline or Committed are valid values.  | Optional |

## Input Example:

```
{ 'user_id':'seed_max_id', 'timeperiod_id':'36f7085a-5889-ea75-84c8-50f42bd1a5ba',
'display_manager':'false', 'group_by': 'forecast', 'dataset': 'likely', 'ranges': 'include',
}
```

## Output Example:

```
{ "color" : [ "#8c2b2b", "#468c2b", "#2b5d8c", "#cd5200", "#e6bf00", "#7f3acd",
"#00a9b8", "#572323", "#004d00", "#000087", "#e48d30", "#9fba09",
"#560066", "#009f92", "#b36262", "#38795c", "#3D3D99", "#99623d",
"#998a3d", "#994e78", "#3d6899", "#CC0000", "#00CC00", "#0000CC",
"#cc5200", "#ccaa00", "#6600cc", "#005fcc" ], "label" : [ "Include" ], "properties"
: [ { "gauge_target_list" : "Array", "goal_marker_color" : [ "#000000", "#7D12B2" ],
"goal_marker_label" : [ "Quota", "Likely Case" ], "goal_marker_type" : [ "group",
"pareto" ], "label_name" : "Include in Forecast", "labels" : "value", "legend" : "on",
"print" : "on", "subtitle" : "", "thousands" : "", "title" : null, "type" : "bar chart",
"value_name" : "Likely Case" } ], "values" : [ { "goalmarkervalue" : [ "111000.00",
"36000.00" ], "goalmarkervalue" : [ "$111,000.00", "$36,000.00" ], "gvalue" :
36000, "gvalue" : "$36,000.00", "label" : "January 2013", "links" : [ "" ],
"valuelabels" : [ "$36,000.00" ], "values" : [ 36000 ] }, { "goalmarkervalue" : [
"111000.00", "61500.00" ], "goalmarkervalue" : [ "$111,000.00", "$61,500.00"
], "gvalue" : 25500, "gvalue" : "$25,500.00", "label" : "February 2013", "links"
: [ "" ], "valuelabels" : [ "$25,500.00" ], "values" : [ 25500 ] }, { "goalmarkervalue" :
[ "111000.00", "61500.00" ], "goalmarkervalue" : [ "$111,000.00",
"$61,500.00" ], "gvalue" : 0, "gvalue" : "$0.00", "label" : "March 2013", "links"
```

---

```
: [ "" ], "valuelabels" : [ "$0.00" ], "values" : [ 0 ] } ] }
```

**Last Modified:** 2021-02-17 02:44:13

## /Filters GET

### Overview

Lists filtered records.

### Summary

This endpoint will return a set of records filtered by an expression. The filter can be applied to multiple fields and have multiple and/or conditions in it. Alternatively, you may use an existing filter by specifying its id. If both a filter definition and a filter id are passed, the two filters will be joined with an AND. Care will need to be taken to make sure that any filters used have appropriate indexes on the server side otherwise the runtime of the endpoint will be very long. Related fields can be searched by specifying the field name as: "link\_name.remote\_field", so if you wished to search the Accounts module by a related member account you would use "members.sic\_code".

### Request Arguments

| Name   | Type   | Description   | Required |
|--------|--------|---|----------|
| filter | String | The filter expression. Filter expressions are explained below. Note that JSON-encoded filters can be specified as query parameters in one of two ways for GET requests: | False    |

| Name      | Type    | Description   | Required |
|-----------|---------|---|----------|
|           |         | <ol style="list-style-type: none"> <li>1. By specifying individual filter arguments as distinct parameters. Example: filter[0][id]=1</li> <li>2. By specifying the whole filter as a single JSON-encoded string. Note that this syntax is currently not supported on certain modules. Example: filter=[{"id": "1"}].</li> </ol> |          |
| filter_id | String  | Identifier for a preexisting filter. If filter is also set, the two filters are joined with an AND.   | False    |
| max_num   | Integer | A maximum number of records to return. Default is 20.   | False    |
| offset    | Integer | The number of records to skip over before records are returned. Default is 0.   | False    |
| fields    | String  | Comma delimited   | False    |

| Name | Type   | Description   | Required |
|------|--------|---|----------|
|      |        | <p>list of fields to return. Each field may be represented either by string, or by map containing field name and additional field parameters (applicable to link and collection fields). The fields id and date_modified will always be returned.</p> <p>Example: name,account_type,description,{"name":"opportunities","fields":["id","name","sales_status"],"order_by":"date_closed:desc"}</p> <p>For more details on additional field parameters, see <a href="#">Relate API</a> and <a href="#">Collection API</a>.</p> |          |
| view | String | <p>Instead of defining the fields argument, the view argument can be used instead. The field list is constructed at the server side based on the view definition which is requested. This argument can be used in combination with the fields argument. Common views are "record" and "list".</p>   | False    |



| Name       | Type    | Description   | Required |
|------------|---------|---|----------|
|            |         | Example: record   |          |
| order_by   | String  | How to sort the returned records, in a comma delimited list with the direction appended to the column name after a colon.<br>Example: name:DESC,account_type:DESC,date_modified:ASC | False    |
| q          | String  | A search expression, will search on this module. Cannot be used at the same time as a filter expression or id.  | False    |
| deleted    | Boolean | Boolean to show deleted records in the result set.  | False    |
| nulls_last | Boolean | Boolean to return records with null values in order_by fields last in the result set.   | False    |

## Filter Expressions

There are four types of filters:

### Basic

This will filter the results by checking the field "name" for value "Nelson Inc". This will only find exact matches.

### Example

---

```
{
  "filter": [
    {
      "name": "Nelson Inc"
    }
  ]
}
```

## Full

This expression allows you to specify what operation you want to use for filtering on the field. In the example you would match any record where the field "name" starts with the value "Nelson".

## Example

```
{
  "filter": [
    {
      "name": {
        "$starts": "Nelson"
      }
    }
  ]
}
```

Below is a list of operation types:

| Operation    | Description                                     |
|--------------|---|
| \$equals     | Performs an exact match on that field.          |
| \$not_equals | Performs an exact match on that field.          |
| \$not_equals | Matches on non-matching values.                 |
| \$starts     | Matches on anything that starts with the value. |
| \$ends       | Matches anything that ends with the value.      |
| \$contains   | Matches anything that contains the value        |
| \$in         | Finds anything where field matches one          |

| Operation  | Description   |
|------------|---|
|            | of the values as specified as an array.   |
| \$not_in   | Finds anything where field does not matches any of the values as specified as an array. |
| \$is_null  | Checks if the field is null. This operation does not need a value specified.            |
| \$not_null | Checks if the field is not null. This operation does not need a value specified.        |
| \$lt       | Matches when the field is less than the value.  |
| \$lte      | Matches when the field is less than or equal to the value.                              |
| \$gt       | Matches when the field is greater than the value.                                       |
| \$gte      | Matches when the field is greater than or equal to the value.                           |

## Sub-expressions

This allows you to group filter expressions into or/and groupings. By default all expressions are and'ed together. The example expression would match if the field "name" was either "Nelson Inc" or "Nelson LLC". The only currently accepted sub-expression types are "\$and" and "\$or".

### Example

```
{
  "filter": [
    {
      "$or": [
        {
          "name": "Nelson Inc"
        },
        {
          "name": "Nelson LLC"
        }
      ]
    }
  ]
}
```

---

```
    ]
  }
]
}
```

## Modules

There are two module expressions, they operate on modules instead of fields. The current module can be specified by either using the module name "\_this" or by leaving the module name as a blank string. The example expression would filter the records in the current module to only your favorites. The only currently accepted module expressions are "\$favorite" and "\$owner".

### Example

```
{
  "filter":[
    {
      "$favorite":"_this"
    }
  ]
}
```

## Response Arguments

| Name        | Type    | Description   |
|-------------|---------|---|
| next_offset | Integer | Displays the next offset for retrieval of additional results. -1 will be returned when there are no more records. |
| records     | Array   | An array of results containing matched records.   |

## Response

---

```
{
  "next_offset":-1,
  "records":[
    {
      "id":"fa300a0e-0ad1-b322-9601-512d0983c19a",
      "name":"Dale Spivey",
      "date_modified":"2013-02-28T05:03:00+00:00",
      "description":"",
      "opportunities": [
        {
          _module: "Opportunities",
          "id": "b0701501-1fab-8ae7-3942-540da93f5017",
          "name": "360 Vacations - 228 Units",
          "date_modified": "2014-09-08T16:05:00+03:00",
          "sales_status": "New"
        },
      ],
      "_acl": {
        "fields": {
        }
      }
    },
    {
      "id":"95e17367-9b3d-0e26-22dc-512d0961fedf",
      "name":"Florence Haddock",
      "date_modified":"2013-02-26T19:12:00+00:00",
      "description":"",
      "opportunities": [
        {
          _module: "Opportunities"
          date_modified: "2014-09-08T16:05:00+03:00"
          id: "9ce7c088-8ee4-7cd3-18f1-540da944d4c0"
          name: "360 Vacations - 312 Units"
          sales_status: "New"
        },
      ],
      "_acl": {
        "fields": {
        }
      }
    }
  ]
}
```

---

## Change Log

| Version | Change                               |
|---------|--------------------------------------|
| v10     | Added /<module>/filter GET endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /ForecastManagerWorksheets GET

Returns a collection of ForecastManagerWorksheet models

### Summary:

This end point is used to return the ManagerWorksheets for a user at a given timeperiod. If no timeperiod is provide it will use the default timeperiod, likewise if no user is provided, it will default to the logged in user.

### Url Parameters:

| Param         | Description   | Optional |
|---------------|---|----------|
| timeperiod_id | Show for a specific time period, defaults to the current time period if one is not passed | Optional |
| user_id       | Show for a specific user, defaults to current user if not defined                         | Optional |

### Possible Errors

| Error | Description |
|-------|-------------|
|       |             |

|                         |  |
|-------------------------|--|
| 412 - Invalid Parameter | When the passed in timeperiod and/or user can not be found   |
| 403 - Not Authorized    | If you are not an administrator, but you are trying to view another managers forecast manager worksheet, you will receive a 403 Not Authorized Error |

## Url Example:

/rest/v10/ForecastManagerWorksheets/:timeperiod\_id/:user\_id

## Output Example:

```
{ "next_offset":-1, "records":[ { "id":"401594f5-5b46-fb66-1627-55771fe8723e",
"name":"Sally Bronsen", "date_modified":"2015-06-09T13:13:26-04:00",
"created_by":"1", "quota":"1932.444445", "best_case":"29848.000000",
"best_case_adjusted":"37310.000000", "likely_case":"28694.444445",
"likely_case_adjusted":"35868.055556", "worst_case":"27540.888889",
"worst_case_adjusted":"34426.111111", "timeperiod_id":"adb78e81-3fbd-
b4e0-287f-55771fd04a06", "draft":true, "is_manager":false,
"user_id":"seed_sally_id", "opp_count":10, "pipeline_opp_count":3,
"pipeline_amount":"2415.555556", "closed_amount":"26278.888889",
"manager_saved":true, "show_history_log":0, "following":false,
"assigned_user_id":"seed_sarah_id", "assigned_user_name":"Sarah Smith",
"team_name":[ { "id":"1", "name":"Global", "name_2":"","primary":true } ],
"currency_id":"-99", "base_rate":"1.000000", "_acl":{"fields":{" } },
"_module":"ForecastManagerWorksheets" }, {
"id":"28226f12-a3c9-bd84-041e-55771f064c4e", "name":"Max Jensen",
"date_modified":"2015-06-09T13:13:26-04:00", "created_by":"1",
"quota":"3141.333332", "best_case":"15848.222223",
"best_case_adjusted":"13206.851853", "likely_case":"14928.222222",
"likely_case_adjusted":"12440.185185", "worst_case":"14008.222223",
"worst_case_adjusted":"11673.518519", "timeperiod_id":"adb78e81-3fbd-
b4e0-287f-55771fd04a06", "draft":true, "is_manager":false,
"user_id":"seed_max_id", "opp_count":12, "pipeline_opp_count":3,
"pipeline_amount":"2617.777777", "closed_amount":"12310.444445",
"manager_saved":true, "show_history_log":0, "following":false,
"assigned_user_id":"seed_sarah_id", "assigned_user_name":"Sarah Smith",
```

---

```
"team_name":[ { "id":"1", "name":"Global", "name_2":"","primary":true } ],
"currency_id":"-99", "base_rate":"1.000000", "_acl":{"fields":{ } },
"_module":"ForecastManagerWorksheets" }, { "id":"1aca66af-
f069-bba4-28a1-55771fe27506", "name":"",
"date_modified":"2015-06-09T13:13:26-04:00", "created_by":"1",
"quota":"10142.333333", "best_case":"37625.000000",
"best_case_adjusted":"37625.000000", "likely_case":"34241.333333",
"likely_case_adjusted":"34241.333333", "worst_case":"30857.666667",
"worst_case_adjusted":"30857.666667", "timeperiod_id":"adb78e81-3fbd-
b4e0-287f-55771fd04a06", "draft":true, "is_manager":true,
"user_id":"seed_sarah_id", "opp_count":13, "pipeline_opp_count":6,
"pipeline_amount":"10142.333333", "closed_amount":"24099.000000",
"manager_saved":true, "show_history_log":0, "following":false,
"assigned_user_id":"seed_sarah_id", "assigned_user_name":"Sarah Smith",
"team_name":[ { "id":"1", "name":"Global", "name_2":"","primary":true } ],
"currency_id":"-99", "base_rate":"1.000000", "_acl":{"fields":{ } },
"_module":"ForecastManagerWorksheets" } ] }
```

**Last Modified:** 2021-02-17 02:44:13

## **/ForecastManagerWorksheets/assignQuota POST**

Assign Quotas to All Reporting Users for a given timeperiod

### **Summary:**

This endpoint is used to assign out the quota to the reporting users with out having to commit a forecast.

### **Parameters:**

| <b>Param</b> | <b>Description</b>                                       | <b>Optional</b> |
|--------------|--|-----------------|
| user_id      | The Manager's user id for who is assigning out the quota | false           |



---

|               |   |       |
|---------------|---|-------|
| timeperiod_id | Which timeperiod are we assigning quota for | false |
|---------------|---|-------|

### Input Example:

```
{ "user_id" : "seed_sarah_id", "timeperiod_id" :  
"36f7085a-5889-ea75-84c8-50f42bd1a5ba" }
```

### Output Example:

```
{success: true}
```

Last Modified: 2021-02-17 02:44:13

## /ForecastManagerWorksheets/export GET

### Overview

Returns a record set in CSV format along with HTTP headers to indicate content type.

### Request Arguments

| Name   | Type  | Description   | Required |
|--------|-------|---|----------|
| uid    | Array | A list of bean ids.   | False    |
| filter | Array | The filter expression. More information on filter expressions can be found in | False    |

---

| Name   | Type  | Description                                | Required |
|--------|-------|--|----------|
|        |       | /<module>/filter.                          |          |
| sample | Array | Indicates whether to download sample data. | False    |

## Request

### Exporting Records by Specific IDs

```
{
  "uid": "d43243c6-9b8e-2973-ae2-512d09bc34b4"
}
```

### Exporting Records by a List of IDs

```
{
  "uid": [
    "d43243c6-9b8e-2973-ae2-512d09bc34b4",
    "b3e87a3f-cd8f-7b86-467a-512d09e8d240"
  ]
}
```

### Exporting Records Using a Filter

```
{
  "filter": [
    {
      "name": "airline"
    }
  ]
}
```

### Exporting a Sample Result Set

```
{
  "sample": true
}
```

---

}

## Response Arguments

| Name         | Type   | Description  |
|--------------|--------|--|
| <csv export> | String | Returns the selected records in CSV format with the content headers. |

## Response

```
result: HTTP/1.1 200 OK
Date: Fri, 01 Mar 2013 04:05:55 GMT
Server: Apache/2.2.22 (Unix) DAV/2 PHP/5.3.17
X-Powered-By: PHP/5.3.17
Expires: Mon, 26 Jul 1997 05:00:00 GMT
Cache-Control: no-store, no-cache, must-revalidate, post-check=0, pre-check=0
Pragma: cache
Content-Disposition: attachment; filename=Accounts.csv
Content-transfer-encoding: binary
Last-Modified: Fri, 01 Mar 2013 04:05:55 GMT
Cache-Control: post-check=0, pre-check=0
Content-Length: 1080
Connection: close
Content-Type: application/octet-stream; charset=UTF-8
```

```
"Name","ID","Website","Email Address","Office Phone","Alternate Phone",
,"Fax","Billing Street","Billing City","Billing State","Billing Postal
Code","Billing Country","Shipping Street","Shipping City","Shipping S
tate","Shipping Postal Code","Shipping Country","Description","Type","
Industry","Annual Revenue","Employees","SIC Code","Ticker Symbol","Par
ent Account ID","Ownership","Campaign ID","Rating","Assigned User Name
","Assigned To","Team ID","Teams","Team Set ID","Date Created","Date M
odified","Modified By","Created By","Deleted","Image","last_activity_d
ate","Linkedin Company ID","Facebook Account","Twitter Account","Googl
e Plus ID"
"Arts & Crafts Inc","d43243c6-9b8e-2973-ae2-512d09bc34b4","","","(052
) 034-1853","","","777 West Filmore Ln","Santa Monica","CA","35354","U
SA","777 West Filmore Ln","Santa Monica","CA","35354","USA","","Custom
er","Transportation","","","","","","","","","sally","seed_sally_id",
```

---

West", "West", "West", "02/26/2013 07:12 pm", "02/26/2013 07:12 pm", "1", "1", "0", "", "02/26/2013 07:12 pm", "", "", "", ""

## Change Log

| Version | Change                               |
|---------|--------------------------------------|
| v10     | Added /<module>/export GET endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /ForecastManagerWorksheets/filter GET

Returns a collection of ForecastManagerWorksheet models

### Summary:

This end point is used to return selective ManagerWorksheets with the optional filter parameter.

### Query Parameters:

| Param  | Description                | Optional |
|--------|----------------------------|----------|
| filter | What you want to filter on | Optional |

### Possible Errors

| Error                   | Description  |
|-------------------------|--|
| 412 - Invalid Parameter | When the passed in timeperiod and/or user can not be found |

---

|                      |  |
|----------------------|--|
| 403 - Not Authorized | If you are not an administrator, but you are trying to view another managers forecast manager worksheet, you will receive a 403 Not Authorized Error |
|----------------------|--|

## Url Example:

```
/rest/v10/ForecastManagerWorksheets/filter { "filter":[ {"assigned_user_id" :  
"seed_jim_id"}, {"timeperiod_id":"e546185a-5889-ea75-84c8-511178d1a5ba"} ], }
```

## Output Example:

```
{ "next_offset": -1, "records": [ { "id": "ad3908c7-83a3-f360-c223-51117844c208",  
"name": "Grow-Fast Inc - 1000 units", "date_entered":  
"2013-02-05T21:22:00+00:00", "date_modified": "2013-02-05T21:22:00+00:00",  
"modified_user_id": "1", "modified_by_name": "Administrator", "created_by": "1",  
"created_by_name": "Administrator", "description": "", "img": "", "deleted": "0",  
"assigned_user_id": "seed_jim_id", "assigned_user_name": "Jim Brennan",  
"team_name": [ { "id": "East", "name": "East", "name_2": "", "primary": true } ],  
"parent_id": "50b90565-e748-ed77-d9d7-511178f5acae", "parent_type":  
"Opportunities", "account_name": "", "account_id": "", "likely_case": "75000",  
"best_case": "75000", "worst_case": "75000", "base_rate": "1", "currency_id": "-99",  
"currency_name": "", "currency_symbol": "", "date_closed": "2013-02-10",  
"date_closed_timestamp": "1360531443", "sales_stage": "Perception Analysis",  
"probability": "70", "commit_stage": "include", "draft": "1", "my_favorite": false,  
"_acl": { "fields": { } } } ] }
```

Last Modified: 2021-02-17 02:44:13

## /ForecastManagerWorksheets/filter POST

Returns a collection of ForecastManagerWorksheet models

---

## Summary:

This end point is used to return selective ManagerWorksheets with the optional filter parameter.

## Query Parameters:

| Param  | Description                | Optional |
|--------|----------------------------|----------|
| filter | What you want to filter on | Optional |

## Possible Errors

| Error                   | Description  |
|-------------------------|--|
| 412 - Invalid Parameter | When the passed in timeperiod and/or user can not be found   |
| 403 - Not Authorized    | If you are not an administrator, but you are trying to view another managers forecast manager worksheet, you will receive a 403 Not Authorized Error |

## Url Example:

```
/rest/v10/ForecastManagerWorksheets/filter { "filter":[ {"assigned_user_id" : "seed_jim_id"}, {"timeperiod_id":"e546185a-5889-ea75-84c8-511178d1a5ba"} ], }
```

## Output Example:

```
{ "next_offset": -1, "records": [ { "id": "ad3908c7-83a3-f360-c223-51117844c208", "name": "Grow-Fast Inc - 1000 units", "date_entered": "2013-02-05T21:22:00+00:00", "date_modified": "2013-02-05T21:22:00+00:00", "modified_user_id": "1", "modified_by_name": "Administrator", "created_by": "1", "created_by_name": "Administrator", "description": "", "img": "", "deleted": "0",
```

---

```
"assigned_user_id": "seed_jim_id", "assigned_user_name": "Jim Brennan",
"team_name": [ { "id": "East", "name": "East", "name_2": "", "primary": true } ],
"parent_id": "50b90565-e748-ed77-d9d7-511178f5acae", "parent_type":
"Opportunities", "account_name": "", "account_id": "", "likely_case": "75000",
"best_case": "75000", "worst_case": "75000", "base_rate": "1", "currency_id": "-99",
"currency_name": "", "currency_symbol": "", "date_closed": "2013-02-10",
"date_closed_timestamp": "1360531443", "sales_stage": "Perception Analysis",
"probability": "70", "commit_stage": "include", "draft": "1", "my_favorite": false,
"_acl": { "fields": { } } }
```

**Last Modified:** 2021-02-17 02:44:13

## **/ForecastManagerWorksheets/:timeperiod\_id GET**

Returns a collection of ForecastManagerWorksheet models

### **Summary:**

This end point is used to return the ManagerWorksheets for a user at a given timeperiod. If no timeperiod is provide it will use the default timeperiod, likewise if no user is provided, it will default to the logged in user.

### **Url Parameters:**

| <b>Param</b>  | <b>Description</b>  | <b>Optional</b> |
|---------------|---|-----------------|
| timeperiod_id | Show for a specific time period, defaults to the current time period if one is not passed | Optional        |
| user_id       | Show for a specific user, defaults to current user if not defined                         | Optional        |

---

## Possible Errors

| Error                   | Description  |
|-------------------------|--|
| 412 - Invalid Parameter | When the passed in timeperiod and/or user can not be found   |
| 403 - Not Authorized    | If you are not an administrator, but you are trying to view another managers forecast manager worksheet, you will receive a 403 Not Authorized Error |

## Url Example:

/rest/v10/ForecastManagerWorksheets/:timeperiod\_id/:user\_id

## Output Example:

```
{ "next_offset":-1, "records":[ { "id":"401594f5-5b46-fb66-1627-55771fe8723e",
"name":"Sally Bronsen", "date_modified":"2015-06-09T13:13:26-04:00",
"created_by":"1", "quota":"1932.444445", "best_case":"29848.000000",
"best_case_adjusted":"37310.000000", "likely_case":"28694.444445",
"likely_case_adjusted":"35868.055556", "worst_case":"27540.888889",
"worst_case_adjusted":"34426.111111", "timeperiod_id":"adb78e81-3fbd-
b4e0-287f-55771fd04a06", "draft":true, "is_manager":false,
"user_id":"seed_sally_id", "opp_count":10, "pipeline_opp_count":3,
"pipeline_amount":"2415.555556", "closed_amount":"26278.888889",
"manager_saved":true, "show_history_log":0, "following":false,
"assigned_user_id":"seed_sarah_id", "assigned_user_name":"Sarah Smith",
"team_name":[ { "id":"1", "name":"Global", "name_2":"","primary":true } ],
"currency_id":"-99", "base_rate":"1.000000", "_acl":{"fields":{" } },
"_module":"ForecastManagerWorksheets" }, {
"id":"28226f12-a3c9-bd84-041e-55771f064c4e", "name":"Max Jensen",
"date_modified":"2015-06-09T13:13:26-04:00", "created_by":"1",
"quota":"3141.333332", "best_case":"15848.222223",
"best_case_adjusted":"13206.851853", "likely_case":"14928.222222",
"likely_case_adjusted":"12440.185185", "worst_case":"14008.222223",
"worst_case_adjusted":"11673.518519", "timeperiod_id":"adb78e81-3fbd-
b4e0-287f-55771fd04a06", "draft":true, "is_manager":false,
```



---

```
"user_id":"seed_max_id", "opp_count":12, "pipeline_opp_count":3,
"pipeline_amount":"2617.777777", "closed_amount":"12310.444445",
"manager_saved":true, "show_history_log":0, "following":false,
"assigned_user_id":"seed_sarah_id", "assigned_user_name":"Sarah Smith",
"team_name":[ { "id":"1", "name":"Global", "name_2":""," "primary":true } ],
"currency_id":"-99", "base_rate":"1.000000", "_acl":{"fields":{" } },
"_module":"ForecastManagerWorksheets" }, { "id":"1aca66af-
f069-bba4-28a1-55771fe27506", "name":"","
"date_modified":"2015-06-09T13:13:26-04:00", "created_by":"1",
"quota":"10142.333333", "best_case":"37625.000000",
"best_case_adjusted":"37625.000000", "likely_case":"34241.333333",
"likely_case_adjusted":"34241.333333", "worst_case":"30857.666667",
"worst_case_adjusted":"30857.666667", "timeperiod_id":"adb78e81-3fbd-
b4e0-287f-55771fd04a06", "draft":true, "is_manager":true,
"user_id":"seed_sarah_id", "opp_count":13, "pipeline_opp_count":6,
"pipeline_amount":"10142.333333", "closed_amount":"24099.000000",
"manager_saved":true, "show_history_log":0, "following":false,
"assigned_user_id":"seed_sarah_id", "assigned_user_name":"Sarah Smith",
"team_name":[ { "id":"1", "name":"Global", "name_2":""," "primary":true } ],
"currency_id":"-99", "base_rate":"1.000000", "_acl":{"fields":{" } },
"_module":"ForecastManagerWorksheets" } ] }
```

**Last Modified:** 2021-02-17 02:44:13

## **/ForecastManagerWorksheets/:timeperiod\_id/:user\_id GET**

Returns a collection of ForecastManagerWorksheet models

### **Summary:**

This end point is used to return the ManagerWorksheets for a user at a given timeperiod. If no timeperiod is provide it will use the default timeperiod, likewise if no user is provided, it will default to the logged in user.

---

## Url Parameters:

| Param         | Description   | Optional |
|---------------|---|----------|
| timeperiod_id | Show for a specific time period, defaults to the current time period if one is not passed | Optional |
| user_id       | Show for a specific user, defaults to current user if not defined                         | Optional |

## Possible Errors

| Error                   | Description  |
|-------------------------|--|
| 412 - Invalid Parameter | When the passed in timeperiod and/or user can not be found   |
| 403 - Not Authorized    | If you are not an administrator, but you are trying to view another managers forecast manager worksheet, you will receive a 403 Not Authorized Error |

## Url Example:

/rest/v10/ForecastManagerWorksheets/:timeperiod\_id/:user\_id

## Output Example:

```
{ "next_offset":-1, "records":[ { "id":"401594f5-5b46-fb66-1627-55771fe8723e",  
"name":"Sally Bronsen", "date_modified":"2015-06-09T13:13:26-04:00",  
"created_by":"1", "quota":"1932.444445", "best_case":"29848.000000",  
"best_case_adjusted":"37310.000000", "likely_case":"28694.444445",  
"likely_case_adjusted":"35868.055556", "worst_case":"27540.888889",  
"worst_case_adjusted":"34426.111111", "timeperiod_id":"adb78e81-3fbd-  
b4e0-287f-55771fd04a06", "draft":true, "is_manager":false,
```

---

```
"user_id":"seed_sally_id", "opp_count":10, "pipeline_opp_count":3,
"pipeline_amount":"2415.555556", "closed_amount":"26278.888889",
"manager_saved":true, "show_history_log":0, "following":false,
"assigned_user_id":"seed_sarah_id", "assigned_user_name":"Sarah Smith",
"team_name":[ { "id":"1", "name":"Global", "name_2":""," "primary":true } ],
"currency_id":"-99", "base_rate":"1.000000", "_acl":{"fields":{ } },
"_module":"ForecastManagerWorksheets" }, {
"id":"28226f12-a3c9-bd84-041e-55771f064c4e", "name":"Max Jensen",
"date_modified":"2015-06-09T13:13:26-04:00", "created_by":"1",
"quota":"3141.333332", "best_case":"15848.222223",
"best_case_adjusted":"13206.851853", "likely_case":"14928.222222",
"likely_case_adjusted":"12440.185185", "worst_case":"14008.222223",
"worst_case_adjusted":"11673.518519", "timeperiod_id":"adb78e81-3fbd-
b4e0-287f-55771fd04a06", "draft":true, "is_manager":false,
"user_id":"seed_max_id", "opp_count":12, "pipeline_opp_count":3,
"pipeline_amount":"2617.777777", "closed_amount":"12310.444445",
"manager_saved":true, "show_history_log":0, "following":false,
"assigned_user_id":"seed_sarah_id", "assigned_user_name":"Sarah Smith",
"team_name":[ { "id":"1", "name":"Global", "name_2":""," "primary":true } ],
"currency_id":"-99", "base_rate":"1.000000", "_acl":{"fields":{ } },
"_module":"ForecastManagerWorksheets" }, { "id":"1aca66af-
f069-bba4-28a1-55771fe27506", "name":"","
"date_modified":"2015-06-09T13:13:26-04:00", "created_by":"1",
"quota":"10142.333333", "best_case":"37625.000000",
"best_case_adjusted":"37625.000000", "likely_case":"34241.333333",
"likely_case_adjusted":"34241.333333", "worst_case":"30857.666667",
"worst_case_adjusted":"30857.666667", "timeperiod_id":"adb78e81-3fbd-
b4e0-287f-55771fd04a06", "draft":true, "is_manager":true,
"user_id":"seed_sarah_id", "opp_count":13, "pipeline_opp_count":6,
"pipeline_amount":"10142.333333", "closed_amount":"24099.000000",
"manager_saved":true, "show_history_log":0, "following":false,
"assigned_user_id":"seed_sarah_id", "assigned_user_name":"Sarah Smith",
"team_name":[ { "id":"1", "name":"Global", "name_2":""," "primary":true } ],
"currency_id":"-99", "base_rate":"1.000000", "_acl":{"fields":{ } },
"_module":"ForecastManagerWorksheets" } ] }
```

**Last Modified:** 2021-02-17 02:44:13

## **/ForecastWorksheets GET**

---

Returns a collection of ForecastWorksheet models

## Summary:

This end point is used to return the Worksheets for a user at a given timeperiod. If no timeperiod is provide it will use the default timeperiod, likewise if no user is provided, it will default to the logged in user.

Also this end points use the visibility requirements set forth by the application, that if the records being requested belong to you, you will get the draft version, If the worksheet is not yours, you will only see the committed version.

## Url Parameters:

| Param         | Description   | Optional |
|---------------|---|----------|
| timeperiod_id | Show for a specific time period, defaults to the current time period if one is not passed | Optional |
| user_id       | Show for a specific user, defaults to current user if not defined                         | Optional |

## Query Parameters:

| Param | Description  | Optional |
|-------|--|----------|
| type  | Which type to return, currently the ones that are supported are, opportunity and product | Optional |

## Possible Errors

| Error                   | Description                          |
|-------------------------|--------------------------------------|
| 412 - Invalid Parameter | When the passed in timeperiod and/or |

|                      |  |
|----------------------|--|
|                      | user can not be found  |
| 403 - Not Authorized | If you are not a manager, but you are trying to view another sales rep forecast worksheet, you will receive a 403 Not Authorized Error |

## Url Example:

/rest/v10/ForecastWorksheets/:timeperiod\_id/:user\_id

## Output Example:

```
{ "next_offset": -1, "records": [ { "id": "ad3908c7-83a3-f360-c223-51117844c208",
"name": "Grow-Fast Inc - 1000 units", "date_entered":
"2013-02-05T21:22:00+00:00", "date_modified": "2013-02-05T21:22:00+00:00",
"modified_user_id": "1", "modified_by_name": "Administrator", "created_by": "1",
"created_by_name": "Administrator", "description": "", "img": "", "deleted": "0",
"assigned_user_id": "seed_jim_id", "assigned_user_name": "Jim Brennan",
"team_name": [ { "id": "East", "name": "East", "name_2": "", "primary": true } ],
"parent_id": "50b90565-e748-ed77-d9d7-511178f5acae", "parent_type":
"Opportunities", "account_name": "", "account_id": "", "likely_case": "75000",
"best_case": "75000", "worst_case": "75000", "base_rate": "1", "currency_id": "-99",
"currency_name": "", "currency_symbol": "", "date_closed": "2013-02-10",
"date_closed_timestamp": "1360531443", "sales_stage": "Perception Analysis",
"probability": "70", "commit_stage": "include", "draft": "1", "my_favorite": false,
"_acl": { "fields": { } } } ] }
```

Last Modified: 2021-02-17 02:44:13

## /ForecastWorksheets/export GET

---

## Overview

Returns a record set in CSV format along with HTTP headers to indicate content type.

## Request Arguments

| Name   | Type  | Description   | Required |
|--------|-------|---|----------|
| uid    | Array | A list of bean ids.   | False    |
| filter | Array | The filter expression. More information on filter expressions can be found in /<module>/filter. | False    |
| sample | Array | Indicates whether to download sample data.  | False    |

## Request

### Exporting Records by Specific IDs

```
{
  "uid": "d43243c6-9b8e-2973-ae2-512d09bc34b4"
}
```

### Exporting Records by a List of IDs

```
{
  "uid": [
    "d43243c6-9b8e-2973-ae2-512d09bc34b4",
    "b3e87a3f-cd8f-7b86-467a-512d09e8d240"
  ]
}
```

### Exporting Records Using a Filter

---

```
{
  "filter":[
    {
      "name":"airline"
    }
  ]
}
```

## Exporting a Sample Result Set

```
{
  "sample":true
}
```

## Response Arguments

| Name         | Type   | Description  |
|--------------|--------|--|
| <csv export> | String | Returns the selected records in CSV format with the content headers. |

## Response

```
result: HTTP/1.1 200 OK
Date: Fri, 01 Mar 2013 04:05:55 GMT
Server: Apache/2.2.22 (Unix) DAV/2 PHP/5.3.17
X-Powered-By: PHP/5.3.17
Expires: Mon, 26 Jul 1997 05:00:00 GMT
Cache-Control: no-store, no-cache, must-revalidate, post-check=0, pre-check=0
Pragma: cache
Content-Disposition: attachment; filename=Accounts.csv
Content-transfer-encoding: binary
Last-Modified: Fri, 01 Mar 2013 04:05:55 GMT
Cache-Control: post-check=0, pre-check=0
Content-Length: 1080
Connection: close
Content-Type: application/octet-stream; charset=UTF-8
```

---

"Name", "ID", "Website", "Email Address", "Office Phone", "Alternate Phone", "Fax", "Billing Street", "Billing City", "Billing State", "Billing Postal Code", "Billing Country", "Shipping Street", "Shipping City", "Shipping State", "Shipping Postal Code", "Shipping Country", "Description", "Type", "Industry", "Annual Revenue", "Employees", "SIC Code", "Ticker Symbol", "Parent Account ID", "Ownership", "Campaign ID", "Rating", "Assigned User Name", "Assigned To", "Team ID", "Teams", "Team Set ID", "Date Created", "Date Modified", "Modified By", "Created By", "Deleted", "Image", "last\_activity\_date", "Linkedin Company ID", "Facebook Account", "Twitter Account", "Google Plus ID"

"Arts & Crafts Inc", "d43243c6-9b8e-2973-ae2-512d09bc34b4", "", "", "(052) 034-1853", "", "", "777 West Filmore Ln", "Santa Monica", "CA", "35354", "USA", "777 West Filmore Ln", "Santa Monica", "CA", "35354", "USA", "", "Customer", "Transportation", "", "", "", "", "", "", "", "sally", "seed\_sally\_id", "West", "West", "West", "02/26/2013 07:12 pm", "02/26/2013 07:12 pm", "1", "1", "0", "", "02/26/2013 07:12 pm", "", "", "", ""

## Change Log

| Version | Change                               |
|---------|--------------------------------------|
| v10     | Added /<module>/export GET endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /ForecastWorksheets/filter GET

Returns a collection of ForecastWorksheet models

### Summary:

This end point is used to return the Worksheets for a user at a given timeperiod. If no timeperiod is provide it will use the default timeperiod, likewise if no user is provided, it will default to the logged in user.



---

Also this end points use the visibility requirements set forth by the application, that if the records being requested belong to you, you will get the draft version, If the worksheet is not yours, you will only see the committed version.

## Query Parameters:

| Param  | Description  | Optional |
|--------|--|----------|
| filter | What you want to filter on   | Optional |
| type   | Which type to return, currently the ones that are supported are, opportunity and product | Optional |

## Possible Errors

| Error                   | Description  |
|-------------------------|--|
| 412 - Invalid Parameter | When the passed in timeperiod and/or user can not be found   |
| 403 - Not Authorized    | If you are not a manager, but you are trying to view another sales rep forecast worksheet, you will receive a 403 Not Authorized Error |

## Url Example:

```
/rest/v10/ForecastWorksheets/:timeperiod_id/:user_id { "filter":[  
{"assigned_user_id" : "seed_jim_id"},  
{"timeperiod_id":"e546185a-5889-ea75-84c8-511178d1a5ba"} ], }
```

## Output Example:

```
{ "next_offset": -1, "records": [ { "id": "ad3908c7-83a3-f360-c223-51117844c208",
```

---

```
"name": "Grow-Fast Inc - 1000 units", "date_entered":
"2013-02-05T21:22:00+00:00", "date_modified": "2013-02-05T21:22:00+00:00",
"modified_user_id": "1", "modified_by_name": "Administrator", "created_by": "1",
"created_by_name": "Administrator", "description": "", "img": "", "deleted": "0",
"assigned_user_id": "seed_jim_id", "assigned_user_name": "Jim Brennan",
"team_name": [ { "id": "East", "name": "East", "name_2": "", "primary": true } ],
"parent_id": "50b90565-e748-ed77-d9d7-511178f5acae", "parent_type":
"Opportunities", "account_name": "", "account_id": "", "likely_case": "75000",
"best_case": "75000", "worst_case": "75000", "base_rate": "1", "currency_id": "-99",
"currency_name": "", "currency_symbol": "", "date_closed": "2013-02-10",
"date_closed_timestamp": "1360531443", "sales_stage": "Perception Analysis",
"probability": "70", "commit_stage": "include", "draft": "1", "my_favorite": false,
"_acl": { "fields": { } } }
```

**Last Modified:** 2021-02-17 02:44:13

## /ForecastWorksheets/filter POST

Returns a collection of ForecastWorksheet models

### Summary:

This end point is used to return the Worksheets for a user at a given timeperiod. If no timeperiod is provide it will use the default timeperiod, likewise if no user is provided, it will default to the logged in user.

Also this end points use the visibility requirements set forth by the application, that if the records being requested belong to you, you will get the draft version, If the worksheet is not yours, you will only see the committed version.

### Query Parameters:

| Param  | Description                | Optional |
|--------|----------------------------|----------|
| filter | What you want to filter on | Optional |
| type   | Which type to return,      | Optional |

---

|  |
|--|
| currently the ones that are supported are, opportunity and product |
|--|

## Possible Errors

| Error                   | Description  |
|-------------------------|--|
| 412 - Invalid Parameter | When the passed in timeperiod and/or user can not be found   |
| 403 - Not Authorized    | If you are not a manager, but you are trying to view another sales rep forecast worksheet, you will receive a 403 Not Authorized Error |

## Url Example:

```
/rest/v10/ForecastWorksheets/:timeperiod_id/:user_id { "filter":[  
{"assigned_user_id" : "seed_jim_id"},  
{"timeperiod_id":"e546185a-5889-ea75-84c8-511178d1a5ba"} ], }
```

## Output Example:

```
{ "next_offset": -1, "records": [ { "id": "ad3908c7-83a3-f360-c223-51117844c208",  
"name": "Grow-Fast Inc - 1000 units", "date_entered":  
"2013-02-05T21:22:00+00:00", "date_modified": "2013-02-05T21:22:00+00:00",  
"modified_user_id": "1", "modified_by_name": "Administrator", "created_by": "1",  
"created_by_name": "Administrator", "description": "", "img": "", "deleted": "0",  
"assigned_user_id": "seed_jim_id", "assigned_user_name": "Jim Brennan",  
"team_name": [ { "id": "East", "name": "East", "name_2": "", "primary": true } ],  
"parent_id": "50b90565-e748-ed77-d9d7-511178f5acae", "parent_type":  
"Opportunities", "account_name": "", "account_id": "", "likely_case": "75000",  
"best_case": "75000", "worst_case": "75000", "base_rate": "1", "currency_id": "-99",  
"currency_name": "", "currency_symbol": "", "date_closed": "2013-02-10",  
"date_closed_timestamp": "1360531443", "sales_stage": "Perception Analysis",  
"probability": "70", "commit_stage": "include", "draft": "1", "my_favorite": false,
```

---

```
"_acl": { "fields": { } } ] ] }
```

**Last Modified:** 2021-02-17 02:44:13

## **/ForecastWorksheets/:record PUT**

Saves a collection of ForecastWorksheet models

### **Summary:**

This endpoint is used to save the json Data for an array of worksheet data array entries

### **Query Parameters:**

| <b>Param</b>                                  | <b>Description</b> | <b>Optional</b> |
|---|--------------------|-----------------|
| This endpoint does not accept any parameters. |                    |                 |

### **Input Example:**

```
{ "amount" : "10000.000000", "assigned_user_id" : "seed_max_id", "base_rate" :  
"1", "best_case" : "25000", "commit_stage" : "include", "currency_id" : "-99",  
"current_user" : "seed_max_id", "date_closed" : "2013-01-14", "date_modified" :  
"2013-01-14T10:58:27-05:00", "draft" : 1, "id" : "347beb60-d57c-  
b3aa-5922-50f42b6c27d4", "likely_case" : "15000", "name" : "RR. Talker Co - 1000  
units", "probability" : "90", "product_id" :  
"34b0d547-adaf-03ea-146c-50f42b3e6f04", "sales_stage" : "Value Proposition",  
"timeperiod_id" : "36f7085a-5889-ea75-84c8-50f42bd1a5ba", "version" : 1,  
"w_date_modified" : "2013-01-14T10:58:27-05:00", "worksheet_id" :  
"e0adb532-7d1c-eb49-b102-50f42b455164", "worst_case" : "10000.000000" }
```

---

## Output Example:

```
{ "amount" : "15000.000000", "assigned_user_id" : "seed_max_id", "base_rate" :
"1", "best_case" : "25000.000000", "commit_stage" : "include", "currency_id" :
"-99", "date_closed" : "2013-01-14", "date_modified" :
"2013-01-15T10:52:31-05:00", "id" : "347beb60-d57c-b3aa-5922-50f42b6c27d4",
"likely_case" : "15000.000000", "name" : "RR. Talker Co - 1000 units", "probability"
: "90", "product_id" : "34b0d547-adaf-03ea-146c-50f42b3e6f04", "sales_stage" :
"Value Proposition", "version" : 1, "w_date_modified" :
"2013-01-14T10:58:27-05:00", "worksheet_id" : "e0adb532-7d1c-
eb49-b102-50f42b455164", "worst_case" : "10000.000000" }
```

**Last Modified:** 2021-02-17 02:44:13

## /ForecastWorksheets/:timeperiod\_id GET

Returns a collection of ForecastWorksheet models

### Summary:

This end point is used to return the Worksheets for a user at a given timeperiod. If no timeperiod is provide it will use the default timeperiod, likewise if no user is provided, it will default to the logged in user.

Also this end points use the visibility requirements set forth by the application, that if the records being requested belong to you, you will get the draft version, If the worksheet is not yours, you will only see the committed version.

### Url Parameters:

| Param | Description | Optional |
|-------|-------------|----------|
|       |             |          |

|               |   |          |
|---------------|---|----------|
| timeperiod_id | Show for a specific time period, defaults to the current time period if one is not passed | Optional |
| user_id       | Show for a specific user, defaults to current user if not defined                         | Optional |

## Query Parameters:

| Param | Description  | Optional |
|-------|--|----------|
| type  | Which type to return, currently the ones that are supported are, opportunity and product | Optional |

## Possible Errors

| Error                   | Description  |
|-------------------------|--|
| 412 - Invalid Parameter | When the passed in timeperiod and/or user can not be found   |
| 403 - Not Authorized    | If you are not a manager, but you are trying to view another sales rep forecast worksheet, you will receive a 403 Not Authorized Error |

## Url Example:

/rest/v10/ForecastWorksheets/:timeperiod\_id/:user\_id

## Output Example:

---

```
{ "next_offset": -1, "records": [ { "id": "ad3908c7-83a3-f360-c223-51117844c208",
"name": "Grow-Fast Inc - 1000 units", "date_entered":
"2013-02-05T21:22:00+00:00", "date_modified": "2013-02-05T21:22:00+00:00",
"modified_user_id": "1", "modified_by_name": "Administrator", "created_by": "1",
"created_by_name": "Administrator", "description": "", "img": "", "deleted": "0",
"assigned_user_id": "seed_jim_id", "assigned_user_name": "Jim Brennan",
"team_name": [ { "id": "East", "name": "East", "name_2": "", "primary": true } ],
"parent_id": "50b90565-e748-ed77-d9d7-511178f5acae", "parent_type":
"Opportunities", "account_name": "", "account_id": "", "likely_case": "75000",
"best_case": "75000", "worst_case": "75000", "base_rate": "1", "currency_id": "-99",
"currency_name": "", "currency_symbol": "", "date_closed": "2013-02-10",
"date_closed_timestamp": "1360531443", "sales_stage": "Perception Analysis",
"probability": "70", "commit_stage": "include", "draft": "1", "my_favorite": false,
"_acl": { "fields": { } } } ] }
```

**Last Modified:** 2021-02-17 02:44:13

## **/ForecastWorksheets/:timeperiod\_id/:user\_id GET**

Returns a collection of ForecastWorksheet models

### **Summary:**

This end point is used to return the Worksheets for a user at a given timeperiod. If no timeperiod is provide it will use the default timeperiod, likewise if no user is provided, it will default to the logged in user.

Also this end points use the visibility requirements set forth by the application, that if the records being requested belong to you, you will get the draft version, If the worksheet is not yours, you will only see the committed version.

### **Url Parameters:**

| <b>Param</b>  | <b>Description</b>       | <b>Optional</b> |
|---------------|--------------------------|-----------------|
| timeperiod_id | Show for a specific time | Optional        |

|         |   |          |
|---------|---|----------|
|         | period, defaults to the current time period if one is not passed  |          |
| user_id | Show for a specific user, defaults to current user if not defined | Optional |

## Query Parameters:

| Param | Description  | Optional |
|-------|--|----------|
| type  | Which type to return, currently the ones that are supported are, opportunity and product | Optional |

## Possible Errors

| Error                   | Description  |
|-------------------------|--|
| 412 - Invalid Parameter | When the passed in timeperiod and/or user can not be found   |
| 403 - Not Authorized    | If you are not a manager, but you are trying to view another sales rep forecast worksheet, you will receive a 403 Not Authorized Error |

## Url Example:

/rest/v10/ForecastWorksheets/:timeperiod\_id/:user\_id

## Output Example:

```
{ "next_offset": -1, "records": [ { "id": "ad3908c7-83a3-f360-c223-51117844c208",
```



---

```
"name": "Grow-Fast Inc - 1000 units", "date_entered":
"2013-02-05T21:22:00+00:00", "date_modified": "2013-02-05T21:22:00+00:00",
"modified_user_id": "1", "modified_by_name": "Administrator", "created_by": "1",
"created_by_name": "Administrator", "description": "", "img": "", "deleted": "0",
"assigned_user_id": "seed_jim_id", "assigned_user_name": "Jim Brennan",
"team_name": [ { "id": "East", "name": "East", "name_2": "", "primary": true } ],
"parent_id": "50b90565-e748-ed77-d9d7-511178f5acae", "parent_type":
"Opportunities", "account_name": "", "account_id": "", "likely_case": "75000",
"best_case": "75000", "worst_case": "75000", "base_rate": "1", "currency_id": "-99",
"currency_name": "", "currency_symbol": "", "date_closed": "2013-02-10",
"date_closed_timestamp": "1360531443", "sales_stage": "Perception Analysis",
"probability": "70", "commit_stage": "include", "draft": "1", "my_favorite": false,
"_acl": { "fields": { } } }
```

**Last Modified:** 2021-02-17 02:44:13

## /Forecasts GET

### Overview

Updates a record of a specified type as a favorite for the current user.

### Request Arguments

This endpoint does not accept any request arguments.

### Response Arguments

| Name           | Type                | Description                                 |
|----------------|---------------------|---|
| <record field> | <record field type> | Returns the fields for the selected record. |

### Response

---

```
{
  "id": "bdd59d85-687b-1739-b00a-512d09f6db9e",
  "name": "Insight Marketing Inc",
  "date_entered": "2013-02-26T19:12:00+00:00",
  "date_modified": "2013-02-26T19:12:00+00:00",
  "modified_user_id": "1",
  "modified_by_name": "Administrator",
  "created_by": "1",
  "created_by_name": "Administrator",
  "description": "",
  "img": "",
  "last_activity_date": "2013-02-26T19:12:00+00:00",
  "deleted": false,
  "assigned_user_id": "seed_max_id",
  "assigned_user_name": "Max Jensen",
  "team_name": [
    {
      "id": "East",
      "name": "East",
      "name_2": "",
      "primary": false
    },
    {
      "id": "1",
      "name": "Global",
      "name_2": "",
      "primary": false
    },
    {
      "id": "West",
      "name": "West",
      "name_2": "",
      "primary": true
    }
  ],
  "linkedin": "",
  "facebook": "",
  "twitter": "",
  "googleplus": "",
  "account_type": "Customer",
  "industry": "Electronics",
  "annual_revenue": "",
  "phone_fax": "",
  "billing_address_street": "345 Sugar Blvd.",
  "billing_address_street_2": ""
}
```

---

```
"billing_address_street_3":"","  
"billing_address_street_4":"","  
"billing_address_city":"San Mateo",  
"billing_address_state":"CA",  
"billing_address_postalcode":"56019",  
"billing_address_country":"USA",  
"rating":"","  
"phone_office":"(927) 136-9572",  
"phone_alternate":"","  
"website":"www.sectionvegan.de",  
"ownership":"","  
"employees":"","  
"ticker_symbol":"","  
"shipping_address_street":"345 Sugar Blvd.",  
"shipping_address_street_2":"","  
"shipping_address_street_3":"","  
"shipping_address_street_4":"","  
"shipping_address_city":"San Mateo",  
"shipping_address_state":"CA",  
"shipping_address_postalcode":"56019",  
"shipping_address_country":"USA",  
"email1":"kid.support.vegan@example.info",  
"parent_id":"","  
"sic_code":"","  
"parent_name":"","  
"email_opt_out":false,  
"invalid_email":false,  
"email":[  
  {  
    "email_address":"kid.support.vegan@example.info",  
    "opt_out":"0",  
    "invalid_email":"0",  
    "primary_address":"1"  
  },  
  {  
    "email_address":"phone.kid@example.cn",  
    "opt_out":"0",  
    "invalid_email":"0",  
    "primary_address":"0"  
  }  
],  
"campaign_id":"","  
"campaign_name":"","  
"my_favorite":true,  
"_acl":{  
  "fields":{
```

---

```
}  
  }  
}
```

## Change Log

| Version | Change   |
|---------|--|
| v10     | Added /<module>/:record/favorite PUT endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /Forecasts/config POST

Creates and/or updates the config settings for the Forecasts module

### Summary:

This endpoint is used to create and/or update the config settings for the Forecasts module as json data. It extends the core config endpoint by adding the functionality to create the Timeperiods and updates existing Opportunities for use in the Forecasts module.

### Query Parameters:

| Param | Description | Optional |
|-------|-------------|----------|
|-------|-------------|----------|

---

## Input Example:

```
{ "is_setup": 1, "is_upgrade": 0, "has_commits": 1, "timeperiod_type":  
"chronological", "timeperiod_interval": "Annual", "timeperiod_leaf_interval":  
"Quarter", "timeperiod_start_date": "2013-01-01", "timeperiod_shown_forward": 2,  
"timeperiod_shown_backward": 2, "forecast_ranges": "show_binary",  
"buckets_dom": "commit_stage_binary_dom", "show_binary_ranges": { "include": {  
"min": 70, "max": 100 }, "exclude": { "min": 0, "max": 69 } },  
"show_buckets_ranges": { "include": { "min": 85, "max": 100 }, "upside": { "min":  
70, "max": 84 }, "exclude": { "min": 0, "max": 69 } }, "sales_stage_won": [ "Closed  
Won" ], "sales_stage_lost": [ "Closed Lost" ], "show_worksheet_likely": 1,  
"show_worksheet_best": 1, "show_worksheet_worst": 0, "show_projected_likely": 1,  
"show_projected_best": 1, "show_projected_worst": 0,  
"show_forecasts_commit_warnings": 1 }
```

## Output Example:

```
{ "is_setup": 1, "is_upgrade": 0, "has_commits": 1, "timeperiod_type":  
"chronological", "timeperiod_interval": "Annual", "timeperiod_leaf_interval":  
"Quarter", "timeperiod_start_date": "2013-01-01", "timeperiod_shown_forward": 2,  
"timeperiod_shown_backward": 2, "forecast_ranges": "show_binary",  
"buckets_dom": "commit_stage_binary_dom", "show_binary_ranges": { "include": {  
"min": 70, "max": 100 }, "exclude": { "min": 0, "max": 69 } },  
"show_buckets_ranges": { "include": { "min": 85, "max": 100 }, "upside": { "min":  
70, "max": 84 }, "exclude": { "min": 0, "max": 69 } }, "sales_stage_won": [ "Closed  
Won" ], "sales_stage_lost": [ "Closed Lost" ], "show_worksheet_likely": 1,  
"show_worksheet_best": 1, "show_worksheet_worst": 0, "show_projected_likely": 1,  
"show_projected_best": 1, "show_projected_worst": 0,  
"show_forecasts_commit_warnings": 1 }
```

**Last Modified:** 2021-02-17 02:44:13

## /Forecasts/config PUT

Creates and/or updates the config settings for the Forecasts module

---

## Summary:

This endpoint is used to create and/or update the config settings for the Forecasts module as json data. It extends the core config endpoint by adding the functionality to create the Timeperiods and updates existing Opportunities for use in the Forecasts module.

## Query Parameters:

| Param | Description | Optional |
|-------|-------------|----------|
|-------|-------------|----------|

## Input Example:

```
{ "is_setup": 1, "is_upgrade": 0, "has_commits": 1, "timeperiod_type":  
"chronological", "timeperiod_interval": "Annual", "timeperiod_leaf_interval":  
"Quarter", "timeperiod_start_date": "2013-01-01", "timeperiod_shown_forward": 2,  
"timeperiod_shown_backward": 2, "forecast_ranges": "show_binary",  
"buckets_dom": "commit_stage_binary_dom", "show_binary_ranges": { "include": {  
"min": 70, "max": 100 }, "exclude": { "min": 0, "max": 69 } },  
"show_buckets_ranges": { "include": { "min": 85, "max": 100 }, "upside": { "min":  
70, "max": 84 }, "exclude": { "min": 0, "max": 69 } }, "sales_stage_won": [ "Closed  
Won" ], "sales_stage_lost": [ "Closed Lost" ], "show_worksheet_likely": 1,  
"show_worksheet_best": 1, "show_worksheet_worst": 0, "show_projected_likely": 1,  
"show_projected_best": 1, "show_projected_worst": 0,  
"show_forecasts_commit_warnings": 1 }
```

## Output Example:

```
{ "is_setup": 1, "is_upgrade": 0, "has_commits": 1, "timeperiod_type":  
"chronological", "timeperiod_interval": "Annual", "timeperiod_leaf_interval":  
"Quarter", "timeperiod_start_date": "2013-01-01", "timeperiod_shown_forward": 2,  
"timeperiod_shown_backward": 2, "forecast_ranges": "show_binary",  
"buckets_dom": "commit_stage_binary_dom", "show_binary_ranges": { "include": {  
"min": 70, "max": 100 }, "exclude": { "min": 0, "max": 69 } },  
"show_buckets_ranges": { "include": { "min": 85, "max": 100 }, "upside": { "min":
```

---

```
70, "max": 84 }, "exclude": { "min": 0, "max": 69 } }, "sales_stage_won": [ "Closed Won" ], "sales_stage_lost": [ "Closed Lost" ], "show_worksheet_likely": 1, "show_worksheet_best": 1, "show_worksheet_worst": 0, "show_projected_likely": 1, "show_projected_best": 1, "show_projected_worst": 0, "show_forecasts_commit_warnings": 1 }
```

**Last Modified:** 2021-02-17 02:44:13

## **/Forecasts/enum/selectedTimePeriod GET**

ForecastsApi Timeperiod filter info

### **Summary:**

This returns the timeperiods with respect to the forward/backward options selected. For example, if we elect to use quarterly timeperiods and 2 forward and 2 backward timeperiod intervals are set, then 5 years worth of timeperiods will be returned (2 backward + current + 2 forward).

### **Query Parameters:**

| <b>Param</b>                                  | <b>Description</b> | <b>Optional</b> |
|---|--------------------|-----------------|
| This endpoint does not accept any parameters. |                    |                 |

### **Input Example:**

### **Output Example:**

---

```
{ "d181230a-a7e0-3176-d10f-50f8530a51ce" : "Q1 (01/01/2012 - 03/31/2012)",
"d2bc58ef-21c4-27d5-e416-50f853db29f9" : "Q2 (04/01/2012 - 06/30/2012)",
"d3db853e-94d6-b5ac-98af-50f8530689be" : "Q3 (07/01/2012 - 09/30/2012)",
"d519f521-5303-1cfc-24f5-50f8537f5b54" : "Q4 (10/01/2012 - 12/31/2012)",
"dcc2885a-5889-ea75-84c8-50f853d1a5ba" : "Q1 (01/01/2013 - 03/31/2013)",
"ddc24224-c6c9-04aa-7869-50f853db2ea2" : "Q2 (04/01/2013 - 06/30/2013)",
"deadcf3-41ed-5f6b-ce5b-50f853de6ef6" : "Q3 (07/01/2013 - 09/30/2013)",
"dfaa3724-6295-8ddb-6d14-50f853047fcc" : "Q4 (10/01/2013 - 12/31/2013)",
"e1ceee19-c8dd-afdd-e797-50f8538d900a" : "Q1 (01/01/2014 - 03/31/2014)",
"e307594a-c12a-6be6-74b7-50f85351c574" : "Q2 (04/01/2014 - 06/30/2014)",
"e469239c-3f71-a48e-cda1-50f853214b6a" : "Q3 (07/01/2014 - 09/30/2014)",
"e57f4889-cefd-4356-6d82-50f85350decd" : "Q4 (10/01/2014 - 12/31/2014)" }
```

**Last Modified:** 2021-02-17 02:44:13

## /Forecasts/init GET

ForecastsApi - init

### Summary:

This endpoint is used to return initialization data for the Forecasts module.

### Query Parameters:

| Param   | Description | Optional |
|---|-------------|----------|
| This endpoint does not accept any parameters. |             |          |

### Input Example:



---

## Output Example:

```
{ "initData": { "selectedUser": { "preferences": { "timezone":"GMT",
"datepref":"m\\d\\Y", "timepref":"h:ia", "currency_id":"-99", "currency_name":"US
Dollars", "currency_symbol":"$", "currency_iso":"USD", "currency_rate":1,
"decimal_precision":"2", "decimal_separator":".", "number_grouping_separator":"",
"language":"en_us", "default_teams": [{ "id":1, "display_name":"Global",
"name":"Global", "name_2":"","primary":true } ] }, "module_list": [ "Home",
"Accounts", "Contacts", "Opportunities", "Leads","Calendar", "Reports", "Quotes",
"Documents", "Emails", "Campaigns", "Calls", "Meetings", "Tasks", "Notes",
"Forecasts", "Cases", "Prospects", "ProspectLists", "Bugs", "Employees" ],
"type":"user", "id":"seed_jim_id", "full_name":"Jim Brennan", "user_name":"jim",
"picture":"46d1fbfb-c258-ce81-fa3a-50f809925709", "acl": { "Forecasts":{"fields":[]
,"admin":"no", "_hash":"095777549714234c8192a7a7963c38b8"}, "ForecastWorksh
eets":{"fields":[],"admin":"no", "_hash":"095777549714234c8192a7a7963c38b8"}, "
ForecastManagerWorksheets":{"fields":[],"admin":"no", "_hash":"09577754971423
4c8192a7a7963c38b8"}, }, "my_teams": [ { "id":"8833dfef-
c1f4-e8b3-ca3b-50f8093616be", "name":"Chris Olliver"},
{ "id":"East", "name":"East"}, { "id":1, "name":"Global"}, { "id":"4ae6baba-
f356-7374-7eb4-50f809745551", "name":"Jim Brennan"},
{ "id":"707a642a-710b-37f1-88f6-50f8098205c0", "name":"Max Jensen"},
{ "id":"63308ab9-f663-bae8-90a5-50f80951c0fe", "name":"Sally Bronsen"},
{ "id":"5776c705-8e6e-4bfc-44e5-50f809d12c0e", "name":"Sarah Smith"},
{ "id":"West", "name":"West"}, { "id":"7cf7ee0b-f88e-
b566-d4d3-50f809dcb717", "name":"Will Westin" } ], "showOpps":false,
"first_name":"Jim", "last_name":"Brennan", "admin":"yes" }, "forecasts_setup":1 },
"defaultSelections": { "timeperiod_id": {
"id":"a2ab9ad3-2101-36f8-7ba3-50f809b3b62c", "label":"Q1 (01\\01\\2013 -
03\\31\\2013)" }, "ranges":["include"], "group_by":"forecast", "dataset":"likely" } }
}
```

Last Modified: 2021-02-17 02:44:13

## /Forecasts/reportees/:user\_id GET

ForecastsApi Reportees

---

## Summary:

This endpoint is used to return the json Data for an array of users and their state for the forecasts users tree filter

## Query Parameters:

| Param   | Description   | Optional |
|---------|---|----------|
| user_id | Show for a specific user, defaults to current user if not defined | Optional |
| level   | Level of child notes, defaults to 1, -1 for all levels            | Optional |

## Input Example:

```
{ 'user_id':'seed_max_id' }
```

## Output Example:

```
{ "attr":{ "id":"jstree_node_jim", "rel":"root" }, "children":[ { "attr":{ "id":"jstree_node_myopps_jim", "rel":"my_opportunities" }, "children":[ ], "data":"Opportunities (Jim Brennan)", "metadata":{ "first_name":"Jim", "full_name":"Jim Brennan", "id":"seed_jim_id", "last_name":"Brennan", "level":"1", "reports_to_id":"","user_name":"jim" }, "state":"" }, { "attr":{ "id":"jstree_node_will", "rel":"manager" }, "children":[ ], "data":"Will Westin", "metadata":{ "first_name":"Will", "full_name":"Will Westin", "id":"seed_will_id", "last_name":"Westin", "level":"2", "reports_to_id":"seed_jim_id", "user_name":"will" }, "state":"closed" }, { "attr":{ "id":"jstree_node_sarah", "rel":"manager" }, "children":[ ], "data":"Sarah Smith", "metadata":{ "first_name":"Sarah", "full_name":"Sarah Smith", "id":"seed_sarah_id", "last_name":"Smith", "level":"2", "reports_to_id":"seed_jim_id", "user_name":"sarah" }, "state":"closed" } ], "data":"Jim Brennan", "metadata":{ "first_name":"Jim", "full_name":"Jim Brennan",
```

---

```
"id":"seed_jim_id", "last_name":"Brennan", "level":"1", "reports_to_id":"","user_name":"jim" }, "state":"open" }
```

Last Modified: 2021-02-17 02:44:13

## **/Forecasts/:timeperiod\_id/progressManager/:user\_id GET**

Projected Manager Data

### **Summary:**

This endpoint is used to return the json Data not already in client view for the Forecasts manager projected panel.

### **Query Parameters:**

| <b>Param</b>  | <b>Description</b>  | <b>Optional</b> |
|---------------|---|-----------------|
| user_id       | Show for a specific user, defaults to current user if not defined                         | Optional        |
| timeperiod_id | Show for a specific time period, defaults to the current time period if one is not passed | Optional        |

### **Input Example:**

```
{ user_id:seed_sally_id timeperiod_id:36f7085a-5889-ea75-84c8-50f42bd1a5ba }
```

---

## Output Example:

```
{ closed_amount: 0 opportunities: 13 pipeline_revenue: 470000 quota_amount: 382000.000000 }
```

Last Modified: 2021-02-17 02:44:13

## /Forecasts/:timeperiod\_id/progressRep/:user\_id GET

Projected Rep Data

### Summary:

This endpoint is used to return the json Data not already in client view for the Forecasts rep projected panel.

### Query Parameters:

| Param         | Description   | Optional |
|---------------|---|----------|
| user_id       | Show for a specific user, defaults to current user if not defined                         | Optional |
| timeperiod_id | Show for a specific time period, defaults to the current time period if one is not passed | Optional |

---

## Input Example:

```
{ user_id:seed_sally_id timeperiod_id:36f7085a-5889-ea75-84c8-50f42bd1a5ba }
```

## Output Example:

```
{ quota_amount: "80000.000000" }
```

Last Modified: 2021-02-17 02:44:13

## /Forecasts/:timeperiod\_id/quotas/direct/:user\_id GET

ForecastsQuotasApi - Get

## Summary:

This endpoint is used to return quota information for a specific user ID, in a specific timeperiod and by a specific type..

## Query Parameters:

| Param         | Description                     | Optional |
|---------------|---------------------------------|----------|
| timeperiod_id | Show for a specific time period | Required |
| quota_type    | "rollup" or "direct" quota      | Required |
| user_id       | Show for a specific user        | Required |

---

## Input Example:

## Output Example:

```
{ "currency_id": "-99", "amount": "75.000000", "date_modified": "2013-09-17 21:23:32", "formatted_amount": "$75.00", "is_top_level_manager": true }
```

Last Modified: 2021-02-17 02:44:13

## /Forecasts/:timeperiod\_id/quotas/rollup/:user\_id GET

ForecastsQuotasApi - Get

## Summary:

This endpoint is used to return quota information for a specific user ID, in a specific timeperiod and by a specific type..

## Query Parameters:

| Param         | Description                     | Optional |
|---------------|---------------------------------|----------|
| timeperiod_id | Show for a specific time period | Required |
| quota_type    | "rollup" or "direct" quota      | Required |
| user_id       | Show for a specific user        | Required |

---

## Input Example:

## Output Example:

```
{ "currency_id": "-99", "amount": "75.000000", "date_modified": "2013-09-17 21:23:32", "formatted_amount": "$75.00", "is_top_level_manager": true }
```

Last Modified: 2021-02-17 02:44:13

## /Forecasts/:timeperiod\_id/:user\_id/chart/:display\_manager GET

Retrieve a Forecasting Information In SugarChart Format

## Summary:

This endpoint is used to return the json Data for SugarCharts to use to display the needed chart.

## Query Parameters:

| Param           | Description                     | Optional |
|-----------------|---------------------------------|----------|
| timeperiod_id   | Show for a specific time period |          |
| user_id         | Show for a specific user        |          |
| display_manager | Pipeline or Committed are       |          |

|          |  |          |
|----------|--|----------|
|          | valid values.  |          |
| dataset  | Which Forecast dataset to show, valid values are likely, best, worst. Defaults to likely if one is not specified     | Optional |
| group_by | Show Which fields the y-axis shows on the chart. Can be any field in the opportunity module, defaults to Sales Stage | Optional |
| ranges   | Pipeline or Committed are valid values.  | Optional |

## Input Example:

```
{ 'user_id':'seed_max_id', 'timeperiod_id':'36f7085a-5889-ea75-84c8-50f42bd1a5ba',
'display_manager':'false', 'group_by': 'forecast', 'dataset': 'likely', 'ranges': 'include',
}
```

## Output Example:

```
{ "color" : [ "#8c2b2b", "#468c2b", "#2b5d8c", "#cd5200", "#e6bf00", "#7f3acd",
"#00a9b8", "#572323", "#004d00", "#000087", "#e48d30", "#9fba09",
"#560066", "#009f92", "#b36262", "#38795c", "#3D3D99", "#99623d",
"#998a3d", "#994e78", "#3d6899", "#CC0000", "#00CC00", "#0000CC",
"#cc5200", "#ccaa00", "#6600cc", "#005fcc" ], "label" : [ "Include" ], "properties"
: [ { "gauge_target_list" : "Array", "goal_marker_color" : [ "#000000", "#7D12B2" ],
"goal_marker_label" : [ "Quota", "Likely Case" ], "goal_marker_type" : [ "group",
"pareto" ], "label_name" : "Include in Forecast", "labels" : "value", "legend" : "on",
"print" : "on", "subtitle" : "", "thousands" : "", "title" : null, "type" : "bar chart",
"value_name" : "Likely Case" } ], "values" : [ { "goalmarkervalue" : [ "111000.00",
"36000.00" ], "goalmarkervalue" : [ "$111,000.00", "$36,000.00" ], "gvalue" :
36000, "gvalue" : "$36,000.00", "label" : "January 2013", "links" : [ "" ],
"valuelabels" : [ "$36,000.00" ], "values" : [ 36000 ] }, { "goalmarkervalue" : [
"111000.00", "61500.00" ], "goalmarkervalue" : [ "$111,000.00", "$61,500.00"
], "gvalue" : 25500, "gvalue" : "$25,500.00", "label" : "February 2013", "links"
```



---

```
: [ "" ], "valuelabels" : [ "$25,500.00" ], "values" : [ 25500 ] }, { "goalmarkervalue" :  
[ "111000.00", "61500.00" ], "goalmarkervalue" : [ "$111,000.00",  
"$61,500.00" ], "gvalue" : 0, "gvalue" : "$0.00", "label" : "March 2013", "links"  
: [ "" ], "valuelabels" : [ "$0.00" ], "values" : [ 0 ] } ] }
```

Last Modified: 2021-02-17 02:44:13

## /Forecasts/user/:user\_id GET

ForecastsApi - user

### Summary:

This endpoint is used to return a user's id, user\_name, full\_name, first\_name, last\_name, and is\_manager param given a user's id.

### Query Parameters:

| Param   | Description                                 | Optional |
|---------|---|----------|
| user_id | Returns user data for this specific user id |          |

### Input Example:

```
{ user_id:seed_sally_id }
```

### Output Example:

---

```
{ first_name: "Sally" full_name: "Sally Bronsen" id: "seed_sally_id" is_manager:
false last_name: "Bronsen" user_name: "sally" }
```

Last Modified: 2021-02-17 02:44:13

## /Genericsearch GET

### Overview

Generic search.

### Summary

This endpoint searches the content of the given modules using the provider specified by the "generic\_search" configuration variable. If the variable is absent, the default provider is "Elastic".

### Request Arguments

| Name        | Type    | Description  | Required |
|-------------|---------|--|----------|
| q           | String  | The search expression.   | True     |
| module_list | String  | Comma-delimited list of modules to search. If omitted, all search enabled modules will be queried.<br>Example:<br>KBDocuments,Bugs | False    |
| max_num     | Integer | A maximum number of records to return. Default is 20.  | False    |
| offset      | Integer | The number of  | False    |

| Name | Type | Description   | Required |
|------|------|---|----------|
|      |      | records to skip over before records are returned. Default is 0. |          |

## Response Arguments

| Name        | Type    | Description   |
|-------------|---------|---|
| next_offset | Integer | Displays the next offset for retrieval of additional results. -1 will be returned when there are no more records. |
| total       | Integer | The number of records found.  |
| records     | Array   | An array of results containing matched records.   |

## Response

```
{
  "next_offset": -1,
  "total": 1,
  "records": [
    {
      "name": "Connecting to the Internet",
      "description": "To connect your device to the Internet, use any application that accesses the Internet. You can connect using either Wi-Fi or Bluetooth.",
      "url": "portal/index.html#KBContents/60142236-bad3-11e9-9d32-3c15c2d57622" (for portal)
      "url": "#KBContents/60142236-bad3-11e9-9d32-3c15c2d57622"
      (for base)
    }
  ]
}
```

## Change Log

---

|         |                                    |
|---------|------------------------------------|
| Version | Change                             |
| v11_9   | Added /Genericsearch GET endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /Genericsearch POST

### Overview

Generic search.

### Summary

This endpoint searches the content of the given modules using the provider specified by the "generic\_search" configuration variable. If the variable is absent, the default provider is "Elastic".

### Request Arguments

| Name        | Type    | Description  | Required |
|-------------|---------|--|----------|
| q           | String  | The search expression.   | True     |
| module_list | String  | Comma-delimited list of modules to search. If omitted, all search enabled modules will be queried.<br>Example:<br>KBDocuments,Bugs | False    |
| max_num     | Integer | A maximum number of records to return. Default is 20.  | False    |

| Name   | Type    | Description   | Required |
|--------|---------|---|----------|
| offset | Integer | The number of records to skip over before records are returned. Default is 0. | False    |

## Response Arguments

| Name        | Type    | Description   |
|-------------|---------|---|
| next_offset | Integer | Displays the next offset for retrieval of additional results. -1 will be returned when there are no more records. |
| total       | Integer | The number of records found.  |
| records     | Array   | An array of results containing matched records.   |

## Response

```
{
  "next_offset": -1,
  "total": 1,
  "records": [
    {
      "name": "Connecting to the Internet",
      "description": "To connect your device to the Internet, use any application that accesses the Internet. You can connect using either Wi-Fi or Bluetooth.",
      "url": "portal/index.html#KBContents/60142236-bad3-11e9-9d32-3c15c2d57622" (for portal)
      "url": "#KBContents/60142236-bad3-11e9-9d32-3c15c2d57622" (for base)
    }
  ]
}
```

---

## Change Log

| Version | Change                              |
|---------|-------------------------------------|
| v11_9   | Added /Genericsearch POST endpoint. |

Last Modified: 2021-02-17 02:44:13

## **/integrate/<module>/:lhs\_sync\_key\_field\_name/:lhs\_sync\_key\_field\_value/link/:link\_name/:rhs\_sync\_key\_field\_name/:rhs\_sync\_key\_field\_value DELETE**

### Overview

Removes a relationship based on lhs\_sync\_key\_field\_name and rhs\_sync\_key\_field\_name. If both the LHS and RHS records can be found with the respective fields, and those records are related, then remove the relationship of the RHS record to the LHS record.

### Request Arguments

| Name                     | Type   | Description  | Required |
|--------------------------|--------|--|----------|
| module                   | String | The module the record belongs to   | True     |
| lhs_sync_key_field_name  | String | The name of the LHS field that contains lhs_sync_key_field_value (the default field is named sync_key but can be renamed via code customization) | True     |
| lhs_sync_key_field_value | String | A unique ID for the LHS record identifying it in an  | True     |

| Name                     | Type   | Description  | Required |
|--------------------------|--------|--|----------|
|                          |        | external system  |          |
| link_name                | String | A name for the link  | True     |
| rhs_sync_key_field_name  | String | The name of the RHS field that contains rhs_sync_key_field_value (the default field is named sync_key but can be renamed via code customization) | True     |
| rhs_sync_key_field_value | String | A unique ID for the RHS record identifying it in an external system  | True     |

## Request

```
/integrate/<module>/:lhs_sync_key_field_name/:lhs_sync_key_field_value
/link/:link_name/:rhs_sync_key_field_name/:rhs_sync_key_field_value
```

## Response Arguments

| Name           | Type   | Description                   |
|----------------|--------|-------------------------------|
| record         | String | The ID of the record.         |
| related_record | String | The ID of the related record. |

## Response

### Status 200

```
{
  "record": "a0328573-a252-a27c-3530-4e4297d4c9e1",
  "related_record": "a0328573-bc54-a554-3530-4e4297d4c9e1"
}
```

---

## Status 422

```
{
  "error": "invalid_parameter",
  "error_message": "Could not find record with :xhs_sync_key_field_name::xhs_sync_key_field_value in module: <module>"
}
```

## Change Log

| Version | Change  |
|---------|---|
| v11_10  | Added<br>/integrate/<module>/:lhs_sync_key_field_name/:lhs_sync_key_field_value/link/:link_name/:rhs_sync_key_field_name/:rhs_sync_key_field_value DELETE endpoint. |

Last Modified: 2021-02-17 02:44:13

## **/integrate/<module>/:lhs\_sync\_key\_field\_name/:lhs\_sync\_key\_field\_value/link/:link\_name/:rhs\_sync\_key\_field\_name/:rhs\_sync\_key\_field\_value POST**

### Overview

Creates a relationship based on lhs\_sync\_key\_field\_name and rhs\_sync\_key\_field\_name. If both the LHS and RHS records can be found with the respective fields, then relate the RHS record to the LHS record.

### Request Arguments

| Name   | Type   | Description                      | Required |
|--------|--------|----------------------------------|----------|
| module | String | The module the record belongs to | True     |



| <b>Name</b>              | <b>Type</b> | <b>Description</b>   | <b>Required</b> |
|--------------------------|-------------|--|-----------------|
| lhs_sync_key_field_name  | String      | The name of the LHS field that contains lhs_sync_key_field_value (the default field is named sync_key but can be renamed via code customization) | True            |
| lhs_sync_key_field_value | String      | A unique ID for the LHS record identifying it in an external system  | True            |
| link_name                | String      | A name for the link  | True            |
| rhs_sync_key_field_name  | String      | The name of the RHS field that contains rhs_sync_key_field_value (the default field is named sync_key but can be renamed via code customization) | True            |
| rhs_sync_key_field_value | String      | A unique ID for the RHS record identifying it in an external system  | True            |

## Request

```
/integrate/<module>/:lhs_sync_key_field_name/:lhs_sync_key_field_value
/link/:link_name/:rhs_sync_key_field_name/:rhs_sync_key_field_value
```

## Response Arguments

| <b>Name</b>    | <b>Type</b> | <b>Description</b>    |
|----------------|-------------|-----------------------|
| record         | String      | The ID of the record. |
| related_record | String      | The ID of the related |

| Name | Type | Description |
|------|------|-------------|
|      |      | record.     |

## Response

### Status 200

```
{
  "record": "a0328573-a252-a27c-3530-4e4297d4c9e1",
  "related_record": "a0328573-bc54-a554-3530-4e4297d4c9e1"
}
```

### Status 422

```
{
  "error": "invalid_parameter",
  "error_message": "Could not find record with :xhs_sync_key_field_name::xhs_sync_key_field_value in module: <module>"
}
```

## Change Log

| Version | Change  |
|---------|---|
| v11_10  | Added<br>/integrate/<module>/:lhs_sync_key_field_name/:lhs_sync_key_field_value/link/:link_name/:rhs_sync_key_field_name/:rhs_sync_key_field_value POST endpoint. |

Last Modified: 2021-02-17 02:44:13

**/integrate/<module>/:record\_id/:sync\_key\_field\_name/:sync\_key\_field\_value PATCH**

---

## Overview

Sets a sync key value for a record.

## Request Arguments

| Name                 | Type   | Description  | Required |
|----------------------|--------|--|----------|
| module               | String | The module the record belongs to   | True     |
| record_id            | String | The ID of the record whose sync key will be set  | True     |
| sync_key_field_name  | String | The name of the field that contains sync_key_field_value (the default field is named sync_key but can be renamed via code customization) | True     |
| sync_key_field_value | String | A unique ID for the record identifying it in an external system  | True     |

## Request

```
/integrate/<module>/:record_id/:sync_key_field_name/:sync_key_field_value
```

## Response

```
{  
  "success": true  
}
```

## Change Log

| Version | Change  |
|---------|---|
| v11_10  | Added /integrate/<module>/:record_id/:sync_key_field_name/:sync_key_field_value PATCH endpoint. |

Last Modified: 2021-05-25 13:54:09

## /integrate/<module>/:record\_id/:sync\_key\_field\_name/:sync\_key\_field\_value PUT

### Overview

Sets a sync key value for a record. Note that the [PATCH method](#) is recommended over the PUT method.

### Request Arguments

| Name                 | Type   | Description  | Required |
|----------------------|--------|--|----------|
| module               | String | The module the record belongs to   | True     |
| record_id            | String | The ID of the record whose sync key will be set  | True     |
| sync_key_field_name  | String | The name of the field that contains sync_key_field_value (the default field is named sync_key but can be renamed via code customization) | True     |
| sync_key_field_value | String | A unique ID for the record identifying it in an external system  | True     |

---

## Request

/integrate/<module>/:record\_id/:sync\_key\_field\_name/:sync\_key\_field\_value

## Response

```
{  
  "success": true  
}
```

## Change Log

| Version | Change  |
|---------|---|
| v11_10  | Added /integrate/<module>/:record_id/:sync_key_field_name/:sync_key_field_value PUT endpoint. |

**Last Modified:** 2021-05-25 13:52:41

## /integrate/<module>/:sync\_key\_field\_name/:sync\_key\_field\_value DELETE

### Overview

Deletes the record with the given sync\_key\_field\_name.

### Request Arguments

| Name                 | Type   | Description  | Required |
|----------------------|--------|--|----------|
| module               | String | The module the record belongs to   | True     |
| sync_key_field_name  | String | The name of the field that contains sync_key_field_value (the default field is named sync_key but can be renamed via code customization) | True     |
| sync_key_field_value | String | A unique ID for the record identifying it in an external system  | True     |

## Request

/integrate/<module>/:sync\_key\_field\_name/:sync\_key\_field\_value

## Response Arguments

| Name   | Type   | Description                            |
|--------|--------|--|
| record | String | The ID of the record that was deleted. |

## Response

Status 200

```
{
  "id": "a0328573-a252-a27c-3530-4e4297d4c9e1"
}
```

## Change Log

| Version | Change   |
|---------|--|
| v11_10  | Added<br>/integrate/<module>/:sync_key_field_name/:sync_key_field_value DELETE endpoint. |

Last Modified: 2021-02-17 02:44:13

## **/integrate/<module>/:sync\_key\_field\_name/:sync\_key\_field\_value GET**

### **Overview**

Retrieves the record with the given sync\_key\_field\_name.

### **Request Arguments**

| Name                 | Type   | Description  | Required |
|----------------------|--------|--|----------|
| module               | String | The module the record belongs to   | True     |
| sync_key_field_name  | String | The name of the field that contains sync_key_field_value (the default field is named sync_key but can be renamed via code customization) | True     |
| sync_key_field_value | String | A unique ID for the record identifying it in an external system  | True     |

---

## Request

/integrate/<module>/:sync\_key\_field\_name/:sync\_key\_field\_value

## Response Arguments

Body: formatted JSON object.

## Response

### Successful Response

Status 200

### Failed Response

Status 422

```
{
  "error": "invalid_parameter",
  "error_message": "Could not find record with :sync_key_field_name:
:sync_key_field_value in module: <module>"
}
```

## Change Log

| Version | Change  |
|---------|---|
| v11_10  | Added<br>/integrate/<modul<br>e>/<br>:sync_key_field_name/:sync_key_field_va<br>lue GET endpoint. |

**Last Modified:** 2021-02-17 02:44:13



---

## **/integrate/<module>/:sync\_key\_field\_name/:sync\_key\_field\_value PATCH**

### **Overview**

Upserts based on `sync_key_field_name`. If a record can be found with `sync_key_field_name`, then update. If the record does not exist, then create it.

**Note:** This endpoint cannot be used to set the `sync_key_field_name` for an existing Sugar record. To do so, it is recommended to use the [set sync key endpoint](#) to update the matching Sugar record ID. Once the `sync_key` is set for the record, then it is possible to leverage this endpoint.

### **Request Arguments**

| <b>Name</b>                       | <b>Type</b> | <b>Description</b>   | <b>Required</b> |
|-----------------------------------|-------------|--|-----------------|
| <code>module</code>               | String      | The module the record belongs to   | True            |
| <code>sync_key_field_name</code>  | String      | The name of the field that contains <code>sync_key_field_value</code> (the default field is named <code>sync_key</code> but can be renamed via code customization) | True            |
| <code>sync_key_field_value</code> | String      | A unique ID for the record identifying it in an external system  | True            |

### **Request**

`/integrate/<module>/:sync_key_field_name/:sync_key_field_value`

### **Response Arguments**

---

| Name   | Type   | Description                             |
|--------|--------|---|
| record | String | The ID of the record that was upserted. |

## Response

- Status 201: For a created record
- Status 200: For an updated record

```
{  
  record: "a0328573-a252-a27c-3530-4e4297d4c9e1"  
}
```

## Change Log

| Version | Change  |
|---------|---|
| v11_10  | Added<br>/integrate/<modul<br>e>/<br>:sync_key_field_name/:sync_key_field_va<br>lue PATCH endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## **/integrate/<module>/:sync\_key\_field\_name/:sync\_key\_field\_value PUT**

### Overview

Upserts based on `sync_key_field_name`. If a record can be found with `sync_key_field_name`, then update. If the record does not exist, then create it. Note that the [PATCH method](#) is recommended over the PUT method.

---

**Note:** This endpoint cannot be used to set the `sync_key_field_name` for an existing Sugar record. To do so, it is recommended to use the [set sync key endpoint](#) to update the matching Sugar record ID. Once the `sync_key_field_name` is set for the record, then it is possible to leverage this endpoint.

## Request Arguments

| Name                 | Type   | Description  | Required |
|----------------------|--------|--|----------|
| module               | String | The module the record belongs to   | True     |
| sync_key_field_name  | String | The name of the field that contains <code>sync_key_field_value</code> (the default field is named <code>sync_key</code> but can be renamed via code customization) | True     |
| sync_key_field_value | String | A unique ID for the record identifying it in an external system  | True     |

## Request

`/integrate/<module>/:sync_key_field_name/:sync_key_field_value`

## Response Arguments

| Name   | Type   | Description                             |
|--------|--------|---|
| record | String | The ID of the record that was upserted. |

## Response

- Status 201: For a created record
- Status 200: For an updated record

---

```
{
  record: "a0328573-a252-a27c-3530-4e4297d4c9e1"
}
```

## Change Log

| Version | Change  |
|---------|---|
| v11_10  | Added<br>/integrate/<module>/<br>:sync_key_field_name/:sync_key_field_value PUT endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /KBContents GET

### Overview

Lists filtered records.

### Summary

This endpoint will return a set of records filtered by an expression. The filter can be applied to multiple fields and have multiple and/or conditions in it. Alternatively, you may use an existing filter by specifying its id. If both a filter definition and a filter id are passed, the two filters will be joined with an AND. Care will need to be taken to make sure that any filters used have appropriate indexes on the server side otherwise the runtime of the endpoint will be very long. Related fields can be searched by specifying the field name as: "link\_name.remote\_field", so if you wished to search the Accounts module by a related member account you would use "members.sic\_code".

### Request Arguments

| Name      | Type   | Description   | Required |
|-----------|--------|---|----------|
| filter    | String | <p>The filter expression. Filter expressions are explained below. Note that JSON-encoded filters can be specified as query parameters in one of two ways for GET requests:</p> <ol style="list-style-type: none"> <li data-bbox="884 707 1126 1061">1. By specifying individual filter arguments as distinct parameters. Example: filter[0][id]=1</li> <li data-bbox="884 1106 1136 1778">2. By specifying the whole filter as a single JSON-encoded string. Note that this syntax is currently not supported on certain modules. Example: filter=[{"id": "1"}].</li> </ol> | False    |
| filter_id | String | Identifier for a preexisting filter. If filter is also set, the two filters are joined with an AND.   | False    |

| Name    | Type    | Description   | Required |
|---------|---------|---|----------|
| max_num | Integer | A maximum number of records to return. Default is 20.   | False    |
| offset  | Integer | The number of records to skip over before records are returned. Default is 0.   | False    |
| fields  | String  | <p>Comma delimited list of fields to return. Each field may be represented either by string, or by map containing field name and additional field parameters (applicable to link and collection fields). The fields id and date_modified will always be returned.</p> <p>Example: name,account_type,description,{"name":"opportunities","fields":["id","name","sales_status"],"order_by":"date_closed:desc"}</p> <p>For more details on additional field parameters, see <a href="#">Relate API</a> and <a href="#">Collection API</a>.</p> | False    |
| view    | String  | Instead of defining the fields argument, the view argument can be used instead. The field list is constructed at the  | False    |

| Name       | Type    | Description  | Required |
|------------|---------|--|----------|
|            |         | server side based on the view definition which is requested. This argument can be used in combination with the fields argument. Common views are "record" and "list".<br>Example: record |          |
| order_by   | String  | How to sort the returned records, in a comma delimited list with the direction appended to the column name after a colon.<br>Example: name:DESC,account_type:DESC,date_modified:ASC      | False    |
| q          | String  | A search expression, will search on this module. Cannot be used at the same time as a filter expression or id.   | False    |
| deleted    | Boolean | Boolean to show deleted records in the result set.   | False    |
| nulls_last | Boolean | Boolean to return records with null values in order_by fields last in the result set.  | False    |

## Filter Expressions

---

There are four types of filters:

### Basic

This will filter the results by checking the field "name" for value "Nelson Inc". This will only find exact matches.

### Example

```
{
  "filter": [
    {
      "name": "Nelson Inc"
    }
  ]
}
```

### Full

This expression allows you to specify what operation you want to use for filtering on the field. In the example you would match any record where the field "name" starts with the value "Nelson".

### Example

```
{
  "filter": [
    {
      "name": {
        "$starts": "Nelson"
      }
    }
  ]
}
```

Below is a list of operation types:

| Operation                 | Description                            |
|---------------------------|--|
| <code>\$equals</code>     | Performs an exact match on that field. |
| <code>\$not_equals</code> | Performs an exact match on that field. |



| Operation    | Description   |
|--------------|---|
| \$not_equals | Matches on non-matching values.   |
| \$starts     | Matches on anything that starts with the value.   |
| \$ends       | Matches anything that ends with the value.  |
| \$contains   | Matches anything that contains the value  |
| \$in         | Finds anything where field matches one of the values as specified as an array.          |
| \$not_in     | Finds anything where field does not matches any of the values as specified as an array. |
| \$is_null    | Checks if the field is null. This operation does not need a value specified.            |
| \$not_null   | Checks if the field is not null. This operation does not need a value specified.        |
| \$lt         | Matches when the field is less than the value.  |
| \$lte        | Matches when the field is less than or equal to the value.                              |
| \$gt         | Matches when the field is greater than the value.                                       |
| \$gte        | Matches when the field is greater than or equal to the value.                           |

## Sub-expressions

This allows you to group filter expressions into or/and groupings. By default all expressions are and'ed together. The example expression would match if the field "name" was either "Nelson Inc" or "Nelson LLC". The only currently accepted sub-expression types are "\$and" and "\$or".

### Example

```
{
```

```

"filter":[
  {
    "$or":[
      {
        "name":"Nelson Inc"
      },
      {
        "name":"Nelson LLC"
      }
    ]
  }
]
}

```

## Modules

There are two module expressions, they operate on modules instead of fields. The current module can be specified by either using the module name "\_this" or by leaving the module name as a blank string. The example expression would filter the records in the current module to only your favorites. The only currently accepted module expressions are "\$favorite" and "\$owner".

### Example

```

{
  "filter":[
    {
      "$favorite":"_this"
    }
  ]
}

```

## Response Arguments

| Name        | Type    | Description  |
|-------------|---------|--|
| next_offset | Integer | Displays the next offset for retrieval of additional results. -1 will be returned when there are no more |

| Name    | Type  | Description                                     |
|---------|-------|---|
|         |       | records.  |
| records | Array | An array of results containing matched records. |

## Response

```
{
  "next_offset":-1,
  "records":[
    {
      "id":"fa300a0e-0ad1-b322-9601-512d0983c19a",
      "name":"Dale Spivey",
      "date_modified":"2013-02-28T05:03:00+00:00",
      "description":"",
      "opportunities": [
        {
          _module: "Opportunities",
          "id": "b0701501-1fab-8ae7-3942-540da93f5017",
          "name": "360 Vacations - 228 Units",
          "date_modified": "2014-09-08T16:05:00+03:00",
          "sales_status": "New"
        },
      ],
      "_acl": {
        "fields": {
        }
      }
    },
    {
      "id":"95e17367-9b3d-0e26-22dc-512d0961fedf",
      "name":"Florence Haddock",
      "date_modified":"2013-02-26T19:12:00+00:00",
      "description":"",
      "opportunities": [
        {
          _module: "Opportunities"
          date_modified: "2014-09-08T16:05:00+03:00"
          id: "9ce7c088-8ee4-7cd3-18f1-540da944d4c0"
          name: "360 Vacations - 312 Units"
          sales_status: "New"
        },
      ],
    }
  ]
}
```

---

```
    ],
    "_acl": {
      "fields": {
        }
      }
    }
  ]
}
```

## Change Log

| Version | Change                               |
|---------|--------------------------------------|
| v10     | Added /<module>/filter GET endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /KBContents/config POST

Creates and/or updates the config settings for the KBContents module

### Summary:

This endpoint is used to create and/or update the config settings for the KBContents module as json data. It extends the core config endpoint by adding the functionality to process deleted languages and documents related to them.

### Query Parameters:

| Param | Description | Optional |
|-------|-------------|----------|
|-------|-------------|----------|

---

## Input Example:

```
{ "languages":[{ "en":"English", "primary":true },{ "de":"German", "primary":false
}], "category_root":"31696245-0438-ff7a-9144-544f8c659daf",
"deleted_languages":["es","ru"] }
```

## Output Example:

```
{ "languages":[{ "en":"English", "primary":true },{ "de":"German", "primary":false
}], "category_root":"31696245-0438-ff7a-9144-544f8c659daf",
"deleted_languages":["es","ru"] }
```

**Last Modified:** 2021-02-17 02:44:13

## /KBContents/config PUT

Creates and/or updates the config settings for the KBContents module

## Summary:

This endpoint is used to create and/or update the config settings for the KBContents module as json data. It extends the core config endpoint by adding the functionality to process deleted languages and documents related to them.

## Query Parameters:

| Param | Description | Optional |
|-------|-------------|----------|
|-------|-------------|----------|

---

## Input Example:

```
{ "languages":[{ "en":"English", "primary":true },{ "de":"German", "primary":false
}], "category_root":"31696245-0438-ff7a-9144-544f8c659daf",
"deleted_languages":["es","ru"] }
```

## Output Example:

```
{ "languages":[{ "en":"English", "primary":true },{ "de":"German", "primary":false
}], "category_root":"31696245-0438-ff7a-9144-544f8c659daf",
"deleted_languages":["es","ru"] }
```

**Last Modified:** 2021-02-17 02:44:13

# /KBContents/duplicateCheck POST

## Overview

Runs a duplicate check against specified data.

## Request Arguments

| Name           | Type                | Description                                | Required |
|----------------|---------------------|--|----------|
| <record field> | <record field type> | The name value list of fields to populate. | True     |

## Request

```
{
  "name": "Airline"
}
```

---

## Response Arguments

| Name           | Type                | Description                              |
|----------------|---------------------|--|
| <record field> | <record field type> | Returns the potential duplicate records. |

## Response

```
{
  "next_offset":-1,
  "records":[
    {
      "id":"c4c26496-5dbc-67dd-bf5c-512d0923889e",
      "name":"Airline Maintenance Co",
      "date_entered":"2013-02-26T19:12:00+00:00",
      "date_modified":"2013-02-26T19:12:00+00:00",
      "modified_user_id":"1",
      "modified_by_name":"Administrator",
      "created_by":"1",
      "created_by_name":"Administrator",
      "description":"",
      "img":"",
      "last_activity_date":"2013-02-26T19:12:00+00:00",
      "deleted":false,
      "assigned_user_id":"seed_sally_id",
      "assigned_user_name":"Sally Bronsen",
      "team_name":[
        {
          "id":"East",
          "name":"East",
          "name_2":"",
          "primary":false
        },
        {
          "id":1,
          "name":"Global",
          "name_2":"",
          "primary":false
        }
      ]
    }
  ]
}
```

---

```
        "id": "West",
        "name": "West",
        "name_2": "",
        "primary": true
    }
],
"linkedin": "",
"facebook": "",
"twitter": "",
"googleplus": "",
"account_type": "Customer",
"industry": "Other",
"annual_revenue": "",
"phone_fax": "",
"billing_address_street": "123 Anywhere Street",
"billing_address_street_2": "",
"billing_address_street_3": "",
"billing_address_street_4": "",
"billing_address_city": "Sunnyvale",
"billing_address_state": "CA",
"billing_address_postalcode": "48566",
"billing_address_country": "USA",
"rating": "",
"phone_office": "(648) 452-3486",
"phone_alternate": "",
"website": "www.kidqa.it",
"ownership": "",
"employees": "",
"ticker_symbol": "",
"shipping_address_street": "123 Anywhere Street",
"shipping_address_street_2": "",
"shipping_address_street_3": "",
"shipping_address_street_4": "",
"shipping_address_city": "Sunnyvale",
"shipping_address_state": "CA",
"shipping_address_postalcode": "48566",
"shipping_address_country": "USA",
"email1": "vegan.im@example.tw",
"parent_id": "",
"sic_code": "",
"parent_name": "",
"email_opt_out": false,
"invalid_email": false,
"email": [
    {
        "email_address": "vegan.im@example.tw",
```



---

```
        "opt_out": "0",
        "invalid_email": "0",
        "primary_address": "1"
    },
    {
        "email_address": "phone85@example.tv",
        "opt_out": "0",
        "invalid_email": "0",
        "primary_address": "0"
    }
],
"campaign_id": "",
"campaign_name": "",
"my_favorite": false,
"_acl": {
    "fields": {

    }
},
"duplicate_check_rank": 0
}
]
```

## Change Log

| Version | Change  |
|---------|---|
| v10     | Added /<module>/duplicateCheck POST endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /KBContents/filter GET

### Overview

---

Lists filtered records.

## Summary

This endpoint will return a set of records filtered by an expression. The filter can be applied to multiple fields and have multiple and/or conditions in it. Alternatively, you may use an existing filter by specifying its id. If both a filter definition and a filter id are passed, the two filters will be joined with an AND. Care will need to be taken to make sure that any filters used have appropriate indexes on the server side otherwise the runtime of the endpoint will be very long. Related fields can be searched by specifying the field name as: "link\_name.remote\_field", so if you wished to search the Accounts module by a related member account you would use "members.sic\_code".

## Request Arguments

| Name   | Type   | Description  | Required |
|--------|--------|--|----------|
| filter | String | <p>The filter expression. Filter expressions are explained below. Note that JSON-encoded filters can be specified as query parameters in one of two ways for GET requests:</p> <ol style="list-style-type: none"><li>1. By specifying individual filter arguments as distinct parameters. Example: filter[0][id]=1</li><li>2. By specifying the whole filter as a single JSON-</li></ol> | False    |

| Name      | Type    | Description   | Required |
|-----------|---------|---|----------|
|           |         | <p>encoded string. Note that this syntax is currently not supported on certain modules. Example: filter=[{"id": "1"}].</p>  |          |
| filter_id | String  | Identifier for a preexisting filter. If filter is also set, the two filters are joined with an AND.   | False    |
| max_num   | Integer | A maximum number of records to return. Default is 20.   | False    |
| offset    | Integer | The number of records to skip over before records are returned. Default is 0.   | False    |
| fields    | String  | <p>Comma delimited list of fields to return. Each field may be represented either by string, or by map containing field name and additional field parameters (applicable to link and collection fields). The fields id and date_modified will always be returned. Example: name,acc</p> | False    |

| Name     | Type   | Description   | Required |
|----------|--------|---|----------|
|          |        | ount_type,description, {"name": "opportunities", "fields": ["id", "name", "sales_status"], "order_by": "date_closed:desc"}<br>For more details on additional field parameters, see <a href="#">Relate API</a> and <a href="#">Collection API</a> .  |          |
| view     | String | Instead of defining the fields argument, the view argument can be used instead. The field list is constructed at the server side based on the view definition which is requested. This argument can be used in combination with the fields argument. Common views are "record" and "list".<br>Example: record | False    |
| order_by | String | How to sort the returned records, in a comma delimited list with the direction appended to the column name after a colon.<br>Example: name:DESC,account_type:DESC,date_modified:ASC   | False    |
| q        | String | A search  | False    |

| Name       | Type    | Description   | Required |
|------------|---------|---|----------|
|            |         | expression, will search on this module. Cannot be used at the same time as a filter expression or id. |          |
| deleted    | Boolean | Boolean to show deleted records in the result set.  | False    |
| nulls_last | Boolean | Boolean to return records with null values in order_by fields last in the result set.                 | False    |

## Filter Expressions

There are four types of filters:

### Basic

This will filter the results by checking the field "name" for value "Nelson Inc". This will only find exact matches.

### Example

```
{
  "filter":[
    {
      "name":"Nelson Inc"
    }
  ]
}
```

### Full

This expression allows you to specify what operation you want to use for filtering on the field. In the example you would match any record where the field "name"

---

starts with the value "Nelson".

**Example**

```
{
  "filter": [
    {
      "name": {
        "$starts": "Nelson"
      }
    }
  ]
}
```

Below is a list of operation types:

| Operation    | Description   |
|--------------|---|
| \$equals     | Performs an exact match on that field.  |
| \$not_equals | Performs an exact match on that field.  |
| \$not_equals | Matches on non-matching values.   |
| \$starts     | Matches on anything that starts with the value.   |
| \$ends       | Matches anything that ends with the value.  |
| \$contains   | Matches anything that contains the value  |
| \$in         | Finds anything where field matches one of the values as specified as an array.          |
| \$not_in     | Finds anything where field does not matches any of the values as specified as an array. |
| \$is_null    | Checks if the field is null. This operation does not need a value specified.            |
| \$not_null   | Checks if the field is not null. This operation does not need a value specified.        |
| \$lt         | Matches when the field is less than the value.  |
| \$lte        | Matches when the field is less than or  |

| Operation | Description   |
|-----------|---|
|           | equal to the value.   |
| \$gt      | Matches when the field is greater than the value.             |
| \$gte     | Matches when the field is greater than or equal to the value. |

## Sub-expressions

This allows you to group filter expressions into or/and groupings. By default all expressions are and'ed together. The example expression would match if the field "name" was either "Nelson Inc" or "Nelson LLC". The only currently accepted sub-expression types are "\$and" and "\$or".

### Example

```
{
  "filter": [
    {
      "$or": [
        {
          "name": "Nelson Inc"
        },
        {
          "name": "Nelson LLC"
        }
      ]
    }
  ]
}
```

## Modules

There are two module expressions, they operate on modules instead of fields. The current module can be specified by either using the module name "\_this" or by leaving the module name as a blank string. The example expression would filter the records in the current module to only your favorites. The only currently accepted module expressions are "\$favorite" and "\$owner".

---

## Example

```
{
  "filter":[
    {
      "$favorite":"_this"
    }
  ]
}
```

## Response Arguments

| Name        | Type    | Description   |
|-------------|---------|---|
| next_offset | Integer | Displays the next offset for retrieval of additional results. -1 will be returned when there are no more records. |
| records     | Array   | An array of results containing matched records.   |

## Response

```
{
  "next_offset":-1,
  "records":[
    {
      "id":"fa300a0e-0ad1-b322-9601-512d0983c19a",
      "name":"Dale Spivey",
      "date_modified":"2013-02-28T05:03:00+00:00",
      "description":"",
      "opportunities": [
        {
          _module: "Opportunities",
          "id": "b0701501-1fab-8ae7-3942-540da93f5017",
          "name": "360 Vacations - 228 Units",
          "date_modified": "2014-09-08T16:05:00+03:00",
          "sales_status": "New"
        },
      ],
    }
  ],
}
```



```
],
  "_acl": {
    "fields": {
    }
  }
},
{
  "id": "95e17367-9b3d-0e26-22dc-512d0961fedf",
  "name": "Florence Haddock",
  "date_modified": "2013-02-26T19:12:00+00:00",
  "description": "",
  "opportunities": [
    {
      _module: "Opportunities"
      date_modified: "2014-09-08T16:05:00+03:00"
      id: "9ce7c088-8ee4-7cd3-18f1-540da944d4c0"
      name: "360 Vacations - 312 Units"
      sales_status: "New"
    },
  ],
  "_acl": {
    "fields": {
    }
  }
}
]
}
```

## Change Log

| Version | Change                               |
|---------|--------------------------------------|
| v10     | Added /<module>/filter GET endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /KBContents/:record/link POST

---

## Overview

Creates relationships to a pre-existing record.

## Request Arguments

| Name                | Type     | Description  | Required |
|---------------------|----------|--|----------|
| <relationship link> | <string> | Link between targeted and related records.   | True     |
| <record ID>         | <string> | The name value list of related records. Each item of the list may be either string equal to related item ID, or map containing record ID ("id" key is required in this case) and addition relationship properties. | True     |

## Request

```
{
  link_name: "accounts"
  ids: [
    "da6a3741-2a81-ba7f-f249-512d0932e94e",
    {
      "id": "e689173e-c953-1e14-c215-512d0927e7a2",
      "role": "owner"
    }
  ]
}
```

## Response Arguments

| Name            | Type  | Description                           |
|-----------------|-------|---------------------------------------|
| record          | Array | The record linked to related records. |
| related_records | Array | Records that were associated.         |

## Response

```

"record": {
  "id": "da6a3741-2a81-ba7f-f249-512d0932e94e",
  "name": "Slender Broadband Inc - 1000 units",
  "date_entered": "2013-02-26T19:12:00+00:00",
  "date_modified": "2013-02-26T19:12:00+00:00",
  "modified_user_id": "1",
  "modified_by_name": "Administrator",
  "created_by": "1",
  "created_by_name": "Administrator",
  "description": "",
  "img": "",
  "last_activity_date": "2013-02-28T18:21:00+00:00",
  "deleted": false,
  "assigned_user_id": "seed_max_id",
  "assigned_user_name": "Max Jensen",
  "team_name": [
    {
      "id": "East",
      "name": "East",
      "name_2": "",
      "primary": false
    },
    {
      "id": "West",
      "name": "West",
      "name_2": "",
      "primary": true
    }
  ],
  "opportunity_type": "",
  "account_name": "Slender Broadband Inc",
  "account_id": "181461c6-dc81-1115-1fe0-512d092e8f15",
  "campaign_id": "",
  "campaign_name": "",
  "lead_source": "Campaign",

```

---

```
"amount": "25000",
"base_rate": "1",
"amount_usdollar": "25000",
"currency_id": "-99",
"currency_name": "",
"currency_symbol": "",
"date_closed": "2013-02-27",
"date_closed_timestamp": "1361992480",
"next_step": "",
"sales_stage": "Needs Analysis",
"sales_status": "New",
"probability": "90",
"best_case": "25000",
"worst_case": "25000",
"commit_stage": "include",
"my_favorite": false,
"_acl": {
  "fields": {
  }
}
},
"related_records": [
  {
    "id": "e689173e-c953-1e14-c215-512d0927e7a2",
    "name": "Gus Dales",
    "date_entered": "2013-02-26T19:12:00+00:00",
    "date_modified": "2013-02-26T19:12:00+00:00",
    "modified_user_id": "1",
    "modified_by_name": "Administrator",
    "created_by": "1",
    "created_by_name": "Administrator",
    "description": "",
    "img": "",
    "deleted": false,
    "assigned_user_id": "seed_sally_id",
    "assigned_user_name": "Sally Bronsen",
    "team_name": [
      {
        "id": "West",
        "name": "West",
        "name_2": "",
        "primary": true
      }
    ],
    "salutation": "",
```

---

```
"first_name": "Gus",
"last_name": "Dales",
"full_name": "Gus Dales",
"title": "Director Operations",
"linkedin": "",
"facebook": "",
"twitter": "",
"googleplus": "",
"department": "",
"do_not_call": false,
"phone_home": "(661) 120-2292",
"email": [
  {
    "email_address": "section.sugar.section@example.it",
    "opt_out": "1",
    "invalid_email": "0",
    "primary_address": "0"
  },
  {
    "email_address": "support.qa.kid@example.co.uk",
    "opt_out": "0",
    "invalid_email": "0",
    "primary_address": "1"
  }
],
"phone_mobile": "(294) 447-9707",
"phone_work": "(036) 840-3216",
"phone_other": "",
"phone_fax": "",
"email1": "support.qa.kid@example.co.uk",
"email2": "section.sugar.section@example.it",
"invalid_email": false,
"email_opt_out": false,
"primary_address_street": "48920 San Carlos Ave",
"primary_address_street_2": "",
"primary_address_street_3": "",
"primary_address_city": "Persistence",
"primary_address_state": "CA",
"primary_address_postalcode": "54556",
"primary_address_country": "USA",
"alt_address_street": "",
"alt_address_street_2": "",
"alt_address_street_3": "",
"alt_address_city": "",
"alt_address_state": "",
```

---

```
"alt_address_postalcode": "",
"alt_address_country": "",
"assistant": "",
"assistant_phone": "",
"picture": "",
"email_and_name1": "",
"lead_source": "Support Portal User Registration",
"account_name": "Arts & Crafts Inc",
"account_id": "d43243c6-9b8e-2973-ae2-512d09bc34b4",
"opportunity_role_fields": "",
"opportunity_role_id": "",
"opportunity_role": "Technical Advisor",
"reports_to_id": "",
"report_to_name": "",
"portal_name": "GusDales145",
"portal_active": true,
"portal_password": "$1$JxYr6tmM$b.O6.KF42jP46RadSwz0N0",
"portal_password1": "",
"portal_app": "",
"preferred_language": "en_us",
"campaign_id": "",
"campaign_name": "",
"c_accept_status_fields": "",
"m_accept_status_fields": "",
"accept_status_id": "",
"accept_status_name": "",
"sync_contact": "",
"my_favorite": false,
"_acl": {
  "fields": {
  }
}
},
{
  "id": "da6a3741-2a81-ba7f-f249-512d0932e94e",
  "name": "Slender Broadband Inc - 1000 units",
  "date_entered": "2013-02-26T19:12:00+00:00",
  "date_modified": "2013-02-26T19:12:00+00:00",
  "modified_user_id": "1",
  "modified_by_name": "Administrator",
  "created_by": "1",
  "created_by_name": "Administrator",
  "description": "",
  "img": "",
  "last_activity_date": "2013-02-28T18:36:00+00:00",
  "deleted": false,
```

---

```
"assigned_user_id": "seed_max_id",
"assigned_user_name": "Max Jensen",
"team_name": [
  {
    "id": "East",
    "name": "East",
    "name_2": "",
    "primary": false
  },
  {
    "id": "West",
    "name": "West",
    "name_2": "",
    "primary": true
  }
],
"opportunity_type": "",
"account_name": "Slender Broadband Inc",
"account_id": "181461c6-dc81-1115-1fe0-512d092e8f15",
"campaign_id": "",
"campaign_name": "",
"lead_source": "Campaign",
"amount": "25000",
"base_rate": "1",
"amount_usdollar": "25000",
"currency_id": "-99",
"currency_name": "",
"currency_symbol": "",
"date_closed": "2013-02-27",
"date_closed_timestamp": "1361992480",
"next_step": "",
"sales_stage": "Needs Analysis",
"sales_status": "New",
"probability": "90",
"best_case": "25000",
"worst_case": "25000",
"commit_stage": "include",
"my_favorite": false,
"_acl": {
  "fields": {
  }
}
}
]
```

---

## Change Log

| Version     | Change  |
|-------------|---|
| v10 (7.6.0) | Added support for additional relationship values. |
| v10 (7.1.5) | Added /<module>/:record/link POST endpoint.       |

**Last Modified:** 2021-02-17 02:44:13

## /KBContents/:record/notuseful PUT

### Overview

Vote for Knowledge Base article.

### Request Arguments

This endpoint does not accept any request arguments.

### Response Arguments

| Name           | Type                | Description                                |
|----------------|---------------------|--|
| <record field> | <record field type> | Returns the fields for the updated record. |

### Response

```
{  
  "active_date": "2014-01-01",  
}
```



---

```
"active_rev": 1,
"approved": false,
"assigned_user_id": "seed_will_id",
"assigned_user_link": {"full_name": "Will Westin", "id": "seed_will_id"},
"assigned_user_name": "Will Westin",
"attachment_list": [],
"cases": {"name": "", "id": ""},
"category_id": "3e844f1c-5ce1-6d6d-496d-5714901e6666",
"category_name": "Database",
"created_by": "1",
"created_by_link": {"full_name": "Administrator", "id": "1"},
"created_by_name": "Administrator",
"date_entered": "2016-04-18T07:43:43+00:00",
"date_modified": "2016-04-18T07:43:43+00:00",
"deleted": false,
"description": "",
"exp_date": "2014-12-31",
"file_mime_type": "",
"following": false,
"id": "87758ab5-75eb-451f-2bd7-571490d29d7a",
"is_external": false,
"kbarticle_id": "8862943c-022e-0385-908e-5714908ac792",
"kbarticle_name": "Resetting the device",
"kbarticles_kbcontents": {"name": "Resetting the device", "id": "8862943c-022e-0385-908e-5714908ac792"},
"kbdocument_body": "
```

When things are not working as expected...

```
", "kbdocument_id": "87a20b6b-3172-ad19-0ca5-571490bec118",
"kbdocument_name": "Resetting the device", "kbdocuments_kbcontents": {"name": "Resetting the device", "id": "87a20b6b-3172-ad19-0ca5-571490bec118"},
"ksapprover_id": "", "ksapprover_name": "", "ksapprovers_kbcontents": {"full_name": "", "id": ""}, "kbscase_id": "", "kbscase_name": "", "language": "en",
"modified_by_name": "Administrator", "modified_user_id": "1",
"modified_user_link": {"full_name": "Administrator", "id": "1"}, "my_favorite": false,
"name": "Resetting the device", "notuseful": 1 "related_languages": ["en"],
"revision": 1 "status": "in-review", "tag": [], "team_count": "", "team_count_link": {"team_count": "", "id": "1"}, "team_name": [{"id": 1, "name": "Global", "name_2": "", "primary": true}], "useful": 0, "usefulness_user_vote": "-1", "viewcount": 4 }
```

## Change Log

---

| Version | Change  |
|---------|---|
| v10     | Added /KBContents/:record/useful PUT endpoint.    |
| v10     | Added /KBContents/:record/notuseful PUT endpoint. |

Last Modified: 2021-02-17 02:44:13

## /KBContents/:record/useful PUT

### Overview

Vote for Knowledge Base article.

### Request Arguments

This endpoint does not accept any request arguments.

### Response Arguments

| Name           | Type                | Description                                |
|----------------|---------------------|--|
| <record field> | <record field type> | Returns the fields for the updated record. |

### Response

```
{
  "active_date": "2014-01-01",
  "active_rev": 1,
  "approved": false,
  "assigned_user_id": "seed_will_id",
  "assigned_user_link": {"full_name": "Will Westin", "id": "seed_wil
l_id"},
```

```

"assigned_user_name": "Will Westin",
"attachment_list": [],
"cases": {"name": "", "id": ""},
"category_id": "3e844f1c-5ce1-6d6d-496d-5714901e6666",
"category_name": "Database",
"created_by": "1",
"created_by_link": {"full_name": "Administrator", "id": "1"},
"created_by_name": "Administrator",
"date_entered": "2016-04-18T07:43:43+00:00",
"date_modified": "2016-04-18T07:43:43+00:00",
"deleted": false,
"description": "",
"exp_date": "2014-12-31",
"file_mime_type": "",
"following": false,
"id": "87758ab5-75eb-451f-2bd7-571490d29d7a",
"is_external": false,
"kbarticle_id": "8862943c-022e-0385-908e-5714908ac792",
"kbarticle_name": "Resetting the device",
"kbarticles_kbcontents": {"name": "Resetting the device", "id": "8
862943c-022e-0385-908e-5714908ac792"},
"kbdocument_body": "

```

When things are not working as expected...

```

", "kbdocument_id": "87a20b6b-3172-ad19-0ca5-571490bec118",
"kbdocument_name": "Resetting the device", "kbdocuments_kbcontents": {"name":
"Resetting the device", "id": "87a20b6b-3172-ad19-0ca5-571490bec118"},
"kbsapprover_id": "", "kbsapprover_name": "", "kbsapprovers_kbcontents":
{"full_name": "", "id": ""}, "kbscase_id": "", "kbscase_name": "", "language": "en",
"modified_by_name": "Administrator", "modified_user_id": "1",
"modified_user_link": {"full_name": "Administrator", "id": "1"}, "my_favorite": false,
"name": "Resetting the device", "notuseful": 1 "related_languages": ["en"],
"revision": 1 "status": "in-review", "tag": [], "team_count": "", "team_count_link":
{"team_count": "", "id": "1"}, "team_name": [{"id": 1, "name": "Global", "name_2":
"", "primary": true}], "useful": 0, "usefulness_user_vote": "-1", "viewcount": 4 }

```

## Change Log

| Version | Change  |
|---------|---|
| v10     | Added /KBContents/:record/useful PUT endpoint.    |
| v10     | Added /KBContents/:record/notuseful PUT endpoint. |

---

**Last Modified:** 2021-02-17 02:44:13

## **/Leads POST**

Create Lead with optional post-save actions

### **Summary:**

This endpoint is used to create a Lead with the optional post-save actions for Convert Target/Prospect and Create Lead from Email operations.

### **Query Parameters:**

| <b>Param</b>     | <b>Description</b>   | <b>Optional</b> |
|------------------|--|-----------------|
| prospect_id      | Pass a prospect id if Lead is being created as part of a Convert Target/Prospect process | Optional        |
| inbound_email_id | Pass an inbound email id if Lead is being created from an Email                          | Optional        |

**Last Modified:** 2021-02-17 02:44:13

## **/Leads/:leadId/convert POST**

Convert Lead to a Contact and optionally link it to a new or existing instance of the

---

modules specified

## Summary:

This endpoint is used to convert the specified Lead to a Contact and optionally link that Contact to a new or existing instance of the modules specified. The types of modules that can be specified are limited to those that have been configured by the system administrator.

## Post Parameters:

| Parameter  | Description   |
|--|---|
| modules (required)   | An object containing the Contacts module to be created as part of the conversion, along with (optionally) any modules that this new Contact record is to be related to. If relate-to modules are also specified, they must consist of a valid module type and either the id of an existing module of that type, or if new, the full record to be created for that type. Note that the allowed module types are defined by the System Administrator. |
| <b>Example</b>   |   |
| <pre>{   "modules": {     "Contacts": {       "deleted": "0",       "do_not_call": false,       "portal_active": "0",       "preferred_language": "en_us",       "assigned_user_id": "1",       "assigned_user_name": "Administrator",       "salutation": "",       "first_name": "Darius",       "last_name": "Paisley",       "title": "Director Operations",       "description": "",       "team_name": [         {           "id": "East",           "name": "East",           "primary": true,           "id": 1,           "name_2": ""         },         {           "name": "Global",           "primary": </pre> |   |

```

false          },          {
  "id": "West",          "name": "West",
    "name_2": "",          "primary": false
  }          ],          "phone_home": "(890) 24
1-5509",          "phone_mobile": "(738) 338-2546",
  "phone_work": "(579) 448-8879",          "phone_fax": "",
    "primary_address_street": "123 Anywhere Street",
    "primary_address_city": "Salt Lake City",          "primar
y_address_state": "CA",          "primary_address_postalcode": "
81738",          "primary_address_country": "USA",
  "campaign_id": "",          "campaign_name": "",
  "email": [          {          "email_adres
s": "kid75@example.it",          "invalid_email": false,
          "opt_out": false,          "prim
ary_address": true,          "reply_to_address": false
          }          ]          },          "Account
s": {          "id": "1c212ff9-c0d5-866d-d3ae-526e6cd47a31",
    "name": "Lexington Shores Corp",          "date_ente
red": "2013-10-28T09:52:46-04:00",          "date_modified": "20
13-10-28T09:52:46-04:00",          "modified_user_id": "1",
    "modified_by_name": "Administrator",          "create
d_by": "1",          "created_by_name": "Administrator",
    "description": "",          "deleted": false,
    "assigned_user_id": "seed_sally_id",          "assigned_use
r_name": "Sally Bronsen",          "team_count": "",
    "team_name": [          {          "id": "
West",          "name": "West",          "
name_2": "",          "primary": true
  }          ],          "linkedin": "",          "fa
cebook": "",          "twitter": "",          "googleplus"
: "",          "account_type": "Customer",          "indus
try": "Electronics",          "annual_revenue": "",
  "phone_fax": "",          "billing_address_street": "111 Sili
con Valley Road",          "billing_address_street_2": "",
    "billing_address_street_3": "",          "billing_addr
ess_street_4": "",          "billing_address_city": "Santa Fe",
    "billing_address_state": "CA",          "billing_
address_postalcode": "63785",          "billing_address_country"
: "USA",          "rating": "",          "phone_office": "
(641) 347-6902",          "phone_alternate": "",
  "website": "www.imphone.de",          "ownership": "",
    "employees": "",          "ticker_symbol": "",
    "shipping_address_street": "111 Silicon Valley Road",
    "shipping_address_street_2": "",          "shipping_address_s
treet_3": "",          "shipping_address_street_4": "",
    "shipping_address_city": "Santa Fe",          "shipping_a

```

```

address_state": "CA",
shipping_address_postalcode": "63785",
shipping_address_country": "USA",
email": [
{
email_address": "section.qa@example.tw",
invalid_email": false,
opt_out": false,
primary_address": true,
reply_to_address": false
},
{
email_address": "vegan29@example.de",
invalid_email": false,
opt_out": false,
primary_address": false,
reply_to_address": false
}
],
parent_id": "",
parent_name": "",
email_opt_out": false,
invalid_email": false,
campaign_id": "",
campaign_name": "",
my_favorite": false,
_acl": {
fields": {},
following": false,
module": "Accounts",
duplicate_check_rank": 8
},
Opportunities": {
id": "5529e246-c42f-04e0-1989-526e6d3029c6",
name": "Lexington Shores Corp - 311 Units",
date_entered": "2013-10-28T09:52:46-04:00",
date_modified": "2013-10-28T09:52:46-04:00",
modified_user_id": "1",
modified_by_name": "Administrator",
created_by": "1",
created_by_name": "Administrator",
description": "",
deleted": false,
assigned_user_id": "seed_sally_id",
assigned_user_name": "Sally Bronsen",
team_count": "",
team_name": [
{
id": "West",
name": "West",
name_2": "",
primary": true
}
],
opportunity_type": "",
account_name": "Lexington Shores Corp",
account_id": "1c212ff9-c0d5-866d-d3ae-526e6cd47a31",
campaign_id": "",
campaign_name": "",
lead_source": "Partner",
amount": 10413,
base_rate": 1,
amount_usdollar": 10413,
currency_id": "-99",
currency_name": "",
currency_symbol": "",
date_closed": "2014-03-30",
date_closed_timestamp": 1396187804,
next_step": "",
sales_stage": "Prospecting",
sales_status": "New",
probability": 10,
best_case": 11795,
worst_case": 9031,
comm_init_stage": "exclude",
total_revenue_line_items": 5,
closed_revenue_line_items": 1,
contact_role": "",
my_favorite": false,
_acl":

```

---

```
{
    "fields": {},
    "allowing": false,
    "duplicate_check_rank": 0
},
{
    "_module": "Opportunities",
}
}
```

**Last Modified:** 2021-02-17 02:44:13

## **/Leads/:record/freebusy GET**

Get a lead's FreeBusy schedule

### **Summary:**

This endpoint returns a list of time slots for which the specified person is busy.

### **Request**

GET /Leads/:id/freebusy

### **Response**

```
{
  "id": "foo"
  "module": "Users",
  "freebusy": [
    {
      "start": "2014-08-24T08:45:00-04:00",
      "end": "2014-08-24T09:15:00-04:00"
    },
    {
      "start": "2014-08-30T05:45:00-04:00",
      "end": "2014-08-30T06:15:00-04:00"
    }
  ]
}
```



---

```
    },
    {
      "start": "2014-09-12T15:45:00-04:00",
      "end": "2014-09-12T16:15:00-04:00"
    }
  ]
}
```

**Last Modified:** 2021-02-17 02:44:13

## **/Leads/register POST**

### **Overview**

Creates new Leads.

### **Request Arguments**

| Name           | Type                | Description                                | Required |
|----------------|---------------------|--|----------|
| <record field> | <record field type> | The name value list of fields to populate. | True     |

### **Request**

```
{
  "first_name": "John",
  "last_name": "Smith"
}
```

### **Response Arguments**

| Name           | Type                | Description                                      |
|----------------|---------------------|--|
| <record field> | <record field type> | Returns the fields for the newly created record. |

## Response

```
{
  "id": "ecba9f86-4a4a-def6-359c-505a5b33f014",
  "name": "John Smith",
  "date_entered": "2012-09-19T23:54:54+0000",
  "date_modified": "2012-09-19T23:54:54+0000",
  "modified_user_id": "1",
  "created_by": "1",
  "deleted": 0,
  "team_id": "1",
  "team_set_id": "1",
  "first_name": "John",
  "last_name": "Smith",
  "full_name": "John Smith",
  "do_not_call": false,
  "converted": false,
  "lead_source": "Support Portal User Registration",
  "status": "New",
  "preferred_language": "en_us",
  "email": [
  ],
  "my_favorite": false
}
```

## Change Log

| Version | Change                               |
|---------|--------------------------------------|
| v10     | Added /Leads/register POST endpoint. |

**Last Modified:** 2021-02-17 02:44:13

---

## /Mail POST

### Overview

Create an email and send or save as draft.

### Query String Parameters

This endpoint does not accept any query string parameters.

### Input Parameters

| Name          | Type   | Description   | Required |
|---------------|--------|---|----------|
| email_config  | String | ID of the outbound email configuration to use when sending this email   | True     |
| to_addresses  | Array  | Array of name/email address pairs for the TO field, when present, only email subfield is required (not name). | True     |
| cc_addresses  | Array  | Array of name/email address pairs for the CC field, when present, email subfield is required.                 | False    |
| bcc_addresses | Array  | Array of name/email address pairs for the BCC field, when present, email subfield is required.                | False    |
| subject       | String | Subject of the  | False    |

| Name        | Type   | Description   | Required |
|-------------|--------|---|----------|
|             |        | email   |          |
| html_body   | String | HTML body of the email  | False    |
| text_body   | String | Text body of the email  | False    |
| status      | String | Indicates the status of the email - 'draft' or 'ready' (ready to be sent)   | True     |
| related     | Object | Contains 'parent_type' and 'parent_id' to relate this email to (for example 'Contact' and a contact's id)   | False    |
| teams       | Object | Team(s) to assign this email to. 'primary' attribute is an id string for the primary team and 'other' attribute is an array of id strings for the other teams - only primary is required                              | True     |
| attachments | Array  | Array of file attachments - each attachment consists of a 'type' (where the attachment came from: upload, document, or template), 'id' (of the file upload, note, document revision, etc), and 'name' (the file name) | False    |

---

## Input Example

```
{
  "email_config": "abc181a2-5c05-b879-8e68-502279a8c401",
  "to_addresses": [
    {
      "name": "John Doe",
      "email": "john_doe@foo.com"
    },
    {
      "name": "David Madison",
      "email": "david_madison@bar.com"
    }
  ],
  "cc_addresses": [
    {
      "name": "Tom Swift",
      "email": "tswift@baz.com"
    }
  ],
  "bcc_addresses": null,
  "subject": "Minneapolis Convention",
  "html_body": "<html><body>Hello World</body></html>",
  "text_body": "Hello World",
  "status": "ready",
  "related": {
    "type": "Contacts",
    "id": "61cf0f8d-938c-c9b2-53ad-51ed7bbcf83b"
  },
  "teams": {
    "primary": "dabec868-696c-f458-e204-50227995ab50",
    "others": [
      "c3094c88-c95f-2e17-4553-50227996ad20",
      "abcde868-696c-f458-e704-58369095ab62"
    ]
  },
  "attachments": [
    {
      "type": "upload",
      "id": "cfbe4551-548d-f602-b228-45387645fc12",
      "name": "company_logo.jpg"
    },
    {
      "type": "document",
      "id": "876112a4-89c1-4ba7-a05a-7729a7a76818"
    }
  ],
}
```

```

    {
      "type": "template",
      "id": "002cfe6c-98e9-4342-bdb1-1660d0788872"
    }
  ],
}

```

## Result

| Name                 | Type                      | Description  |
|----------------------|---------------------------|--|
| <email record field> | <email record field type> | Returns the fields for the newly created email record. |

## Output Example

```

{
  "team_id": "9c61c46a-a7c5-df71-481c-51d48232f820",
  "team_set_id": "9c61c46a-a7c5-df71-481c-51d48232f820",
  "id": "d9c165d0-8863-ba61-dc85-51ed8016c476",
  "date_entered": "2013-07-22 18:57:57",
  "date_modified": "2013-07-22 18:57:57",
  "assigned_user_id": "1",
  "assigned_user_name": "",
  "modified_user_id": "1",
  "modified_by_name": "admin",
  "created_by": "1",
  "created_by_name": "",
  "deleted": 0,
  "from_addr_name": "SugarCRM",
  "reply_to_addr": "",
  "to_addrs_names": "john_doe@foo.com, david_madison@bar.com",
  "cc_addrs_names": "tswift@baz.com",
  "description_html": "<html><body>Hello World</body></html>",
  "description": "Hello World",
  "date_sent": "2013-07-22 18:57:00",
  "name": "Minneapolis Convention",
  "type": "out",
  "status": "sent",
  "parent_type": "Contacts",

```

---

```
"parent_id": "61cf0f8d-938c-c9b2-53ad-51ed7bbcf83b" ,  
}
```

## Change Log

| Version | Change   |
|---------|--|
| v11     | Last version in which /Mail POST is available. Use /Emails POST instead. |
| v10     | Added /Mail POST endpoint.   |

**Last Modified:** 2021-02-17 02:44:13

## /Mail/address/validate POST

### Overview

Validate one or more email addresses.

### Request Arguments

| Type  | Description                                       | Required |
|-------|---|----------|
| Array | Array of one or more email addresses to validate. | True     |

### Request

```
[  
  "a@b.com" ,  
  "c@d.com" ,  
  "invalid-email.com"  
]
```

---

## Response Arguments

| Type   | Description  |
|--------|--|
| Object | Returns an object with each email address as a key and a boolean indicating whether the email address is valid as the value. |

## Response

```
{
  "a@b.com": true,
  "c@d.com": true,
  "invalid-email.com": false
}
```

## Change Log

| Version | Change  |
|---------|---|
| v11     | Last version in which /Mail/address/validate POST is available. |
| v10     | Added /Mail/address/validate POST endpoint.                     |

Last Modified: 2021-02-17 02:44:13

## /Mail/archive POST

### Overview



---

Archives an email.

## Query String Parameters

This endpoint does not accept any query string parameters.

## Input Parameters

| Name          | Type   | Description   | Required |
|---------------|--------|---|----------|
| date_sent     | String | Date of email sent  | True     |
| from_address  | String | From email address  | True     |
| to_addresses  | Array  | Array of name/email address pairs for the TO field, when present, only email subfield is required (not name). | True     |
| cc_addresses  | Array  | Array of name/email address pairs for the CC field, when present, email subfield is required.                 | False    |
| bcc_addresses | Array  | Array of name/email address pairs for the BCC field, when present, email subfield is required.                | False    |
| subject       | String | Subject of the email  | True     |
| html_body     | String | HTML body of the email  | False    |
| text_body     | String | Text body of the email  | False    |
| status        | String | Indicates the   | True     |

| Name             | Type   | Description   | Required |
|------------------|--------|---|----------|
|                  |        | status of the email - 'draft' or 'ready' (ready to be sent)   |          |
| related          | Object | Contains 'parent_type' and 'parent_id' to relate this email to (for example 'Contact' and a contact's id)   | False    |
| teams            | Object | Team(s) to assign this email to. 'primary' attribute is an id string for the primary team and 'other' attribute is an array of id strings for the other teams - only primary is required                              | True     |
| assigned_user_id | String | ID of a user this record is assigned to.  | False    |
| attachments      | Array  | Array of file attachments - each attachment consists of a 'type' (where the attachment came from: upload, document, or template), 'id' (of the file upload, note, document revision, etc), and 'name' (the file name) | False    |

## Input Example

```
{
```

---

```
"date_sent": "2014-02-07T00:00:00",
"from_address": "test@foo.com"
"to_addresses": [
  {
    "name": "John Doe",
    "email": "john_doe@foo.com",
    "module": "Leads"
  },
  {
    "name": "David Madison",
    "email": "david_madison@bar.com",
    "module": "Leads"
  }
],
"cc_addresses": [
  {
    "name": "Tom Swift",
    "email": "tswift@baz.com"
  }
],
"bcc_addresses": null,
"subject": "Minneapolis Convention",
"html_body": "<html><body>Hello World</body></html>",
"text_body": "Hello World"
"status": "archive",
"related": {
  "type": "Contacts",
  "id": "61cf0f8d-938c-c9b2-53ad-51ed7bbcf83b"
},
"teams": {
  "primary": "dabec868-696c-f458-e204-50227995ab50",
  "others": [
    "c3094c88-c95f-2e17-4553-50227996ad20",
    "abcde868-696c-f458-e704-58369095ab62"
  ]
},
"assigned_user_id": "seed_jim_id",
"attachments": [
  {
    "type": "upload",
    "id": "cfbe4551-548d-f602-b228-45387645fc12",
    "name": "company_logo.jpg"
  },
  {
    "type": "document",
    "id": "876112a4-89c1-4ba7-a05a-7729a7a76818"
```

---

```

    },
    {
      "type": "template",
      "id": "002cfe6c-98e9-4342-bdb1-1660d0788872"
    }
  ],
}

```

## Result

| Name                 | Type                      | Description  |
|----------------------|---------------------------|--|
| <email record field> | <email record field type> | Returns the fields for the newly created email record. |

## Output Example

```

{
  "team_id": "9c61c46a-a7c5-df71-481c-51d48232f820",
  "team_set_id": "9c61c46a-a7c5-df71-481c-51d48232f820",
  "id": "d9c165d0-8863-ba61-dc85-51ed8016c476",
  "date_entered": "2013-07-22 18:57:57",
  "date_modified": "2013-07-22 18:57:57",
  "assigned_user_id": "1",
  "assigned_user_name": "",
  "modified_user_id": "1",
  "modified_by_name": "admin",
  "created_by": "1",
  "created_by_name": "",
  "deleted": 0,
  "from_addr_name": "SugarCRM",
  "reply_to_addr": "",
  "to_addrs_names": "john_doe@foo.com, david_madison@bar.com",
  "cc_addrs_names": "tswift@baz.com",
  "description_html": "<html><body>Hello World</body></html>",
  "description": "Hello World",
  "date_sent": "2013-07-22 18:57:00",
  "name": "Minneapolis Convention",
  "type": "out",
  "status": "sent",
}

```

---

```
"parent_type": "Contacts",
"parent_id": "61cf0f8d-938c-c9b2-53ad-51ed7bbcf83b",
"from_address": "test@foo.com"
}
```

## Change Log

| Version | Change  |
|---------|---|
| v11     | Last version in which /Mail/archive POST is available. Use /Emails POST with {"state": "Archived"} instead. |
| v10     | Added /Mail/archive POST endpoint.  |

Last Modified: 2021-02-17 02:44:13

## /Mail/attachment POST

### Overview

Upload an email attachment

### Query String Parameters

This endpoint does not accept any query string parameters.

### Input Parameters

| Name             | Type   | Description         | Required |
|------------------|--------|---------------------|----------|
| email_attachment | String | The file to upload. | True     |

### Input Example

---

```
{"email_attachment": "@\path\to\ExampleDocument.txt"}
```

## Result

| Name                 | Type                      | Description  |
|----------------------|---------------------------|--|
| <email record field> | <email record field type> | Returns the fields for the newly created email record. |

## Output Example

```
{  
  "guid": "61b19f41-0ac9-0f2f-d9c5-51eecaf89396",  
  "name": "ExampleDocument.txt",  
  "nameForDisplay": "ExampleDocument.txt"  
}
```

## Change Log

| Version | Change  |
|---------|---|
| v11     | Last version in which /Mail/attachment POST is available. Use /Notes/temp/file/filename POST in conjunction with /Emails/:record/link/attachments POST instead. |
| v10     | Added /Mail/attachment POST endpoint.   |

**Last Modified:** 2021-02-17 02:44:13

## /Mail/attachment/cache DELETE

---

## Overview

Clears the user's attachment cache directory

## Query Parameters:

This endpoint does not accept any parameters.

## Input Example:

This endpoint does not accept any input.

## Output Example:

If successful, the endpoint responds with a bool of true.

## Change Log

| Version | Change  |
|---------|---|
| v11     | Last version in which /Mail/attachment/cache DELETE is available. Attachments are no longer written as temporary files to the current user's cache directory. |
| v10     | Added /Mail/attachment/cache DELETE endpoint.   |

**Last Modified:** 2021-02-17 02:44:13

---

## **/Mail/attachment/:file\_guid DELETE**

### **Overview**

Delete an updated email attachment (where :file\_guid is the guid value returned from the /Mail/attachment API)

### **Query Parameters:**

This endpoint does not accept any parameters.

### **Input Example:**

This endpoint does not accept any input.

### **Output Example:**

If successful, the endpoint responds with a bool of true.

### **Change Log**

| Version | Change   |
|---------|--|
| v11     | Last version in which /Mail/attachment/:file_guid DELETE is available. Use /Notes/:id/file/filename DELETE to delete a file from the filesystem. Use /Emails/:record/link/attachments/:remote_id DELETE to remove an attachment from an email. Note that removing an attachment from an email will also delete it from the filesystem. |
| v10     | Added /Mail/attachment/:file_guid DELETE endpoint.   |



---

Last Modified: 2021-02-17 02:44:13

## **/Mail/recipients/find GET**

### **Overview**

Finds recipients that match the search term.

### **Request Arguments**

| Name        | Type   | Description   | Required |
|-------------|--------|---|----------|
| q           | string | The search string   | False    |
| module_list | string | One of the following strings: users, accounts, contacts, leads, prospects, all Will determine which modules are searched using the given search string. | False    |
| order_by    | string | columns to sort by (one or more of \$sortableColumns) with direction Example: name:asc,id:desc (will sort by last_name ASC and then id DESC)            | False    |
| offset      | int    | Offset of first record to return  | False    |
| max_num     | int    | Maximum records to return   | False    |

---

## Request

```
?q=foo&module_list=all&order_by=name:asc,id:desc&offset=1&max_num=4
```

## Response Arguments

| Name        | Type  | Description  |
|-------------|-------|--|
| next_offset | int   | Returns the next offset to be used if paging ahead for more records  |
| records     | Array | Array of records found based on the search string and module_list. Each record contains the ID, module, name, email address and it's ID, opt out flag of the email address, and _acl of the recipient found. |

## Response

```
{
  "next_offset": 3,
  "records": [
    {
      "id": "seed_sarah_id",
      "_module": "Users",
      "name": "Sarah Smith",
      "email": "sarah@example.com",
      "email_address_id": "962cefa8-2f1t-11e6-9bee-80e6577b09a3"
    },
    {
      "opt_out": false
    },
    {
      "_acl": {
        "fields": {
          "assigned_user_id": {
            "write": "no",
            "create": "no"
          }
        }
      }
    }
  ]
}
```

---

```

        "date_sent": {
            "write": "no",
            "create": "no"
        }
    }
},
{
    "id": "962cefa8-2f1f-11e6-9ade-80e6500b09a0",
    "_module": "Leads",
    "name": "Antonia Piermarini",
    "email": "support.sales.vegan@example.name",
    "email_address_id": "756yafa8-2f1t-11e6-9bee-80e6577b09a3"
,
    "opt_out": true
    "_acl": {
        "fields": {
            "assigned_user_id": {
                "write": "no",
                "create": "no"
            },
            "date_sent": {
                "write": "no",
                "create": "no"
            }
        }
    }
},
{
    "id": "962850e2-2f1f-11e6-804e-80e6500b09a0",
    "_module": "Leads",
    "name": "Santa Leffingwell",
    "email": "vegan.vegan@example.info",
    "email_address_id": "211uhhg4-2f1t-11e6-9bee-80e6577b09a3"
,
    "opt_out": false
    "_acl": {
        "fields": {
            "assigned_user_id": {
                "write": "no",
                "create": "no"
            },
            "date_sent": {
                "write": "no",
                "create": "no"
            }
        }
    }
}

```

---

```
}
  }
}
]
```

## Change Log

| Version | Change                                    |
|---------|---|
| v10     | Added /Mail/recipients/find GET endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /Mail/recipients/lookup POST

### Overview

Accepts an array of one or more recipients and tries to resolve unsupplied arguments to provide more comprehensive data for the recipient(s).

### Request

```
[
  {
    "module": "Contacts",
    "id": "962cefa8-2f1f-11e6-9ade-80e6500b09a0",
    "email": "",
    "name": ""
  },
  {
    "module": "Leads",
    "id": "9c61c46a-a7c5-df71-481c-51d48232f820",
    "email": "",
    "name": "Vince Tallion"
  }
]
```

---

```
}  
]
```

## Response

```
[  
  {  
    "module": "Contacts",  
    "id": "962cefa8-2f1f-11e6-9ade-80e6500b09a0",  
    "email": "kg@example.com",  
    "name": "Kelly Germaine",  
    "resolved": true  
  },  
  {  
    "module": "Leads",  
    "id": "9c61c46a-a7c5-df71-481c-51d48232f820",  
    "email": "vtallion@example.com",  
    "name": "Vince Tallion",  
    "resolved": true  
  }  
]
```

## Change Log

| Version | Change   |
|---------|--|
| v11     | Last version in which /Mail/recipients/lookup POST is available. |
| v10     | Added /Mail/recipients/lookup POST endpoint.                     |

**Last Modified:** 2021-02-17 02:44:13

## /Meetings POST

---

## Overview

Create a single event or a series of event records.

## Request Arguments

| Name           | Type                | Description                                | Required |
|----------------|---------------------|--|----------|
| <record field> | <record field type> | The name value list of fields to populate. | True     |

## Request

```
{
  "name": "Department Meeting",
  "description": "Weekly Department Meeting",
  "date_start": "yyyy-mm-ddThh:mm:ss-00:00",
  "date_end": "yyyy-mm-ddThh:mm:ss-00:00",
  "repeat_type": "Weekly",
  "repeat_interval": "1", /* Every Week */
  "repeat_dow": "25", /* Tue and Fri */
  "repeat_count": "4", /* 4 Recurrences */
  "repeat_until": "",
}
```

## Response Arguments

| Name           | Description                                      | Start Date | End Date |
|----------------|--|------------|----------|
| <record field> | Returns the fields for the newly created record. |            |          |

## Response

```
{
}
```

---

## Change Log

| Version | Change                         |
|---------|--------------------------------|
| v10     | Added /<module> POST endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /Meetings/:record DELETE

### Overview

Deletes either a single event record or a series of event records

### Request Arguments

| Name            | Type    | Description                            | Required |
|-----------------|---------|--|----------|
| all_recurrences | Boolean | Flag to delete all events in a series. | False    |

### Request

`http://{site_url}/rest/v10/Meetings/2c9e5c09-6824-0d14-f5cb-5130321ac3cf?all_recurrences=true`

### Response Arguments

| Name | Type   | Description                           |
|------|--------|---------------------------------------|
| id   | String | Returns the ID of the deleted record. |

---

## Response

```
{
  "id": "11cf0d0a-40af-8cb1-9da0-5057a5f511f9"
}
```

## Change Log

| Version | Change                                   |
|---------|--|
| v10     | Added /<module>/:record DELETE endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /Meetings/:record PUT

### Overview

Update a calendar event record of the specified type.

### Request Arguments

| Name            | Type    | Description                            | Required |
|-----------------|---------|--|----------|
| all_recurrences | Boolean | Flag to update all events in a series. | False    |

### Request

[http://{site\\_url}/rest/v10/Meetings/2c9e5c09-6824-0d14-f5cb-5130321ac3](http://{site_url}/rest/v10/Meetings/2c9e5c09-6824-0d14-f5cb-5130321ac3)



---

```

cf?all_recurrences=true
{
  "name": "Department Meeting",
  "description": "Weekly Department Meeting",
  "date_start": "yyyy-mm-ddThh:mm:ss-00:00",
  "date_end": "yyyy-mm-ddThh:mm:ss-00:00",
  "repeat_type": "Weekly",
  "repeat_interval": "1", /* Every Week */
  "repeat_dow": "25", /* Tue and Fri */
  "repeat_count": "4", /* 4 Recurrences */
  "repeat_until": "",
}

```

## Response Arguments

| Name           | Description                                | Start Date | End Date |
|----------------|--|------------|----------|
| <record field> | Returns the fields for the updated record. |            |          |

## Response

```

{
}

```

## Change Log

| Version | Change                                |
|---------|---------------------------------------|
| v10     | Added /<module>/:record PUT endpoint. |

**Last Modified:** 2021-02-17 02:44:13

---

## **/Meetings/:record/external GET**

Retrieves info about launching an external meeting

### **Summary:**

This endpoint is used to retrieve info about launching an external meeting. This includes whether the current user has permission to host and/or join the meeting along with the host/join URLs.

### **Query Parameters:**

| <b>Param</b>                                  | <b>Description</b> | <b>Optional</b> |
|---|--------------------|-----------------|
| This endpoint does not accept any parameters. |                    |                 |

### **Input Example:**

### **Output Example:**

```
{ "is_host_option_allowed": false, "host_url": "", "is_join_option_allowed": true, "join_url": "//link.to/external/meeting" }
```

**Last Modified:** 2021-02-17 02:44:13

## **/Notifications GET**

---

## Overview

Lists filtered records.

## Summary

This endpoint will return a set of records filtered by an expression. The filter can be applied to multiple fields and have multiple and/or conditions in it. Alternatively, you may use an existing filter by specifying its id. If both a filter definition and a filter id are passed, the two filters will be joined with an AND. Care will need to be taken to make sure that any filters used have appropriate indexes on the server side otherwise the runtime of the endpoint will be very long. Related fields can be searched by specifying the field name as: "link\_name.remote\_field", so if you wished to search the Accounts module by a related member account you would use "members.sic\_code".

## Request Arguments

| Name   | Type   | Description   | Required |
|--------|--------|---|----------|
| filter | String | <p>The filter expression. Filter expressions are explained below. Note that JSON-encoded filters can be specified as query parameters in one of two ways for GET requests:</p> <ol style="list-style-type: none"><li>1. By specifying individual filter arguments as distinct parameters. Example: filter[0][id]=1</li><li>2. By specifying the whole</li></ol> | False    |

| Name      | Type    | Description  | Required |
|-----------|---------|--|----------|
|           |         | filter as a single JSON-encoded string. Note that this syntax is currently not supported on certain modules. Example: filter=[{"id": "1"}].  |          |
| filter_id | String  | Identifier for a preexisting filter. If filter is also set, the two filters are joined with an AND.  | False    |
| max_num   | Integer | A maximum number of records to return. Default is 20.  | False    |
| offset    | Integer | The number of records to skip over before records are returned. Default is 0.  | False    |
| fields    | String  | Comma delimited list of fields to return. Each field may be represented either by string, or by map containing field name and additional field parameters (applicable to link and collection fields). The fields id and date_modified will always be | False    |

| Name     | Type   | Description  | Required |
|----------|--------|--|----------|
|          |        | <p>returned.<br/>           Example: name,account_type,description,{"name":"opportunities","fields":["id","name","sales_status"],"order_by":"date_closed:desc"}<br/>           For more details on additional field parameters, see <a href="#">Relate API</a> and <a href="#">Collection API</a>.</p>                           |          |
| view     | String | <p>Instead of defining the fields argument, the view argument can be used instead. The field list is constructed at the server side based on the view definition which is requested. This argument can be used in combination with the fields argument. Common views are "record" and "list".<br/>           Example: record</p> | False    |
| order_by | String | <p>How to sort the returned records, in a comma delimited list with the direction appended to the column name after a colon.<br/>           Example: name:DESC,account_type:DESC,date_modified:ASC</p>   | False    |

| Name       | Type    | Description  | Required |
|------------|---------|--|----------|
| q          | String  | A search expression, will search on this module. Cannot be used at the same time as a filter expression or id. | False    |
| deleted    | Boolean | Boolean to show deleted records in the result set.   | False    |
| nulls_last | Boolean | Boolean to return records with null values in order_by fields last in the result set.                          | False    |

## Filter Expressions

There are four types of filters:

### Basic

This will filter the results by checking the field "name" for value "Nelson Inc". This will only find exact matches.

### Example

```
{
  "filter":[
    {
      "name":"Nelson Inc"
    }
  ]
}
```

### Full

---

This expression allows you to specify what operation you want to use for filtering on the field. In the example you would match any record where the field "name" starts with the value "Nelson".

**Example**

```
{
  "filter": [
    {
      "name": {
        "$starts": "Nelson"
      }
    }
  ]
}
```

Below is a list of operation types:

| Operation    | Description   |
|--------------|---|
| \$equals     | Performs an exact match on that field.  |
| \$not_equals | Performs an exact match on that field.  |
| \$not_equals | Matches on non-matching values.   |
| \$starts     | Matches on anything that starts with the value.   |
| \$ends       | Matches anything that ends with the value.  |
| \$contains   | Matches anything that contains the value  |
| \$in         | Finds anything where field matches one of the values as specified as an array.          |
| \$not_in     | Finds anything where field does not matches any of the values as specified as an array. |
| \$is_null    | Checks if the field is null. This operation does not need a value specified.            |
| \$not_null   | Checks if the field is not null. This operation does not need a value specified.        |
| \$lt         | Matches when the field is less than the value.  |

---

| Operation | Description   |
|-----------|---|
| \$lte     | Matches when the field is less than or equal to the value.    |
| \$gt      | Matches when the field is greater than the value.             |
| \$gte     | Matches when the field is greater than or equal to the value. |

## Sub-expressions

This allows you to group filter expressions into or/and groupings. By default all expressions are and'ed together. The example expression would match if the field "name" was either "Nelson Inc" or "Nelson LLC". The only currently accepted sub-expression types are "\$and" and "\$or".

### Example

```
{
  "filter": [
    {
      "$or": [
        {
          "name": "Nelson Inc"
        },
        {
          "name": "Nelson LLC"
        }
      ]
    }
  ]
}
```

## Modules

There are two module expressions, they operate on modules instead of fields. The current module can be specified by either using the module name "\_this" or by leaving the module name as a blank string. The example expression would filter the records in the current module to only your favorites. The only currently



---

accepted module expressions are "\$favorite" and "\$owner".

### Example

```
{
  "filter": [
    {
      "$favorite": "_this"
    }
  ]
}
```

## Response Arguments

| Name        | Type    | Description   |
|-------------|---------|---|
| next_offset | Integer | Displays the next offset for retrieval of additional results. -1 will be returned when there are no more records. |
| records     | Array   | An array of results containing matched records.   |

## Response

```
{
  "next_offset": -1,
  "records": [
    {
      "id": "fa300a0e-0ad1-b322-9601-512d0983c19a",
      "name": "Dale Spivey",
      "date_modified": "2013-02-28T05:03:00+00:00",
      "description": "",
      "opportunities": [
        {
          "_module": "Opportunities",
          "id": "b0701501-1fab-8ae7-3942-540da93f5017",
          "name": "360 Vacations - 228 Units",

```

```

        "date_modified": "2014-09-08T16:05:00+03:00",
        "sales_status": "New"
    },
],
"_acl": {
    "fields": {
    }
}
},
{
    "id": "95e17367-9b3d-0e26-22dc-512d0961fedf",
    "name": "Florence Haddock",
    "date_modified": "2013-02-26T19:12:00+00:00",
    "description": "",
    "opportunities": [
        {
            _module: "Opportunities"
            date_modified: "2014-09-08T16:05:00+03:00"
            id: "9ce7c088-8ee4-7cd3-18f1-540da944d4c0"
            name: "360 Vacations - 312 Units"
            sales_status: "New"
        },
    ],
    "_acl": {
        "fields": {
        }
    }
}
]
}

```

## Change Log

| Version | Change                               |
|---------|--------------------------------------|
| v10     | Added /<module>/filter GET endpoint. |

**Last Modified:** 2021-02-17 02:44:13

---

# /Opportunities/config POST

## Overview

Opportunity Config Save

## Summary

This saves the config changes to the Opportunity Module, when the **opps\_view\_by** attribute changes, it will perform the nessicary migrations for the Metadata and the actual Data.

## Request Arguments

| Name           | Type                | Description                          | Required |
|----------------|---------------------|--------------------------------------|----------|
| <config field> | <config field type> | The list of config fields to update. | False    |

## Request

```
{  
  "MyConfigOption": "MyConfigValue"  
}
```

## Response Arguments

| Name           | Type                | Description                                 |
|----------------|---------------------|---|
| <config field> | <config field type> | The list of config fields will be returned. |

## Response

```
{  
  "MyConfigOption": "MyConfigValue"  
}
```

---

```
}
```

## Change Log

| Version | Change                                     |
|---------|--|
| v10     | Added /Opportunities/config POST endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /Opportunities/enum/:field GET

### Overview

Retrieves the enum values for a specific field.

### Request Arguments

This endpoint does not accept any request arguments.

### Response Arguments

| Name          | Type  | Description                          |
|---------------|-------|--------------------------------------|
| <list values> | Array | Returns the enum values for a field. |

### Response

```
{  
  "": "",  
  "Analyst": "Analyst",  
}
```

---

```
"Competitor": "Competitor",
"Customer": "Customer",
"Integrator": "Integrator",
"Investor": "Investor",
"Partner": "Partner",
"Press": "Press",
"Prospect": "Prospect",
"Reseller": "Reseller",
"Other": "Other"
}
```

## Change Log

| Version | Change                                    |
|---------|---|
| v10     | Added /<module>/enum/:field GET endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /Opportunities/:record PUT

### Overview

Update a record of the specified type.

### Request Arguments

| Name           | Type                | Description                                | Required |
|----------------|---------------------|--|----------|
| <record field> | <record field type> | The name value list of fields to populate. | True     |

---

## Request

```
{
  "name": "New Account Name",
  "phone_office": "(555) 888-5555",
  "website": "www.newsite.com",
  "meetings": {
    {
      "add": [ "21e3385e-404f-b470-407e-54044e3d8024" ],
      "delete": [ "21e3385e-404f-b470-407e-54044e3d8023" ],
      "create": [
        {
          "name": "Test Meeting"
        }
      ]
    }
  ]
}
```

## Link fields

It is possible to add or delete record relations to other records and create new related records.

| Action | Type | Description  |
|--------|------|--|
| add    | List | List of related records ID. See <a href="#">RelateRecordApi</a> for details. |
| delete | List | List of related records ID.  |
| create | List | List of name to value arrays of related records.                             |

## Response Arguments

| Name           | Type                | Description                                |
|----------------|---------------------|--|
| <record field> | <record field type> | Returns the fields for the updated record. |

## Response

---

```
{
  "id": "f222265a-b755-da89-0bc7-512d09b800b6",
  "name": "New Account Name",
  "date_entered": "2013-02-26T19:12:00+00:00",
  "date_modified": "2013-02-27T22:49:00+00:00",
  "modified_user_id": "1",
  "modified_by_name": "Administrator",
  "created_by": "1",
  "created_by_name": "Administrator",
  "description": "",
  "img": "",
  "last_activity_date": "2013-02-26T19:12:00+00:00",
  "deleted": false,
  "assigned_user_id": "seed_sarah_id",
  "assigned_user_name": "Sarah Smith",
  "team_name": [
    {
      "id": 1,
      "name": "Global",
      "name_2": "",
      "primary": false
    },
    {
      "id": "West",
      "name": "West",
      "name_2": "",
      "primary": true
    }
  ],
  "linkedin": "",
  "facebook": "",
  "twitter": "",
  "googleplus": "",
  "account_type": "Customer",
  "industry": "Hospitality",
  "annual_revenue": "",
  "phone_fax": "",
  "billing_address_street": "9 IBM Path",
  "billing_address_street_2": "",
  "billing_address_street_3": "",
  "billing_address_street_4": "",
  "billing_address_city": "San Francisco",
  "billing_address_state": "CA",
  "billing_address_postalcode": "43635",
  "billing_address_country": "USA",
```

---

```
"rating":"","  
"phone_office":"(555) 888-5555",  
"phone_alternate":"","  
"website":"www.newsite.com",  
"ownership":"","  
"employees":"","  
"ticker_symbol":"","  
"shipping_address_street":"9 IBM Path",  
"shipping_address_street_2":"","  
"shipping_address_street_3":"","  
"shipping_address_street_4":"","  
"shipping_address_city":"San Francisco",  
"shipping_address_state":"CA",  
"shipping_address_postalcode":"43635",  
"shipping_address_country":"USA",  
"email1":"kid86@example.net",  
"parent_id":"","  
"sic_code":"","  
"parent_name":"","  
"email_opt_out":false,  
"invalid_email":false,  
"email":[  
  {  
    "email_address":"kid86@example.net",  
    "opt_out":"0",  
    "invalid_email":"0",  
    "primary_address":"1"  
  },  
  {  
    "email_address":"the.dev@example.name",  
    "opt_out":"0",  
    "invalid_email":"0",  
    "primary_address":"0"  
  }  
],  
"campaign_id":"","  
"campaign_name":"","  
"my_favorite":false,  
"_acl":{  
  "fields":{  
  
  }  
}  
}
```



---

## Change Log

| Version | Change                                |
|---------|---------------------------------------|
| v10     | Added /<module>/:record PUT endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /OutboundEmailConfiguration/list GET

### Overview

Lists the current user's outbound email configurations for sending email.

### Summary

Used by the Emails module for selecting an outbound email configuration for sending an email.

### Response

```
[
  {
    "id": "ecbf2a6c-261e-5fca-fbb6-512d093554b8",
    "name": "George Lee ",
    "type": "user",
    "default": false
  },
  {
    "id": "af5f8dae-7169-b497-1d77-512d0937ed81",
    "name": "ACME, Inc. ",
    "type": "system",
    "default": true
  }
]
```

---

## Change Log

| Version | Change   |
|---------|--|
| v11     | Last version in which /OutboundEmailConfiguration/list GET is available. Use /Emails/enum/outbound_email_id GET instead. |
| v10     | Added the /OutboundEmailConfiguration/list GET endpoint.   |

Last Modified: 2021-02-17 02:44:13

## /OutboundEmail POST

### Overview

Create a new OutboundEmail configuration to use to send emails over SMTP.

### Summary

Each configuration that is created is validated first by attempting to connect to the server.

### Request Arguments

| Name          | Type   | Description  | Required |
|---------------|--------|--|----------|
| name          | String | The display name of the configuration.             | True     |
| mail_sendtype | String | Only SMTP is supported. This field is defaulted to | False    |

| Name              | Type    | Description   | Required |
|-------------------|---------|---|----------|
|                   |         | <b>smtp.</b>  |          |
| mail_smtpstype    | String  | The email provider through which emails are sent. This is merely a convenience which allows for prepopulating data in the UI. Possible values are: google, exchange, outlook, other. <b>other</b> is the default. | False    |
| mail_smtpserver   | String  | The address of the SMTP server.   | True     |
| mail_smtpport     | Integer | The port on which to connect to the SMTP server. The default is <b>465</b> , which assumes you are using SSL.   | False    |
| mail_smtpuser     | String  | The username for authenticating with the SMTP server. It is only required if <b>mail_smtpauth_req</b> is <b>true</b> .  | False    |
| mail_smtppass     | String  | The password for authenticating with the SMTP server. It is only required if <b>mail_smtpauth_req</b> is <b>true</b> .  | False    |
| mail_smtpauth_req | Boolean | Indicates whether or not the SMTP server requires authentication. The default is <b>false</b> .   | False    |
| mail_smtpssl      | String  | The encryption protocol used for connecting to the SMTP server. <b>"0"</b>  | False    |

| Name | Type | Description   | Required |
|------|------|---|----------|
|      |      | represents no encryption. "1" represents SSL. "2" represents TLS. The default is SSL. |          |

## Request

```
{
  "name": "My Exchange Account",
  "mail_smtp_type": "exchange",
  "mail_smtp_server": "smtp.example.com",
  "mail_smtp_port": 465,
  "mail_smtp_user": "foo@example.com",
  "mail_smtp_pass": "P@55w0rd",
  "mail_smtp_auth_req": true,
  "mail_smtp_ssl": "1"
}
```

## Response Arguments

| Name          | Type   | Description   |
|---------------|--------|---|
| name          | String | The display name of the configuration.  |
| type          | String | Only <b>user</b> configuration may be created using this endpoint, so <b>user</b> will always be returned. <b>system</b> and <b>system-override</b> configurations are always created by the application. |
| user_id       | String | The current user's ID. The current user may only create configurations for himself or herself.  |
| mail_sendtype | String | Only SMTP is supported, so <b>smtp</b> will always be   |

| Name              | Type    | Description   |
|-------------------|---------|---|
|                   |         | returned.   |
| mail_smtptype     | String  | The email provider through which emails are sent. Possible values are: google, exchange, outlook, other.  |
| mail_smtpserver   | String  | The address of the SMTP server.   |
| mail_smtpport     | Integer | The port on which to connect to the SMTP server.  |
| mail_smtpuser     | String  | The username for authenticating with the SMTP server.   |
| mail_smtppass     | Boolean | Indicates whether or not a password exists. <b>true</b> is returned for this field when a password does exist. This field is not included in the response when a password does not exist. |
| mail_smtpauth_req | Boolean | Indicates whether or not the SMTP server requires authentication.   |
| mail_smtpssl      | String  | The encryption protocol used for connecting to the SMTP server.   |

## Response

```
{
  "id": "e04ce998-960e-11e6-8628-3c15c2d582c6",
  "name": "My Exchange Account",
  "type": "user",
  "user_id": "e91b1fa7-1bd8-3c71-be96-512e643f9ca4",
  "mail_sendtype": "smtp",
  "mail_smtptype": "exchange",
  "mail_smtpserver": "smtp.example.com",
  "mail_smtpport": 465,
```

---

```
"mail_smtpuser": "foo@example.com",
"mail_smtppass": true,
"mail_smtpauth_req": true,
"mail_smtpssl": "1",
"deleted": false,
"my_favorite": false,
"_acl": {
  "fields": {}
},
"_module": "OutboundEmail"
}
```

## Change Log

| Version | Change                              |
|---------|-------------------------------------|
| v10     | Added /OutboundEmail POST endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /OutboundEmail/:record PUT

### Overview

Update an OutboundEmail configuration.

### Summary

Each configuration that is saved is validated first by attempting to connect to the server.

### Request Arguments

| Name              | Type    | Description  | Required |
|-------------------|---------|--|----------|
| name              | String  | The display name of the configuration.   | False    |
| mail_sendtype     | String  | Only SMTP is supported. It is recommended that you do not change this from <b>smtp</b> .   | False    |
| mail_smtptype     | String  | The email provider through which emails are sent. This is merely a convenience which allows for prepopulating data in the UI. Possible values are: google, exchange, outlook, other. | False    |
| mail_smtpserver   | String  | The address of the SMTP server.  | False    |
| mail_smtpport     | Integer | The port on which to connect to the SMTP server.   | False    |
| mail_smtpuser     | String  | The username for authenticating with the SMTP server. It is only required if <b>mail_smtpauth_req</b> is <b>true</b> .   | False    |
| mail_smtppass     | String  | The password for authenticating with the SMTP server. It is only required if <b>mail_smtpauth_req</b> is <b>true</b> .   | False    |
| mail_smtpauth_req | Boolean | Indicates whether or not the SMTP server requires authentication.  | False    |
| mail_smtpssl      | String  | The encryption   | False    |

| Name | Type | Description  | Required |
|------|------|--|----------|
|      |      | protocol used for connecting to the SMTP server. "0" represents no encryption. "1" represents SSL. "2" represents TLS. |          |

## Request

```
{
  "mail_smtpport": 587,
  "mail_smtpssl": "2"
}
```

## Response Arguments

| Name           | Type   | Description   |
|----------------|--------|---|
| name           | String | The display name of the configuration.  |
| type           | String | Possible values are: user, system, system-override. Only the administrator may update the <b>system</b> configuration. This field may never change. |
| user_id        | String | The current user's ID. The current user may only update configurations that he or she owns.   |
| mail_sendtype  | String | Only SMTP is supported, <b>smtp</b> will always be returned.  |
| mail_smtpstype | String | The email provider through which emails are sent. Possible values are: google, exchange, outlook, other.  |



| Name              | Type    | Description   |
|-------------------|---------|---|
| mail_smtpserver   | String  | The address of the SMTP server.   |
| mail_smtpport     | Integer | The port on which to connect to the SMTP server.  |
| mail_smtpuser     | String  | The username for authenticating with the SMTP server.   |
| mail_smtppass     | Boolean | Indicates whether or not a password exists. <b>true</b> is returned for this field when a password does exist. This field is not included in the response when a password does not exist. |
| mail_smtpauth_req | Boolean | Indicates whether or not the SMTP server requires authentication.   |
| mail_smtpssl      | String  | The encryption protocol used for connecting to the SMTP server.   |

## Response

```
{
  "id": "e04ce998-960e-11e6-8628-3c15c2d582c6",
  "name": "My Exchange Account",
  "type": "user",
  "user_id": "e91b1fa7-1bd8-3c71-be96-512e643f9ca4",
  "mail_sendtype": "smtp",
  "mail_smtptype": "exchange",
  "mail_smtpserver": "smtp.example.com",
  "mail_smtpport": 587,
  "mail_smtpuser": "foo@example.com",
  "mail_smtppass": true,
  "mail_smtpauth_req": true,
  "mail_smtpssl": "2",
  "deleted": false,
  "my_favorite": false,
}
```

---

```
"_acl": {
  "fields": {}
},
"_module": "OutboundEmail"
}
```

## Change Log

| Version | Change                                     |
|---------|--|
| v10     | Added /OutboundEmail/:record PUT endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /PdfManager GET

### Overview

Lists filtered records.

### Summary

This endpoint will return a set of records filtered by an expression. The filter can be applied to multiple fields and have multiple and/or conditions in it. Alternatively, you may use an existing filter by specifying its id. If both a filter definition and a filter id are passed, the two filters will be joined with an AND. Care will need to be taken to make sure that any filters used have appropriate indexes on the server side otherwise the runtime of the endpoint will be very long. Related fields can be searched by specifying the field name as: "link\_name.remote\_field", so if you wished to search the Accounts module by a related member account you would use "members.sic\_code".

### Request Arguments

| Name      | Type   | Description   | Required |
|-----------|--------|---|----------|
| filter    | String | <p>The filter expression. Filter expressions are explained below. Note that JSON-encoded filters can be specified as query parameters in one of two ways for GET requests:</p> <ol style="list-style-type: none"> <li data-bbox="884 707 1126 1061">1. By specifying individual filter arguments as distinct parameters. Example: filter[0][id]=1</li> <li data-bbox="884 1106 1137 1778">2. By specifying the whole filter as a single JSON-encoded string. Note that this syntax is currently not supported on certain modules. Example: filter=[{"id": "1"}].</li> </ol> | False    |
| filter_id | String | Identifier for a preexisting filter. If filter is also set, the two filters are joined with an AND.   | False    |

| Name    | Type    | Description   | Required |
|---------|---------|---|----------|
| max_num | Integer | A maximum number of records to return. Default is 20.   | False    |
| offset  | Integer | The number of records to skip over before records are returned. Default is 0.   | False    |
| fields  | String  | <p>Comma delimited list of fields to return. Each field may be represented either by string, or by map containing field name and additional field parameters (applicable to link and collection fields). The fields id and date_modified will always be returned.</p> <p>Example: name,account_type,description,{"name":"opportunities","fields":["id","name","sales_status"],"order_by":"date_closed:desc"}</p> <p>For more details on additional field parameters, see <a href="#">Relate API</a> and <a href="#">Collection API</a>.</p> | False    |
| view    | String  | Instead of defining the fields argument, the view argument can be used instead. The field list is constructed at the  | False    |

| Name       | Type    | Description  | Required |
|------------|---------|--|----------|
|            |         | server side based on the view definition which is requested. This argument can be used in combination with the fields argument. Common views are "record" and "list".<br>Example: record |          |
| order_by   | String  | How to sort the returned records, in a comma delimited list with the direction appended to the column name after a colon.<br>Example: name:DESC,account_type:DESC,date_modified:ASC      | False    |
| q          | String  | A search expression, will search on this module. Cannot be used at the same time as a filter expression or id.   | False    |
| deleted    | Boolean | Boolean to show deleted records in the result set.   | False    |
| nulls_last | Boolean | Boolean to return records with null values in order_by fields last in the result set.  | False    |

## Filter Expressions

---

There are four types of filters:

### Basic

This will filter the results by checking the field "name" for value "Nelson Inc". This will only find exact matches.

### Example

```
{
  "filter": [
    {
      "name": "Nelson Inc"
    }
  ]
}
```

### Full

This expression allows you to specify what operation you want to use for filtering on the field. In the example you would match any record where the field "name" starts with the value "Nelson".

### Example

```
{
  "filter": [
    {
      "name": {
        "$starts": "Nelson"
      }
    }
  ]
}
```

Below is a list of operation types:

| Operation                 | Description                            |
|---------------------------|--|
| <code>\$equals</code>     | Performs an exact match on that field. |
| <code>\$not_equals</code> | Performs an exact match on that field. |

| Operation    | Description   |
|--------------|---|
| \$not_equals | Matches on non-matching values.   |
| \$starts     | Matches on anything that starts with the value.   |
| \$ends       | Matches anything that ends with the value.  |
| \$contains   | Matches anything that contains the value  |
| \$in         | Finds anything where field matches one of the values as specified as an array.          |
| \$not_in     | Finds anything where field does not matches any of the values as specified as an array. |
| \$is_null    | Checks if the field is null. This operation does not need a value specified.            |
| \$not_null   | Checks if the field is not null. This operation does not need a value specified.        |
| \$lt         | Matches when the field is less than the value.  |
| \$lte        | Matches when the field is less than or equal to the value.                              |
| \$gt         | Matches when the field is greater than the value.                                       |
| \$gte        | Matches when the field is greater than or equal to the value.                           |

## Sub-expressions

This allows you to group filter expressions into or/and groupings. By default all expressions are and'ed together. The example expression would match if the field "name" was either "Nelson Inc" or "Nelson LLC". The only currently accepted sub-expression types are "\$and" and "\$or".

### Example

```
{
```

---

```
"filter":[
  {
    "$or":[
      {
        "name":"Nelson Inc"
      },
      {
        "name":"Nelson LLC"
      }
    ]
  }
]
```

## Modules

There are two module expressions, they operate on modules instead of fields. The current module can be specified by either using the module name "\_this" or by leaving the module name as a blank string. The example expression would filter the records in the current module to only your favorites. The only currently accepted module expressions are "\$favorite" and "\$owner".

### Example

```
{
  "filter":[
    {
      "$favorite":"_this"
    }
  ]
}
```

## Response Arguments

| Name        | Type    | Description  |
|-------------|---------|--|
| next_offset | Integer | Displays the next offset for retrieval of additional results. -1 will be returned when there are no more |



| Name    | Type  | Description                                     |
|---------|-------|---|
|         |       | records.  |
| records | Array | An array of results containing matched records. |

## Response

```
{
  "next_offset":-1,
  "records":[
    {
      "id":"fa300a0e-0ad1-b322-9601-512d0983c19a",
      "name":"Dale Spivey",
      "date_modified":"2013-02-28T05:03:00+00:00",
      "description":"",
      "opportunities": [
        {
          _module: "Opportunities",
          "id": "b0701501-1fab-8ae7-3942-540da93f5017",
          "name": "360 Vacations - 228 Units",
          "date_modified": "2014-09-08T16:05:00+03:00",
          "sales_status": "New"
        },
      ],
      "_acl": {
        "fields": {
        }
      }
    },
    {
      "id":"95e17367-9b3d-0e26-22dc-512d0961fedf",
      "name":"Florence Haddock",
      "date_modified":"2013-02-26T19:12:00+00:00",
      "description":"",
      "opportunities": [
        {
          _module: "Opportunities"
          date_modified: "2014-09-08T16:05:00+03:00"
          id: "9ce7c088-8ee4-7cd3-18f1-540da944d4c0"
          name: "360 Vacations - 312 Units"
          sales_status: "New"
        },
      ],
    }
  ]
}
```

```
    ],
    "_acl": {
      "fields": {
      }
    }
  }
]
}
```

## Change Log

| Version | Change                               |
|---------|--------------------------------------|
| v10     | Added /<module>/filter GET endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /PdfManager/generate GET

### Overview

PdfManager Generate Endpoint Help

### Summary

This endpoint returns and initiates download of a PDF.

### Request Arguments

| Name   | Type   | Description  | Required |
|--------|--------|--|----------|
| module | String | The Module name of the Bean from which to create a PDF | True     |

| Name            | Type   | Description                                       | Required |
|-----------------|--------|---|----------|
| record          | String | The Record ID from which to create a PDF          | True     |
| pdf_template_id | String | The PDF Template ID to use to create the PDF      | True     |
| sugarpdf        | String | The type of PDF to use. Defaults to 'pdfmanager'. | False    |

## Request

```
{
  "module": "Quotes",
  "record": "abcde-fghij-12345-67890",
  "pdf_template_id": "12345-67890-abcde-fghij",
  "sugarpdf": "pdfmanager"
}
```

## Response

The response is a base64 encoded string of the contents of the PDF file.

## Change Log

| Version | Change                                   |
|---------|--|
| v11.3   | Added /PdfManager/generate GET endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /ProductTemplates/tree GET

---

## ProductTemplate API

### Summary:

This endpoint is designed to return a paged recordset of one level of product templates and product categories in a N-level deep tree representing the relationship between categories and templates. The results are loosely filtered (wildcard before and after).

### Query Parameters:

| Param   | Description  | Optional |
|---------|--|----------|
| filter  | The filter used to search Product Template and Product Category names.<br>%filter%           | true     |
| root    | The ID of the root node you wish to retrieve.<br>Defaults to null (the root level)           | true     |
| offset  | Specifies the numeric value of the offset you wish to retrieve                               | true     |
| max_num | Specifies the numeric value of the max number of records you wish to receive. Default is 20. | true     |

### Response Parameters:

| Param | Description                                    |
|-------|--|
| id    | The id of the item (Product Category/Template) |
| Data  | The name of the item                           |

---

|       |  |
|-------|--|
| state | Specifies the open or closed state of the element. (used for categories) |
| index | Specifies the index of this element in the current level.                |

## Response:

```
{
  "records": [
    {
      "id": "023d316a-d9d0-11e7-9f54-02425392a518",
      "type": "category",
      "data": "Christen Widgets",
      "state": "closed",
      "index": 0
    },
    {
      "id": "01828a4a-d9d0-11e7-8989-02425392a518",
      "type": "category",
      "data": "Desktops",
      "state": "closed",
      "index": 1
    }
  ],
  "next_offset": 2
}
```

**Last Modified:** 2021-02-17 02:44:13

## /ProductTemplates/tree POST

ProductTemplate API

---

## Summary:

This endpoint is designed to return a paged recordset of one level of product templates and product categories in a N-level deep tree representing the relationship between categories and templates. The results are loosely filtered (wildcard before and after).

## Query Parameters:

| Param   | Description  | Optional |
|---------|--|----------|
| filter  | The filter used to search Product Template and Product Category names. %filter%              | true     |
| root    | The ID of the root node you wish to retrieve. Defaults to null (the root level)              | true     |
| offset  | Specifies the numeric value of the offset you wish to retrieve                               | true     |
| max_num | Specifies the numeric value of the max number of records you wish to receive. Default is 20. | true     |

## Response Parameters:

| Param | Description  |
|-------|--|
| id    | The id of the item (Product Category/Template)                           |
| Data  | The name of the item   |
| state | Specifies the open or closed state of the element. (used for categories) |
| index | Specifies the index of this element in the                               |

---

current level.

## Response:

```
{
  "records": [
    {
      "id": "023d316a-d9d0-11e7-9f54-02425392a518",
      "type": "category",
      "data": "Christen Widgets",
      "state": "closed",
      "index": 0
    },
    {
      "id": "01828a4a-d9d0-11e7-8989-02425392a518",
      "type": "category",
      "data": "Desktops",
      "state": "closed",
      "index": 1
    }
  ],
  "next_offset": 2
}
```

Last Modified: 2021-02-17 02:44:13

## /Quotes/config GET

### Overview

[Quote Config GET Help](#)

### Summary

---

This endpoint returns dependent and related fields for all fields used in the Quoted Line Items area of the Quote record.

## Request Arguments

This endpoint does not accept any request arguments.

## Response Arguments

| Name           | Type                | Description                                 |
|----------------|---------------------|---|
| <config field> | <config field type> | The list of config fields will be returned. |

## Response

```
{
  "summary_columns": [
    {
      "name": "deal_tot",
      "label": "LBL_LIST_DEAL_TOT",
      "css_class": "quote-totals-row-item",
      "related_fields": [
        "deal_tot_discount_percentage"
      ],
      "type": "currency",
      "labelModule": "Quotes"
    },
    {
      "name": "new_sub",
      "css_class": "quote-totals-row-item",
      "type": "currency",
      "label": "LBL_NEW_SUB",
      "labelModule": "Quotes"
    },
    {
      "name": "tax",
      "label": "LBL_TAX_TOTAL",
      "css_class": "quote-totals-row-item",
      "type": "currency",
      "labelModule": "Quotes"
    }
  ],
}
```



---

```

    {
      "name": "shipping",
      "css_class": "quote-totals-row-item",
      "type": "currency",
      "label": "LBL_SHIPPING",
      "labelModule": "Quotes"
    },
    {
      "name": "total",
      "label": "LBL_LIST_GRAND_TOTAL",
      "css_class": "quote-totals-row-item",
      "type": "currency",
      "labelModule": "Quotes"
    }
  ],
  "worksheet_columns": [
    {
      "name": "line_num",
      "label": null,
      "widthClass": "cell-xsmall",
      "css_class": "line_num tcenter",
      "type": "line-num",
      "readonly": true
    },
    {
      "name": "quantity",
      "label": "LBL_QUANTITY",
      "widthClass": "cell-small",
      "css_class": "quantity",
      "type": "float",
      "labelModule": "Products"
    },
    {
      "name": "product_template_name",
      "label": "LBL_ITEM_NAME",
      "widthClass": "cell-large",
      "type": "quote-data-relate",
      "required": true,
      "labelModule": "Quotes"
    },
    {
      "name": "mft_part_num",
      "label": "LBL_MFT_PART_NUM",
      "type": "base",
      "labelModule": "Products"
    }
  ],

```

```

{
  "name": "discount_price",
  "label": "LBL_DISCOUNT_PRICE",
  "type": "currency",
  "convertToBase": true,
  "showTransactionalAmount": true,
  "related_fields": [
    "discount_price",
    "currency_id",
    "base_rate"
  ],
  "labelModule": "Products"
},
{
  "name": "discount",
  "type": "fieldset",
  "css_class": "quote-discount-percent",
  "label": "LBL_DISCOUNT_AMOUNT",
  "fields": [
    {
      "name": "discount_amount",
      "label": "LBL_DISCOUNT_AMOUNT",
      "type": "discount",
      "convertToBase": true,
      "showTransactionalAmount": true
    },
    {
      "type": "discount-select",
      "name": "discount_select",
      "no_default_action": true,
      "buttons": [
        {
          "type": "rowaction",
          "name": "select_discount_amount_button",
          "label": "LBL_DISCOUNT_AMOUNT",
          "event": "button:discount_select_change:cl
ick"
        },
        {
          "type": "rowaction",
          "name": "select_discount_percent_button",
          "label": "LBL_DISCOUNT_PERCENT",
          "event": "button:discount_select_change:cl
ick"
        }
      ]
    }
  ],

```

---

```

        "label": "LBL_DISCOUNT_AS_PERCENT"
    }
],
"labelModule": "Products"
},
{
    "name": "total_amount",
    "label": "LBL_LINE_ITEM_TOTAL",
    "type": "currency",
    "widthClass": "cell-medium",
    "showTransactionalAmount": true,
    "related_fields": [
        "total_amount",
        "currency_id",
        "base_rate"
    ],
    "labelModule": "Quotes"
}
],
"footer_rows": [
    {
        "name": "new_sub",
        "type": "currency"
    },
    {
        "name": "tax",
        "type": "currency"
    },
    {
        "name": "shipping",
        "type": "quote-footer-currency",
        "css_class": "quote-footer-currency",
        "default": "0.00"
    },
    {
        "name": "total",
        "type": "currency",
        "css_class": "grand-total"
    }
],
"summary_columns_related_fields": [
    "base_rate",
    "deal_tot",
    "deal_tot_usdollar",
    "shipping",
    "subtotal",

```

---

```
    "subtotal_usdollar",
    "tax",
    "taxable_subtotal"
  ],
  "worksheet_columns_related_fields": [
    "base_rate",
    "deal_calc",
    "discount_amount",
    "discount_price",
    "discount_select",
    "quantity",
    "subtotal",
    "tax_class",
    "total_amount",
    "description",
    "quote_id",
    "name",
    "product_template_id",
    "product_template_name"
  ],
  "footer_rows_related_fields": [
    "deal_tot",
    "deal_tot_usdollar",
    "shipping",
    "subtotal",
    "subtotal_usdollar",
    "tax",
    "taxable_subtotal"
  ],
  "dependentFields": {
    "Quotes": {
      "currency_id": {
        "related": {
          "subtotal": {
            "module": "Quotes",
            "field": "subtotal",
            "reason": "related_fields"
          },
          "discount": {
            "module": "Quotes",
            "field": "discount",
            "reason": "related_fields"
          },
          "new_sub": {
            "module": "Quotes",
            "field": "new_sub",
```

---

```
        "reason": "related_fields"
    },
    "tax": {
        "module": "Quotes",
        "field": "tax",
        "reason": "related_fields"
    },
    "shipping": {
        "module": "Quotes",
        "field": "shipping",
        "reason": "related_fields"
    },
    "subtotal_usdollar": {
        "module": "Quotes",
        "field": "subtotal_usdollar",
        "reason": "related_fields"
    }
}
},
"base_rate": {
    "related": {
        "subtotal": {
            "module": "Quotes",
            "field": "subtotal",
            "reason": "related_fields"
        },
        "discount": {
            "module": "Quotes",
            "field": "discount",
            "reason": "related_fields"
        },
        "new_sub": {
            "module": "Quotes",
            "field": "new_sub",
            "reason": "related_fields"
        },
        "tax": {
            "module": "Quotes",
            "field": "tax",
            "reason": "related_fields"
        },
        "shipping": {
            "module": "Quotes",
            "field": "shipping",
            "reason": "related_fields"
        }
    }
},
```

---

```
        "subtotal_usdollar": {
            "module": "Quotes",
            "field": "subtotal_usdollar",
            "reason": "related_fields"
        }
    },
    "locked": {
        "subtotal_usdollar": {
            "module": "Quotes",
            "field": "subtotal_usdollar",
            "reason": "formula"
        },
        "deal_tot_usdollar": {
            "module": "Quotes",
            "field": "deal_tot_usdollar",
            "reason": "formula"
        }
    }
},
"taxable_subtotal": {
    "locked": {
        "tax": {
            "module": "Quotes",
            "field": "tax",
            "reason": "formula"
        }
    },
    "related": {
        "tax": {
            "module": "Quotes",
            "field": "tax",
            "reason": "related_fields"
        }
    }
},
"taxrate_value": {
    "locked": {
        "tax": {
            "module": "Quotes",
            "field": "tax",
            "reason": "formula"
        }
    },
    "related": {
        "tax": {
            "module": "Quotes",
```

---

```
        "field": "tax",
        "reason": "related_fields"
    }
}
},
"subtotal_usdollar": {
    "locked": {
        "deal_tot_discount_percentage": {
            "module": "Quotes",
            "field": "deal_tot_discount_percentage",
            "reason": "formula"
        }
    }
},
"subtotal": {
    "locked": {
        "subtotal_usdollar": {
            "module": "Quotes",
            "field": "subtotal_usdollar",
            "reason": "formula"
        }
    }
},
"deal_tot_usdollar": {
    "locked": {
        "deal_tot_discount_percentage": {
            "module": "Quotes",
            "field": "deal_tot_discount_percentage",
            "reason": "formula"
        }
    }
},
"deal_tot": {
    "locked": {
        "deal_tot_usdollar": {
            "module": "Quotes",
            "field": "deal_tot_usdollar",
            "reason": "formula"
        }
    }
},
"tax": {
    "locked": {
        "total": {
            "module": "Quotes",
            "field": "total",
```

---

```

        "reason": "formula"
    }
}
},
"shipping": {
    "locked": {
        "total": {
            "module": "Quotes",
            "field": "total",
            "reason": "formula"
        }
    }
}
},
"ProductBundles": {
    "subtotal": {
        "locked": {
            "new_sub": {
                "module": "ProductBundles",
                "field": "new_sub",
                "reason": "formula"
            }
        }
    }
},
"currency_id": {
    "related": {
        "subtotal": {
            "module": "ProductBundles",
            "field": "subtotal",
            "reason": "related_fields"
        },
        "deal_tot": {
            "module": "ProductBundles",
            "field": "deal_tot",
            "reason": "related_fields"
        },
        "new_sub": {
            "module": "ProductBundles",
            "field": "new_sub",
            "reason": "related_fields"
        }
    }
},
"base_rate": {
    "related": {
        "subtotal": {

```



---

```

        "module": "ProductBundles",
        "field": "subtotal",
        "reason": "related_fields"
    },
    "deal_tot": {
        "module": "ProductBundles",
        "field": "deal_tot",
        "reason": "related_fields"
    },
    "new_sub": {
        "module": "ProductBundles",
        "field": "new_sub",
        "reason": "related_fields"
    }
},
"new_sub": {
    "locked": {
        "new_sub": {
            "module": "Quotes",
            "field": "new_sub",
            "reason": "rollup"
        },
        "total": {
            "module": "Quotes",
            "field": "total",
            "reason": "rollup"
        }
    }
},
"deal_tot": {
    "locked": {
        "new_sub": {
            "module": "ProductBundles",
            "field": "new_sub",
            "reason": "formula"
        }
    }
},
"taxable_subtotal": {
    "locked": {
        "taxable_subtotal": {
            "module": "Quotes",
            "field": "taxable_subtotal",
            "reason": "rollup"
        }
    }
}

```

---

```

    }
  },
  "Products": {
    "subtotal": {
      "locked": {
        "subtotal": {
          "module": "ProductBundles",
          "field": "subtotal",
          "reason": "rollup"
        }
      }
    }
  },
  "quantity": {
    "locked": {
      "total_amount": {
        "module": "Products",
        "field": "total_amount",
        "reason": "formula"
      }
    },
    "related": {
      "total_amount": {
        "module": "Products",
        "field": "total_amount",
        "reason": "related_fields"
      }
    }
  },
  "discount_price": {
    "locked": {
      "total_amount": {
        "module": "Products",
        "field": "total_amount",
        "reason": "formula"
      }
    },
    "related": {
      "total_amount": {
        "module": "Products",
        "field": "total_amount",
        "reason": "related_fields"
      }
    }
  },
  "currency_id": {

```

---

```
"related": {
  "discount_price": {
    "module": "Products",
    "field": "discount_price",
    "reason": "related_fields"
  },
  "discount_amount": {
    "module": "Products",
    "field": "discount_amount",
    "reason": "related_fields"
  },
  "total_amount": {
    "module": "Products",
    "field": "total_amount",
    "reason": "related_fields"
  }
}
},
"base_rate": {
  "related": {
    "discount_price": {
      "module": "Products",
      "field": "discount_price",
      "reason": "related_fields"
    },
    "discount_amount": {
      "module": "Products",
      "field": "discount_amount",
      "reason": "related_fields"
    },
    "total_amount": {
      "module": "Products",
      "field": "total_amount",
      "reason": "related_fields"
    }
  }
},
"deal_calc": {
  "locked": {
    "deal_tot": {
      "module": "ProductBundles",
      "field": "deal_tot",
      "reason": "rollup"
    }
  }
},
```

---

```
"discount_select": {
  "related": {
    "discount_amount": {
      "module": "Products",
      "field": "discount_amount",
      "reason": "related_fields"
    },
    "total_amount": {
      "module": "Products",
      "field": "total_amount",
      "reason": "related_fields"
    }
  },
  "locked": {
    "total_amount": {
      "module": "Products",
      "field": "total_amount",
      "reason": "formula"
    }
  }
},
"discount_amount": {
  "locked": {
    "total_amount": {
      "module": "Products",
      "field": "total_amount",
      "reason": "formula"
    }
  },
  "related": {
    "total_amount": {
      "module": "Products",
      "field": "total_amount",
      "reason": "related_fields"
    }
  }
},
"total_amount": {
  "locked": {
    "taxable_subtotal": {
      "module": "ProductBundles",
      "field": "taxable_subtotal",
      "reason": "rollup"
    }
  }
},
```

---

```

    "tax_class": {
      "locked": {
        "taxable_subtotal": {
          "module": "ProductBundles",
          "field": "taxable_subtotal",
          "reason": "rollup"
        }
      }
    }
  },
  "relatedFields": {
    "Products": {
      "name": {
        "locked": {
          "product_template_name": {
            "module": "Products",
            "field": "name",
            "reason": "formula"
          }
        }
      }
    }
  },
  "subtotal": {
    "locked": {
      "quantity": {
        "module": "Products",
        "field": "subtotal",
        "reason": "formula"
      },
      "discount_price": {
        "module": "Products",
        "field": "subtotal",
        "reason": "formula"
      }
    }
  },
  "related": {
    "currency_id": {
      "module": "Products",
      "field": "subtotal",
      "reason": "related_fields"
    },
    "base_rate": {
      "module": "Products",
      "field": "subtotal",
      "reason": "related_fields"
    }
  },

```

---

```
    "discount_price": {
      "module": "Products",
      "field": "subtotal",
      "reason": "related_fields"
    },
    "quantity": {
      "module": "Products",
      "field": "subtotal",
      "reason": "related_fields"
    }
  }
},
"total_amount": {
  "locked": {
    "quantity": {
      "module": "Products",
      "field": "total_amount",
      "reason": "formula"
    },
    "discount_price": {
      "module": "Products",
      "field": "total_amount",
      "reason": "formula"
    },
    "discount_select": {
      "module": "Products",
      "field": "total_amount",
      "reason": "formula"
    },
    "discount_amount": {
      "module": "Products",
      "field": "total_amount",
      "reason": "formula"
    }
  },
  "related": {
    "currency_id": {
      "module": "Products",
      "field": "total_amount",
      "reason": "related_fields"
    },
    "base_rate": {
      "module": "Products",
      "field": "total_amount",
      "reason": "related_fields"
    }
  },
}
```

---

```

    "quantity": {
      "module": "Products",
      "field": "total_amount",
      "reason": "related_fields"
    },
    "discount_price": {
      "module": "Products",
      "field": "total_amount",
      "reason": "related_fields"
    },
    "discount_select": {
      "module": "Products",
      "field": "total_amount",
      "reason": "related_fields"
    },
    "discount_amount": {
      "module": "Products",
      "field": "total_amount",
      "reason": "related_fields"
    }
  },
  "manufacturer_name": {
    "related": {
      "manufacturer_id": {
        "module": "Products",
        "field": "manufacturer_name",
        "reason": "related_fields"
      }
    }
  },
  "cost_price": {
    "related": {
      "currency_id": {
        "module": "Products",
        "field": "cost_price",
        "reason": "related_fields"
      },
      "base_rate": {
        "module": "Products",
        "field": "cost_price",
        "reason": "related_fields"
      }
    }
  },
  "discount_price": {

```

---

```
    "related": {
      "currency_id": {
        "module": "Products",
        "field": "discount_price",
        "reason": "related_fields"
      },
      "base_rate": {
        "module": "Products",
        "field": "discount_price",
        "reason": "related_fields"
      }
    }
  },
  "discount_amount": {
    "related": {
      "currency_id": {
        "module": "Products",
        "field": "discount_amount",
        "reason": "related_fields"
      },
      "base_rate": {
        "module": "Products",
        "field": "discount_amount",
        "reason": "related_fields"
      },
      "discount_select": {
        "module": "Products",
        "field": "discount_amount",
        "reason": "related_fields"
      }
    }
  },
  "discount_rate_percent": {
    "locked": {
      "discount_price": {
        "module": "Products",
        "field": "discount_rate_percent",
        "reason": "formula"
      },
      "discount_amount": {
        "module": "Products",
        "field": "discount_rate_percent",
        "reason": "formula"
      }
    }
  },
},
```



---

```
"discount_amount_usdollar": {
  "locked": {
    "discount_amount": {
      "module": "Products",
      "field": "discount_amount_usdollar",
      "reason": "formula"
    },
    "base_rate": {
      "module": "Products",
      "field": "discount_amount_usdollar",
      "reason": "formula"
    }
  }
},
"deal_calc": {
  "locked": {
    "discount_select": {
      "module": "Products",
      "field": "deal_calc",
      "reason": "formula"
    },
    "discount_price": {
      "module": "Products",
      "field": "deal_calc",
      "reason": "formula"
    },
    "quantity": {
      "module": "Products",
      "field": "deal_calc",
      "reason": "formula"
    },
    "discount_amount": {
      "module": "Products",
      "field": "deal_calc",
      "reason": "formula"
    }
  },
  "related": {
    "currency_id": {
      "module": "Products",
      "field": "deal_calc",
      "reason": "related_fields"
    },
    "base_rate": {
      "module": "Products",
      "field": "deal_calc",
```

---

```
        "reason": "related_fields"
    },
    "discount_price": {
        "module": "Products",
        "field": "deal_calc",
        "reason": "related_fields"
    },
    "quantity": {
        "module": "Products",
        "field": "deal_calc",
        "reason": "related_fields"
    },
    "discount_amount": {
        "module": "Products",
        "field": "deal_calc",
        "reason": "related_fields"
    }
}
},
"deal_calc_usdollar": {
    "locked": {
        "deal_calc": {
            "module": "Products",
            "field": "deal_calc_usdollar",
            "reason": "formula"
        },
        "base_rate": {
            "module": "Products",
            "field": "deal_calc_usdollar",
            "reason": "formula"
        }
    },
    "related": {
        "currency_id": {
            "module": "Products",
            "field": "deal_calc_usdollar",
            "reason": "related_fields"
        },
        "base_rate": {
            "module": "Products",
            "field": "deal_calc_usdollar",
            "reason": "related_fields"
        }
    }
},
"list_price": {
```

---

```
"related": {
  "currency_id": {
    "module": "Products",
    "field": "list_price",
    "reason": "related_fields"
  },
  "base_rate": {
    "module": "Products",
    "field": "list_price",
    "reason": "related_fields"
  }
},
"cost_usdollar": {
  "locked": {
    "cost_price": {
      "module": "Products",
      "field": "cost_usdollar",
      "reason": "formula"
    },
    "base_rate": {
      "module": "Products",
      "field": "cost_usdollar",
      "reason": "formula"
    }
  },
  "related": {
    "currency_id": {
      "module": "Products",
      "field": "cost_usdollar",
      "reason": "related_fields"
    },
    "base_rate": {
      "module": "Products",
      "field": "cost_usdollar",
      "reason": "related_fields"
    }
  }
},
"discount_usdollar": {
  "locked": {
    "discount_price": {
      "module": "Products",
      "field": "discount_usdollar",
      "reason": "formula"
    }
  },
```

---

```

        "base_rate": {
            "module": "Products",
            "field": "discount_usdollar",
            "reason": "formula"
        }
    },
    "list_usdollar": {
        "locked": {
            "list_price": {
                "module": "Products",
                "field": "list_usdollar",
                "reason": "formula"
            },
            "base_rate": {
                "module": "Products",
                "field": "list_usdollar",
                "reason": "formula"
            }
        },
        "related": {
            "currency_id": {
                "module": "Products",
                "field": "list_usdollar",
                "reason": "related_fields"
            },
            "base_rate": {
                "module": "Products",
                "field": "list_usdollar",
                "reason": "related_fields"
            }
        }
    },
    "book_value": {
        "related": {
            "currency_id": {
                "module": "Products",
                "field": "book_value",
                "reason": "related_fields"
            },
            "base_rate": {
                "module": "Products",
                "field": "book_value",
                "reason": "related_fields"
            }
        }
    }
}

```

---

```

    },
    "book_value_usdollar": {
      "locked": {
        "book_value": {
          "module": "Products",
          "field": "book_value_usdollar",
          "reason": "formula"
        },
        "base_rate": {
          "module": "Products",
          "field": "book_value_usdollar",
          "reason": "formula"
        }
      },
      "related": {
        "currency_id": {
          "module": "Products",
          "field": "book_value_usdollar",
          "reason": "related_fields"
        },
        "base_rate": {
          "module": "Products",
          "field": "book_value_usdollar",
          "reason": "related_fields"
        }
      }
    },
    "date_closed_timestamp": {
      "locked": {
        "date_closed": {
          "module": "Products",
          "field": "date_closed_timestamp",
          "reason": "formula"
        }
      }
    }
  },
  "Quotes": {
    "subtotal": {
      "locked": {
        "product_bundles": {
          "module": "Quotes",
          "field": "subtotal",
          "reason": "formula"
        }
      }
    }
  },

```

---

```
"related": {
  "currency_id": {
    "module": "Quotes",
    "field": "subtotal",
    "reason": "related_fields"
  },
  "base_rate": {
    "module": "Quotes",
    "field": "subtotal",
    "reason": "related_fields"
  }
},
"subtotal_usdollar": {
  "locked": {
    "subtotal": {
      "module": "Quotes",
      "field": "subtotal_usdollar",
      "reason": "formula"
    },
    "base_rate": {
      "module": "Quotes",
      "field": "subtotal_usdollar",
      "reason": "formula"
    }
  },
  "related": {
    "currency_id": {
      "module": "Quotes",
      "field": "subtotal_usdollar",
      "reason": "related_fields"
    },
    "base_rate": {
      "module": "Quotes",
      "field": "subtotal_usdollar",
      "reason": "related_fields"
    }
  }
},
"shipping": {
  "related": {
    "currency_id": {
      "module": "Quotes",
      "field": "shipping",
      "reason": "related_fields"
    }
  },
```

---

```
        "base_rate": {
            "module": "Quotes",
            "field": "shipping",
            "reason": "related_fields"
        }
    },
    "shipping_usdollar": {
        "locked": {
            "shipping": {
                "module": "Quotes",
                "field": "shipping_usdollar",
                "reason": "formula"
            },
            "base_rate": {
                "module": "Quotes",
                "field": "shipping_usdollar",
                "reason": "formula"
            }
        },
        "related": {
            "currency_id": {
                "module": "Quotes",
                "field": "shipping_usdollar",
                "reason": "related_fields"
            },
            "base_rate": {
                "module": "Quotes",
                "field": "shipping_usdollar",
                "reason": "related_fields"
            }
        }
    },
    "discount": {
        "related": {
            "currency_id": {
                "module": "Quotes",
                "field": "discount",
                "reason": "related_fields"
            },
            "base_rate": {
                "module": "Quotes",
                "field": "discount",
                "reason": "related_fields"
            }
        }
    }
}
```

---

```
    },
    "deal_tot": {
      "locked": {
        "product_bundles": {
          "module": "Quotes",
          "field": "deal_tot",
          "reason": "formula"
        }
      }
    },
    "deal_tot_discount_percentage": {
      "locked": {
        "subtotal_usdollar": {
          "module": "Quotes",
          "field": "deal_tot_discount_percentage",
          "reason": "formula"
        },
        "deal_tot_usdollar": {
          "module": "Quotes",
          "field": "deal_tot_discount_percentage",
          "reason": "formula"
        }
      }
    },
    "deal_tot_usdollar": {
      "locked": {
        "deal_tot": {
          "module": "Quotes",
          "field": "deal_tot_usdollar",
          "reason": "formula"
        },
        "base_rate": {
          "module": "Quotes",
          "field": "deal_tot_usdollar",
          "reason": "formula"
        }
      }
    },
    "new_sub": {
      "locked": {
        "product_bundles": {
          "module": "Quotes",
          "field": "new_sub",
          "reason": "formula"
        }
      }
    },
  },
```



---

```
"related": {
  "currency_id": {
    "module": "Quotes",
    "field": "new_sub",
    "reason": "related_fields"
  },
  "base_rate": {
    "module": "Quotes",
    "field": "new_sub",
    "reason": "related_fields"
  }
},
"new_sub_usdollar": {
  "locked": {
    "new_sub": {
      "module": "Quotes",
      "field": "new_sub_usdollar",
      "reason": "formula"
    },
    "base_rate": {
      "module": "Quotes",
      "field": "new_sub_usdollar",
      "reason": "formula"
    }
  },
  "related": {
    "currency_id": {
      "module": "Quotes",
      "field": "new_sub_usdollar",
      "reason": "related_fields"
    },
    "base_rate": {
      "module": "Quotes",
      "field": "new_sub_usdollar",
      "reason": "related_fields"
    }
  }
},
"taxable_subtotal": {
  "locked": {
    "product_bundles": {
      "module": "Quotes",
      "field": "taxable_subtotal",
      "reason": "formula"
    }
  }
}
```

---

```
    }
  },
  "tax": {
    "locked": {
      "taxable_subtotal": {
        "module": "Quotes",
        "field": "tax",
        "reason": "formula"
      },
      "taxrate_value": {
        "module": "Quotes",
        "field": "tax",
        "reason": "formula"
      }
    },
    "related": {
      "currency_id": {
        "module": "Quotes",
        "field": "tax",
        "reason": "related_fields"
      },
      "base_rate": {
        "module": "Quotes",
        "field": "tax",
        "reason": "related_fields"
      },
      "taxrate_value": {
        "module": "Quotes",
        "field": "tax",
        "reason": "related_fields"
      },
      "taxable_subtotal": {
        "module": "Quotes",
        "field": "tax",
        "reason": "related_fields"
      }
    }
  },
  "tax_usdollar": {
    "locked": {
      "tax": {
        "module": "Quotes",
        "field": "tax_usdollar",
        "reason": "formula"
      },
      "base_rate": {
```

---

```
        "module": "Quotes",
        "field": "tax_usdollar",
        "reason": "formula"
    }
},
"related": {
    "currency_id": {
        "module": "Quotes",
        "field": "tax_usdollar",
        "reason": "related_fields"
    },
    "base_rate": {
        "module": "Quotes",
        "field": "tax_usdollar",
        "reason": "related_fields"
    }
}
},
"total": {
    "locked": {
        "product_bundles": {
            "module": "Quotes",
            "field": "total",
            "reason": "formula"
        },
        "tax": {
            "module": "Quotes",
            "field": "total",
            "reason": "formula"
        },
        "shipping": {
            "module": "Quotes",
            "field": "total",
            "reason": "formula"
        }
    }
},
"total_usdollar": {
    "locked": {
        "total": {
            "module": "Quotes",
            "field": "total_usdollar",
            "reason": "formula"
        },
        "base_rate": {
            "module": "Quotes",
```

---

```

        "field": "total_usdollar",
        "reason": "formula"
    }
},
"related": {
    "currency_id": {
        "module": "Quotes",
        "field": "total_usdollar",
        "reason": "related_fields"
    },
    "base_rate": {
        "module": "Quotes",
        "field": "total_usdollar",
        "reason": "related_fields"
    }
}
}
}
},
"productsFields": {
    "date_entered": {
        "type": "datetime",
        "studio": {
            "portaleditview": false
        },
        "readonly": true,
        "label": "LBL_DATE_ENTERED"
    },
    "date_modified": {
        "type": "datetime",
        "studio": {
            "portaleditview": false
        },
        "readonly": true,
        "label": "LBL_DATE_MODIFIED"
    },
    "modified_by_name": {
        "type": "relate",
        "link": "modified_user_link",
        "readonly": true,
        "label": "LBL_MODIFIED"
    },
    "created_by_name": {
        "type": "relate",
        "link": "created_by_link",
        "readonly": true,

```

---

```
    "label": "LBL_CREATED"
  },
  "description": {
    "type": "text",
    "label": "LBL_DESCRIPTION"
  },
  "revenuelineitem_name": {
    "type": "relate",
    "link": "revenuelineitems",
    "studio": "visible",
    "label": "LBL_REVENUELINEITEM_NAME"
  },
  "product_template_name": {
    "type": "relate",
    "link": "product_templates_link",
    "studio": {
      "editview": false,
      "detailview": false,
      "quickcreate": false
    },
    "label": "LBL_PRODUCT_TEMPLATE"
  },
  "subtotal": {
    "type": "currency",
    "default": "0",
    "related_fields": [
      "currency_id",
      "base_rate",
      "discount_price",
      "quantity"
    ],
    "label": "LBL_SUBTOTAL"
  },
  "total_amount": {
    "default": "0.00",
    "type": "currency",
    "related_fields": [
      "currency_id",
      "base_rate",
      "quantity",
      "discount_price",
      "discount_select",
      "discount_amount"
    ],
    "label": "LBL_CALCULATED_LINE_ITEM_AMOUNT"
  },
}
```

---

```
"contact_name": {
  "type": "relate",
  "link": "contact_link",
  "label": "LBL_CONTACT_NAME"
},
"manufacturer_name": {
  "type": "relate",
  "link": "manufacturers",
  "related_fields": [
    "manufacturer_id"
  ],
  "label": "LBL_MANUFACTURER_NAME"
},
"category_name": {
  "type": "relate",
  "link": "product_categories_link",
  "studio": {
    "editview": false,
    "detailview": false,
    "quickcreate": false
  },
  "label": "LBL_CATEGORY_NAME"
},
"mft_part_num": {
  "type": "varchar",
  "label": "LBL_MFT_PART_NUM"
},
"vendor_part_num": {
  "type": "varchar",
  "label": "LBL_VENDOR_PART_NUM"
},
"date_purchased": {
  "type": "date",
  "label": "LBL_DATE_PURCHASED"
},
"discount_rate_percent": {
  "type": "decimal",
  "label": "LBL_DISCOUNT_RATE"
},
"discount_amount_usdollar": {
  "type": "currency",
  "studio": {
    "editview": false,
    "mobile": false
  },
  "label": "LBL_DISCOUNT_RATE_USDOLLAR"
}
```

---

```
},
"discount_select": {
  "type": "bool",
  "default": true,
  "label": "LBL_DISCOUNT_AS_PERCENT"
},
"deal_calc": {
  "type": "currency",
  "related_fields": [
    "currency_id",
    "base_rate",
    "discount_price",
    "quantity",
    "discount_amount"
  ],
  "label": "LBL_DISCOUNT_TOTAL"
},
"deal_calc_usdollar": {
  "type": "currency",
  "studio": {
    "editview": false,
    "mobile": false
  },
  "related_fields": [
    "currency_id",
    "base_rate"
  ],
  "label": "LBL_DISCOUNT_TOTAL_USDOLLAR"
},
"list_price": {
  "type": "currency",
  "related_fields": [
    "currency_id",
    "base_rate"
  ],
  "label": "LBL_LIST_PRICE"
},
"cost_usdollar": {
  "type": "currency",
  "studio": {
    "editview": false,
    "mobile": false
  },
  "related_fields": [
    "currency_id",
    "base_rate"
  ]
}
```

---

```
    ],
    "label": "LBL_COST_USDOLLAR"
  },
  "discount_usdollar": {
    "type": "currency",
    "studio": {
      "editview": false,
      "mobile": false
    },
    "label": "LBL_DISCOUNT_USDOLLAR"
  },
  "list_usdollar": {
    "type": "currency",
    "studio": {
      "editview": false,
      "mobile": false
    },
    "related_fields": [
      "currency_id",
      "base_rate"
    ],
    "label": "LBL_LIST_USDOLLAR"
  },
  "tax_class": {
    "type": "enum",
    "default": "Taxable",
    "label": "LBL_TAX_CLASS"
  },
  "website": {
    "type": "varchar",
    "label": "LBL_URL"
  },
  "weight": {
    "type": "decimal",
    "label": "LBL_WEIGHT"
  },
  "quantity": {
    "type": "decimal",
    "default": true,
    "label": "LBL_QUANTITY"
  },
  "support_name": {
    "type": "varchar",
    "label": "LBL_SUPPORT_NAME"
  },
  "support_description": {
```



---

```
    "type": "varchar",
    "label": "LBL_SUPPORT_DESCRIPTION"
  },
  "support_contact": {
    "type": "varchar",
    "label": "LBL_SUPPORT_CONTACT"
  },
  "support_term": {
    "type": "varchar",
    "label": "LBL_SUPPORT_TERM"
  },
  "date_support_expires": {
    "type": "date",
    "label": "LBL_DATE_SUPPORT_EXPIRES"
  },
  "date_support_starts": {
    "type": "date",
    "label": "LBL_DATE_SUPPORT_STARTS"
  },
  "pricing_formula": {
    "type": "varchar",
    "label": "LBL_PRICING_FORMULA"
  },
  "pricing_factor": {
    "type": "int",
    "label": "LBL_PRICING_FACTOR"
  },
  "serial_number": {
    "type": "varchar",
    "label": "LBL_SERIAL_NUMBER"
  },
  "asset_number": {
    "type": "varchar",
    "label": "LBL_ASSET_NUMBER"
  },
  "book_value": {
    "type": "currency",
    "related_fields": [
      "currency_id",
      "base_rate"
    ],
    "label": "LBL_BOOK_VALUE"
  },
  "book_value_usdollar": {
    "type": "currency",
    "studio": {
```

---

```
        "editview": false,
        "mobile": false
    },
    "related_fields": [
        "currency_id",
        "base_rate"
    ],
    "label": "LBL_BOOK_VALUE_USDOLLAR"
},
"book_value_date": {
    "type": "date",
    "label": "LBL_BOOK_VALUE_DATE"
},
"date_closed": {
    "type": "date",
    "label": "LBL_DATE_CLOSED"
},
"next_step": {
    "type": "varchar",
    "label": "LBL_NEXT_STEP"
},
"campaign_name": {
    "type": "relate",
    "link": "campaign_products",
    "label": "LBL_CAMPAIGN"
},
"opportunity_name": {
    "type": "relate",
    "link": "opportunities",
    "label": "LBL_OPPORTUNITY_NAME"
},
"type_name": {
    "type": "relate",
    "link": "product_types_link",
    "label": "LBL_TYPE"
},
"tag": {
    "type": "tag",
    "link": "tag_link",
    "studio": {
        "portal": false,
        "base": {
            "popuplist": false
        },
    },
    "mobile": {
        "wirelesseditview": true,
```

---

```
        "wirelessdetailview": true
      }
    },
    "sortable": false,
    "label": "LBL_TAGS"
  },
  "team_name": {
    "type": "relate",
    "link": "team_link",
    "studio": {
      "portallistview": false,
      "portalrecordview": false
    },
    "label": "LBL_TEAMS"
  },
  "base_rate": {
    "type": "text",
    "label": "LBL_CURRENCY_RATE"
  },
  "name": {
    "type": "name",
    "link": true,
    "label": "LBL_NAME",
    "default": true
  },
  "account_name": {
    "type": "relate",
    "link": "account_link",
    "label": "LBL_ACCOUNT_NAME",
    "related_fields": [
      "account_id"
    ]
  },
  "status": {
    "type": "enum",
    "default": "",
    "label": "LBL_STATUS"
  },
  "quote_name": {
    "type": "relate",
    "link": true,
    "label": "LBL_ASSOCIATED_QUOTE",
    "related_fields": [
      "quote_id"
    ],
    "default": true
  }
}
```

---

```
    },
    "discount_price": {
      "type": "currency",
      "default": "0",
      "related_fields": [
        "discount_price",
        "currency_id",
        "base_rate"
      ],
      "label": "LBL_DISCOUNT_PRICE"
    },
    "cost_price": {
      "type": "currency",
      "related_fields": [
        "cost_price",
        "currency_id",
        "base_rate"
      ],
      "label": "LBL_COST_PRICE"
    },
    "discount_amount": {
      "type": "discount",
      "default": "0",
      "related_fields": [
        "discount_select",
        "currency_id",
        "base_rate"
      ],
      "label": "LBL_DISCOUNT_AMOUNT"
    },
    "assigned_user_name": {
      "link": "assigned_user_link",
      "type": "relate",
      "label": "LBL_ASSIGNED_TO"
    }
  },
  "quotesFields": {
    "modified_by_name": {
      "type": "relate",
      "link": "modified_user_link",
      "readonly": true,
      "label": "LBL_MODIFIED"
    },
    "created_by_name": {
      "type": "relate",
      "link": "created_by_link",
```

---

```
    "readonly": true,
    "label": "LBL_CREATED"
  },
  "description": {
    "type": "text",
    "label": "LBL_DESCRIPTION"
  },
  "shipper_name": {
    "type": "relate",
    "link": "shippers",
    "label": "LBL_SHIPPING_PROVIDER"
  },
  "taxrate_name": {
    "type": "relate",
    "link": "taxrates",
    "label": "LBL_TAXRATE"
  },
  "show_line_nums": {
    "type": "bool",
    "default": 1,
    "label": "LBL_SHOW_LINE_NUMS"
  },
  "quote_type": {
    "type": "enum",
    "label": "LBL_QUOTE_TYPE"
  },
  "original_po_date": {
    "type": "date",
    "label": "LBL_ORIGINAL_PO_DATE"
  },
  "payment_terms": {
    "type": "enum",
    "label": "LBL_PAYMENT_TERMS"
  },
  "date_quote_closed": {
    "type": "date",
    "label": "LBL_DATE_QUOTE_CLOSED"
  },
  "date_order_shipped": {
    "type": "date",
    "label": "LBL_LIST_DATE_QUOTE_CLOSED"
  },
  "order_stage": {
    "type": "enum",
    "label": "LBL_ORDER_STAGE"
  },
}
```

---

```
"purchase_order_num": {
  "type": "varchar",
  "label": "LBL_PURCHASE_ORDER_NUM"
},
"subtotal": {
  "type": "currency",
  "related_fields": [
    "currency_id",
    "base_rate"
  ],
  "label": "LBL_SUBTOTAL"
},
"subtotal_usdollar": {
  "type": "currency",
  "studio": {
    "wirelesseditview": false,
    "wirelessdetailview": false,
    "wirelesslistview": false,
    "wireless_basic_search": false,
    "wireless_advanced_search": false,
    "mobile": false
  },
  "related_fields": [
    "currency_id",
    "base_rate"
  ],
  "label": "LBL_SUBTOTAL_USDOLLAR"
},
"shipping": {
  "type": "currency",
  "related_fields": [
    "currency_id",
    "base_rate"
  ],
  "default": "0",
  "label": "LBL_SHIPPING"
},
"shipping_usdollar": {
  "type": "currency",
  "studio": {
    "wirelesseditview": false,
    "wirelessdetailview": false,
    "wirelesslistview": false,
    "wireless_basic_search": false,
    "wireless_advanced_search": false,
    "mobile": false
```

---

```
    },
    "related_fields": [
        "currency_id",
        "base_rate"
    ],
    "label": "LBL_SHIPPING_USDOLLAR"
},
"discount": {
    "type": "currency",
    "default": "0",
    "related_fields": [
        "currency_id",
        "base_rate"
    ],
    "label": "LBL_DISCOUNT_TOTAL"
},
"deal_tot": {
    "type": "currency",
    "label": "LBL_DEAL_TOT"
},
"deal_tot_discount_percentage": {
    "type": "float",
    "default": "0",
    "label": "LBL_DEAL_TOT_PERCENTAGE"
},
"deal_tot_usdollar": {
    "type": "currency",
    "studio": {
        "wirelesseditview": false,
        "wirelessdetailview": false,
        "wirelesslistview": false,
        "wireless_basic_search": false,
        "wireless_advanced_search": false,
        "mobile": false
    },
    "label": "LBL_DEAL_TOT_USDOLLAR"
},
"new_sub": {
    "type": "currency",
    "related_fields": [
        "currency_id",
        "base_rate"
    ],
    "label": "LBL_NEW_SUB"
},
"new_sub_usdollar": {
```

---

```
"type": "currency",
"studio": {
  "wirelesseditview": false,
  "wirelessdetailview": false,
  "wirelesslistview": false,
  "wireless_basic_search": false,
  "wireless_advanced_search": false,
  "mobile": false
},
"related_fields": [
  "currency_id",
  "base_rate"
],
"label": "LBL_NEW_SUB_USDOLLAR"
},
"taxable_subtotal": {
  "type": "currency",
  "label": "LBL_TAXABLE_SUBTOTAL"
},
"tax": {
  "type": "currency",
  "related_fields": [
    "currency_id",
    "base_rate",
    "taxrate_value",
    "taxable_subtotal"
  ],
  "default": "0",
  "label": "LBL_TAX"
},
"tax_usdollar": {
  "type": "currency",
  "studio": {
    "wirelesseditview": false,
    "wirelessdetailview": false,
    "wirelesslistview": false,
    "wireless_basic_search": false,
    "wireless_advanced_search": false,
    "mobile": false
  },
  "related_fields": [
    "currency_id",
    "base_rate"
  ],
  "label": "LBL_TAX_USDOLLAR"
},
```



---

```
"billing_address_street": {
  "type": "text",
  "label": "LBL_BILLING_ADDRESS_STREET"
},
"billing_address_city": {
  "type": "varchar",
  "label": "LBL_BILLING_ADDRESS_CITY"
},
"billing_address_state": {
  "type": "varchar",
  "label": "LBL_BILLING_ADDRESS_STATE"
},
"billing_address_postalcode": {
  "type": "varchar",
  "label": "LBL_BILLING_ADDRESS_POSTAL_CODE"
},
"billing_address_country": {
  "type": "varchar",
  "label": "LBL_BILLING_ADDRESS_COUNTRY"
},
"shipping_address_street": {
  "type": "text",
  "label": "LBL_SHIPPING_ADDRESS_STREET"
},
"shipping_address_city": {
  "type": "varchar",
  "label": "LBL_SHIPPING_ADDRESS_CITY"
},
"shipping_address_state": {
  "type": "varchar",
  "label": "LBL_SHIPPING_ADDRESS_STATE"
},
"shipping_address_postalcode": {
  "type": "varchar",
  "label": "LBL_SHIPPING_ADDRESS_POSTAL_CODE"
},
"shipping_address_country": {
  "type": "varchar",
  "label": "LBL_SHIPPING_ADDRESS_COUNTRY"
},
"shipping_account_name": {
  "type": "relate",
  "link": "shipping_accounts",
  "label": "LBL_SHIPPING_ACCOUNT_NAME"
},
"shipping_contact_name": {
```

---

```
    "type": "relate",
    "link": "shipping_contacts",
    "label": "LBL_SHIPPING_CONTACT_NAME"
  },
  "shipping_contact_id": {
    "type": "relate",
    "link": "shipping_contacts",
    "label": "LBL_SHIPPING_CONTACT_ID"
  },
  "billing_contact_name": {
    "type": "relate",
    "link": "billing_contacts",
    "label": "LBL_BILLING_CONTACT_NAME"
  },
  "billing_contact_id": {
    "type": "relate",
    "link": "billing_contacts",
    "label": "LBL_BILLING_CONTACT_ID"
  },
  "bundles": {
    "type": "collection",
    "label": "LBL_PRODUCT_BUNDLES"
  },
  "opportunity_name": {
    "type": "relate",
    "link": "opportunities",
    "label": "LBL_OPPORTUNITY_NAME"
  },
  "opportunity_id": {
    "type": "relate",
    "link": "opportunities",
    "label": "LBL_OPPORTUNITY_ID"
  },
  "tag": {
    "type": "tag",
    "link": "tag_link",
    "studio": {
      "portal": false,
      "base": {
        "popuplist": false
      },
      "mobile": {
        "wirelesseditview": true,
        "wirelessdetailview": true
      }
    }
  },
}
```

---

```
    "sortable": false,
    "label": "LBL_TAGS"
  },
  "team_name": {
    "type": "relate",
    "link": "team_link",
    "studio": {
      "portallistview": false,
      "portalrecordview": false
    },
    "label": "LBL_TEAMS"
  },
  "base_rate": {
    "type": "text",
    "label": "LBL_CURRENCY_RATE"
  },
  "quote_num": {
    "type": "int",
    "readonly": true,
    "label": "LBL_LIST_QUOTE_NUM",
    "default": true
  },
  "name": {
    "type": "name",
    "label": "LBL_LIST_QUOTE_NAME",
    "default": true,
    "link": true
  },
  "billing_account_name": {
    "type": "relate",
    "link": "billing_accounts",
    "label": "LBL_LIST_ACCOUNT_NAME",
    "default": true,
    "sortable": false
  },
  "quote_stage": {
    "type": "enum",
    "label": "LBL_QUOTE_STAGE",
    "default": true
  },
  "total": {
    "type": "currency",
    "label": "LBL_TOTAL",
    "default": true,
    "related_fields": [
      "currency_id"
    ]
  }
}
```

---

```
    ],
  },
  "total_usdollar": {
    "type": "currency",
    "studio": {
      "wirelesseditview": false,
      "wirelessdetailview": false,
      "wirelesslistview": false,
      "wireless_basic_search": false,
      "wireless_advanced_search": false,
      "mobile": false
    },
    "related_fields": [
      "currency_id",
      "base_rate"
    ],
    "label": "LBL_LIST_AMOUNT_USDOLLAR",
    "default": true
  },
  "date_quote_expected_closed": {
    "type": "date",
    "label": "LBL_LIST_DATE_QUOTE_EXPECTED_CLOSED",
    "default": true
  },
  "assigned_user_name": {
    "link": "assigned_user_link",
    "type": "relate",
    "label": "LBL_LIST_ASSIGNED_TO_NAME",
    "default": true,
    "sortable": false
  },
  "date_modified": {
    "type": "datetime",
    "studio": {
      "portaleditview": false
    },
    "readonly": true,
    "default": true,
    "label": "LBL_DATE_MODIFIED"
  },
  "date_entered": {
    "type": "datetime",
    "studio": {
      "portaleditview": false
    },
    "readonly": true,
```

```
        "default": true,  
        "label": "LBL_DATE_ENTERED"  
    }  
}
```

## Change Log

| Version | Change                             |
|---------|------------------------------------|
| v11.3   | Added /Quotes/config GET endpoint. |

Last Modified: 2021-02-17 02:44:13

## /Quotes/config POST

### Overview

[Quote Config POST Help](#)

### Summary

This endpoint allows customizations to be made to the Quoted Line Items section of the Quote record.

### Request Arguments

| Name              | Type  | Description   | Required |
|-------------------|-------|---|----------|
| worksheet_columns | array | A viewdef "fields"-style definition of the columns you want to display in the QLI section. These get written out to | True     |

| Name                            | Type  | Description   | Required |
|---------------------------------|-------|---|----------|
|                                 |       | the custom/Product s/clients/base/views /quote-data-group-list/quote-data-group-list.php file.  |          |
| worksheet_column_related_fields | array | Array of the related field names needed for data to be returned for use by the quote-data-group-list  | True     |
| summary_columns                 | array | A viewdef "fields"-style definition of the columns you want to display in the Quote Summary header section. These get written out to the custom/Q uotes/clients/base/v iews/quote-data-gra nd-totals-header/qu ote-data-grand-totals-header.php file. | True     |
| summary_columns_related_fields  | array | Array of the related field names needed for data to be returned for use by the quote-data-grand-totals-header   | True     |
| footer_rows                     | array | A viewdef "fields"-style definition of the columns you want to display in the Quote Grand Totals Footer section. These get written out to the custom/Q uotes/clients/base/v iews/quote-data-gra   | True     |

| Name                       | Type  | Description   | Required |
|----------------------------|-------|---|----------|
|                            |       | nd-totals-footer/quote-data-grand-totals-footer.php file.   |          |
| footer_rows_related_fields | array | Array of the related field names needed for data to be returned for use by the quote-data-grand-totals-footer | True     |

## Sample Request

```
{
  "summary_columns": [
    {
      "name": "deal_tot",
      "label": "LBL_LIST_DEAL_TOT",
      "css_class": "quote-totals-row-item",
      "related_fields": [
        "deal_tot_discount_percentage"
      ],
      "type": "currency",
      "labelModule": "Quotes"
    },
    {
      "name": "new_sub",
      "css_class": "quote-totals-row-item",
      "type": "currency",
      "label": "LBL_NEW_SUB",
      "labelModule": "Quotes"
    },
    {
      "name": "tax",
      "label": "LBL_TAX_TOTAL",
      "css_class": "quote-totals-row-item",
      "type": "currency",
      "labelModule": "Quotes"
    },
    {
      "name": "shipping",
      "css_class": "quote-totals-row-item",
      "type": "currency",
```

---

```

        "label": "LBL_SHIPPING",
        "labelModule": "Quotes"
    },
    {
        "name": "total",
        "label": "LBL_LIST_GRAND_TOTAL",
        "css_class": "quote-totals-row-item",
        "type": "currency",
        "labelModule": "Quotes"
    }
],
"summary_columns_related_fields": [
    "base_rate",
    "deal_tot",
    "deal_tot_usdollar",
    "shipping",
    "subtotal",
    "subtotal_usdollar",
    "tax",
    "taxable_subtotal"
],
"worksheet_columns": [
    {
        "name": "line_num",
        "label": null,
        "widthClass": "cell-xsmall",
        "css_class": "line_num tcenter",
        "type": "line-num",
        "readonly": true
    },
    {
        "name": "quantity",
        "label": "LBL_QUANTITY",
        "widthClass": "cell-small",
        "css_class": "quantity",
        "type": "float",
        "labelModule": "Products"
    },
    {
        "name": "product_template_name",
        "label": "LBL_ITEM_NAME",
        "widthClass": "cell-large",
        "type": "quote-data-relate",
        "required": true,
        "labelModule": "Quotes"
    }
],

```



```

{
  "name": "mft_part_num",
  "label": "LBL_MFT_PART_NUM",
  "type": "base",
  "labelModule": "Products"
},
{
  "name": "discount_price",
  "label": "LBL_DISCOUNT_PRICE",
  "type": "currency",
  "convertToBase": true,
  "showTransactionalAmount": true,
  "related_fields": [
    "discount_price",
    "currency_id",
    "base_rate"
  ],
  "labelModule": "Products"
},
{
  "name": "discount",
  "type": "fieldset",
  "css_class": "quote-discount-percent",
  "label": "LBL_DISCOUNT_AMOUNT",
  "fields": [
    {
      "name": "discount_amount",
      "label": "LBL_DISCOUNT_AMOUNT",
      "type": "discount",
      "convertToBase": true,
      "showTransactionalAmount": true
    },
    {
      "type": "discount-select",
      "name": "discount_select",
      "no_default_action": true,
      "buttons": [
        {
          "type": "rowaction",
          "name": "select_discount_amount_button",
          "label": "LBL_DISCOUNT_AMOUNT",
          "event": "button:discount_select_change:cl
ick"
        }
      ]
    }
  ]
},
{
  "type": "rowaction",

```

```

        "name": "select_discount_percent_button",
        "label": "LBL_DISCOUNT_PERCENT",
        "event": "button:discount_select_change:cl
ick"
    },
    ],
    "label": "LBL_DISCOUNT_AS_PERCENT"
}
],
"labelModule": "Products"
},
{
    "name": "total_amount",
    "label": "LBL_LINE_ITEM_TOTAL",
    "type": "currency",
    "widthClass": "cell-medium",
    "showTransactionalAmount": true,
    "related_fields": [
        "total_amount",
        "currency_id",
        "base_rate"
    ],
    "labelModule": "Quotes"
}
],
"worksheet_columns_related_fields": [
    "base_rate",
    "deal_calc",
    "discount_amount",
    "discount_price",
    "discount_select",
    "quantity",
    "subtotal",
    "tax_class",
    "total_amount",
    "description",
    "quote_id",
    "name",
    "product_template_id",
    "product_template_name"
],
"footer_rows": [
    {
        "name": "new_sub",
        "type": "currency"
    },
    ],

```

---

```
    {
      "name": "tax",
      "type": "currency"
    },
    {
      "name": "shipping",
      "type": "quote-footer-currency",
      "css_class": "quote-footer-currency",
      "default": "0.00"
    },
    {
      "name": "total",
      "type": "currency",
      "css_class": "grand-total"
    }
  ],
  "footer_rows_related_fields": [
    "deal_tot",
    "deal_tot_usdollar",
    "shipping",
    "subtotal",
    "subtotal_usdollar",
    "tax",
    "taxable_subtotal"
  ]
}
```

## Response Arguments

**NONE**

## Response

Saved Config or SugarApiExceptionInvalidParameter

```
{
  "summary_columns": [
    {
      "name": "deal_tot",
      "label": "LBL_LIST_DEAL_TOT",
      "css_class": "quote-totals-row-item",
      "related_fields": [
        "deal_tot_discount_percentage"
      ]
    }
  ]
}
```

```

    ],
    "type": "currency",
    "labelModule": "Quotes"
  },
  {
    "name": "new_sub",
    "css_class": "quote-totals-row-item",
    "type": "currency",
    "label": "LBL_NEW_SUB",
    "labelModule": "Quotes"
  },
  {
    "name": "tax",
    "label": "LBL_TAX_TOTAL",
    "css_class": "quote-totals-row-item",
    "type": "currency",
    "labelModule": "Quotes"
  },
  {
    "name": "shipping",
    "css_class": "quote-totals-row-item",
    "type": "currency",
    "label": "LBL_SHIPPING",
    "labelModule": "Quotes"
  },
  {
    "name": "total",
    "label": "LBL_LIST_GRAND_TOTAL",
    "css_class": "quote-totals-row-item",
    "type": "currency",
    "labelModule": "Quotes"
  }
],
"worksheet_columns": [
  {
    "name": "line_num",
    "label": null,
    "widthClass": "cell-xsmall",
    "css_class": "line_num tcenter",
    "type": "line-num",
    "readonly": true
  },
  {
    "name": "quantity",
    "label": "LBL_QUANTITY",
    "widthClass": "cell-small",

```

---

```

    "css_class": "quantity",
    "type": "float",
    "labelModule": "Products"
  },
  {
    "name": "product_template_name",
    "label": "LBL_ITEM_NAME",
    "widthClass": "cell-large",
    "type": "quote-data-relate",
    "required": true,
    "labelModule": "Quotes"
  },
  {
    "name": "mft_part_num",
    "label": "LBL_MFT_PART_NUM",
    "type": "base",
    "labelModule": "Products"
  },
  {
    "name": "discount_price",
    "label": "LBL_DISCOUNT_PRICE",
    "type": "currency",
    "convertToBase": true,
    "showTransactionalAmount": true,
    "related_fields": [
      "discount_price",
      "currency_id",
      "base_rate"
    ],
    "labelModule": "Products"
  },
  {
    "name": "discount",
    "type": "fieldset",
    "css_class": "quote-discount-percent",
    "label": "LBL_DISCOUNT_AMOUNT",
    "fields": [
      {
        "name": "discount_amount",
        "label": "LBL_DISCOUNT_AMOUNT",
        "type": "discount",
        "convertToBase": true,
        "showTransactionalAmount": true
      },
      {
        "type": "discount-select",

```

```

        "name": "discount_select",
        "no_default_action": true,
        "buttons": [
            {
                "type": "rowaction",
                "name": "select_discount_amount_button",
                "label": "LBL_DISCOUNT_AMOUNT",
                "event": "button:discount_select_change:cl
ick"
            },
            {
                "type": "rowaction",
                "name": "select_discount_percent_button",
                "label": "LBL_DISCOUNT_PERCENT",
                "event": "button:discount_select_change:cl
ick"
            }
        ],
        "label": "LBL_DISCOUNT_AS_PERCENT"
    }
],
"labelModule": "Products"
},
{
    "name": "total_amount",
    "label": "LBL_LINE_ITEM_TOTAL",
    "type": "currency",
    "widthClass": "cell-medium",
    "showTransactionalAmount": true,
    "related_fields": [
        "total_amount",
        "currency_id",
        "base_rate"
    ],
    "labelModule": "Quotes"
}
],
"footer_rows": [
    {
        "name": "new_sub",
        "type": "currency"
    },
    {
        "name": "tax",
        "type": "currency"
    }
],

```

---

```
    {
      "name": "shipping",
      "type": "quote-footer-currency",
      "css_class": "quote-footer-currency",
      "default": "0.00"
    },
    {
      "name": "total",
      "type": "currency",
      "css_class": "grand-total"
    }
  ],
  "summary_columns_related_fields": [
    "base_rate",
    "deal_tot",
    "deal_tot_usdollar",
    "shipping",
    "subtotal",
    "subtotal_usdollar",
    "tax",
    "taxable_subtotal"
  ],
  "worksheet_columns_related_fields": [
    "base_rate",
    "deal_calc",
    "discount_amount",
    "discount_price",
    "discount_select",
    "quantity",
    "subtotal",
    "tax_class",
    "total_amount",
    "description",
    "quote_id",
    "name",
    "product_template_id",
    "product_template_name"
  ],
  "footer_rows_related_fields": [
    "deal_tot",
    "deal_tot_usdollar",
    "shipping",
    "subtotal",
    "subtotal_usdollar",
    "tax",
    "taxable_subtotal"
  ]
```

---

```
    ]  
}
```

## Change Log

| Version | Change                              |
|---------|-------------------------------------|
| v11.3   | Added /Quotes/config POST endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /Quotes/:record/opportunity POST

### Overview

Quote Convert to Opportunity

### Summary

This endpoint converts a Quote to an Opportunity.

### Request Arguments

NONE

### Response Arguments

NONE

### Response

Created Opportunity:



---

```
{
  "record": {
    "id": "31a601ee-2d3f-11e8-bfae-024289eecda3",
    "name": "Mirrors for J.K.M. Corp (HA)",
    "date_entered": "2018-03-21T19:36:47+00:00",
    "date_modified": "2018-03-21T19:36:47+00:00",
    "modified_user_id": "1",
    "modified_by_name": "admin",
    "modified_user_link": {
      "full_name": "admin",
      "id": "1",
      "_acl": {
        "fields": {
          "pwd_last_changed": {
            "write": "no",
            "create": "no"
          },
          "last_login": {
            "write": "no",
            "create": "no"
          }
        },
        "delete": "no",
        "_hash": "08b99a97c2e8d792f7a44d8882b5af6d"
      }
    },
  },
  "created_by": "1",
  "created_by_name": "",
  "created_by_link": {
    "full_name": "",
    "id": "1",
    "_acl": {
      "fields": {
        "pwd_last_changed": {
          "write": "no",
          "create": "no"
        },
        "last_login": {
          "write": "no",
          "create": "no"
        }
      },
      "delete": "no",
      "_hash": "08b99a97c2e8d792f7a44d8882b5af6d"
    }
  },
},
```

---

```
"deleted": false,
"opportunity_type": "New Business",
"account_name": "",
"accounts": {
  "name": "",
  "id": "0029279c-2d3d-11e8-a121-024289eecda3",
  "_acl": {
    "fields": [],
    "_hash": "654d337e0e912edaa00dbb0fb3dc3c17"
  }
},
"account_id": "0029279c-2d3d-11e8-a121-024289eecda3",
"campaign_name": "",
"campaign_opportunities": {
  "name": "",
  "id": null,
  "_acl": {
    "fields": [],
    "_hash": "654d337e0e912edaa00dbb0fb3dc3c17"
  }
},
"amount": "520.000000",
"amount_usdollar": "520.000000",
"date_closed": "2012-04-30",
"date_closed_timestamp": 1335744000,
"sales_stage": "Prospecting",
"sales_status": "In Progress",
"probability": 10,
"best_case": "520.000000",
"worst_case": "520.000000",
"commit_stage": "exclude",
"total_revenue_line_items": 1,
"closed_revenue_line_items": 0,
"included_revenue_line_items": 0,
"mkto_sync": false,
"assigned_user_id": "seed_max_id",
"assigned_user_name": "Max Jensen",
"assigned_user_link": {
  "full_name": "Max Jensen",
  "id": "seed_max_id",
  "_acl": {
    "fields": [],
    "_hash": "654d337e0e912edaa00dbb0fb3dc3c17"
  }
},
"team_id": "1",
```

---

```
"team_set_id": "1",
"acl_team_set_id": "f846e71c-2d3c-11e8-a9e4-024289eecda3",
"team_count": "",
"team_count_link": {
  "team_count": "",
  "id": "1",
  "_acl": {
    "fields": [],
    "_hash": "654d337e0e912edaa00dbb0fb3dc3c17"
  }
},
"currency_id": "-99",
"base_rate": "1.000000",
"currency_name": "",
"currencies": {
  "name": "",
  "id": "-99",
  "_acl": {
    "fields": [],
    "_hash": "654d337e0e912edaa00dbb0fb3dc3c17"
  },
  "symbol": ""
},
"currency_symbol": "",
"my_favorite": false,
"_acl": {
  "fields": {}
},
"_module": "Opportunities"
},
"related_record": {
  "id": "23d19cec-2d3d-11e8-b4bf-024289eecda3",
  "name": "Mirrors for J.K.M. Corp (HA)",
  "date_entered": "2018-03-21T19:20:19+00:00",
  "date_modified": "2018-03-21T19:36:47+00:00",
  "modified_user_id": "1",
  "modified_by_name": "admin",
  "modified_user_link": {
    "full_name": "admin",
    "id": "1",
    "_acl": {
      "fields": {
        "pwd_last_changed": {
          "write": "no",
          "create": "no"
        }
      }
    }
  },
```

---

```
        "last_login": {
            "write": "no",
            "create": "no"
        }
    },
    "delete": "no",
    "_hash": "08b99a97c2e8d792f7a44d8882b5af6d"
}
},
"created_by": "1",
"created_by_name": "Administrator",
"created_by_link": {
    "full_name": "Administrator",
    "id": "1",
    "_acl": {
        "fields": {
            "pwd_last_changed": {
                "write": "no",
                "create": "no"
            },
            "last_login": {
                "write": "no",
                "create": "no"
            }
        }
    },
    "delete": "no",
    "_hash": "08b99a97c2e8d792f7a44d8882b5af6d"
}
},
"description": "",
"deleted": false,
"shipper_id": "",
"shipper_name": "",
"shippers": {
    "name": "",
    "id": "",
    "_acl": {
        "fields": [],
        "_hash": "654d337e0e912edaa00dbb0fb3dc3c17"
    }
}
},
"taxrate_id": "2254f224-2d3d-11e8-925e-024289eecda3",
"taxrate_name": "8.25 - Cupertino, CA",
"taxrates": {
    "name": "8.25 - Cupertino, CA",
    "id": "2254f224-2d3d-11e8-925e-024289eecda3",
```

---

```
    "_acl": {
      "fields": [],
      "_hash": "654d337e0e912edaa00dbb0fb3dc3c17"
    }
  },
  "taxrate_value": "8.250000",
  "show_line_nums": true,
  "quote_type": "Quotes",
  "date_quote_expected_closed": "2012-04-30",
  "original_po_date": "",
  "payment_terms": "Net 15",
  "date_quote_closed": "",
  "date_order_shipped": "",
  "order_stage": "",
  "quote_stage": "Negotiation",
  "purchase_order_num": "3940021",
  "quote_num": 2,
  "subtotal": "520.000000",
  "subtotal_usdollar": "520.000000",
  "shipping": "0.000000",
  "shipping_usdollar": "0.000000",
  "discount": "",
  "deal_tot": "0.000000",
  "deal_tot_discount_percentage": 0,
  "deal_tot_usdollar": "0.000000",
  "new_sub": "520.000000",
  "new_sub_usdollar": "520.000000",
  "taxable_subtotal": "520.000000",
  "tax": "42.900000",
  "tax_usdollar": "42.900000",
  "total": "562.900000",
  "total_usdollar": "562.900000",
  "billing_address_street": "111 Silicon Valley Road",
  "billing_address_city": "Kansas City",
  "billing_address_state": "CA",
  "billing_address_postalcode": "47108",
  "billing_address_country": "USA",
  "shipping_address_street": "111 Silicon Valley Road",
  "shipping_address_city": "Kansas City",
  "shipping_address_state": "CA",
  "shipping_address_postalcode": "47108",
  "shipping_address_country": "USA",
  "shipping_account_name": "",
  "shipping_accounts": {
    "name": "",
    "id": "0029279c-2d3d-11e8-a121-024289eecda3",
```

---

```
    "_acl": {
      "fields": [],
      "_hash": "654d337e0e912edaa00dbb0fb3dc3c17"
    }
  },
  "shipping_account_id": "",
  "shipping_contact_name": "",
  "shipping_contacts": {
    "full_name": "",
    "id": "",
    "_acl": {
      "fields": [],
      "_hash": "654d337e0e912edaa00dbb0fb3dc3c17"
    }
  },
  "shipping_contact_id": "",
  "account_name": "J.K.M. Corp (HA)",
  "billing_accounts": {
    "name": "J.K.M. Corp (HA)",
    "id": "0029279c-2d3d-11e8-a121-024289eecda3",
    "_acl": {
      "fields": [],
      "_hash": "654d337e0e912edaa00dbb0fb3dc3c17"
    }
  },
  "account_id": "0029279c-2d3d-11e8-a121-024289eecda3",
  "billing_account_name": "J.K.M. Corp (HA)",
  "billing_account_id": "0029279c-2d3d-11e8-a121-024289eecda3",
  "billing_contact_name": "",
  "billing_contacts": {
    "full_name": "",
    "id": "",
    "_acl": {
      "fields": [],
      "_hash": "654d337e0e912edaa00dbb0fb3dc3c17"
    }
  },
  "billing_contact_id": "",
  "opportunity_name": "",
  "opportunities": {
    "name": "",
    "id": "23d19cec-2d3d-11e8-b4bf-024289eecda3",
    "_acl": {
      "fields": [],
      "_hash": "654d337e0e912edaa00dbb0fb3dc3c17"
    }
  }
}
```

---

```
},
"opportunity_id": "",
"following": "",
"my_favorite": false,
"tag": [],
"locked_fields": [],
"assigned_user_id": "seed_max_id",
"assigned_user_name": "Max Jensen",
"assigned_user_link": {
  "full_name": "Max Jensen",
  "id": "seed_max_id",
  "_acl": {
    "fields": [],
    "_hash": "654d337e0e912edaa00dbb0fb3dc3c17"
  }
},
"team_count": "",
"team_count_link": {
  "team_count": "",
  "id": "1",
  "_acl": {
    "fields": [],
    "_hash": "654d337e0e912edaa00dbb0fb3dc3c17"
  }
},
"team_name": [{
  "id": "1",
  "name": "Global",
  "name_2": "",
  "primary": true,
  "selected": false
}],
"currency_id": "-99",
"base_rate": "1.000000",
"currency_name": "",
"currencies": {
  "name": "",
  "id": "-99",
  "_acl": {
    "fields": [],
    "_hash": "654d337e0e912edaa00dbb0fb3dc3c17"
  },
  "symbol": ""
},
"currency_symbol": "",
"_acl": {
```

---

```
    "fields": {}
  },
  "_module": "Quotes"
}
```

**Last Modified:** 2021-02-17 02:44:13

## **/Reports/:record/chart GET**

### **Overview**

An API to get chart data for a saved report.

### **Summary**

This endpoint will return chart data for a saved report.

### **Request Arguments**

None.

### **Request Example**

GET /rest/v10/Reports/:id/chart

### **Response Arguments**

| Name       | Type  | Description                  |
|------------|-------|------------------------------|
| reportData | Array | Report def for the chart.    |
| chartData  | Array | The chart data for a report. |



---

## Response

```
{
  "reportData":
  {
    "label": "Accounts by Industry",
    "id": "a06b4212-3509-11e7-ab6e-f45c898a3ce7",
    ...
  },
  "chartData":
  {
    "properties": [...],
    "values": [...],
    ...
  }
}
```

**Last Modified:** 2021-02-17 02:44:13

## /Reports/:record/record\_count GET

### Overview

An API to get total number of filtered records from a saved report.

### Summary

This endpoint will return total number of records from a saved report filtered by an expression.

### Request Arguments

| Name          | Type   | Description  | Required |
|---------------|--------|--|----------|
| group_filters | String | The group filter expression. Filter expressions are explained below. | False    |

| Name              | Type    | Description   | Required |
|-------------------|---------|---|----------|
|                   |         | <p>Note that JSON-encoded filters can be specified as query parameters in one of two ways for GET requests:</p> <ol style="list-style-type: none"> <li>1. By specifying individual filter arguments as distinct parameters. Example: <code>group_filters[0][name]=value</code>.</li> <li>2. By specifying the whole filter as a single JSON-encoded string. Example: <code>group_filters=[{"name":"value"}]</code>.</li> </ol> <p>Example: <code>group_filters[0][industry]=Engineering</code>.</p> |          |
| use_saved_filters | Boolean | <p>Flag to indicate whether or not to apply saved runtime filters if exists. The default value is false. Example: <code>use_saved_filters=true</code>.</p>  | False    |

---

## Request Example

GET /rest/v10/Reports/:id/record\_count?group\_filters[0][industry]=Engineering

## Response Arguments

| Name         | Type    | Description                       |
|--------------|---------|-----------------------------------|
| record_count | Integer | Total number of filtered records. |

## Response

```
{  
  "record_count": 5  
}
```

**Last Modified:** 2021-02-17 02:44:13

## /Reports/:record/records GET

### Overview

An API to deliver filtered records from a saved report.

### Summary

This endpoint will return a list of records from a saved report filtered by an expression.

### Request Arguments

| Name              | Type    | Description   | Required |
|-------------------|---------|---|----------|
| group_filters     | String  | <p>The group filter expression. Filter expressions are explained below. Note that JSON-encoded filters can be specified as query parameters in one of two ways for GET requests:</p> <ol style="list-style-type: none"> <li>1. By specifying individual filter arguments as distinct parameters. Example: group_filters[0][name]=value.</li> <li>2. By specifying the whole filter as a single JSON-encoded string. Example: group_filters=[{"name":"value"}].</li> </ol> <p>Example: group_filters[0][industry]=Engineering.</p> | False    |
| use_saved_filters | Boolean | <p>Flag to indicate whether or not to apply saved runtime filters if exists. The default value is false. Example: use_save</p>  | False    |

| Name    | Type    | Description   | Required |
|---------|---------|---|----------|
|         |         | d_filters=true.   |          |
| max_num | Integer | A maximum number of records to return. Default is 20.                         | False    |
| offset  | Integer | The number of records to skip over before records are returned. Default is 0. | False    |

## Request Example

GET /rest/v10/Reports/:id/records?group\_filters[0][industry]=Engineering&use\_saved\_filters=true&offset=0&max\_num=20

## Response Arguments

| Name        | Type    | Description   |
|-------------|---------|---|
| records     | Array   | An array of results containing matched records.   |
| next_offset | Integer | Displays the next offset for retrieval of additional results. -1 will be returned when there are no more records. |

## Response

```
{
  "records": [
    {
      "id": "fa300a0e-0ad1-b322-9601-512d0983c19a",
      "name": "Dale Spivey",
      "date_modified": "2013-02-28T05:03:00+00:00",

```

---

```
    "description": "",
    "_acl": {
      "fields": {
      }
    }
  },
  {
    "id": "95e17367-9b3d-0e26-22dc-512d0961fedf",
    "name": "Florence Haddock",
    "date_modified": "2013-02-26T19:12:00+00:00",
    "description": "",
    "_acl": {
      "fields": {
      }
    }
  }
],
"next_offset": -1
}
```

**Last Modified:** 2021-02-17 02:44:13

## **/RevenueLineItems/multi-quote POST**

Convert Multiple Revenue Line Item to a quote.

### **Summary:**

This endpoint is used to convert multiple Revenue Line Items to a single quote

### **Query Parameters:**

| <b>Param</b> | <b>Description</b> | <b>Optional</b> |
|--------------|--------------------|-----------------|
|              |                    |                 |

---

## Valid Urls:

- POST: /rest/v10/RevenueLineItems/multi-quote

## Input Example:

```
{ records : [ 'id_1', 'id_2', ] opportunity_id:"123-456-789-0", account_id:"12-3-4-5" }
```

## Output Example:

```
{ id:"123-456-789-0", name:"My Test Quote" }
```

**Last Modified:** 2021-02-17 02:44:13

## /RevenueLineItems/:record/quote POST

Convert a Revenue Line Item to a quote.

## Summary:

This endpoint is used to convert a single RevenueLineItem to a quote

## Query Parameters:

| Param  | Description             | Optional |
|--------|-------------------------|----------|
| record | Which Revenue Line Item | false    |

---

|  |            |  |
|--|------------|--|
|  | to convert |  |
|--|------------|--|

## Valid Urls:

- /rest/v10/RevenueLineItems/:record/quote/

## Output Example:

```
{ id:"123-456-789-0", name:"My Test Quote" }
```

Last Modified: 2021-02-17 02:44:13

## /Tags/:record PUT

### Overview

Update a record of the specified type.

### Request Arguments

| Name           | Type                | Description                                | Required |
|----------------|---------------------|--|----------|
| <record field> | <record field type> | The name value list of fields to populate. | True     |

### Request

```
{  
  "name": "New Account Name",  
}
```



```

"phone_office": "(555) 888-5555",
"website": "www.newsite.com",
"meetings": {
  {
    "add": [ "21e3385e-404f-b470-407e-54044e3d8024" ],
    "delete": [ "21e3385e-404f-b470-407e-54044e3d8023" ],
    "create": [
      {
        "name": "Test Meeting"
      }
    ]
  }
}

```

## Link fields

It is possible to add or delete record relations to other records and create new related records.

| Action | Type | Description  |
|--------|------|--|
| add    | List | List of related records ID. See <a href="#">RelateRecordApi</a> for details. |
| delete | List | List of related records ID.  |
| create | List | List of name to value arrays of related records.                             |

## Response Arguments

| Name           | Type                | Description                                |
|----------------|---------------------|--|
| <record field> | <record field type> | Returns the fields for the updated record. |

## Response

```

{
  "id": "f222265a-b755-da89-0bc7-512d09b800b6",
  "name": "New Account Name",

```

---

```
"date_entered":"2013-02-26T19:12:00+00:00",
"date_modified":"2013-02-27T22:49:00+00:00",
"modified_user_id":"1",
"modified_by_name":"Administrator",
"created_by":"1",
"created_by_name":"Administrator",
"description":"",
"img":"",
"last_activity_date":"2013-02-26T19:12:00+00:00",
"deleted":false,
"assigned_user_id":"seed_sarah_id",
"assigned_user_name":"Sarah Smith",
"team_name":[
  {
    "id":1,
    "name":"Global",
    "name_2":"",
    "primary":false
  },
  {
    "id":"West",
    "name":"West",
    "name_2":"",
    "primary":true
  }
],
"linkedin":"",
"facebook":"",
"twitter":"",
"googleplus":"",
"account_type":"Customer",
"industry":"Hospitality",
"annual_revenue":"",
"phone_fax":"",
"billing_address_street":"9 IBM Path",
"billing_address_street_2":"",
"billing_address_street_3":"",
"billing_address_street_4":"",
"billing_address_city":"San Francisco",
"billing_address_state":"CA",
"billing_address_postalcode":"43635",
"billing_address_country":"USA",
"rating":"",
"phone_office":"(555) 888-5555",
"phone_alternate":"",
"website":"www.newsite.com",
```

---

```
"ownership": "",
"employees": "",
"ticker_symbol": "",
"shipping_address_street": "9 IBM Path",
"shipping_address_street_2": "",
"shipping_address_street_3": "",
"shipping_address_street_4": "",
"shipping_address_city": "San Francisco",
"shipping_address_state": "CA",
"shipping_address_postalcode": "43635",
"shipping_address_country": "USA",
"email1": "kid86@example.net",
"parent_id": "",
"sic_code": "",
"parent_name": "",
"email_opt_out": false,
"invalid_email": false,
"email": [
  {
    "email_address": "kid86@example.net",
    "opt_out": "0",
    "invalid_email": "0",
    "primary_address": "1"
  },
  {
    "email_address": "the.dev@example.name",
    "opt_out": "0",
    "invalid_email": "0",
    "primary_address": "0"
  }
],
"campaign_id": "",
"campaign_name": "",
"my_favorite": false,
"_acl": {
  "fields": {
  }
}
}
```

## Change Log

|  |  |
|--|--|
|  |  |
|--|--|

---

| Version | Change                                |
|---------|---------------------------------------|
| v10     | Added /<module>/:record PUT endpoint. |

Last Modified: 2021-02-17 02:44:13

## /Teams/:record/link POST

### Overview

Creates relationships to a pre-existing record.

### Request Arguments

| Name                | Type     | Description  | Required |
|---------------------|----------|--|----------|
| <relationship link> | <string> | Link between targeted and related records.   | True     |
| <record ID>         | <string> | The name value list of related records. Each item of the list may be either string equal to related item ID, or map containing record ID ("id" key is required in this case) and addition relationship properties. | True     |

### Request

```
{
```

```

link_name: "accounts"
ids: [
  "da6a3741-2a81-ba7f-f249-512d0932e94e",
  {
    "id": "e689173e-c953-1e14-c215-512d0927e7a2",
    "role": "owner"
  }
]
}

```

## Response Arguments

| Name            | Type  | Description                           |
|-----------------|-------|---------------------------------------|
| record          | Array | The record linked to related records. |
| related_records | Array | Records that were associated.         |

## Response

```

"record": {
  "id": "da6a3741-2a81-ba7f-f249-512d0932e94e",
  "name": "Slender Broadband Inc - 1000 units",
  "date_entered": "2013-02-26T19:12:00+00:00",
  "date_modified": "2013-02-26T19:12:00+00:00",
  "modified_user_id": "1",
  "modified_by_name": "Administrator",
  "created_by": "1",
  "created_by_name": "Administrator",
  "description": "",
  "img": "",
  "last_activity_date": "2013-02-28T18:21:00+00:00",
  "deleted": false,
  "assigned_user_id": "seed_max_id",
  "assigned_user_name": "Max Jensen",
  "team_name": [
    {
      "id": "East",
      "name": "East",
      "name_2": ""
    }
  ]
}

```

---

```
        "primary": false
      },
      {
        "id": "West",
        "name": "West",
        "name_2": "",
        "primary": true
      }
    ],
    "opportunity_type": "",
    "account_name": "Slender Broadband Inc",
    "account_id": "181461c6-dc81-1115-1fe0-512d092e8f15",
    "campaign_id": "",
    "campaign_name": "",
    "lead_source": "Campaign",
    "amount": "25000",
    "base_rate": "1",
    "amount_usdollar": "25000",
    "currency_id": "-99",
    "currency_name": "",
    "currency_symbol": "",
    "date_closed": "2013-02-27",
    "date_closed_timestamp": "1361992480",
    "next_step": "",
    "sales_stage": "Needs Analysis",
    "sales_status": "New",
    "probability": "90",
    "best_case": "25000",
    "worst_case": "25000",
    "commit_stage": "include",
    "my_favorite": false,
    "_acl": {
      "fields": {
      }
    }
  },
  "related_records": [
    {
      "id": "e689173e-c953-1e14-c215-512d0927e7a2",
      "name": "Gus Dales",
      "date_entered": "2013-02-26T19:12:00+00:00",
      "date_modified": "2013-02-26T19:12:00+00:00",
      "modified_user_id": "1",
      "modified_by_name": "Administrator",
      "created_by": "1",
```

---

```
"created_by_name": "Administrator",
"description": "",
"img": "",
"deleted": false,
"assigned_user_id": "seed_sally_id",
"assigned_user_name": "Sally Bronsen",
"team_name": [
  {
    "id": "West",
    "name": "West",
    "name_2": "",
    "primary": true
  }
],
"salutation": "",
"first_name": "Gus",
"last_name": "Dales",
"full_name": "Gus Dales",
"title": "Director Operations",
"linkedin": "",
"facebook": "",
"twitter": "",
"googleplus": "",
"department": "",
"do_not_call": false,
"phone_home": "(661) 120-2292",
"email": [
  {
    "email_address": "section.sugar.section@example.it",
    "opt_out": "1",
    "invalid_email": "0",
    "primary_address": "0"
  },
  {
    "email_address": "support.qa.kid@example.co.uk",
    "opt_out": "0",
    "invalid_email": "0",
    "primary_address": "1"
  }
],
"phone_mobile": "(294) 447-9707",
"phone_work": "(036) 840-3216",
"phone_other": "",
"phone_fax": "",
"email1": "support.qa.kid@example.co.uk",
```

---

```
"email2": "section.sugar.section@example.it",
"invalid_email": false,
"email_opt_out": false,
"primary_address_street": "48920 San Carlos Ave",
"primary_address_street_2": "",
"primary_address_street_3": "",
"primary_address_city": "Persistence",
"primary_address_state": "CA",
"primary_address_postalcode": "54556",
"primary_address_country": "USA",
"alt_address_street": "",
"alt_address_street_2": "",
"alt_address_street_3": "",
"alt_address_city": "",
"alt_address_state": "",
"alt_address_postalcode": "",
"alt_address_country": "",
"assistant": "",
"assistant_phone": "",
"picture": "",
"email_and_name1": "",
"lead_source": "Support Portal User Registration",
"account_name": "Arts & Crafts Inc",
"account_id": "d43243c6-9b8e-2973-ae2-512d09bc34b4",
"opportunity_role_fields": "",
"opportunity_role_id": "",
"opportunity_role": "Technical Advisor",
"reports_to_id": "",
"report_to_name": "",
"portal_name": "GusDales145",
"portal_active": true,
"portal_password": "$1$JxYr6tmM$b.O6.KF42jP46RadSwz0N0",
"portal_password1": "",
"portal_app": "",
"preferred_language": "en_us",
"campaign_id": "",
"campaign_name": "",
"c_accept_status_fields": "",
"m_accept_status_fields": "",
"accept_status_id": "",
"accept_status_name": "",
"sync_contact": "",
"my_favorite": false,
"_acl": {
  "fields": {
  }
}
```



---

```
    }
  },
  {
    "id": "da6a3741-2a81-ba7f-f249-512d0932e94e",
    "name": "Slender Broadband Inc - 1000 units",
    "date_entered": "2013-02-26T19:12:00+00:00",
    "date_modified": "2013-02-26T19:12:00+00:00",
    "modified_user_id": "1",
    "modified_by_name": "Administrator",
    "created_by": "1",
    "created_by_name": "Administrator",
    "description": "",
    "img": "",
    "last_activity_date": "2013-02-28T18:36:00+00:00",
    "deleted": false,
    "assigned_user_id": "seed_max_id",
    "assigned_user_name": "Max Jensen",
    "team_name": [
      {
        "id": "East",
        "name": "East",
        "name_2": "",
        "primary": false
      },
      {
        "id": "West",
        "name": "West",
        "name_2": "",
        "primary": true
      }
    ],
    "opportunity_type": "",
    "account_name": "Slender Broadband Inc",
    "account_id": "181461c6-dc81-1115-1fe0-512d092e8f15",
    "campaign_id": "",
    "campaign_name": "",
    "lead_source": "Campaign",
    "amount": "25000",
    "base_rate": "1",
    "amount_usdollar": "25000",
    "currency_id": "-99",
    "currency_name": "",
    "currency_symbol": "",
    "date_closed": "2013-02-27",
    "date_closed_timestamp": "1361992480",
    "next_step": "",
```

---

```
    "sales_stage": "Needs Analysis",
    "sales_status": "New",
    "probability": "90",
    "best_case": "25000",
    "worst_case": "25000",
    "commit_stage": "include",
    "my_favorite": false,
    "_acl": {
      "fields": {
        }
      }
    }
  ]
}
```

## Change Log

| Version     | Change  |
|-------------|---|
| v10 (7.6.0) | Added support for additional relationship values. |
| v10 (7.1.5) | Added /<module>/:record/link POST endpoint.       |

**Last Modified:** 2021-02-17 02:44:13

## **/Teams/:record/link/:link\_name/:remote\_id DELETE**

### Overview

Deletes an existing relationship between two records.

### Request Arguments

---

This endpoint does not accept any arguments.

## Response Arguments

| Name           | Type  | Description   |
|----------------|-------|---|
| record         | Array | The record to disassociate from the related record. |
| related_record | Array | The record that was disassociated.                  |

## Response

```
{
  "record": {
    "id": "da6a3741-2a81-ba7f-f249-512d0932e94e",
    "name": "Slender Broadband Inc - 1000 units",
    "date_entered": "2013-02-26T19:12:00+00:00",
    "date_modified": "2013-02-26T19:12:00+00:00",
    "modified_user_id": "1",
    "modified_by_name": "Administrator",
    "created_by": "1",
    "created_by_name": "Administrator",
    "description": "",
    "img": "",
    "last_activity_date": "2013-02-28T18:36:00+00:00",
    "deleted": false,
    "assigned_user_id": "seed_max_id",
    "assigned_user_name": "Max Jensen",
    "team_name": [
      {
        "id": "East",
        "name": "East",
        "name_2": "",
        "primary": false
      },
      {
        "id": "West",
        "name": "West",
        "name_2": "",
        "primary": true
      }
    ]
  }
}
```

---

```
],
  "opportunity_type": "",
  "account_name": "Slender Broadband Inc",
  "account_id": "181461c6-dc81-1115-1fe0-512d092e8f15",
  "campaign_id": "",
  "campaign_name": "",
  "lead_source": "Campaign",
  "amount": "25000",
  "base_rate": "1",
  "amount_usdollar": "25000",
  "currency_id": "-99",
  "currency_name": "",
  "currency_symbol": "",
  "date_closed": "2013-02-27",
  "date_closed_timestamp": "1361992480",
  "next_step": "",
  "sales_stage": "Needs Analysis",
  "sales_status": "New",
  "probability": "90",
  "best_case": "25000",
  "worst_case": "25000",
  "commit_stage": "include",
  "my_favorite": false,
  "_acl": {
    "fields": {
      }
    }
  },
  "related_record": {
    "id": "e689173e-c953-1e14-c215-512d0927e7a2",
    "name": "Gus Dales",
    "date_entered": "2013-02-26T19:12:00+00:00",
    "date_modified": "2013-02-26T19:12:00+00:00",
    "modified_user_id": "1",
    "modified_by_name": "Administrator",
    "created_by": "1",
    "created_by_name": "Administrator",
    "description": "",
    "img": "",
    "deleted": false,
    "assigned_user_id": "seed_sally_id",
    "assigned_user_name": "Sally Bronsen",
    "team_name": [
      {
        "id": "West",
```

---

```
        "name": "West",
        "name_2": "",
        "primary": true
    }
],
"salutation": "",
"first_name": "Gus",
"last_name": "Dales",
"full_name": "Gus Dales",
"title": "Director Operations",
"linkedin": "",
"facebook": "",
"twitter": "",
"googleplus": "",
"department": "",
"do_not_call": false,
"phone_home": "(661) 120-2292",
"email": [
    {
        "email_address": "section.sugar.section@example.it",
        "opt_out": "1",
        "invalid_email": "0",
        "primary_address": "0"
    },
    {
        "email_address": "support.qa.kid@example.co.uk",
        "opt_out": "0",
        "invalid_email": "0",
        "primary_address": "1"
    }
],
"phone_mobile": "(294) 447-9707",
"phone_work": "(036) 840-3216",
"phone_other": "",
"phone_fax": "",
"email1": "support.qa.kid@example.co.uk",
"email2": "section.sugar.section@example.it",
"invalid_email": false,
"email_opt_out": false,
"primary_address_street": "48920 San Carlos Ave",
"primary_address_street_2": "",
"primary_address_street_3": "",
"primary_address_city": "Persistence",
"primary_address_state": "CA",
"primary_address_postalcode": "54556",
"primary_address_country": "USA",
```

---

```
"alt_address_street":"","  
"alt_address_street_2":"","  
"alt_address_street_3":"","  
"alt_address_city":"","  
"alt_address_state":"","  
"alt_address_postalcode":"","  
"alt_address_country":"","  
"assistant":"","  
"assistant_phone":"","  
"picture":"","  
"email_and_name1":"","  
"lead_source":"Support Portal User Registration",  
"account_name":"Arts & Crafts Inc",  
"account_id":"d43243c6-9b8e-2973-ae2-512d09bc34b4",  
"opportunity_role_fields":"","  
"opportunity_role_id":"","  
"opportunity_role":"","  
"reports_to_id":"","  
"report_to_name":"","  
"portal_name":"GusDales145",  
"portal_active":true,  
"portal_password":"$1$JxYr6tmM$b.06.KF42jP46RadSwz0N0",  
"portal_password1":"","  
"portal_app":"","  
"preferred_language":"en_us",  
"campaign_id":"","  
"campaign_name":"","  
"c_accept_status_fields":"","  
"m_accept_status_fields":"","  
"accept_status_id":"","  
"accept_status_name":"","  
"sync_contact":"","  
"my_favorite":false,  
"_acl":{  
  "fields":{  
  
  }  
}  
}
```

## Change Log

|  |  |
|--|--|
|  |  |
|--|--|

---

| Version | Change  |
|---------|---|
| v10     | Added /<module>/:record/link/:link_name/:remote_id DELETE endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## **/Teams/:record/link/:link\_name/:remote\_id POST**

### **Overview**

Creates a relationship to a pre-existing record.

### **Query String Parameters**

This endpoint does not accept any arguments.

### **Response Arguments**

| Name           | Type  | Description                              |
|----------------|-------|--|
| record         | Array | The record linked to the related record. |
| related_record | Array | The record that was associated.          |

### **Response**

```
{
  "record": {
    "id": "da6a3741-2a81-ba7f-f249-512d0932e94e",
    "name": "Slender Broadband Inc - 1000 units",
    "date_entered": "2013-02-26T19:12:00+00:00",
    "date_modified": "2013-02-26T19:12:00+00:00",
    "modified_user_id": "1",
```

---

```
"modified_by_name": "Administrator",
"created_by": "1",
"created_by_name": "Administrator",
"description": "",
"img": "",
"last_activity_date": "2013-02-28T18:21:00+00:00",
"deleted": false,
"assigned_user_id": "seed_max_id",
"assigned_user_name": "Max Jensen",
"team_name": [
  {
    "id": "East",
    "name": "East",
    "name_2": "",
    "primary": false
  },
  {
    "id": "West",
    "name": "West",
    "name_2": "",
    "primary": true
  }
],
"opportunity_type": "",
"account_name": "Slender Broadband Inc",
"account_id": "181461c6-dc81-1115-1fe0-512d092e8f15",
"campaign_id": "",
"campaign_name": "",
"lead_source": "Campaign",
"amount": "25000",
"base_rate": "1",
"amount_usdollar": "25000",
"currency_id": "-99",
"currency_name": "",
"currency_symbol": "",
"date_closed": "2013-02-27",
"date_closed_timestamp": "1361992480",
"next_step": "",
"sales_stage": "Needs Analysis",
"sales_status": "New",
"probability": "90",
"best_case": "25000",
"worst_case": "25000",
"commit_stage": "include",
"my_favorite": false,
"_acl": {
```



---

```
    "fields":{
      }
    },
    "related_record":{
      "id":"e689173e-c953-1e14-c215-512d0927e7a2",
      "name":"Gus Dales",
      "date_entered":"2013-02-26T19:12:00+00:00",
      "date_modified":"2013-02-26T19:12:00+00:00",
      "modified_user_id":"1",
      "modified_by_name":"Administrator",
      "created_by":"1",
      "created_by_name":"Administrator",
      "description":"",
      "img":"",
      "deleted":false,
      "assigned_user_id":"seed_sally_id",
      "assigned_user_name":"Sally Bronsen",
      "team_name":[
        {
          "id":"West",
          "name":"West",
          "name_2":"",
          "primary":true
        }
      ],
      "salutation":"",
      "first_name":"Gus",
      "last_name":"Dales",
      "full_name":"Gus Dales",
      "title":"Director Operations",
      "linkedin":"",
      "facebook":"",
      "twitter":"",
      "googleplus":"",
      "department":"",
      "do_not_call":false,
      "phone_home":"(661) 120-2292",
      "email":[
        {
          "email_address":"section.sugar.section@example.it",
          "opt_out":"1",
          "invalid_email":"0",
          "primary_address":"0"
        }
      ],
    },
```

---

```
{
  "email_address":"support.qa.kid@example.co.uk",
  "opt_out":"0",
  "invalid_email":"0",
  "primary_address":"1"
}
],
"phone_mobile":"(294) 447-9707",
"phone_work":"(036) 840-3216",
"phone_other":"",
"phone_fax":"",
"email1":"support.qa.kid@example.co.uk",
"email2":"section.sugar.section@example.it",
"invalid_email":false,
"email_opt_out":false,
"primary_address_street":"48920 San Carlos Ave",
"primary_address_street_2":"",
"primary_address_street_3":"",
"primary_address_city":"Persistence",
"primary_address_state":"CA",
"primary_address_postalcode":"54556",
"primary_address_country":"USA",
"alt_address_street":"",
"alt_address_street_2":"",
"alt_address_street_3":"",
"alt_address_city":"",
"alt_address_state":"",
"alt_address_postalcode":"",
"alt_address_country":"",
"assistant":"",
"assistant_phone":"",
"picture":"",
"email_and_name1":"",
"lead_source":"Support Portal User Registration",
"account_name":"Arts & Crafts Inc",
"account_id":"d43243c6-9b8e-2973-ae2-512d09bc34b4",
"opportunity_role_fields":"",
"opportunity_role_id":"",
"opportunity_role":"Technical Advisor",
"reports_to_id":"",
"report_to_name":"",
"portal_name":"GusDales145",
"portal_active":true,
"portal_password":"$1$JxYr6tmM$b.O6.KF42jP46RadSwz0N0",
"portal_password1":"",
"portal_app":"",
```

---

```
"preferred_language": "en_us",
"campaign_id": "",
"campaign_name": "",
"c_accept_status_fields": "",
"m_accept_status_fields": "",
"accept_status_id": "",
"accept_status_name": "",
"sync_contact": "",
"my_favorite": false,
"_acl": {
  "fields": {
    }
  }
}
```

## Change Log

| Version | Change  |
|---------|---|
| v10     | Added /<module>/:record/link/:link_name/:remote_id POST endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /TimePeriods GET

### Overview

Lists filtered records.

### Summary

This endpoint will return a set of records filtered by an expression. The filter can be applied to multiple fields and have multiple and/or conditions in it.

Alternatively, you may use an existing filter by specifying its id. If both a filter definition and a filter id are passed, the two filters will be joined with an AND. Care will need to be taken to make sure that any filters used have appropriate indexes on the server side otherwise the runtime of the endpoint will be very long. Related fields can be searched by specifying the field name as: "link\_name.remote\_field", so if you wished to search the Accounts module by a related member account you would use "members.sic\_code".

## Request Arguments

| Name   | Type   | Description   | Required |
|--------|--------|---|----------|
| filter | String | <p>The filter expression. Filter expressions are explained below. Note that JSON-encoded filters can be specified as query parameters in one of two ways for GET requests:</p> <ol style="list-style-type: none"> <li>1. By specifying individual filter arguments as distinct parameters. Example: filter[0][id]=1</li> <li>2. By specifying the whole filter as a single JSON-encoded string. Note that this syntax is currently not supported</li> </ol> | False    |

| Name      | Type    | Description   | Required |
|-----------|---------|---|----------|
|           |         | on certain modules.<br>Example: filter=[{"id": "1"}].   |          |
| filter_id | String  | Identifier for a preexisting filter. If filter is also set, the two filters are joined with an AND.   | False    |
| max_num   | Integer | A maximum number of records to return. Default is 20.   | False    |
| offset    | Integer | The number of records to skip over before records are returned. Default is 0.   | False    |
| fields    | String  | Comma delimited list of fields to return. Each field may be represented either by string, or by map containing field name and additional field parameters (applicable to link and collection fields). The fields id and date_modified will always be returned.<br>Example: name,account_type,description,{"name": "opportunities", "fields": ["id", "name", "sales_status"], "order_by": "date_closed:desc"}<br>For more details on | False    |

| Name     | Type    | Description   | Required |
|----------|---------|---|----------|
|          |         | additional field parameters, see <a href="#">Relate API</a> and <a href="#">Collection API</a> .  |          |
| view     | String  | Instead of defining the fields argument, the view argument can be used instead. The field list is constructed at the server side based on the view definition which is requested. This argument can be used in combination with the fields argument. Common views are "record" and "list".<br>Example: record | False    |
| order_by | String  | How to sort the returned records, in a comma delimited list with the direction appended to the column name after a colon.<br>Example: name:DESC,account_type:DESC,date_modified:ASC   | False    |
| q        | String  | A search expression, will search on this module. Cannot be used at the same time as a filter expression or id.  | False    |
| deleted  | Boolean | Boolean to show   | False    |

---

| Name       | Type    | Description   | Required |
|------------|---------|---|----------|
|            |         | deleted records in the result set.  |          |
| nulls_last | Boolean | Boolean to return records with null values in order_by fields last in the result set. | False    |

## Filter Expressions

There are four types of filters:

### Basic

This will filter the results by checking the field "name" for value "Nelson Inc". This will only find exact matches.

### Example

```
{
  "filter": [
    {
      "name": "Nelson Inc"
    }
  ]
}
```

### Full

This expression allows you to specify what operation you want to use for filtering on the field. In the example you would match any record where the field "name" starts with the value "Nelson".

### Example

```
{
  "filter": [
```

```

    {
      "name": {
        "$starts": "Nelson"
      }
    }
  ]
}

```

Below is a list of operation types:

| Operation    | Description   |
|--------------|---|
| \$equals     | Performs an exact match on that field.  |
| \$not_equals | Performs an exact match on that field.  |
| \$not_equals | Matches on non-matching values.   |
| \$starts     | Matches on anything that starts with the value.   |
| \$ends       | Matches anything that ends with the value.  |
| \$contains   | Matches anything that contains the value  |
| \$in         | Finds anything where field matches one of the values as specified as an array.          |
| \$not_in     | Finds anything where field does not matches any of the values as specified as an array. |
| \$is_null    | Checks if the field is null. This operation does not need a value specified.            |
| \$not_null   | Checks if the field is not null. This operation does not need a value specified.        |
| \$lt         | Matches when the field is less than the value.  |
| \$lte        | Matches when the field is less than or equal to the value.                              |
| \$gt         | Matches when the field is greater than the value.                                       |
| \$gte        | Matches when the field is greater than or equal to the value.                           |



---

## Sub-expressions

This allows you to group filter expressions into or/and groupings. By default all expressions are and'ed together. The example expression would match if the field "name" was either "Nelson Inc" or "Nelson LLC". The only currently accepted sub-expression types are "\$and" and "\$or".

### Example

```
{
  "filter": [
    {
      "$or": [
        {
          "name": "Nelson Inc"
        },
        {
          "name": "Nelson LLC"
        }
      ]
    }
  ]
}
```

## Modules

There are two module expressions, they operate on modules instead of fields. The current module can be specified by either using the module name "\_this" or by leaving the module name as a blank string. The example expression would filter the records in the current module to only your favorites. The only currently accepted module expressions are "\$favorite" and "\$owner".

### Example

```
{
  "filter": [
    {
      "$favorite": "_this"
    }
  ]
}
```

---

```
]
}
```

## Response Arguments

| Name        | Type    | Description   |
|-------------|---------|---|
| next_offset | Integer | Displays the next offset for retrieval of additional results. -1 will be returned when there are no more records. |
| records     | Array   | An array of results containing matched records.   |

## Response

```
{
  "next_offset":-1,
  "records":[
    {
      "id":"fa300a0e-0ad1-b322-9601-512d0983c19a",
      "name":"Dale Spivey",
      "date_modified":"2013-02-28T05:03:00+00:00",
      "description":"",
      "opportunities": [
        {
          _module: "Opportunities",
          "id": "b0701501-1fab-8ae7-3942-540da93f5017",
          "name": "360 Vacations - 228 Units",
          "date_modified": "2014-09-08T16:05:00+03:00",
          "sales_status": "New"
        },
      ],
      "_acl": {
        "fields": {
        }
      }
    },
  ],
}
```

```

{
  "id": "95e17367-9b3d-0e26-22dc-512d0961fedf",
  "name": "Florence Haddock",
  "date_modified": "2013-02-26T19:12:00+00:00",
  "description": "",
  "opportunities": [
    {
      _module: "Opportunities"
      date_modified: "2014-09-08T16:05:00+03:00"
      id: "9ce7c088-8ee4-7cd3-18f1-540da944d4c0"
      name: "360 Vacations - 312 Units"
      sales_status: "New"
    },
  ],
  "_acl": {
    "fields": {
    }
  }
}
]
}

```

## Change Log

| Version | Change                               |
|---------|--------------------------------------|
| v10     | Added /<module>/filter GET endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /TimePeriods/current GET

Get the get the current timeperiod

### Summary:

---

This endpoint is used to get the current TimePeriod. If one is not found a 404 is returned

## Output Example:

```
{ "id":"e394485a-5889-ea75-84c8-51543bd1a5ba", "name":"Q1 (01\01\2013 - 03\31\2013)", "parent_id":"e28efe2d-c51c-be45-3d84-51543b4d2910", "start_date":"2013-01-01", "start_date_timestamp":"1356998400", "end_date":"2013-03-31", "end_date_timestamp":"1364774399", "created_by":"1", "date_entered":"2013-03-28 12:46:36", "date_modified":"2013-03-28 12:46:36", "deleted":"0", "is_fiscal":"0", "is_fiscal_year":"0", "leaf_cycle":"1", "type":"Quarter", "related_timeperiods":"" }
```

**Last Modified:** 2021-02-17 02:44:13

## /TimePeriods/:date GET

Return a Timeperiod by a given date

## Summary:

This endpoint is used to get a TimePeriod for a given date. If one is not found a 404 is returned.

## Output Example:

```
{ "id":"e394485a-5889-ea75-84c8-51543bd1a5ba", "name":"Q1 (01\01\2013 - 03\31\2013)", "parent_id":"e28efe2d-c51c-be45-3d84-51543b4d2910", "start_date":"2013-01-01", "start_date_timestamp":"1356998400", "end_date":"2013-03-31", "end_date_timestamp":"1364774399", "created_by":"1", "date_entered":"2013-03-28 12:46:36", "date_modified":"2013-03-28 12:46:36", "deleted":"0", "is_fiscal":"0", "is_fiscal_year":"0", "leaf_cycle":"1", "type":"Quarter",
```

---

```
"related_timeperiods":"" }
```

**Last Modified:** 2021-02-17 02:44:13

## **/TimePeriods/filter GET**

### **Overview**

Lists filtered records.

### **Summary**

This endpoint will return a set of records filtered by an expression. The filter can be applied to multiple fields and have multiple and/or conditions in it. Alternatively, you may use an existing filter by specifying its id. If both a filter definition and a filter id are passed, the two filters will be joined with an AND. Care will need to be taken to make sure that any filters used have appropriate indexes on the server side otherwise the runtime of the endpoint will be very long. Related fields can be searched by specifying the field name as: "link\_name.remote\_field", so if you wished to search the Accounts module by a related member account you would use "members.sic\_code".

### **Request Arguments**

| Name   | Type   | Description   | Required |
|--------|--------|---|----------|
| filter | String | The filter expression. Filter expressions are explained below. Note that JSON-encoded filters can be specified as query parameters in one of two ways for GET requests: | False    |

| Name      | Type    | Description   | Required |
|-----------|---------|---|----------|
|           |         | <ol style="list-style-type: none"> <li>1. By specifying individual filter arguments as distinct parameters. Example: filter[0][id]=1</li> <li>2. By specifying the whole filter as a single JSON-encoded string. Note that this syntax is currently not supported on certain modules. Example: filter=[{"id": "1"}].</li> </ol> |          |
| filter_id | String  | Identifier for a preexisting filter. If filter is also set, the two filters are joined with an AND.   | False    |
| max_num   | Integer | A maximum number of records to return. Default is 20.   | False    |
| offset    | Integer | The number of records to skip over before records are returned. Default is 0.   | False    |
| fields    | String  | Comma delimited   | False    |

| Name | Type   | Description   | Required |
|------|--------|---|----------|
|      |        | <p>list of fields to return. Each field may be represented either by string, or by map containing field name and additional field parameters (applicable to link and collection fields). The fields id and date_modified will always be returned.</p> <p>Example: name,account_type,description,{"name":"opportunities","fields":["id","name","sales_status"],"order_by":"date_closed:desc"}</p> <p>For more details on additional field parameters, see <a href="#">Relate API</a> and <a href="#">Collection API</a>.</p> |          |
| view | String | <p>Instead of defining the fields argument, the view argument can be used instead. The field list is constructed at the server side based on the view definition which is requested. This argument can be used in combination with the fields argument. Common views are "record" and "list".</p>   | False    |

| Name       | Type    | Description   | Required |
|------------|---------|---|----------|
|            |         | Example: record   |          |
| order_by   | String  | How to sort the returned records, in a comma delimited list with the direction appended to the column name after a colon.<br>Example: name:DESC,account_type:DESC,date_modified:ASC | False    |
| q          | String  | A search expression, will search on this module. Cannot be used at the same time as a filter expression or id.  | False    |
| deleted    | Boolean | Boolean to show deleted records in the result set.  | False    |
| nulls_last | Boolean | Boolean to return records with null values in order_by fields last in the result set.   | False    |

## Filter Expressions

There are four types of filters:

### Basic

This will filter the results by checking the field "name" for value "Nelson Inc". This will only find exact matches.

### Example



---

```
{
  "filter":[
    {
      "name": "Nelson Inc"
    }
  ]
}
```

## Full

This expression allows you to specify what operation you want to use for filtering on the field. In the example you would match any record where the field "name" starts with the value "Nelson".

## Example

```
{
  "filter":[
    {
      "name":{
        "$starts": "Nelson"
      }
    }
  ]
}
```

Below is a list of operation types:

| Operation    | Description                                     |
|--------------|---|
| \$equals     | Performs an exact match on that field.          |
| \$not_equals | Performs an exact match on that field.          |
| \$not_equals | Matches on non-matching values.                 |
| \$starts     | Matches on anything that starts with the value. |
| \$ends       | Matches anything that ends with the value.      |
| \$contains   | Matches anything that contains the value        |
| \$in         | Finds anything where field matches one          |

| Operation  | Description   |
|------------|---|
|            | of the values as specified as an array.   |
| \$not_in   | Finds anything where field does not matches any of the values as specified as an array. |
| \$is_null  | Checks if the field is null. This operation does not need a value specified.            |
| \$not_null | Checks if the field is not null. This operation does not need a value specified.        |
| \$lt       | Matches when the field is less than the value.  |
| \$lte      | Matches when the field is less than or equal to the value.                              |
| \$gt       | Matches when the field is greater than the value.                                       |
| \$gte      | Matches when the field is greater than or equal to the value.                           |

## Sub-expressions

This allows you to group filter expressions into or/and groupings. By default all expressions are and'ed together. The example expression would match if the field "name" was either "Nelson Inc" or "Nelson LLC". The only currently accepted sub-expression types are "\$and" and "\$or".

### Example

```
{
  "filter": [
    {
      "$or": [
        {
          "name": "Nelson Inc"
        },
        {
          "name": "Nelson LLC"
        }
      ]
    }
  ]
}
```

---

```
    ]
  }
]
}
```

## Modules

There are two module expressions, they operate on modules instead of fields. The current module can be specified by either using the module name "\_this" or by leaving the module name as a blank string. The example expression would filter the records in the current module to only your favorites. The only currently accepted module expressions are "\$favorite" and "\$owner".

### Example

```
{
  "filter":[
    {
      "$favorite":"_this"
    }
  ]
}
```

## Response Arguments

| Name        | Type    | Description   |
|-------------|---------|---|
| next_offset | Integer | Displays the next offset for retrieval of additional results. -1 will be returned when there are no more records. |
| records     | Array   | An array of results containing matched records.   |

## Response

---

```
{
  "next_offset":-1,
  "records":[
    {
      "id":"fa300a0e-0ad1-b322-9601-512d0983c19a",
      "name":"Dale Spivey",
      "date_modified":"2013-02-28T05:03:00+00:00",
      "description":"",
      "opportunities": [
        {
          _module: "Opportunities",
          "id": "b0701501-1fab-8ae7-3942-540da93f5017",
          "name": "360 Vacations - 228 Units",
          "date_modified": "2014-09-08T16:05:00+03:00",
          "sales_status": "New"
        },
      ],
      "_acl": {
        "fields": {
        }
      }
    },
    {
      "id":"95e17367-9b3d-0e26-22dc-512d0961fedf",
      "name":"Florence Haddock",
      "date_modified":"2013-02-26T19:12:00+00:00",
      "description":"",
      "opportunities": [
        {
          _module: "Opportunities"
          date_modified: "2014-09-08T16:05:00+03:00"
          id: "9ce7c088-8ee4-7cd3-18f1-540da944d4c0"
          name: "360 Vacations - 312 Units"
          sales_status: "New"
        },
      ],
      "_acl": {
        "fields": {
        }
      }
    }
  ]
}
```

---

## Change Log

| Version | Change                               |
|---------|--------------------------------------|
| v10     | Added /<module>/filter GET endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /Users GET

### Overview

Lists filtered records.

### Summary

This endpoint will return a set of records filtered by an expression. The filter can be applied to multiple fields and have multiple and/or conditions in it. Alternatively, you may use an existing filter by specifying its id. If both a filter definition and a filter id are passed, the two filters will be joined with an AND. Care will need to be taken to make sure that any filters used have appropriate indexes on the server side otherwise the runtime of the endpoint will be very long. Related fields can be searched by specifying the field name as: "link\_name.remote\_field", so if you wished to search the Accounts module by a related member account you would use "members.sic\_code".

### Request Arguments

| Name   | Type   | Description  | Required |
|--------|--------|--|----------|
| filter | String | The filter expression. Filter expressions are explained below. Note that JSON-encoded filters can be specified as query parameters | False    |

| Name      | Type    | Description   | Required |
|-----------|---------|---|----------|
|           |         | <p>in one of two ways for GET requests:</p> <ol style="list-style-type: none"> <li>1. By specifying individual filter arguments as distinct parameters. Example: filter[0][id]=1</li> <li>2. By specifying the whole filter as a single JSON-encoded string. Note that this syntax is currently not supported on certain modules. Example: filter=[{"id": "1"}].</li> </ol> |          |
| filter_id | String  | Identifier for a preexisting filter. If filter is also set, the two filters are joined with an AND.   | False    |
| max_num   | Integer | A maximum number of records to return. Default is 20.   | False    |
| offset    | Integer | The number of records to skip over before records are   | False    |

| Name   | Type   | Description   | Required |
|--------|--------|---|----------|
|        |        | returned. Default is 0.   |          |
| fields | String | <p>Comma delimited list of fields to return. Each field may be represented either by string, or by map containing field name and additional field parameters (applicable to link and collection fields). The fields id and date_modified will always be returned.</p> <p>Example: name,account_type,description,{"name":"opportunities","fields":["id","name","sales_status"],"order_by":"date_closed:desc"}</p> <p>For more details on additional field parameters, see <a href="#">Relate API</a> and <a href="#">Collection API</a>.</p> | False    |
| view   | String | <p>Instead of defining the fields argument, the view argument can be used instead. The field list is constructed at the server side based on the view definition which is requested. This argument can be used in combination with the fields</p>   | False    |

| Name       | Type    | Description   | Required |
|------------|---------|---|----------|
|            |         | argument. Common views are "record" and "list".<br>Example: record  |          |
| order_by   | String  | How to sort the returned records, in a comma delimited list with the direction appended to the column name after a colon.<br>Example: name:DESC,account_type:DESC,date_modified:ASC | False    |
| q          | String  | A search expression, will search on this module. Cannot be used at the same time as a filter expression or id.  | False    |
| deleted    | Boolean | Boolean to show deleted records in the result set.  | False    |
| nulls_last | Boolean | Boolean to return records with null values in order_by fields last in the result set.   | False    |

## Filter Expressions

There are four types of filters:

### Basic

This will filter the results by checking the field "name" for value "Nelson Inc". This will only find exact matches.



---

## Example

```
{
  "filter": [
    {
      "name": "Nelson Inc"
    }
  ]
}
```

## Full

This expression allows you to specify what operation you want to use for filtering on the field. In the example you would match any record where the field "name" starts with the value "Nelson".

## Example

```
{
  "filter": [
    {
      "name": {
        "$starts": "Nelson"
      }
    }
  ]
}
```

Below is a list of operation types:

| Operation                 | Description                                     |
|---------------------------|---|
| <code>\$equals</code>     | Performs an exact match on that field.          |
| <code>\$not_equals</code> | Performs an exact match on that field.          |
| <code>\$not_equals</code> | Matches on non-matching values.                 |
| <code>\$starts</code>     | Matches on anything that starts with the value. |
| <code>\$ends</code>       | Matches anything that ends with the value.      |
| <code>\$contains</code>   | Matches anything that contains the value        |

| Operation  | Description   |
|------------|---|
| \$in       | Finds anything where field matches one of the values as specified as an array.          |
| \$not_in   | Finds anything where field does not matches any of the values as specified as an array. |
| \$is_null  | Checks if the field is null. This operation does not need a value specified.            |
| \$not_null | Checks if the field is not null. This operation does not need a value specified.        |
| \$lt       | Matches when the field is less than the value.  |
| \$lte      | Matches when the field is less than or equal to the value.                              |
| \$gt       | Matches when the field is greater than the value.                                       |
| \$gte      | Matches when the field is greater than or equal to the value.                           |

## Sub-expressions

This allows you to group filter expressions into or/and groupings. By default all expressions are and'ed together. The example expression would match if the field "name" was either "Nelson Inc" or "Nelson LLC". The only currently accepted sub-expression types are "\$and" and "\$or".

### Example

```
{
  "filter": [
    {
      "$or": [
        {
          "name": "Nelson Inc"
        },
        {
          "name": "Nelson LLC"
        }
      ]
    }
  ]
}
```

---

```
    }
  ]
}
}
```

## Modules

There are two module expressions, they operate on modules instead of fields. The current module can be specified by either using the module name "\_this" or by leaving the module name as a blank string. The example expression would filter the records in the current module to only your favorites. The only currently accepted module expressions are "\$favorite" and "\$owner".

### Example

```
{
  "filter":[
    {
      "$favorite":"_this"
    }
  ]
}
```

## Response Arguments

| Name        | Type    | Description   |
|-------------|---------|---|
| next_offset | Integer | Displays the next offset for retrieval of additional results. -1 will be returned when there are no more records. |
| records     | Array   | An array of results containing matched records.   |

---

## Response

```
{
  "next_offset":-1,
  "records":[
    {
      "id":"fa300a0e-0ad1-b322-9601-512d0983c19a",
      "name":"Dale Spivey",
      "date_modified":"2013-02-28T05:03:00+00:00",
      "description":"",
      "opportunities": [
        {
          _module: "Opportunities",
          "id": "b0701501-1fab-8ae7-3942-540da93f5017",
          "name": "360 Vacations - 228 Units",
          "date_modified": "2014-09-08T16:05:00+03:00",
          "sales_status": "New"
        },
      ],
      "_acl": {
        "fields": {
        }
      }
    },
    {
      "id":"95e17367-9b3d-0e26-22dc-512d0961fedf",
      "name":"Florence Haddock",
      "date_modified":"2013-02-26T19:12:00+00:00",
      "description":"",
      "opportunities": [
        {
          _module: "Opportunities"
          date_modified: "2014-09-08T16:05:00+03:00"
          id: "9ce7c088-8ee4-7cd3-18f1-540da944d4c0"
          name: "360 Vacations - 312 Units"
          sales_status: "New"
        },
      ],
      "_acl": {
        "fields": {
        }
      }
    }
  ]
}
```

---

## Change Log

| Version | Change                               |
|---------|--------------------------------------|
| v10     | Added /<module>/filter GET endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## **/Users/:record DELETE**

Delete a User and return its ID

### **Summary:**

This endpoint is used to delete a User. Returns the ID of the deleted User.

**Last Modified:** 2021-02-17 02:44:13

## **/Users/:record/freebusy GET**

Get a user's FreeBusy schedule

### **Summary:**

This endpoint returns a list of time slots for which the specified person is busy.

## **Request**

---

GET /Users/:id/freebusy

## Response

```
{
  "id": "foo"
  "module": "Users",
  "freebusy": [
    {
      "start": "2014-08-24T08:45:00-04:00",
      "end": "2014-08-24T09:15:00-04:00"
    },
    {
      "start": "2014-08-30T05:45:00-04:00",
      "end": "2014-08-30T06:15:00-04:00"
    },
    {
      "start": "2014-09-12T15:45:00-04:00",
      "end": "2014-09-12T16:15:00-04:00"
    }
  ]
}
```

**Last Modified:** 2021-02-17 02:44:13

## /Users/:record/link POST

### Overview

Creates relationships to a pre-existing record.

### Request Arguments

| Name                | Type     | Description  | Required |
|---------------------|----------|--|----------|
| <relationship link> | <string> | Link between targeted and related records.   | True     |
| <record ID>         | <string> | The name value list of related records. Each item of the list may be either string equal to related item ID, or map containing record ID ("id" key is required in this case) and addition relationship properties. | True     |

## Request

```
{
  link_name: "accounts"
  ids: [
    "da6a3741-2a81-ba7f-f249-512d0932e94e",
    {
      "id": "e689173e-c953-1e14-c215-512d0927e7a2",
      "role": "owner"
    }
  ]
}
```

## Response Arguments

| Name            | Type  | Description                           |
|-----------------|-------|---------------------------------------|
| record          | Array | The record linked to related records. |
| related_records | Array | Records that were associated.         |

---

## Response

```
"record": {
  "id": "da6a3741-2a81-ba7f-f249-512d0932e94e",
  "name": "Slender Broadband Inc - 1000 units",
  "date_entered": "2013-02-26T19:12:00+00:00",
  "date_modified": "2013-02-26T19:12:00+00:00",
  "modified_user_id": "1",
  "modified_by_name": "Administrator",
  "created_by": "1",
  "created_by_name": "Administrator",
  "description": "",
  "img": "",
  "last_activity_date": "2013-02-28T18:21:00+00:00",
  "deleted": false,
  "assigned_user_id": "seed_max_id",
  "assigned_user_name": "Max Jensen",
  "team_name": [
    {
      "id": "East",
      "name": "East",
      "name_2": "",
      "primary": false
    },
    {
      "id": "West",
      "name": "West",
      "name_2": "",
      "primary": true
    }
  ],
  "opportunity_type": "",
  "account_name": "Slender Broadband Inc",
  "account_id": "181461c6-dc81-1115-1fe0-512d092e8f15",
  "campaign_id": "",
  "campaign_name": "",
  "lead_source": "Campaign",
  "amount": "25000",
  "base_rate": "1",
  "amount_usdollar": "25000",
  "currency_id": "-99",
  "currency_name": "",
  "currency_symbol": "",
  "date_closed": "2013-02-27",
  "date_closed_timestamp": "1361992480",
  "next_step": "",

```



---

```
"sales_stage": "Needs Analysis",
"sales_status": "New",
"probability": "90",
"best_case": "25000",
"worst_case": "25000",
"commit_stage": "include",
"my_favorite": false,
"_acl": {
  "fields": {
  }
}
},
"related_records": [
  {
    "id": "e689173e-c953-1e14-c215-512d0927e7a2",
    "name": "Gus Dales",
    "date_entered": "2013-02-26T19:12:00+00:00",
    "date_modified": "2013-02-26T19:12:00+00:00",
    "modified_user_id": "1",
    "modified_by_name": "Administrator",
    "created_by": "1",
    "created_by_name": "Administrator",
    "description": "",
    "img": "",
    "deleted": false,
    "assigned_user_id": "seed_sally_id",
    "assigned_user_name": "Sally Bronsen",
    "team_name": [
      {
        "id": "West",
        "name": "West",
        "name_2": "",
        "primary": true
      }
    ],
    "salutation": "",
    "first_name": "Gus",
    "last_name": "Dales",
    "full_name": "Gus Dales",
    "title": "Director Operations",
    "linkedin": "",
    "facebook": "",
    "twitter": "",
    "googleplus": "",
    "department": ""
  }
]
```

---

```
"do_not_call": false,
"phone_home": "(661) 120-2292",
"email": [
  {
    "email_address": "section.sugar.section@example.it",
    "opt_out": "1",
    "invalid_email": "0",
    "primary_address": "0"
  },
  {
    "email_address": "support.qa.kid@example.co.uk",
    "opt_out": "0",
    "invalid_email": "0",
    "primary_address": "1"
  }
],
"phone_mobile": "(294) 447-9707",
"phone_work": "(036) 840-3216",
"phone_other": "",
"phone_fax": "",
"email1": "support.qa.kid@example.co.uk",
"email2": "section.sugar.section@example.it",
"invalid_email": false,
"email_opt_out": false,
"primary_address_street": "48920 San Carlos Ave",
"primary_address_street_2": "",
"primary_address_street_3": "",
"primary_address_city": "Persistence",
"primary_address_state": "CA",
"primary_address_postalcode": "54556",
"primary_address_country": "USA",
"alt_address_street": "",
"alt_address_street_2": "",
"alt_address_street_3": "",
"alt_address_city": "",
"alt_address_state": "",
"alt_address_postalcode": "",
"alt_address_country": "",
"assistant": "",
"assistant_phone": "",
"picture": "",
"email_and_name1": "",
"lead_source": "Support Portal User Registration",
"account_name": "Arts & Crafts Inc",
"account_id": "d43243c6-9b8e-2973-ae2-512d09bc34b4",
```

---

```
"opportunity_role_fields": "",
"opportunity_role_id": "",
"opportunity_role": "Technical Advisor",
"reports_to_id": "",
"report_to_name": "",
"portal_name": "GusDales145",
"portal_active": true,
"portal_password": "$1$JxYr6tmM$b.O6.KF42jP46RadSwz0N0",
"portal_password1": "",
"portal_app": "",
"preferred_language": "en_us",
"campaign_id": "",
"campaign_name": "",
"c_accept_status_fields": "",
"m_accept_status_fields": "",
"accept_status_id": "",
"accept_status_name": "",
"sync_contact": "",
"my_favorite": false,
"_acl": {
  "fields": {
  }
}
},
{
  "id": "da6a3741-2a81-ba7f-f249-512d0932e94e",
  "name": "Slender Broadband Inc - 1000 units",
  "date_entered": "2013-02-26T19:12:00+00:00",
  "date_modified": "2013-02-26T19:12:00+00:00",
  "modified_user_id": "1",
  "modified_by_name": "Administrator",
  "created_by": "1",
  "created_by_name": "Administrator",
  "description": "",
  "img": "",
  "last_activity_date": "2013-02-28T18:36:00+00:00",
  "deleted": false,
  "assigned_user_id": "seed_max_id",
  "assigned_user_name": "Max Jensen",
  "team_name": [
    {
      "id": "East",
      "name": "East",
      "name_2": "",
      "primary": false
    }
  ],
}
```

```

        {
            "id": "West",
            "name": "West",
            "name_2": "",
            "primary": true
        }
    ],
    "opportunity_type": "",
    "account_name": "Slender Broadband Inc",
    "account_id": "181461c6-dc81-1115-1fe0-512d092e8f15",
    "campaign_id": "",
    "campaign_name": "",
    "lead_source": "Campaign",
    "amount": "25000",
    "base_rate": "1",
    "amount_usdollar": "25000",
    "currency_id": "-99",
    "currency_name": "",
    "currency_symbol": "",
    "date_closed": "2013-02-27",
    "date_closed_timestamp": "1361992480",
    "next_step": "",
    "sales_stage": "Needs Analysis",
    "sales_status": "New",
    "probability": "90",
    "best_case": "25000",
    "worst_case": "25000",
    "commit_stage": "include",
    "my_favorite": false,
    "_acl": {
        "fields": {
            }
        }
    }
}

```

## Change Log

| Version     | Change  |
|-------------|---|
| v10 (7.6.0) | Added support for additional relationship values. |

---

v10 (7.1.5)

Added /<module>/:record/link POST endpoint.

**Last Modified:** 2021-02-17 02:44:13

## **/Users/:record/link/:link\_name/:remote\_id DELETE**

### **Overview**

Deletes an existing relationship between two records.

### **Request Arguments**

This endpoint does not accept any arguments.

### **Response Arguments**

| Name           | Type  | Description   |
|----------------|-------|---|
| record         | Array | The record to disassociate from the related record. |
| related_record | Array | The record that was disassociated.                  |

### **Response**

```
{
  "record": {
    "id": "da6a3741-2a81-ba7f-f249-512d0932e94e",
    "name": "Slender Broadband Inc - 1000 units",
    "date_entered": "2013-02-26T19:12:00+00:00",
    "date_modified": "2013-02-26T19:12:00+00:00",
    "modified_user_id": "1",
    "modified_by_name": "Administrator",
    "created_by": "1",
```

---

```
"created_by_name": "Administrator",
"description": "",
"img": "",
"last_activity_date": "2013-02-28T18:36:00+00:00",
"deleted": false,
"assigned_user_id": "seed_max_id",
"assigned_user_name": "Max Jensen",
"team_name": [
  {
    "id": "East",
    "name": "East",
    "name_2": "",
    "primary": false
  },
  {
    "id": "West",
    "name": "West",
    "name_2": "",
    "primary": true
  }
],
"opportunity_type": "",
"account_name": "Slender Broadband Inc",
"account_id": "181461c6-dc81-1115-1fe0-512d092e8f15",
"campaign_id": "",
"campaign_name": "",
"lead_source": "Campaign",
"amount": "25000",
"base_rate": "1",
"amount_usdollar": "25000",
"currency_id": "-99",
"currency_name": "",
"currency_symbol": "",
"date_closed": "2013-02-27",
"date_closed_timestamp": "1361992480",
"next_step": "",
"sales_stage": "Needs Analysis",
"sales_status": "New",
"probability": "90",
"best_case": "25000",
"worst_case": "25000",
"commit_stage": "include",
"my_favorite": false,
"_acl": {
  "fields": {
```

---

```
    }
  },
  "related_record":{
    "id":"e689173e-c953-1e14-c215-512d0927e7a2",
    "name":"Gus Dales",
    "date_entered":"2013-02-26T19:12:00+00:00",
    "date_modified":"2013-02-26T19:12:00+00:00",
    "modified_user_id":"1",
    "modified_by_name":"Administrator",
    "created_by":"1",
    "created_by_name":"Administrator",
    "description":"",
    "img":"",
    "deleted":false,
    "assigned_user_id":"seed_sally_id",
    "assigned_user_name":"Sally Bronsen",
    "team_name":[
      {
        "id":"West",
        "name":"West",
        "name_2":"",
        "primary":true
      }
    ],
    "salutation":"",
    "first_name":"Gus",
    "last_name":"Dales",
    "full_name":"Gus Dales",
    "title":"Director Operations",
    "linkedin":"",
    "facebook":"",
    "twitter":"",
    "googleplus":"",
    "department":"",
    "do_not_call":false,
    "phone_home":"(661) 120-2292",
    "email":[
      {
        "email_address":"section.sugar.section@example.it",
        "opt_out":"1",
        "invalid_email":"0",
        "primary_address":"0"
      },
      {
        "email_address":"support.qa.kid@example.co.uk",
```

---

```
        "opt_out": "0",
        "invalid_email": "0",
        "primary_address": "1"
    }
],
"phone_mobile": "(294) 447-9707",
"phone_work": "(036) 840-3216",
"phone_other": "",
"phone_fax": "",
"email1": "support.qa.kid@example.co.uk",
"email2": "section.sugar.section@example.it",
"invalid_email": false,
"email_opt_out": false,
"primary_address_street": "48920 San Carlos Ave",
"primary_address_street_2": "",
"primary_address_street_3": "",
"primary_address_city": "Persistence",
"primary_address_state": "CA",
"primary_address_postalcode": "54556",
"primary_address_country": "USA",
"alt_address_street": "",
"alt_address_street_2": "",
"alt_address_street_3": "",
"alt_address_city": "",
"alt_address_state": "",
"alt_address_postalcode": "",
"alt_address_country": "",
"assistant": "",
"assistant_phone": "",
"picture": "",
"email_and_name1": "",
"lead_source": "Support Portal User Registration",
"account_name": "Arts & Crafts Inc",
"account_id": "d43243c6-9b8e-2973-ae2-512d09bc34b4",
"opportunity_role_fields": "",
"opportunity_role_id": "",
"opportunity_role": "",
"reports_to_id": "",
"report_to_name": "",
"portal_name": "GusDales145",
"portal_active": true,
"portal_password": "$1$JxYr6tmM$b.O6.KF42jP46RadSwz0N0",
"portal_password1": "",
"portal_app": "",
"preferred_language": "en_us",
"campaign_id": "",
```



---

```
"campaign_name": "",
"c_accept_status_fields": "",
"m_accept_status_fields": "",
"accept_status_id": "",
"accept_status_name": "",
"sync_contact": "",
"my_favorite": false,
"_acl": {
  "fields": {
    }
  }
}
```

## Change Log

| Version | Change  |
|---------|---|
| v10     | Added /<module>/:record/link/:link_name/:remote_id DELETE endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /Users/:record/link/:link\_name/:remote\_id POST

### Overview

Creates a relationship to a pre-existing record.

### Query String Parameters

This endpoint does not accept any arguments.

### Response Arguments

| Name           | Type  | Description                              |
|----------------|-------|--|
| record         | Array | The record linked to the related record. |
| related_record | Array | The record that was associated.          |

## Response

```
{
  "record": {
    "id": "da6a3741-2a81-ba7f-f249-512d0932e94e",
    "name": "Slender Broadband Inc - 1000 units",
    "date_entered": "2013-02-26T19:12:00+00:00",
    "date_modified": "2013-02-26T19:12:00+00:00",
    "modified_user_id": "1",
    "modified_by_name": "Administrator",
    "created_by": "1",
    "created_by_name": "Administrator",
    "description": "",
    "img": "",
    "last_activity_date": "2013-02-28T18:21:00+00:00",
    "deleted": false,
    "assigned_user_id": "seed_max_id",
    "assigned_user_name": "Max Jensen",
    "team_name": [
      {
        "id": "East",
        "name": "East",
        "name_2": "",
        "primary": false
      },
      {
        "id": "West",
        "name": "West",
        "name_2": "",
        "primary": true
      }
    ],
    "opportunity_type": "",
    "account_name": "Slender Broadband Inc",
    "account_id": "181461c6-dc81-1115-1fe0-512d092e8f15",
    "campaign_id": "",
    "campaign_name": ""
  }
}
```

---

```
"lead_source": "Campaign",
"amount": "25000",
"base_rate": "1",
"amount_usdollar": "25000",
"currency_id": "-99",
"currency_name": "",
"currency_symbol": "",
"date_closed": "2013-02-27",
"date_closed_timestamp": "1361992480",
"next_step": "",
"sales_stage": "Needs Analysis",
"sales_status": "New",
"probability": "90",
"best_case": "25000",
"worst_case": "25000",
"commit_stage": "include",
"my_favorite": false,
"_acl": {
  "fields": {
    }
  }
},
"related_record": {
  "id": "e689173e-c953-1e14-c215-512d0927e7a2",
  "name": "Gus Dales",
  "date_entered": "2013-02-26T19:12:00+00:00",
  "date_modified": "2013-02-26T19:12:00+00:00",
  "modified_user_id": "1",
  "modified_by_name": "Administrator",
  "created_by": "1",
  "created_by_name": "Administrator",
  "description": "",
  "img": "",
  "deleted": false,
  "assigned_user_id": "seed_sally_id",
  "assigned_user_name": "Sally Bronsen",
  "team_name": [
    {
      "id": "West",
      "name": "West",
      "name_2": "",
      "primary": true
    }
  ],
  "salutation": ""
```

---

```
"first_name": "Gus",
"last_name": "Dales",
"full_name": "Gus Dales",
"title": "Director Operations",
"linkedin": "",
"facebook": "",
"twitter": "",
"googleplus": "",
"department": "",
"do_not_call": false,
"phone_home": "(661) 120-2292",
"email": [
  {
    "email_address": "section.sugar.section@example.it",
    "opt_out": "1",
    "invalid_email": "0",
    "primary_address": "0"
  },
  {
    "email_address": "support.qa.kid@example.co.uk",
    "opt_out": "0",
    "invalid_email": "0",
    "primary_address": "1"
  }
],
"phone_mobile": "(294) 447-9707",
"phone_work": "(036) 840-3216",
"phone_other": "",
"phone_fax": "",
"email1": "support.qa.kid@example.co.uk",
"email2": "section.sugar.section@example.it",
"invalid_email": false,
"email_opt_out": false,
"primary_address_street": "48920 San Carlos Ave",
"primary_address_street_2": "",
"primary_address_street_3": "",
"primary_address_city": "Persistence",
"primary_address_state": "CA",
"primary_address_postalcode": "54556",
"primary_address_country": "USA",
"alt_address_street": "",
"alt_address_street_2": "",
"alt_address_street_3": "",
"alt_address_city": "",
"alt_address_state": "",
"alt_address_postalcode": "",
```

```

"alt_address_country":"","
"assistant":"","
"assistant_phone":"","
"picture":"","
"email_and_name1":"","
"lead_source":"Support Portal User Registration",
"account_name":"Arts & Crafts Inc",
"account_id":"d43243c6-9b8e-2973-ae2-512d09bc34b4",
"opportunity_role_fields":"","
"opportunity_role_id":"","
"opportunity_role":"Technical Advisor",
"reports_to_id":"","
"report_to_name":"","
"portal_name":"GusDales145",
"portal_active":true,
"portal_password":"$1$JxYr6tmM$b.06.KF42jP46RadSwz0N0",
"portal_password1":"","
"portal_app":"","
"preferred_language":"en_us",
"campaign_id":"","
"campaign_name":"","
"c_accept_status_fields":"","
"m_accept_status_fields":"","
"accept_status_id":"","
"accept_status_name":"","
"sync_contact":"","
"my_favorite":false,
"_acl":{
  "fields":{
    }
  }
}
}
}

```

## Change Log

| Version | Change  |
|---------|---|
| v10     | Added /<module>/:record/link/:link_name/:remote_id POST endpoint. |

---

Last Modified: 2021-02-17 02:44:13

## /VCardDownload GET

### Overview

Downloads a vCard.

### Request Arguments

| Name   | Type   | Description                                   | Required |
|--------|--------|---|----------|
| id     | String | The id of the vcard.                          | True     |
| module | String | The name of the module to get the vcard from. | True     |

### Request

`http://{site_url}/rest/v10/VCardDownload?id=2c9e5c09-6824-0d14-f5cb-5130321ac3cf&module=Contacts`

**Note:** GET endpoint parameters are passed in the form of a query string.

### Response Arguments

| Name                | Type    | Description             |
|---------------------|---------|-------------------------|
| <vcard information> | String; | Record in vcard format. |

### Response

```
BEGIN:VCARD
N;CHARSET=utf-8:Leone;Rosemarie;;
```

---

```
FN;CHARSET=utf-8: Rosemarie Leone
BDAY:
TEL;WORK;FAX:
TEL;HOME;CHARSET=utf-8:(692) 586-8287
TEL;CELL;CHARSET=utf-8:(117) 577-0969
TEL;WORK;CHARSET=utf-8:(844) 325-7679
EMAIL;INTERNET;CHARSET=utf-8:support.im@example.it
ADR;WORK;CHARSET=utf-8;;;777 West Filmore Ln;San Mateo;CA;74984;USA
ORG;CHARSET=utf-8:Q.R.&E. Corp;
TITLE;CHARSET=utf-8:Director Sales
END:VCARD
```

## Change Log

| Version | Change                             |
|---------|------------------------------------|
| v10     | Added /VCardDownload GET endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /bulk POST

### Overview

Run API calls in bulk.

### Summary

This request will run a sequence of API requests within one query. The requests are executed sequentially and their results are returned as one response. Some requests may return failure code, that does not interrupt the execution of the batch, and the overall request will still be considered successful.

### Request Arguments

| Name     | Type  | Description          | Required |
|----------|-------|----------------------|----------|
| requests | Array | The list of requests | True     |

Each of the requests can have the following fields:

| Name    | Type        | Description  | Required |
|---------|-------------|--|----------|
| url     | String      | The request URL, starting with version.                        | True     |
| data    | JSON String | The data for the POST/PUT body. Must be a JSON-encoded string. | False    |
| headers | Array       | The request headers  | False    |
| method  | String      | The HTTP method (default is GET)                               | False    |

## Request Example

```
{
  "requests": [
    {
      "url": "/v10/Accounts", "method": "POST", "data": "{\"name\": \"test123\"}"
    },
    {
      "url": "/v10/Accounts", "method": "GET"
    }
  ]
}
```

## Response

The response will contain an array of response objects, each of them will correspond to the individual request. The following fields are in the response objects:

| Name     | Type            | Description            |
|----------|-----------------|------------------------|
| contents | Array or String | The response contents, |



| Name    | Type    | Description  |
|---------|---------|--|
|         |         | can be JSON object or string depending on what the individual request is supposed to return.     |
| headers | Array   | The response headers   |
| status  | Integer | HTTP status code of the response. Will be 2XX for successful requests and 4XX or 5XX for errors. |

## Response Example

```
[
  {
    "contents": {
      "my_favorite": false,
      "following": true,
      "id": "7d2e21a6-8a76-a74f-bb53-535620211304",
      "name": "test123",
      "date_entered": "2014-04-22T03:56:24-04:00",
      "_module": "Accounts"
    },
    "headers": [],
    "status": 200
  },
  {
    "contents": {
      "next_offset": -1,
      "records": [
        {
          "my_favorite": false,
          "following": true,
          "id": "7d2e21a6-8a76-a74f-bb53-535620211304",
          "name": "test123",
          "date_entered": "2014-04-22T03:56:24-04:00",
          "date_modified": "2014-04-22T03:56:24-04:00",
        }
      ]
    },
    "headers": [],
    "status": null
  }
]
```

---

```
}  
]
```

## Change Log

| Version | Change                     |
|---------|----------------------------|
| v10     | Added /bulk POST endpoint. |

Last Modified: 2021-02-17 02:44:13

## /collection/:collection\_name GET

### Overview

Lists records from multiple modules at a time.

### Summary

This endpoint will return a set of records fetched from multiple modules defined by :collection\_name. The records will be filtered, sorted and truncated to max\_num as a single collection. Collections may use a field mapping. For instance, the due\_date of Tasks may be referred to as date\_end. In this case the alias (date\_end) should be used in filter and order\_by expressions instead of real field name. Note that response data still contains the original fields for the module.

### Request Arguments

| Name   | Type   | Description  | Required |
|--------|--------|--|----------|
| fields | String | See <a href="#">Filter API</a> . If the collection definition uses aliases, then aliases should be used instead of real field names. | False    |

| Name     | Type    | Description  | Required |
|----------|---------|--|----------|
| max_num  | Integer | See <a href="#">Filter API</a> .   | False    |
| filter   | String  | See <a href="#">Filter API</a> . If collection definition uses aliases, then aliases should be used instead of real field names.   | False    |
| order_by | String  | See <a href="#">Filter API</a> . If collection definition uses aliases, then aliases should be used instead of real field names.   | False    |
| offset   | Map     | Individual offset for each module which the collection consists of. -1 (or any negative value) denotes that the module should be skipped. If module offset is not specified, it defaults to 0. | False    |

## Response Arguments

| Name        | Type  | Description   |
|-------------|-------|---|
| next_offset | Map   | The next offset to retrieve records. -1 will be returned for the given module when there are no more records. |
| records     | Array | The record result set.  |

## Response

---

```
{
  "next_offset": {
    "Calls": 1,
    "Meetings": -1,
    "Tasks": -2,
  },
  "records": [
    {
      "_module": "Calls",
      "id": "8703fbf3-0ffa-c288-8d2c-512f943ecdc3",
      "name": "Discuss review process",
      "date_end": "2014-02-26T19:12:00+00:00"
    },
    {
      "_module": "Tasks",
      "id": "e1c495cb-af17-1b37-dd66-512f934fe155",
      "name": "Introduce all players",
      "due_date": "2014-02-26T19:12:00+00:00"
    },
    {
      "_module": "Tasks",
      "id": "456b7848-9959-5a64-cd34-512d0938add",
      "name": "Follow-up on proposal",
      "due_date": "2014-02-26T19:12:00+00:00"
    }
  ]
}
```

## Change Log

| Version | Change   |
|---------|--|
| v10     | Added /collection/:collection_name GET endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /connectors GET

---

## Overview

Gets general info about connectors.

## Request Arguments

This endpoint does not accept any request arguments.

## Result Arguments

### Response

```
{
  "connectors": {
    "ext_rest_twitter": {
      "testing_enabled": true,
      "test_passed": false,
      "eapm_bean": false,
      "field_mapping": {
        "beans": {
          "Accounts": {
            "name": "name",
            "id": "id"
          },
          "Contacts": {
            "name": "full_name",
            "id": "id"
          },
          "Leads": {
            "name": "account_name",
            "id": "id"
          },
          "Prospects": {
            "name": "account_name",
            "id": "id"
          }
        }
      }
    },
    "id": "ext_rest_twitter",
    "name": "Twitter"
  },
  "ext_eapm_google": {
```

---

```
    "testing_enabled": false,
    "test_passed": false,
    "eapm_bean": false,
    "field_mapping": [],
    "id": "ext_eapm_google",
    "name": "Google"
  },
  "ext_eapm_gotomeeting": {
    "testing_enabled": false,
    "test_passed": false,
    "eapm_bean": false,
    "field_mapping": [],
    "id": "ext_eapm_gotomeeting",
    "name": "GoToMeeting"
  },
  "ext_eapm_ibmsmartcloud": {
    "testing_enabled": false,
    "test_passed": false,
    "eapm_bean": false,
    "field_mapping": [],
    "id": "ext_eapm_ibmsmartcloud",
    "name": "IBM SmartCloud"
  },
  "ext_eapm_webex": {
    "testing_enabled": false,
    "test_passed": false,
    "eapm_bean": false,
    "field_mapping": [],
    "id": "ext_eapm_webex",
    "name": "WebEx"
  },
  "ext_eapm_lotuslive": {
    "testing_enabled": false,
    "test_passed": false,
    "eapm_bean": false,
    "field_mapping": [],
    "id": "ext_eapm_lotuslive",
    "name": "LotusLive"
  },
  "ext_rest_dnb": {
    "testing_enabled": false,
    "test_passed": false,
    "eapm_bean": false,
    "field_mapping": {
      "beans": {
        "Accounts": {
```

```
        "name": "name",
        "id": "id"
    }
}
},
"id": "ext_rest_dnb",
"name": "DNB"
},
"_hash": "\u0000d4751e1632fd5d1d2c9069a1f176e6f"
},
"_hash": "2cd9132603ead4f79715c69ee98e64f1"
}
```

## Change Log

| Version | Change                            |
|---------|-----------------------------------|
| v10     | Added /<connectors> GET endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /connector/twitter/currentUser GET

### Overview

Responds with twitter timeline if connector is set up in administration

### Request Arguments

| Name  | Type    | Description                       | Required |
|-------|---------|-----------------------------------|----------|
| count | Integer | The number of tweets to retrieve. | False    |

---

## Response Arguments

| Name       | Type   | Description |
|------------|--------|-------------|
| <response> | String |             |

## Response

```
[
  {
    "created_at": "Tue Jun 25 23:45:35 +0000 2013",
    "id": 349674766946414592,
    "id_str": "349674766946414592",
    "text": "this tweet is awesome!",
    "source": "web",
    "truncated": false,
    "in_reply_to_status_id": null,
    "in_reply_to_status_id_str": null,
    "in_reply_to_user_id": 143456975,
    "in_reply_to_user_id_str": "14934565",
    "in_reply_to_screen_name": "testdesk",
    "user": {
      "id": 2630841,
      "id_str": "2630841",
      "name": "SugarCRM",
      "screen_name": "sugarcrm",
      "location": "Cupertino, CA",
      "description": "Everyone Sells. Everyone Supports. Everyone Co
nnects.",
      "url": "http://t.co/s9ejrBSlki",
      "entities": {
        "url": {
          "urls": [
            {
              "url": "http://t.co/s9ejrBSlki",
              "expanded_url": "http://www.sugarcrm.com",
              "display_url": "sugarcrm.com",
              "indices": [
                0,
                22
              ]
            }
          ]
        }
      }
    }
  },
]
```



---

```
    "description":{
      "urls":[

    ]
  }
},
"protected":false,
"followers_count":8761,
"friends_count":6966,
"listed_count":453,
"created_at":"Wed Mar 28 07:16:58 +0000 2007",
"favourites_count":27,
"utc_offset":-28800,
"time_zone":"Pacific Time (US \u0026 Canada)",
"geo_enabled":false,
"verified":false,
"statuses_count":7488,
"lang":"en",
"contributors_enabled":false,
"is_translator":false,
"profile_background_color":"98C7EA",
"profile_background_image_url":"http://a0.twimg.com/profile_
background_images/551274192/sugar-twitter-background.png",
"profile_background_image_url_https":"https://si0.twimg.com
/profile_background_images/551274192/sugar-twitter-background.png",
"profile_background_tile":false,
"profile_image_url":"http://a0.twimg.com/profile_images/2
027721183/Sugar_cube_RGB_180x180_normal.png",
"profile_image_url_https":"https://si0.twimg.com/profile_i
mages/2027721183/Sugar_cube_RGB_180x180_normal.png",
"profile_link_color":"0045AD",
"profile_sidebar_border_color":"FFFFFF",
"profile_sidebar_fill_color":"CCEAFF",
"profile_text_color":"000000",
"profile_use_background_image":true,
"default_profile":false,
"default_profile_image":false,
"following":null,
"follow_request_sent":false,
"notifications":null
},
"geo":null,
"coordinates":null,
"place":null,
"contributors":null,
"retweet_count":1,
```

---

```
"favorite_count":0,
"entities":{
  "hashtags":[

  ],
  "symbols":[

  ],
  "urls":[

  ],
  "user_mentions":[
    {
      "screen_name":"testdesk",
      "name":"testdesk",
      "id":143455,
      "id_str":"ertrt75",
      "indices":[
        0,
        8
      ]
    }
  ],
  "media":[

  ]
},
"favorited":false,
"retweeted":false,
"possibly_sensitive":false,
"lang":"en"
}
]
```

## Change Log

| Version | Change                                   |
|---------|--|
| v10     | Added /twitter/{twitterId} GET endpoint. |

## /connector/twitter/:twitterId GET

### Overview

Responds with twitter timeline if connector is set up in administration

### Request Arguments

| Name  | Type    | Description                       | Required |
|-------|---------|-----------------------------------|----------|
| count | Integer | The number of tweets to retrieve. | False    |

### Response Arguments

| Name       | Type   | Description |
|------------|--------|-------------|
| <response> | String |             |

### Response

```
[
  {
    "created_at": "Tue Jun 25 23:45:35 +0000 2013",
    "id": 349674766946414592,
    "id_str": "349674766946414592",
    "text": "this tweet is awesome!",
    "source": "web",
    "truncated": false,
    "in_reply_to_status_id": null,
    "in_reply_to_status_id_str": null,
    "in_reply_to_user_id": 143456975,
    "in_reply_to_user_id_str": "14934565",
    "in_reply_to_screen_name": "testdesk",
    "user": {
```

---

```
"id":2630841,
"id_str":"2630841",
"name":"SugarCRM",
"screen_name":"sugarcrm",
"location":"Cupertino, CA",
"description":"Everyone Sells. Everyone Supports. Everyone Co
nnects.",
"url":"http://t.co/s9ejrBSlki",
"entities":{
  "url":{
    "urls":[
      {
        "url":"http://t.co/s9ejrBSlki",
        "expanded_url":"http://www.sugarcrm.com",
        "display_url":"sugarcrm.com",
        "indices":[
          0,
          22
        ]
      }
    ]
  },
  "description":{
    "urls":[]
  }
},
"protected":false,
"followers_count":8761,
"friends_count":6966,
"listed_count":453,
"created_at":"Wed Mar 28 07:16:58 +0000 2007",
"favourites_count":27,
"utc_offset":-28800,
"time_zone":"Pacific Time (US \u0026 Canada)",
"geo_enabled":false,
"verified":false,
"statuses_count":7488,
"lang":"en",
"contributors_enabled":false,
"is_translator":false,
"profile_background_color":"98C7EA",
"profile_background_image_url":"http://a0.twimg.com/profil
e_background_images/551274192/sugar-twitter-background.png",
"profile_background_image_url_https":"https://si0.twimg.com
```

---

```
\profile_background_images\551274192\sugar-twitter-background.png",
  "profile_background_tile":false,
  "profile_image_url":"http://a0.twimg.com/profile_images/2
027721183/Sugar_cube_RGB_180x180_normal.png",
  "profile_image_url_https":"https://si0.twimg.com/profile_i
mages/2027721183/Sugar_cube_RGB_180x180_normal.png",
  "profile_link_color":"0045AD",
  "profile_sidebar_border_color":"FFFFFF",
  "profile_sidebar_fill_color":"CCEAFF",
  "profile_text_color":"000000",
  "profile_use_background_image":true,
  "default_profile":false,
  "default_profile_image":false,
  "following":null,
  "follow_request_sent":false,
  "notifications":null
},
"geo":null,
"coordinates":null,
"place":null,
"contributors":null,
"retweet_count":1,
"favorite_count":0,
"entities":{"
  "hashtags":[

  ],
  "symbols":[

  ],
  "urls":[

  ],
  "user_mentions":[
    {
      "screen_name":"testdesk",
      "name":"testdesk",
      "id":143455,
      "id_str":"ertrt75",
      "indices":[
        0,
        8
      ]
    }
  ],
  "media":[
```

---

```
    ]
  },
  "favorited":false,
  "retweeted":false,
  "possibly_sensitive":false,
  "lang":"en"
}
]
```

## Change Log

| Version | Change                                   |
|---------|--|
| v10     | Added /twitter/{twitterId} GET endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /css GET

### Overview

Runs LessPHP for a platform and a theme and outputs an array of css files. If not found the css files will be compiled.

### Request Arguments

| Name     | Type   | Description  | Required                          |
|----------|--------|--|-----------------------------------|
| platform | String | The theme platform<br>-<br>/the<br>mes/cli<br>ents/<br>*<br>** | No. (defaults to<br><i>base</i> ) |

| Name      | Type   | Description  | Required                             |
|-----------|--------|--|--------------------------------------|
|           |        | <b>PL<br/>ATFO<br/>RM***</b><br>/themeName/.<br>Accepted values<br>are 'base' and<br>'portal'. |                                      |
| themeName | String | The theme name - /<br>themes/clients/platf<br>orm/<br><b>***THEMENAME*</b><br><b>**/</b> .     | No. (defaults to<br><i>default</i> ) |

## Request

```
{
  platform: 'portal',
  themeName: 'default'
}
```

## Response

```
{
  url: [
    'cache/themes/clients/base/default/bootstrap_97c9cf53841dbe471c20d169e3533763.css',
    'cache/themes/clients/base/default/sugar_14c42516aad866b7f80cc896ce5c5406.css',
  ]
}
```

## Change Log

| Version | Change                                       |
|---------|--|
| v10     | Added <code>&lt;css&gt;</code> GET endpoint. |

---

Last Modified: 2021-02-17 02:44:13

## /css/preview GET

### Overview

Runs LessPHP for a platform and a theme and outputs the compiled CSS. It only allows to preview the theme because the file is not saved on the server.

### Request Arguments

| Name      | Type    | Description  | Required                          |
|-----------|---------|--|-----------------------------------|
| platform  | String  | The theme platform - /themes/clients/* <b>**PLATFORM**</b> /themeName/. Accepted values are 'base' and 'portal'. | No. (defaults to <i>base</i> )    |
| themeName | String  | The theme name - /themes/clients/platform/ <b>***THEMENAME**</b> */.   | No. (defaults to <i>default</i> ) |
| min       | Boolean | Whether or not to minify the css   | No. (defaults to <i>false</i> )   |

### Request



---

```
{
  platform: 'portal',
  themeName: 'default',
  min: false
}
```

## Response Arguments

### Response

**Content-type: text/css**

```
.someClass {
  any-property: any-value;
}
```

## Change Log

| Version | Change                           |
|---------|----------------------------------|
| v10     | Added /css/preview GET endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /globalsearch GET

### Overview

Global search

### Summary

This endpoint exposes the global search capability using solely the Elasticsearch backend as an alternative to the /search endpoint. This endpoint can be used with

---

a long list of request arguments. Instead of using GET request arguments, all described arguments can be used inside a JSON encoded request body using a the GET request. If your client has no support for GET requests with a body, the POST method can be used as an alternative.

## Request Arguments

| Name        | Type   | Description   | Required |
|-------------|--------|---|----------|
| q           | String | The search expression. Multiple terms can be specified at once. All enabled fields will be searched in. The results are ordered by relevance which is based on a multitude of settings based on token counts, hit ratio, (weighted) boost values and type of field. Currently no operators are supported in the search expression itself. By refining the search expression more relevant results will be returned as top results. If no search expression is given results are returned based on last modified date. | False    |
| module_list | String | Comma delimited list of modules to search. If omitted, all search enabled modules will be queried. Note that  | False    |

| Name                    | Type    | Description   | Required |
|-------------------------|---------|---|----------|
|                         |         | when consuming the endpoint <code>/:module/globalsearch</code> that this parameter is ignored.<br>Example: Accounts,Contacts  |          |
| <code>max_num</code>    | Integer | A maximum number of records to return. Default is 20.   | False    |
| <code>offset</code>     | Integer | The number of records to skip over before records are returned. Default is 0.   | False    |
| <code>highlights</code> | Boolean | Whether or not to return highlighted results. Default is true.  | False    |
| <code>sort</code>       | Array   | Define the sort order of the results. By default the results are returned by relevance which is the preferred approach. Using this argument any search enabled field can be used to sort on. Keep in mind the not sorting by relevance may have a negative performance impact.<br>Example: <code>{"date_modified":"desc","name":"asc"}</code> | False    |

---

## Request

```
{  
}
```

## Response Arguments

| Name        | Type    | Description   |
|-------------|---------|---|
| next_offset | Integer | Displays the next offset for retrieval of additional results. -1 will be returned when there are no more records. |
| records     | Array   | An array of results containing matched records.   |

## Response

```
{  
}
```

## Change Log

| Version | Change   |
|---------|--|
| v10     | Added /globalsearch GET/POST endpoint.         |
| v10     | Added /:module/globalsearch GET/POST endpoint. |

**Last Modified:** 2021-02-17 02:44:13

---

# /globalsearch POST

## Overview

Global search

## Summary

This endpoint exposes the global search capability using solely the Elasticsearch backend as an alternative to the /search endpoint. This endpoint can be used with a long list of request arguments. Instead of using GET request arguments, all described arguments can be used inside a JSON encoded request body using a the GET request. If your client has no support for GET requests with a body, the POST method can be used as an alternative.

## Request Arguments

| Name | Type   | Description  | Required |
|------|--------|--|----------|
| q    | String | The search expression. Multiple terms can be specified at once. All enabled fields will be searched in. The results are ordered by relevance which is based on a multitude of settings based on token counts, hit ratio, (weighted) boost values and type of field. Currently no operators are supported in the search expression itself. By refining the search expression more | False    |

| Name        | Type    | Description   | Required |
|-------------|---------|---|----------|
|             |         | relevant results will be returned as top results. If no search expression is given results are returned based on last modified date.  |          |
| module_list | String  | Comma delimited list of modules to search. If omitted, all search enabled modules will be queried. Note that when consuming the endpoint /:module/globalsearch that this parameter is ignored.<br>Example:<br>Accounts,Contacts | False    |
| max_num     | Integer | A maximum number of records to return. Default is 20.   | False    |
| offset      | Integer | The number of records to skip over before records are returned. Default is 0.   | False    |
| highlights  | Boolean | Whether or not to return highlighted results. Default is true.  | False    |
| sort        | Array   | Define the sort order of the results. By default the results are returned by relevance which is the preferred approach. Using this argument any search enabled  | False    |

| Name | Type | Description   | Required |
|------|------|---|----------|
|      |      | field can be used to sort on. Keep in mind the not sorting by relevance may have a negative performance impact.<br>Example: {"date_modified":"desc","name":"asc"} |          |

## Request

```
{
}
```

## Response Arguments

| Name        | Type    | Description   |
|-------------|---------|---|
| next_offset | Integer | Displays the next offset for retrieval of additional results. -1 will be returned when there are no more records. |
| records     | Array   | An array of results containing matched records.   |

## Response

```
{
}
```

---

## Change Log

| Version | Change   |
|---------|--|
| v10     | Added /globalsearch GET/POST endpoint.         |
| v10     | Added /:module/globalsearch GET/POST endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /help GET

### Overview

Fetches the help documentation

### Request Arguments

This endpoint does not accept any request arguments.

### Response Arguments

| Name   | Type   | Description                      |
|--------|--------|----------------------------------|
| <html> | String | Returns the html of the help doc |

### Response

The HTML for this help document.

## Change Log



---

| Version | Change                    |
|---------|---------------------------|
| v10     | Added /help GET endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## **/help/exceptions GET**

### **Overview**

Fetches the documentation on which exceptions are thrown by the API, their HTTP codes, their default messages and a brief description of what the exception means.

### **Request Arguments**

This endpoint does not accept any request arguments.

### **Response Arguments**

| Name   | Type   | Description                      |
|--------|--------|----------------------------------|
| <html> | String | Returns the html of the help doc |

### **Response**

The HTML document of the exception help page.

### **Change Log**

| Version | Change                               |
|---------|--------------------------------------|
| v10     | Added /help/exceptions GET endpoint. |

---

Last Modified: 2021-02-17 02:44:13

## /logger POST

### Overview

Logs a message to the Sugar Log

### Request Arguments

| Name    | Type   | Description                                  | Required |
|---------|--------|--|----------|
| level   | String | The log level                                | True     |
| message | String | The message to log                           | True     |
| channel | String | Prefix for the log message, defaults to Main | false    |

### Response Arguments

| Name   | Type | Description               |
|--------|------|---------------------------|
| status | bool | if the message was logged |

### Response

```
{  
  "status": true,  
}
```

### Change Log

---

| Version | Change                       |
|---------|------------------------------|
| v10     | Added /logger POST endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /login/content GET

### Overview

Returns information to facilitate receiving marketing content from SugarCRM.

### Request Arguments

| Name              | Type   | Description   | Required                   |
|-------------------|--------|---|----------------------------|
| selected_language | String | Code for the desired marketing content language. (Eg. "en_us", "fr_FR"). Providing a certain language code does not guarantee that content returned will be in the provided language. If an invalid language is specified, will assume "en_us". | False. Defaults to "en_us" |

### Response Arguments

| Name        | Type   | Description      |
|-------------|--------|------------------|
| content_url | String | URL suitable for |

---

| Name | Type | Description   |
|------|------|---|
|      |      | embedding in an iFrame that links to new marketing material from SugarCRM. Will always be provided, but may be an empty string if there is no suitable content available. |

## Response

```
{  
  "content_url": "https://marketing.sugarcrm.com/exciting-new-content"  
}
```

## Change Log

| Version | Change                             |
|---------|------------------------------------|
| v11_2   | Added /login/content GET endpoint. |

**Last Modified:** 2021-02-17 02:44:13

# /login/marketingContentUrl GET

## Overview

Returns the SugarCRM marketing content URL that is managed by the marketing team.

## Summary

---

This API attempts to reach SugarCRM's marketing content URL. If the service is unreachable, a URL for the static content is returned.

## Request Arguments

| Name              | Type    | Description   | Required  |
|-------------------|---------|---|---|
| selected_language | String  | Code for the desired marketing content language. (Eg. "en_us", "fr_FR"). Providing a certain language code does not guarantee that content returned will be in the provided language. If an invalid language is specified, will assume "en_us". | False. It uses the configured language if this parameter is missing. Defaults to "en_us". |
| static            | Boolean | If set to true, return URL for static marketing content. Defaults to false.   | False. If this parameter is missing, the API defaults to the dynamic content url.         |

## Response Arguments

| Name | Type   | Description  |
|------|--------|--|
| url  | String | URL suitable for embedding in an iFrame that links to marketing content from SugarCRM. |

## Response

"https://www.sugarcrm.com/product-login-page-service/"

---

## Change Log

| Version | Change   |
|---------|--|
| v11_9   | Added /login/marketingContentUrl GET endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /me GET

### Overview

Returns the current user object.

### Request Arguments

This endpoint does not accept any request arguments.

### Response Arguments

#### Response User

```
{
  "current_user": {
    "type": "user",
    "id": "1",
    "full_name": "Administrator",
    "timepref": "h:ia",
    "timezone": "America/Los_Angeles",
    "user_name": "admin"
  }
}
```

#### Response Portal User

---

```
{
  "current_user": {
    "type": "support_portal",
    "id": "1234-567",
    "user_id": "abcd-123",
    "full_name": "Bill Williamson",
    "timepref": "h:ia",
    "timezone": "America/Denver",
    "user_name": "SupportPortalApi"
  }
}
```

## Change Log

| Version | Change                  |
|---------|-------------------------|
| v10     | Added /me GET endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /me PUT

### Overview

Returns the current user object.

### Request Arguments

This endpoint does not accept any request arguments.

### Response Arguments

### Response User Example

```
{
```

---

```
"current_user":{
  "type":"user",
  "id":"1",
  "full_name":"Administrator",
  "timepref":"h:ia",
  "timezone":"America/Los_Angeles",
  "user_name":"admin"
}
```

## Response Portal User Example

```
{
  "current_user":{
    "type":"support_portal",
    "id":"1234-567",
    "user_id":"abcd-123",
    "full_name":"Bill Williamson",
    "timepref":"h:ia",
    "timezone":"America/Denver",
    "user_name":"SupportPortalApi"
  }
}
```

## Change Log

| Version | Change                  |
|---------|-------------------------|
| v10     | Added /me PUT endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /me/following GET

### Overview



---

Returns all of the current users followed records

## Request Arguments

limit and offset are available query parameters.

## Response Arguments

| Name | Type | Description |
|------|------|-------------|
|      |      |             |

## Response

```
{  
  
}
```

## Change Log

| Version | Change                            |
|---------|-----------------------------------|
| v10     | Added /me/following GET endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /me/password POST

### Overview

Create a new record of a specified type.

---

## Summary

This endpoint allows for verification of the user's password. If client type is `support_portal`, it will update the corresponding Contact. Otherwise, it will update User

## Request Arguments

| Name                            | Type   | Description            | Required |
|---------------------------------|--------|------------------------|----------|
| <code>password_to_verify</code> | String | The password to verify | True     |

## Request

```
{  
  "password_to_verify": "mycurrentpassword"  
}
```

## Response Arguments

| Name               | Type    | Description                                       |
|--------------------|---------|---|
| <code>valid</code> | Boolean | Returns the success of the password verification. |

## Response

```
{  
  "valid": true  
}
```

## Change Log

| Version | Change   |
|---------|--|
| v10     | Added <code>/me/password</code> POST endpoint. |

---

Last Modified: 2021-02-17 02:44:13

## /me/password PUT

### Overview

Create a new record of a specified type.

### Summary

This endpoint allows for changes to the user's password. If client type is support\_portal, it will update the corrending Contact. Otherwise, it will update User

### Request Arguments

| Name         | Type   | Description           | Required |
|--------------|--------|-----------------------|----------|
| old_password | String | The current password. | True     |
| new_password | String | The new password.     | True     |

### Request

```
{  
  "old_password": "myoldpass",  
  "new_password": "mynewpass"  
}
```

### Response Arguments

---

| Name       | Type    | Description                                       |
|------------|---------|---|
| valid      | Boolean | Returns the success of the password verification. |
| expiration | Date    | When the password will expire.                    |

## Response

```
{  
  "valid":true,  
  "expiration":null  
}
```

## Change Log

| Version | Change                           |
|---------|----------------------------------|
| v10     | Added /me/password PUT endpoint. |

**Last Modified:** 2021-02-17 02:44:13

# **/me/preference/:preference\_name DELETE**

## Overview

Deletes a specific preference for the current user.

## Request Arguments

This endpoint does not accept any request arguments.

## Response Arguments

---

| Name | Type | Description |
|------|------|-------------|
|      |      |             |

## Response

```
{  
}
```

## Change Log

| Version | Change   |
|---------|--|
| v10     | Added<br>/me/preference/:preference_name<br>DELETE endpoint. |

**Last Modified:** 2021-02-17 02:44:13

# /me/preference/:preference\_name GET

## Overview

Returns a specific preference for the current user.

## Request Arguments

This endpoint does not accept any request arguments.

## Response Arguments

---

| Name | Type | Description |
|------|------|-------------|
|      |      |             |

## Response

```
{  
}
```

## Change Log

| Version | Change  |
|---------|---|
| v10     | Added<br>/me/preference/:preference_name GET<br>endpoint. |

**Last Modified:** 2021-02-17 02:44:13

# /me/preference/:preference\_name POST

## Overview

Creates a preference for the current user.

## Request Arguments

This endpoint does not accept any request arguments.

## Response Arguments

---

| Name | Type | Description |
|------|------|-------------|
|      |      |             |

## Response

```
{  
}
```

## Change Log

| Version | Change   |
|---------|--|
| v10     | Added<br>/me/preference/:preference_name POST<br>endpoint. |

**Last Modified:** 2021-02-17 02:44:13

# /me/preference/:preference\_name PUT

## Overview

Updates a specific preference for the current user.

## Request Arguments

This endpoint does not accept any request arguments.

## Response Arguments

---

| Name | Type | Description |
|------|------|-------------|
|      |      |             |

## Response

```
{  
}
```

## Change Log

| Version | Change  |
|---------|---|
| v10     | Added<br>/me/preference/:preference_name PUT<br>endpoint. |

**Last Modified:** 2021-02-17 02:44:13

# /me/preferences GET

## Overview

Returns all the current user's stored preferences.

## Request Arguments

This endpoint does not accept any request arguments.

## Response Arguments



---

| Name | Type | Description |
|------|------|-------------|
|      |      |             |

## Response

```
{  
}
```

## Change Log

| Version | Change                              |
|---------|-------------------------------------|
| v10     | Added /me/preferences GET endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /me/preferences PUT

### Overview

Mass updates preferences for the user.

### Request Arguments

This endpoint does not accept any request arguments.

### Response Arguments

| Name | Type | Description |
|------|------|-------------|
|      |      |             |

---

## Response

```
{  
}
```

## Change Log

| Version | Change                              |
|---------|-------------------------------------|
| v10     | Added /me/preferences PUT endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /metadata/<module>/:segment GET

### Overview

[ADMIN] Gets the desired segment for a given module.

### Summary

Gets the desired segment for a given module. This is used only for modules that are not visible and thus not in metadata for the given context. This endpoint is only available to administrators.

### Request Arguments

This endpoint does not accept any request arguments.

---

## Response

```
{
  "fields": {
    Any fields associated with the module
  }
}
```

## Change Log

| Version | Change  |
|---------|---|
| v11_11  | Added /metadata/<module>/:segment GET endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /<module>/Activities GET

Activities on a module's list view

### Summary:

This endpoint lists activities across a particular module in the system. It uses a subscription model, and can be queried like a normal bean collection, but without search, ordering or filtering.

### Query Parameters:

| Param   | Description                           | Optional |
|---------|---------------------------------------|----------|
| max_num | A maximum number of records to return | Optional |
|         |                                       |          |

---

|        |   |          |
|--------|---|----------|
| offset | How many records to skip over before records are returned | Optional |
|--------|---|----------|

## Input Example:

This endpoint does not accept any input

## Output Example:

```
{
  "next_offset": 20,
  "records": [{
    "id": "22fb8b16-de1d-f1dc-b15b-51240efde177",
    "date_entered": "2013-02-19T23:47:11+00:00",
    "date_modified": "2013-02-19T23:47:11+00:00",
    "created_by": "1",
    "deleted": "0",
    "parent_id": "f5bb0331-2c0f-5c7c-b4db-5123caac0056",
    "parent_type": "Contacts",
    "activity_type": "post",
    "data": {
      "value": "This is a test post on a contact I'm subscribed
to."
    },
    "comment_count": 0,
    "last_comment": {
      "deleted": 0,
      "data": []
    },
    "fields": [],
    "first_name": null,
```

This will be set to -1 when there are no more records after this "page".

This will be the type of activity performed.

This will be set to the total number of comments on the post.

This will be the last comment on the post, which can be used to create a comment model on the frontend.

---

```
        "last_name": "Administrator",
        "created_by_name":
" Administrator" This will be the locale-
formatted full name of the user.
    }, ... ]
}
```

**Last Modified:** 2021-02-17 02:44:13

## **/`<module>`/Activities/filter GET**

Activities on a module's list view

### **Summary:**

This endpoint lists activities across a particular module in the system. It uses a subscription model, and can be queried like a normal bean collection, but without search, ordering or filtering.

### **Query Parameters:**

| Param   | Description   | Optional |
|---------|---|----------|
| max_num | A maximum number of records to return                     | Optional |
| offset  | How many records to skip over before records are returned | Optional |

### **Input Example:**

---

This endpoint does not accept any input

## Output Example:

```
{
  "next_offset": 20,
  "records": [{
    "id": "22fb8b16-de1d-f1dc-b15b-51240efde177",
    "date_entered": "2013-02-19T23:47:11+00:00",
    "date_modified": "2013-02-19T23:47:11+00:00",
    "created_by": "1",
    "deleted": "0",
    "parent_id": "f5bb0331-2c0f-5c7c-b4db-5123caac0056",
    "parent_type": "Contacts",
    "activity_type": "post",
    "data": {
      "value": "This is a test post on a contact I'm subscribed
to."
    },
    "comment_count": 0,
    "last_comment": {
      "deleted": 0,
      "data": []
    },
    "fields": [],
    "first_name": null,
    "last_name": "Administrator",
    "created_by_name":
      " Administrator" This will be the locale-
formatted full name of the user.
  }, ... ]
}
```

**Last Modified:** 2021-02-17 02:44:13

---

## /<module>/MassUpdate DELETE

### Overview

An API to mass delete records.

### Query String Parameters

| Name                  | Type  | Description             | Required |
|-----------------------|-------|-------------------------|----------|
| massupdate_params     | Array | Mass update parameters. | True     |
| massupdate_params.uid | Array | A list of ids.          | True     |

### Request

#### Mass Deleting Records by ID in a Module

```
{
  "massupdate_params": {
    "uid": [
      "ebf22b86-94ea-1601-4f4f-512d09173438",
      "e3b71c55-d96b-80bb-1696-512d09672398"
    ]
  }
}
```

### Response Arguments

| Name   | Type   | Description  |
|--------|--------|--|
| Status | String | The status of the mass update. Possible value is 'done'. |

---

## Output Done Example

```
{  
  "status": "done"  
}
```

## Change Log

| Version | Change                                      |
|---------|---|
| v10     | Added /<module>/MassUpdate DELETE endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /<module>/MassUpdate PUT

### Overview

An API to mass update records.

### Query String Parameters

| Name                             | Type         | Description                      | Required |
|----------------------------------|--------------|----------------------------------|----------|
| massupdate_params                | Array        | Mass update parameters.          | True     |
| massupdate_params.uid            | Array        | A list of ids.                   | True     |
| massupdate_params.[field name]   | [field type] | The field to be modified.        | False    |
| massupdate_params.team_name      | Array        | Team array.                      | False    |
| massupdate_params.team_name_type | String       | Whether to replace or add teams. | False    |



---

| Name | Type | Description                              | Required |
|------|------|--|----------|
|      |      | Possible values are 'add' and 'replace'. |          |

## Request

### Mass Updating Records by ID in a Module

```
{
  "massupdate_params": {
    "uid": [
      "f22d1955-97d8-387d-9866-512d09cc1520",
      "ef1b40aa-5815-4f8d-e909-512d09617ac8"
    ],
    "department": "Marketing"
  }
}
```

### Mass Updating Records with Teams

```
{
  "massupdate_params": {
    "uid": [
      "f22d1955-97d8-387d-9866-512d09cc1520",
      "ef1b40aa-5815-4f8d-e909-512d09617ac8"
    ],
    "team_name": [
      {
        "id": "35eab226-c20d-48f4-4670-512d095c8c6f",
        "primary": true
      },
      {
        "id": "8f640aba-f356-7374-7eb4-512d09745551",
        "primary": false
      }
    ],
    "team_name_type": "replace"
  }
}
```

---

## Mass Add Leads, Contacts or Prospects to a Target List

```
{
  "massupdate_params": {
    "uid": [ /* Leads, Contacts, or Prospects to Add */
      "f3d90a49-14b4-a81c-6cac-526e6c71d33e",
      "f22cde0d-9a20-89d3-ca14-526e6c3c4d08",
      "f15f10bd-1445-5e20-9b5c-526e6ceb71d0"
    ],
    "prospect_lists": [
      /* Prospect List(s) to Add them To */
      "bc5bc249-9c9c-52ad-52b9-526e71f0e18d"
    ]
  }
}
```

## Response Arguments

| Name   | Type   | Description  |
|--------|--------|--|
| Status | String | The status of the mass update. Possible value is 'done'. |

## Output Done Example

```
{
  "status": "done"
}
```

## Change Log

| Version | Change                                   |
|---------|--|
| v10     | Added /<module>/MassUpdate PUT endpoint. |

## /<module> GET

### Overview

Lists filtered records.

### Summary

This endpoint will return a set of records filtered by an expression. The filter can be applied to multiple fields and have multiple and/or conditions in it. Alternatively, you may use an existing filter by specifying its id. If both a filter definition and a filter id are passed, the two filters will be joined with an AND. Care will need to be taken to make sure that any filters used have appropriate indexes on the server side otherwise the runtime of the endpoint will be very long. Related fields can be searched by specifying the field name as: "link\_name.remote\_field", so if you wished to search the Accounts module by a related member account you would use "members.sic\_code".

### Request Arguments

| Name   | Type   | Description   | Required |
|--------|--------|---|----------|
| filter | String | The filter expression. Filter expressions are explained below. Note that JSON-encoded filters can be specified as query parameters in one of two ways for GET requests:<br><br>1. By specifying individual filter arguments | False    |

| Name      | Type    | Description   | Required |
|-----------|---------|---|----------|
|           |         | <p>as distinct parameters. Example: filter[0][id]=1</p> <p>2. By specifying the whole filter as a single JSON-encoded string. Note that this syntax is currently not supported on certain modules. Example: filter=[{"id": "1"}].</p> |          |
| filter_id | String  | Identifier for a preexisting filter. If filter is also set, the two filters are joined with an AND.   | False    |
| max_num   | Integer | A maximum number of records to return. Default is 20.   | False    |
| offset    | Integer | The number of records to skip over before records are returned. Default is 0.   | False    |
| fields    | String  | Comma delimited list of fields to return. Each field may be represented either by string, or by map containing  | False    |

| Name     | Type   | Description  | Required |
|----------|--------|--|----------|
|          |        | <p>field name and additional field parameters (applicable to link and collection fields). The fields id and date_modified will always be returned.</p> <p>Example: name,account_type,description,{"name":"opportunities","fields":["id","name","sales_status"],"order_by":"date_closed:desc"}</p> <p>For more details on additional field parameters, see <a href="#">Relate API</a> and <a href="#">Collection API</a>.</p> |          |
| view     | String | <p>Instead of defining the fields argument, the view argument can be used instead. The field list is constructed at the server side based on the view definition which is requested. This argument can be used in combination with the fields argument. Common views are "record" and "list".</p> <p>Example: record</p>   | False    |
| order_by | String | <p>How to sort the returned records, in a comma delimited list with</p>  | False    |

| Name       | Type    | Description  | Required |
|------------|---------|--|----------|
|            |         | the direction appended to the column name after a colon.<br>Example: name:DESC,account_type:DESC,date_modified:ASC |          |
| q          | String  | A search expression, will search on this module. Cannot be used at the same time as a filter expression or id.     | False    |
| deleted    | Boolean | Boolean to show deleted records in the result set.   | False    |
| nulls_last | Boolean | Boolean to return records with null values in order_by fields last in the result set.                              | False    |

## Filter Expressions

There are four types of filters:

### Basic

This will filter the results by checking the field "name" for value "Nelson Inc". This will only find exact matches.

### Example

```
{
  "filter": [
    {
      "name": "Nelson Inc"
    }
  ]
}
```

```
]
}
```

## Full

This expression allows you to specify what operation you want to use for filtering on the field. In the example you would match any record where the field "name" starts with the value "Nelson".

## Example

```
{
  "filter": [
    {
      "name": {
        "$starts": "Nelson"
      }
    }
  ]
}
```

Below is a list of operation types:

| Operation    | Description   |
|--------------|---|
| \$equals     | Performs an exact match on that field.  |
| \$not_equals | Performs an exact match on that field.  |
| \$not_equals | Matches on non-matching values.   |
| \$starts     | Matches on anything that starts with the value.   |
| \$ends       | Matches anything that ends with the value.  |
| \$contains   | Matches anything that contains the value  |
| \$in         | Finds anything where field matches one of the values as specified as an array.          |
| \$not_in     | Finds anything where field does not matches any of the values as specified as an array. |
| \$is_null    | Checks if the field is null. This   |

| Operation  | Description  |
|------------|--|
|            | operation does not need a value specified.                                       |
| \$not_null | Checks if the field is not null. This operation does not need a value specified. |
| \$lt       | Matches when the field is less than the value.                                   |
| \$lte      | Matches when the field is less than or equal to the value.                       |
| \$gt       | Matches when the field is greater than the value.                                |
| \$gte      | Matches when the field is greater than or equal to the value.                    |

## Sub-expressions

This allows you to group filter expressions into or/and groupings. By default all expressions are and'ed together. The example expression would match if the field "name" was either "Nelson Inc" or "Nelson LLC". The only currently accepted sub-expression types are "\$and" and "\$or".

### Example

```
{
  "filter":[
    {
      "$or":[
        {
          "name":"Nelson Inc"
        },
        {
          "name":"Nelson LLC"
        }
      ]
    }
  ]
}
```



---

## Modules

There are two module expressions, they operate on modules instead of fields. The current module can be specified by either using the module name "\_this" or by leaving the module name as a blank string. The example expression would filter the records in the current module to only your favorites. The only currently accepted module expressions are "\$favorite" and "\$owner".

### Example

```
{
  "filter":[
    {
      "$favorite":"_this"
    }
  ]
}
```

## Response Arguments

| Name        | Type    | Description   |
|-------------|---------|---|
| next_offset | Integer | Displays the next offset for retrieval of additional results. -1 will be returned when there are no more records. |
| records     | Array   | An array of results containing matched records.   |

## Response

```
{
  "next_offset":-1,
  "records":[
    {
      "id":"fa300a0e-0ad1-b322-9601-512d0983c19a",
      "name":"Dale Spivey",
```

```

    "date_modified": "2013-02-28T05:03:00+00:00",
    "description": "",
    "opportunities": [
      {
        _module: "Opportunities",
        "id": "b0701501-1fab-8ae7-3942-540da93f5017",
        "name": "360 Vacations - 228 Units",
        "date_modified": "2014-09-08T16:05:00+03:00",
        "sales_status": "New"
      },
    ],
    "_acl": {
      "fields": {
    }
  }
},
{
  "id": "95e17367-9b3d-0e26-22dc-512d0961fedf",
  "name": "Florence Haddock",
  "date_modified": "2013-02-26T19:12:00+00:00",
  "description": "",
  "opportunities": [
    {
      _module: "Opportunities"
      date_modified: "2014-09-08T16:05:00+03:00"
      id: "9ce7c088-8ee4-7cd3-18f1-540da944d4c0"
      name: "360 Vacations - 312 Units"
      sales_status: "New"
    },
  ],
  "_acl": {
    "fields": {
  }
  }
}
]
}

```

## Change Log

| Version | Change                               |
|---------|--------------------------------------|
| v10     | Added /<module>/filter GET endpoint. |

---

Last Modified: 2021-02-17 02:44:13

## /<module> POST

### Overview

Create a new record of a specified type.

### Request Arguments

| Name           | Type                | Description                                | Required |
|----------------|---------------------|--|----------|
| <record field> | <record field type> | The name value list of fields to populate. | True     |

### Request

```
{
  "name": "Example Account",
  "account_type": "Customer",
  "description": "My Example Account",
  "meetings": {
    {
      "add": ["21e3385e-404f-b470-407e-54044e3d8023"],
      "create": [
        {
          "name": "Test Meeting"
        }
      ]
    }
  ]
}
```

---

## Link fields

It is possible to add record relations to other records and create new related records.

| Action | Type | Description  |
|--------|------|--|
| add    | List | List of related records ID. See <a href="#">RelateRecordApi</a> for details. |
| create | List | List of name to value arrays of related records.                             |

## Response Arguments

| Name           | Type                | Description                                      |
|----------------|---------------------|--|
| <record field> | <record field type> | Returns the fields for the newly created record. |

## Response

```
{
  "id": "e91b1fa7-1bd8-3c71-be96-512e643f9ca4",
  "name": "Example Account",
  "date_entered": "2013-02-27T19:56:00+00:00",
  "date_modified": "2013-02-27T19:56:00+00:00",
  "modified_user_id": "1",
  "modified_by_name": "Administrator",
  "created_by": "1",
  "created_by_name": "Administrator",
  "description": "My Example Account",
  "img": "",
  "deleted": false,
  "assigned_user_id": "",
  "assigned_user_name": "",
  "team_name": [
    {
      "id": 1,
      "name": "Global",
      "name_2": "",
      "primary": true
    }
  ]
}
```

---

```
],
"linkedin": "",
"facebook": "",
"twitter": "",
"googleplus": "",
"account_type": "Customer",
"industry": "",
"annual_revenue": "",
"phone_fax": "",
"billing_address_street": "",
"billing_address_street_2": "",
"billing_address_street_3": "",
"billing_address_street_4": "",
"billing_address_city": "",
"billing_address_state": "",
"billing_address_postalcode": "",
"billing_address_country": "",
"rating": "",
"phone_office": "",
"phone_alternate": "",
"website": "",
"ownership": "",
"employees": "",
"ticker_symbol": "",
"shipping_address_street": "",
"shipping_address_street_2": "",
"shipping_address_street_3": "",
"shipping_address_street_4": "",
"shipping_address_city": "",
"shipping_address_state": "",
"shipping_address_postalcode": "",
"shipping_address_country": "",
"email": "",
"parent_id": "",
"sic_code": "",
"parent_name": "",
"email_opt_out": "",
"invalid_email": "",
"email": [

],
"campaign_id": "",
"campaign_name": "",
"my_favorite": false,
"_acl": {
  "fields": {
```

```
}  
  }  
}
```

## Change Log

| Version     | Change                         |
|-------------|--------------------------------|
| v10 (7.6.0) | Added support for link fields. |
| v10         | Added /<module> POST endpoint. |

Last Modified: 2021-02-17 02:44:13

## /<module>/append/:target POST

### Overview

Append new node to target node as last child.

### Request Arguments

| Name   | Type   | Description   | Required |
|--------|--------|---|----------|
| module | String | The name of sugar module that contains a nested set data and implements the NestedSetInterface. | True     |
| target | String | The ID of record that will be used as target to append new node                                 | True     |

---

## Request

```
{
  "name" : "Children Node 1"
}
```

## Response Arguments

This endpoint does not return any response arguments.

## Response

This endpoint returns a newly created bean

```
{ "my_favorite":false, "following":""," "id":"59fa8dd7-0f2c-4bfd-364f-54495f77fa3f",
"name":"Default title", "date_entered":"2014-10-23T23:03:22+03:00",
"date_modified":"2014-10-23T23:03:22+03:00", "modified_user_id":"1",
"modified_by_name":"Administrator", "created_by":"1",
"created_by_name":"Administrator", "doc_owner":""," "description":"","
"deleted":false, "source_id":""," "source_type":""," "source_meta":"","
"root":"be9b0c4a-8b78-1ffa-4f14-54481c2f6269", "lft":118, "rgt":119, "level":1,
"_acl":{"fields":{}}}, "_module":"Categories" }
```

## Change Log

| Version | Change  |
|---------|---|
| v10     | Added /<module>/append/:target POST endpoint. |

Last Modified: 2021-02-17 02:44:13

## /<module>/audit/export GET

### Overview

---

Returns a list of data changes for a specific module.

## Request Arguments

| Name   | Type   | Description             | Required |
|--------|--------|-------------------------|----------|
| module | String | The name of the module. | True     |

## Query Parameters

| Name    | Type    | Description   | Required |
|---------|---------|---|----------|
| max_num | Integer | A maximum number of Audit records to return. The default is 100 records.          | False    |
| offset  | Integer | The number of records to skip over before records are returned. The default is 0. | False    |

## Response Arguments

| Name        | Type    | Description   |
|-------------|---------|---|
| next_offset | Integer | Displays the next offset for retrieval of additional results. -1 will be returned when there are no more records. |
| records     | Array   | An array of results containing matched records.   |

## Response



---

```
{
  "next_offset":-1,
  "records":[
    {
      "id":"b569e480-237a-5921-4382-512ff555fee7",
      "parent_id":"ef1b40aa-5815-4f8d-e909-512d09617ac8",
      "date_created":"03\01\2013 12:26am",
      "created_by":"admin",
      "field_name":"Team ID:",
      "data_type":"team_list",
      "before_value_string":"East",
      "after_value_string":"Will"
    },
    {
      "id":"bc0bee72-8398-a0a6-d731-512ff5bfebc7",
      "parent_id":"ef1b40aa-5815-4f8d-e909-512d09617ac8",
      "date_created":"03\01\2013 12:26am",
      "created_by":"admin",
      "field_name":"Teams",
      "data_type":"id",
      "before_value_string":"East, Global, West",
      "after_value_string":"Jim, Will"
    }
  ]
}
```

## Change Log

| Version | Change                                     |
|---------|--|
| v11_11  | Added /<module>/audit/export GET endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /<module>/config GET

### Overview

---

Retrieves the config settings for a given module.

## Summary

This endpoint is normally used for the forecasting module.

## Request Arguments

This endpoint does not accept any request arguments.

## Response Arguments

| Name           | Type                | Description                                 |
|----------------|---------------------|---|
| <config field> | <config field type> | The list of config fields will be returned. |

## Response

```
{
  "is_setup":1,
  "is_upgrade":0,
  "has_commits":1,
  "timeperiod_type":"chronological",
  "timeperiod_interval":"Annual",
  "timeperiod_leaf_interval":"Quarter",
  "timeperiod_start_date":"2013-01-01",
  "timeperiod_shown_forward":2,
  "timeperiod_shown_backward":2,
  "forecast_ranges":"show_binary",
  "buckets_dom":"commit_stage_binary_dom",
  "show_binary_ranges":{
    "include":{
      "min":70,
      "max":100
    },
    "exclude":{
      "min":0,
      "max":69
    }
  }
}
```

---

```
},
"show_buckets_ranges":{
  "include":{
    "min":85,
    "max":100
  },
  "upside":{
    "min":70,
    "max":84
  },
  "exclude":{
    "min":0,
    "max":69
  }
},
"show_custom_buckets_ranges":{
  "include":{
    "min":85,
    "max":100
  },
  "upside":{
    "min":70,
    "max":84
  },
  "exclude":{
    "min":0,
    "max":69
  }
},
"sales_stage_won":[
  "Closed Won"
],
"sales_stage_lost":[
  "Closed Lost"
],
"show_worksheet_likely":1,
"show_worksheet_best":1,
"show_worksheet_worst":0,
"show_projected_likely":1,
"show_projected_best":1,
"show_projected_worst":0,
"show_forecasts_commit_warnings":1
}
```

---

## Change Log

| Version | Change                               |
|---------|--------------------------------------|
| v10     | Added /<module>/config GET endpoint. |

Last Modified: 2021-02-17 02:44:13

## /<module>/config POST

### Overview

Retrieves the config settings for a given module.

### Summary

This endpoint is normally used to manage the forecasting module.

### Request Arguments

| Name           | Type                | Description                          | Required |
|----------------|---------------------|--------------------------------------|----------|
| <config field> | <config field type> | The list of config fields to update. | False    |

### Request

```
{  
  "MyConfigOption": "MyConfigValue"  
}
```

### Response Arguments

---

| Name           | Type                | Description                                 |
|----------------|---------------------|---|
| <config field> | <config field type> | The list of config fields will be returned. |

## Response

```
{  
  "MyConfigOption": "MyConfigValue"  
}
```

## Change Log

| Version | Change                                |
|---------|---------------------------------------|
| v10     | Added /<module>/config POST endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /<module>/config PUT

### Overview

Retrieves the config settings for a given module.

### Summary

This endpoint is normally used to manage the forecasting module.

### Request Arguments

---

| Name           | Type                | Description                          | Required |
|----------------|---------------------|--------------------------------------|----------|
| <config field> | <config field type> | The list of config fields to update. | False    |

## Request

```
{  
  "MyConfigOption": "MyConfigValue"  
}
```

## Response Arguments

| Name           | Type                | Description                                 |
|----------------|---------------------|---|
| <config field> | <config field type> | The list of config fields will be returned. |

## Response

```
{  
  "MyConfigOption": "MyConfigValue"  
}
```

## Change Log

| Version | Change                               |
|---------|--------------------------------------|
| v10     | Added /<module>/config PUT endpoint. |

**Last Modified:** 2021-02-17 02:44:13

---

## /<module>/count GET

### Overview

Lists filtered records.

### Summary

This endpoint will return a set of records filtered by an expression. The filter can be applied to multiple fields and have multiple and/or conditions in it. Alternatively, you may use an existing filter by specifying its id. If both a filter definition and a filter id are passed, the two filters will be joined with an AND. Care will need to be taken to make sure that any filters used have appropriate indexes on the server side otherwise the runtime of the endpoint will be very long. Related fields can be searched by specifying the field name as: "link\_name.remote\_field", so if you wished to search the Accounts module by a related member account you would use "members.sic\_code".

### Request Arguments

| Name   | Type   | Description  | Required |
|--------|--------|--|----------|
| filter | String | The filter expression. Filter expressions are explained below. Note that JSON-encoded filters can be specified as query parameters in one of two ways for GET requests:<br><br>1. By specifying individual filter arguments as distinct parameters. Example: filter[0][id]=1 | False    |

| Name      | Type    | Description   | Required |
|-----------|---------|---|----------|
|           |         | <p>2. By specifying the whole filter as a single JSON-encoded string. Note that this syntax is currently not supported on certain modules. Example: filter=[{"id":"1"}].</p>  |          |
| filter_id | String  | Identifier for a preexisting filter. If filter is also set, the two filters are joined with an AND.   | False    |
| max_num   | Integer | A maximum number of records to return. Default is 20.   | False    |
| offset    | Integer | The number of records to skip over before records are returned. Default is 0.   | False    |
| fields    | String  | Comma delimited list of fields to return. Each field may be represented either by string, or by map containing field name and additional field parameters (applicable to link | False    |



| Name     | Type   | Description   | Required |
|----------|--------|---|----------|
|          |        | <p>and collection fields). The fields id and date_modified will always be returned.</p> <p>Example: name,account_type,description,{"name":"opportunities","fields":["id","name","sales_status"],"order_by":"date_closed:desc"}</p> <p>For more details on additional field parameters, see <a href="#">Relate API</a> and <a href="#">Collection API</a>.</p> |          |
| view     | String | <p>Instead of defining the fields argument, the view argument can be used instead. The field list is constructed at the server side based on the view definition which is requested. This argument can be used in combination with the fields argument. Common views are "record" and "list".</p> <p>Example: record</p>                                      | False    |
| order_by | String | <p>How to sort the returned records, in a comma delimited list with the direction appended to the column name after a colon.</p>  | False    |

| Name       | Type    | Description  | Required |
|------------|---------|--|----------|
|            |         | Example: name:DESC,account_type:DESC,date_modified:ASC   |          |
| q          | String  | A search expression, will search on this module. Cannot be used at the same time as a filter expression or id. | False    |
| deleted    | Boolean | Boolean to show deleted records in the result set.   | False    |
| nulls_last | Boolean | Boolean to return records with null values in order_by fields last in the result set.                          | False    |

## Filter Expressions

There are four types of filters:

### Basic

This will filter the results by checking the field "name" for value "Nelson Inc". This will only find exact matches.

### Example

```
{
  "filter":[
    {
      "name":"Nelson Inc"
    }
  ]
}
```

---

## Full

This expression allows you to specify what operation you want to use for filtering on the field. In the example you would match any record where the field "name" starts with the value "Nelson".

### Example

```
{
  "filter": [
    {
      "name": {
        "$starts": "Nelson"
      }
    }
  ]
}
```

Below is a list of operation types:

| Operation                 | Description   |
|---------------------------|---|
| <code>\$equals</code>     | Performs an exact match on that field.  |
| <code>\$not_equals</code> | Performs an exact match on that field.  |
| <code>\$not_equals</code> | Matches on non-matching values.   |
| <code>\$starts</code>     | Matches on anything that starts with the value.   |
| <code>\$ends</code>       | Matches anything that ends with the value.  |
| <code>\$contains</code>   | Matches anything that contains the value  |
| <code>\$in</code>         | Finds anything where field matches one of the values as specified as an array.          |
| <code>\$not_in</code>     | Finds anything where field does not matches any of the values as specified as an array. |
| <code>\$is_null</code>    | Checks if the field is null. This operation does not need a value specified.            |
| <code>\$not_null</code>   | Checks if the field is not null. This operation does not need a value specified.        |

---

| Operation | Description   |
|-----------|---|
| \$lt      | Matches when the field is less than the value.                |
| \$lte     | Matches when the field is less than or equal to the value.    |
| \$gt      | Matches when the field is greater than the value.             |
| \$gte     | Matches when the field is greater than or equal to the value. |

## Sub-expressions

This allows you to group filter expressions into or/and groupings. By default all expressions are and'ed together. The example expression would match if the field "name" was either "Nelson Inc" or "Nelson LLC". The only currently accepted sub-expression types are "\$and" and "\$or".

### Example

```
{
  "filter": [
    {
      "$or": [
        {
          "name": "Nelson Inc"
        },
        {
          "name": "Nelson LLC"
        }
      ]
    }
  ]
}
```

## Modules

There are two module expressions, they operate on modules instead of fields. The current module can be specified by either using the module name "\_this" or by

---

leaving the module name as a blank string. The example expression would filter the records in the current module to only your favorites. The only currently accepted module expressions are "\$favorite" and "\$owner".

### Example

```
{
  "filter":[
    {
      "$favorite":"_this"
    }
  ]
}
```

## Response Arguments

| Name        | Type    | Description   |
|-------------|---------|---|
| next_offset | Integer | Displays the next offset for retrieval of additional results. -1 will be returned when there are no more records. |
| records     | Array   | An array of results containing matched records.   |

## Response

```
{
  "next_offset":-1,
  "records":[
    {
      "id":"fa300a0e-0ad1-b322-9601-512d0983c19a",
      "name":"Dale Spivey",
      "date_modified":"2013-02-28T05:03:00+00:00",
      "description":"",
      "opportunities": [
        {
          _module: "Opportunities",
```

```

        "id": "b0701501-1fab-8ae7-3942-540da93f5017",
        "name": "360 Vacations - 228 Units",
        "date_modified": "2014-09-08T16:05:00+03:00",
        "sales_status": "New"
    },
],
"_acl": {
    "fields": {
    }
}
},
{
    "id": "95e17367-9b3d-0e26-22dc-512d0961fedf",
    "name": "Florence Haddock",
    "date_modified": "2013-02-26T19:12:00+00:00",
    "description": "",
    "opportunities": [
        {
            _module: "Opportunities"
            date_modified: "2014-09-08T16:05:00+03:00"
            id: "9ce7c088-8ee4-7cd3-18f1-540da944d4c0"
            name: "360 Vacations - 312 Units"
            sales_status: "New"
        },
    ],
    "_acl": {
        "fields": {
        }
    }
}
]
}

```

## Change Log

| Version | Change                               |
|---------|--------------------------------------|
| v10     | Added /<module>/filter GET endpoint. |

**Last Modified:** 2021-02-17 02:44:13

---

## /<module>/customfield POST

### Overview

Create a new custom field for a specified module.

### Summary

This endpoint is used to create a new custom field for a specified module.

### Request Arguments

| Name | Type  | Description         | Required |
|------|-------|---------------------|----------|
| data | array | The field metadata. | True     |

### Request Examples

This example will create a decimal type custom field:

```
{
  "localizations": {
    "en_us": {
      "LBL_AI_SCORE": "Ai Score"
    },
    ...
  },
  "data": {
    "name": "ai_score",
    "label": "LBL_AI_SCORE",
    "type": "decimal",
    "len": "18",
    "precision": 8,
    "required": false,
    "reportable": false,
    "audited": false,
    "importable": false,
    "duplicate_merge": false
  }
}
```

---

```
}
```

This example will create a textField type custom field:

```
{
  "localizations": {
    "en_us": {
      "LBL_AI_SCORE_DESC": "Ai Score Description"
    },
    ...
  },
  "data": {
    "name": "ai_score_desc",
    "label": "LBL_AI_SCORE_DESC",
    "type": "varchar",
    "help": "Text Field Help Text",
    "comments": "Text Field Comment Text",
    "default_value": "",
    "len": 255,
    "required": false,
    "reportable": true,
    "audited": false,
    "importable": "true",
    "duplicate_merge": false
  }
}
```

This example will create an enum type custom field with a new dropdown list:

```
{
  "localizations": {
    "en_us": {
      "LBL_DROPDOWN_FIELD": "New Dropdown Field",
      "LBL_DD_ITEM_ONE": "First Text",
      "LBL_DD_ITEM_TWO": "Second Text",
      "LBL_DD_ITEM_THREE": "Third Text"
    },
    ...
  },
  "data": {
    "name": "new_dropdown_field",
    "label": "LBL_DROPDOWN_FIELD",
    "type": "enum",
    "options": {
      "dropdownName": "a_new_dropdown",
      "dropdownList": [
```



---

```
        {"value": "First", "label": "LBL_DD_ITEM_ONE"},
        {"value": "Second", "label": "LBL_DD_ITEM_TWO"},
        {"value": "Third", "label": "LBL_DD_ITEM_THREE"}
    ]
},
"default_value": "First"
}
```

This example will create an enum type custom field using an existing dropdown list:

```
{
  "localizations": {
    "en_us": {
      "LBL_DROPDOWN_FIELD": "New Dropdown Field"
    },
    ...
  },
  "data": {
    "name": "new_dropdown_field",
    "label": "LBL_DROPDOWN_FIELD",
    "type": "enum",
    "options": "account_type_dom",
    "default_value": "Analyst"
  }
}
```

## Response

```
{
  "duplicate_merge_dom_value": 0,
  "required": false,
  "source": "custom_fields",
  "name": "ai_score_c",
  "vname": "LBL_AI_SCORE",
  "type": "decimal",
  "massupdate": false,
  "hidemassupdate": false,
  "no_default": false,
  "comments": "",
  "help": "",
  "importable": "",
  "duplicate_merge": "disabled",
```

---

```
"audited": false,
"reportable": false,
"unified_search": false,
"merge_filter": "disabled",
"pii": false,
"calculated": false,
"len": 18,
"size": "20",
"enable_range_search": false,
"precision": "8",
"id": "ca9653de-0976-11eb-a558-6c400895ea84",
"custom_module": "Opportunities"
}
```

## Change Log

| Version | Change                                     |
|---------|--|
| v11.11  | Added /<module>/customfield POST endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /<module>/customfield/:field DELETE

### Overview

Delete a custom field for a specified module.

### Summary

This endpoint is used to delete a custom field for a specified module.

### Request Arguments

This endpoint does not accept any request arguments.

---

## Response

```
{
  "name": "ai_conv_score_c"
}
```

## Response Codes and Error Messages

All successful responses should return 200.

This API returns the following error responses:

- **403 (SugarAPIExceptionNotAuthorized)**: Sent if the user attempts to access a module which they are forbidden to access.
- **404 (SugarApiExceptionNot Found)**: Sent if the requested field is not found.
- **422 (SugarApiExceptionInvalidParameter)**: Sent if the module and/or field are invalid.
- **500 (SugarApiExceptionError)**: Sent if there's an unknown error that causes the custom field to not be deleted in the module.

## Change Log

| Version | Change  |
|---------|---|
| v11.11  | Added /<module>/customfield/:field DELETE endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /<module>/duplicateCheck POST

### Overview

Runs a duplicate check against specified data.

---

## Request Arguments

| Name           | Type                | Description                                | Required |
|----------------|---------------------|--|----------|
| <record field> | <record field type> | The name value list of fields to populate. | True     |

## Request

```
{  
  "name": "Airline"  
}
```

## Response Arguments

| Name           | Type                | Description                              |
|----------------|---------------------|--|
| <record field> | <record field type> | Returns the potential duplicate records. |

## Response

```
{  
  "next_offset": -1,  
  "records": [  
    {  
      "id": "c4c26496-5dbc-67dd-bf5c-512d0923889e",  
      "name": "Airline Maintenance Co",  
      "date_entered": "2013-02-26T19:12:00+00:00",  
      "date_modified": "2013-02-26T19:12:00+00:00",  
      "modified_user_id": "1",  
      "modified_by_name": "Administrator",  
      "created_by": "1",  
      "created_by_name": "Administrator",  
      "description": "",  
      "img": "",  
      "last_activity_date": "2013-02-26T19:12:00+00:00",  
      "deleted": false,  
      "assigned_user_id": "seed_sally_id",  
    }  
  ]  
}
```

---

```
"assigned_user_name":"Sally Bronsen",
"team_name":[
  {
    "id":"East",
    "name":"East",
    "name_2":"",
    "primary":false
  },
  {
    "id":1,
    "name":"Global",
    "name_2":"",
    "primary":false
  },
  {
    "id":"West",
    "name":"West",
    "name_2":"",
    "primary":true
  }
],
"linkedin":"",
"facebook":"",
"twitter":"",
"googleplus":"",
"account_type":"Customer",
"industry":"Other",
"annual_revenue":"",
"phone_fax":"",
"billing_address_street":"123 Anywhere Street",
"billing_address_street_2":"",
"billing_address_street_3":"",
"billing_address_street_4":"",
"billing_address_city":"Sunnyvale",
"billing_address_state":"CA",
"billing_address_postalcode":"48566",
"billing_address_country":"USA",
"rating":"",
"phone_office":"(648) 452-3486",
"phone_alternate":"",
"website":"www.kidqa.it",
"ownership":"",
"employees":"",
"ticker_symbol":"",
"shipping_address_street":"123 Anywhere Street",
"shipping_address_street_2":"",
```

```

"shipping_address_street_3":"","
"shipping_address_street_4":"","
"shipping_address_city":"Sunnyvale",
"shipping_address_state":"CA",
"shipping_address_postalcode":"48566",
"shipping_address_country":"USA",
"email1":"vegan.im@example.tw",
"parent_id":"","
"sic_code":"","
"parent_name":"","
"email_opt_out":false,
"invalid_email":false,
"email":[
  {
    "email_address":"vegan.im@example.tw",
    "opt_out":"0",
    "invalid_email":"0",
    "primary_address":"1"
  },
  {
    "email_address":"phone85@example.tv",
    "opt_out":"0",
    "invalid_email":"0",
    "primary_address":"0"
  }
],
"campaign_id":"","
"campaign_name":"","
"my_favorite":false,
"_acl":{
  "fields":{

  }
},
"duplicate_check_rank":0
}
]
}

```

## Change Log

| Version | Change                         |
|---------|--------------------------------|
| v10     | Added /<module>/duplicateCheck |

---

POST endpoint.

Last Modified: 2021-02-17 02:44:13

## /<module>/enum/:field GET

### Overview

Retrieves the enum values for a specific field.

### Request Arguments

This endpoint does not accept any request arguments.

### Response Arguments

| Name          | Type  | Description                          |
|---------------|-------|--------------------------------------|
| <list values> | Array | Returns the enum values for a field. |

### Response

```
{
  "": "",
  "Analyst": "Analyst",
  "Competitor": "Competitor",
  "Customer": "Customer",
  "Integrator": "Integrator",
  "Investor": "Investor",
  "Partner": "Partner",
  "Press": "Press",
  "Prospect": "Prospect",
  "Reseller": "Reseller",
  "Other": "Other"
```

---

}

## Change Log

| Version | Change   |
|---------|--|
| v10     | Added <code>/&lt;module&gt;/enum/:field</code> GET endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## `/<module>/export/:record_list_id` GET

### Overview

Returns a record set in CSV format along with HTTP headers to indicate content type.

### Request Arguments

| Name   | Type  | Description   | Required |
|--------|-------|---|----------|
| uid    | Array | A list of bean ids.   | False    |
| filter | Array | The filter expression. More information on filter expressions can be found in <code>/&lt;module&gt;/filter</code> . | False    |
| sample | Array | Indicates whether to download sample data.  | False    |

### Request



---

## Exporting Records by Specific IDs

```
{
  "uid": "d43243c6-9b8e-2973-ae2-512d09bc34b4"
}
```

## Exporting Records by a List of IDs

```
{
  "uid": [
    "d43243c6-9b8e-2973-ae2-512d09bc34b4",
    "b3e87a3f-cd8f-7b86-467a-512d09e8d240"
  ]
}
```

## Exporting Records Using a Filter

```
{
  "filter": [
    {
      "name": "airline"
    }
  ]
}
```

## Exporting a Sample Result Set

```
{
  "sample": true
}
```

## Response Arguments

| Name         | Type   | Description  |
|--------------|--------|--|
| <csv export> | String | Returns the selected records in CSV format with the content headers. |

---

## Response

result: HTTP/1.1 200 OK  
Date: Fri, 01 Mar 2013 04:05:55 GMT  
Server: Apache/2.2.22 (Unix) DAV/2 PHP/5.3.17  
X-Powered-By: PHP/5.3.17  
Expires: Mon, 26 Jul 1997 05:00:00 GMT  
Cache-Control: no-store, no-cache, must-revalidate, post-check=0, pre-check=0  
Pragma: cache  
Content-Disposition: attachment; filename=Accounts.csv  
Content-transfer-encoding: binary  
Last-Modified: Fri, 01 Mar 2013 04:05:55 GMT  
Cache-Control: post-check=0, pre-check=0  
Content-Length: 1080  
Connection: close  
Content-Type: application/octet-stream; charset=UTF-8

"Name","ID","Website","Email Address","Office Phone","Alternate Phone",  
,"Fax","Billing Street","Billing City","Billing State","Billing Postal  
Code","Billing Country","Shipping Street","Shipping City","Shipping S  
tate","Shipping Postal Code","Shipping Country","Description","Type","  
Industry","Annual Revenue","Employees","SIC Code","Ticker Symbol","Par  
ent Account ID","Ownership","Campaign ID","Rating","Assigned User Name  
","Assigned To","Team ID","Teams","Team Set ID","Date Created","Date M  
odified","Modified By","Created By","Deleted","Image","last\_activity\_d  
ate","Linkedin Company ID","Facebook Account","Twitter Account","Googl  
e Plus ID"

"Arts & Crafts Inc","d43243c6-9b8e-2973-ae2-512d09bc34b4","","","(052  
) 034-1853","","","777 West Filmore Ln","Santa Monica","CA","35354","U  
SA","777 West Filmore Ln","Santa Monica","CA","35354","USA","","Custom  
er","Transportation","","","","","","","","","sally","seed\_sally\_id","  
West","West","West","02/26/2013 07:12 pm","02/26/2013 07:12 pm","1","1  
","0","","02/26/2013 07:12 pm","","","","",""

## Change Log

| Version | Change                               |
|---------|--------------------------------------|
| v10     | Added /<module>/export GET endpoint. |

---

Last Modified: 2021-02-17 02:44:13

## /<module>/favorites GET

### Overview

Opportunity Favorites Help

### Summary

This endpoint returns all the favorite Quotes/Revenue Line Items in alphabetical order to be displayed in the "Product Catalog Quick Picks" dashlet.

### Request Arguments

| Name    | Type    | Description  | Required |
|---------|---------|--|----------|
| pageNum | integer | An integer attribute in the payload data object which gets the page number for which the items need to be displayed based on the current page or the page clicked. | False    |

### Request

```
{  
  pageNum: 0  
}
```

---

## Response Arguments

| Name           | Type                | Description                                 |
|----------------|---------------------|---|
| <config field> | <config field type> | The list of config fields will be returned. |

## Response

```
{
  "totalPages":5,
  "pageNum":0,
  "max_num":8,
  "records":[
    {
      "id":"c181bd32-c7f2-11e8-b4eb-7831c1c14620",
      "name":"Allyson Gadget",
      "date_entered":"2018-10-04 16:28:37",
      "date_modified":"2018-10-04 16:28:37",
      "modified_user_id":"1",
      "created_by":"1",
      "description":null,
      "deleted":0,
      "type_id":null,
      "manufacturer_id":"c03f952a-
c7f2-11e8-b410-7831c1c14620",
      "category_id":"c18112d8-c7f2-11e8-b753-7831c1c1462
0",
      "mft_part_num":"Ink Conglomerate Inc 921535XYZ987"
    },
    {
      "vendor_part_num":null,
      "date_cost_price":null,
      "cost_price":"534.000000",
      "discount_price":"842.000000",
      "list_price":"905.000000",
      "cost_usdollar":"534.000000",
      "discount_usdollar":"842.000000",
      "list_usdollar":"905.000000",
      "status":"Available",
      "tax_class":"Taxable",
      "date_available":"2004-10-15",
      "website":null,
      "weight":"20.00",
    }
  ]
}
```

---

```
    "qty_in_stock":26,
    "support_name":null,
    "support_description":null,
    "support_contact":null,
    "support_term":null,
    "pricing_formula":"Fixed",
    "pricing_factor":"1.00",
    "assigned_user_id":null,
    "currency_id":"-99",
    "base_rate":"1.000000"
  },
  {
    "id":"c18e0448-c7f2-11e8-86b0-7831c1c14620",
    "name":"Arla Gadget",
    "date_entered":"2018-10-04 16:28:37",
    "date_modified":"2018-10-04 16:28:37",
    "modified_user_id":"1",
    "created_by":"1",
    "description":null,
    "deleted":0,
    "type_id":null,
    "manufacturer_id":"c03f952a-
c7f2-11e8-b410-7831c1c14620",
    "category_id":"c18b8b64-c7f2-11e8-8c1a-7831c1c1462
0",
    "mft_part_num":"24\7 Couriers 795391XYZ987",
    "vendor_part_num":null,
    "date_cost_price":null,
    "cost_price":"398.000000",
    "discount_price":"402.020202",
    "list_price":"941.000000",
    "cost_usdollar":"398.000000",
    "discount_usdollar":"402.020202",
    "list_usdollar":"941.000000",
    "status":"Available",
    "tax_class":"Taxable",
    "date_available":"2004-10-15",
    "website":null,
    "weight":"22.00",
    "qty_in_stock":145,
    "support_name":null,
    "support_description":null,
    "support_contact":null,
    "support_term":null,
    "pricing_formula":"ProfitMargin",
    "pricing_factor":"1.00",
```

---

```
    "assigned_user_id":null,
    "currency_id":"-99",
    "base_rate":"1.000000"
  },
  {
    "id":"c1b60434-c7f2-11e8-8964-7831c1c14620",
    "name":"Billie Gadget",
    "date_entered":"2018-10-04 16:28:37",
    "date_modified":"2018-10-04 16:28:37",
    "modified_user_id":"1",
    "created_by":"1",
    "description":null,
    "deleted":0,
    "type_id":null,
    "manufacturer_id":"c03f952a-
c7f2-11e8-b410-7831c1c14620",
    "category_id":"c1b3bf58-c7f2-11e8-92e7-7831c1c1462
0",
    "mft_part_num":"Kringle Bell IncK.A. Tower \u0026
Co 694143XYZ987",
    "vendor_part_num":null,
    "date_cost_price":null,
    "cost_price":"403.000000",
    "discount_price":"927.000000",
    "list_price":"927.000000",
    "cost_usdollar":"403.000000",
    "discount_usdollar":"927.000000",
    "list_usdollar":"927.000000",
    "status":"Available",
    "tax_class":"Taxable",
    "date_available":"2004-10-15",
    "website":null,
    "weight":"16.00",
    "qty_in_stock":148,
    "support_name":null,
    "support_description":null,
    "support_contact":null,
    "support_term":null,
    "pricing_formula":"IsList",
    "pricing_factor":"1.00",
    "assigned_user_id":null,
    "currency_id":"-99",
    "base_rate":"1.000000"
  },
  {
    "id":"c186a612-c7f2-11e8-9fee-7831c1c14620",
```

---

```

        "name": "Bradford Gadget",
        "date_entered": "2018-10-04 16:28:37",
        "date_modified": "2018-10-04 16:28:37",
        "modified_user_id": "1",
        "created_by": "1",
        "description": null,
        "deleted": 0,
        "type_id": null,
        "manufacturer_id": "c03f952a-
c7f2-11e8-b410-7831c1c14620",
        "category_id": "c185dbb0-c7f2-11e8-a6b7-7831c1c1462
0",
        "mft_part_num": "Mississippi Bank Group 133834XYZ98
7",
        "vendor_part_num": null,
        "date_cost_price": null,
        "cost_price": "528.000000",
        "discount_price": "533.333333",
        "list_price": "745.000000",
        "cost_usdollar": "528.000000",
        "discount_usdollar": "533.333333",
        "list_usdollar": "745.000000",
        "status": "Available",
        "tax_class": "Taxable",
        "date_available": "2004-10-15",
        "website": null,
        "weight": "33.00",
        "qty_in_stock": 70,
        "support_name": null,
        "support_description": null,
        "support_contact": null,
        "support_term": null,
        "pricing_formula": "ProfitMargin",
        "pricing_factor": "1.00",
        "assigned_user_id": null,
        "currency_id": "-99",
        "base_rate": "1.000000"
    },
    {
        "id": "c1b4680e-c7f2-11e8-9380-7831c1c14620",
        "name": "Brain Gadget",
        "date_entered": "2018-10-04 16:28:37",
        "date_modified": "2018-10-04 16:28:37",
        "modified_user_id": "1",
        "created_by": "1",
        "description": null,

```

---

```
        "deleted":0,
        "type_id":null,
        "manufacturer_id":"c03f952a-
c7f2-11e8-b410-7831c1c14620",
        "category_id":"c1b3bf58-c7f2-11e8-92e7-7831c1c1462
0",
        "mft_part_num":"Smallville Resources Inc 362299XYZ
987",
        "vendor_part_num":null,
        "date_cost_price":null,
        "cost_price":"370.000000",
        "discount_price":"854.370000",
        "list_price":"863.000000",
        "cost_usdollar":"370.000000",
        "discount_usdollar":"854.370000",
        "list_usdollar":"863.000000",
        "status":"Available",
        "tax_class":"Taxable",
        "date_available":"2004-10-15",
        "website":null,
        "weight":"10.00",
        "qty_in_stock":106,
        "support_name":null,
        "support_description":null,
        "support_contact":null,
        "support_term":null,
        "pricing_formula":"PercentageDiscount",
        "pricing_factor":"1.00",
        "assigned_user_id":null,
        "currency_id":"-99",
        "base_rate":"1.000000"
    },
    {
        "id":"c1baf0e8-c7f2-11e8-ab05-7831c1c14620",
        "name":"Carley Gadget",
        "date_entered":"2018-10-04 16:28:37",
        "date_modified":"2018-10-04 16:28:37",
        "modified_user_id":"1",
        "created_by":"1",
        "description":null,
        "deleted":0,
        "type_id":null,
        "manufacturer_id":"c03f952a-
c7f2-11e8-b410-7831c1c14620",
        "category_id":"c1b8e4ec-
c7f2-11e8-b435-7831c1c14620",
```



---

```
"mft_part_num":"Hollywood Diner Ltd 10023XYZ987",
"vendor_part_num":null,
"date_cost_price":null,
"cost_price":"554.000000",
"discount_price":"559.595960",
"list_price":"927.000000",
"cost_usdollar":"554.000000",
"discount_usdollar":"559.595959",
"list_usdollar":"927.000000",
"status":"Available",
"tax_class":"Taxable",
"date_available":"2004-10-15",
"website":null,
"weight":"30.00",
"qty_in_stock":58,
"support_name":null,
"support_description":null,
"support_contact":null,
"support_term":null,
"pricing_formula":"ProfitMargin",
"pricing_factor":"1.00",
"assigned_user_id":null,
"currency_id":"-99",
"base_rate":"1.000000"
},
{
  "id":"c1b77544-c7f2-11e8-8347-7831c1c14620",
  "name":"Carma Gadget",
  "date_entered":"2018-10-04 16:28:37",
  "date_modified":"2018-10-04 16:28:37",
  "modified_user_id":"1",
  "created_by":"1",
  "description":null,
  "deleted":0,
  "type_id":null,
  "manufacturer_id":"c03f952a-
c7f2-11e8-b410-7831c1c14620",
  "category_id":"c1b3bf58-c7f2-11e8-92e7-7831c1c1462
0",
  "mft_part_num":"Sea Region Inc 773472XYZ987",
  "vendor_part_num":null,
  "date_cost_price":null,
  "cost_price":"332.000000",
  "discount_price":"745.000000",
  "list_price":"822.000000",
  "cost_usdollar":"332.000000",
```

---

```
"discount_usdollar": "745.000000",
"list_usdollar": "822.000000",
"status": "Available",
"tax_class": "Taxable",
"date_available": "2004-10-15",
"website": null,
"weight": "35.00",
"qty_in_stock": 1,
"support_name": null,
"support_description": null,
"support_contact": null,
"support_term": null,
"pricing_formula": "Fixed",
"pricing_factor": "1.00",
"assigned_user_id": null,
"currency_id": "-99",
"base_rate": "1.000000"
},
{
  "id": "c1b98c9e-c7f2-11e8-9740-7831c1c14620",
  "name": "Catrina Gadget",
  "date_entered": "2018-10-04 16:28:37",
  "date_modified": "2018-10-04 16:28:37",
  "modified_user_id": "1",
  "created_by": "1",
  "description": null,
  "deleted": 0,
  "type_id": null,
  "manufacturer_id": "c03f952a-
c7f2-11e8-b410-7831c1c14620",
  "category_id": "c1b8e4ec-
c7f2-11e8-b435-7831c1c14620",
  "mft_part_num": "Jungle Systems Inc 273034XYZ987",
  "vendor_part_num": null,
  "date_cost_price": null,
  "cost_price": "577.000000",
  "discount_price": "582.770000",
  "list_price": "946.000000",
  "cost_usdollar": "577.000000",
  "discount_usdollar": "582.770000",
  "list_usdollar": "946.000000",
  "status": "Available",
  "tax_class": "Taxable",
  "date_available": "2004-10-15",
  "website": null,
  "weight": "13.00",
```

---

```
        "qty_in_stock":105,
        "support_name":null,
        "support_description":null,
        "support_contact":null,
        "support_term":null,
        "pricing_formula":"PercentageMarkup",
        "pricing_factor":"1.00",
        "assigned_user_id":null,
        "currency_id":"-99",
        "base_rate":"1.000000"
    }
]
}
```

## Change Log

| Version | Change                                       |
|---------|--|
| v10     | Added /Opportunities/favorites GET endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /<module>/favorites POST

### Overview

Opportunity Favorites Help

### Summary

This endpoint returns all the favorite Quotes/Revenue Line Items in alphabetical order to be displayed in the "Product Catalog Quick Picks" dashlet.

### Request Arguments

| Name    | Type    | Description  | Required |
|---------|---------|--|----------|
| pageNum | integer | An integer attribute in the payload data object which gets the page number for which the items need to be displayed based on the current page or the page clicked. | False    |

## Request

```
{
  pageNum: 0
}
```

## Response Arguments

| Name           | Type                | Description                                 |
|----------------|---------------------|---|
| <config field> | <config field type> | The list of config fields will be returned. |

## Response

```
{
  "totalPages": 5,
  "pageNum": 0,
  "max_num": 8,
  "records": [
    {
      "id": "c181bd32-c7f2-11e8-b4eb-7831c1c14620",
      "name": "Allyson Gadget",
      "date_entered": "2018-10-04 16:28:37",
      "date_modified": "2018-10-04 16:28:37",
      "modified_user_id": "1",
      "created_by": "1",
    }
  ]
}
```

---

```
        "description":null,
        "deleted":0,
        "type_id":null,
        "manufacturer_id":"c03f952a-
c7f2-11e8-b410-7831c1c14620",
        "category_id":"c18112d8-c7f2-11e8-b753-7831c1c1462
0",
        "mft_part_num":"Ink Conglomerate Inc 921535XYZ987"
,
        "vendor_part_num":null,
        "date_cost_price":null,
        "cost_price":"534.000000",
        "discount_price":"842.000000",
        "list_price":"905.000000",
        "cost_usdollar":"534.000000",
        "discount_usdollar":"842.000000",
        "list_usdollar":"905.000000",
        "status":"Available",
        "tax_class":"Taxable",
        "date_available":"2004-10-15",
        "website":null,
        "weight":"20.00",
        "qty_in_stock":26,
        "support_name":null,
        "support_description":null,
        "support_contact":null,
        "support_term":null,
        "pricing_formula":"Fixed",
        "pricing_factor":"1.00",
        "assigned_user_id":null,
        "currency_id":"-99",
        "base_rate":"1.000000"
    },
    {
        "id":"c18e0448-c7f2-11e8-86b0-7831c1c14620",
        "name":"Arla Gadget",
        "date_entered":"2018-10-04 16:28:37",
        "date_modified":"2018-10-04 16:28:37",
        "modified_user_id":"1",
        "created_by":"1",
        "description":null,
        "deleted":0,
        "type_id":null,
        "manufacturer_id":"c03f952a-
c7f2-11e8-b410-7831c1c14620",
        "category_id":"c18b8b64-c7f2-11e8-8c1a-7831c1c1462
```

---

0",

```
"mft_part_num":"24\7 Couriers 795391XYZ987",
"vendor_part_num":null,
"date_cost_price":null,
"cost_price":"398.000000",
"discount_price":"402.020202",
"list_price":"941.000000",
"cost_usdollar":"398.000000",
"discount_usdollar":"402.020202",
"list_usdollar":"941.000000",
"status":"Available",
"tax_class":"Taxable",
"date_available":"2004-10-15",
"website":null,
"weight":"22.00",
"qty_in_stock":145,
"support_name":null,
"support_description":null,
"support_contact":null,
"support_term":null,
"pricing_formula":"ProfitMargin",
"pricing_factor":"1.00",
"assigned_user_id":null,
"currency_id":"-99",
"base_rate":"1.000000"
```

```
},
{
```

```
"id":"c1b60434-c7f2-11e8-8964-7831c1c14620",
"name":"Billie Gadget",
"date_entered":"2018-10-04 16:28:37",
"date_modified":"2018-10-04 16:28:37",
"modified_user_id":"1",
"created_by":"1",
"description":null,
"deleted":0,
"type_id":null,
"manufacturer_id":"c03f952a-
c7f2-11e8-b410-7831c1c14620",
"category_id":"c1b3bf58-c7f2-11e8-92e7-7831c1c1462
```

0",

```
"mft_part_num":"Kringle Bell IncK.A. Tower \u0026
Co 694143XYZ987",
"vendor_part_num":null,
"date_cost_price":null,
"cost_price":"403.000000",
"discount_price":"927.000000",
```

---

```
    "list_price": "927.000000",
    "cost_usdollar": "403.000000",
    "discount_usdollar": "927.000000",
    "list_usdollar": "927.000000",
    "status": "Available",
    "tax_class": "Taxable",
    "date_available": "2004-10-15",
    "website": null,
    "weight": "16.00",
    "qty_in_stock": 148,
    "support_name": null,
    "support_description": null,
    "support_contact": null,
    "support_term": null,
    "pricing_formula": "IsList",
    "pricing_factor": "1.00",
    "assigned_user_id": null,
    "currency_id": "-99",
    "base_rate": "1.000000"
  },
  {
    "id": "c186a612-c7f2-11e8-9fee-7831c1c14620",
    "name": "Bradford Gadget",
    "date_entered": "2018-10-04 16:28:37",
    "date_modified": "2018-10-04 16:28:37",
    "modified_user_id": "1",
    "created_by": "1",
    "description": null,
    "deleted": 0,
    "type_id": null,
    "manufacturer_id": "c03f952a-
c7f2-11e8-b410-7831c1c14620",
    "category_id": "c185dbb0-c7f2-11e8-a6b7-7831c1c1462
0",
    "mft_part_num": "Mississippi Bank Group 133834XYZ98
7",
    "vendor_part_num": null,
    "date_cost_price": null,
    "cost_price": "528.000000",
    "discount_price": "533.333333",
    "list_price": "745.000000",
    "cost_usdollar": "528.000000",
    "discount_usdollar": "533.333333",
    "list_usdollar": "745.000000",
    "status": "Available",
    "tax_class": "Taxable",
```

---

```

        "date_available":"2004-10-15",
        "website":null,
        "weight":"33.00",
        "qty_in_stock":70,
        "support_name":null,
        "support_description":null,
        "support_contact":null,
        "support_term":null,
        "pricing_formula":"ProfitMargin",
        "pricing_factor":"1.00",
        "assigned_user_id":null,
        "currency_id":"-99",
        "base_rate":"1.000000"
    },
    {
        "id":"c1b4680e-c7f2-11e8-9380-7831c1c14620",
        "name":"Brain Gadget",
        "date_entered":"2018-10-04 16:28:37",
        "date_modified":"2018-10-04 16:28:37",
        "modified_user_id":"1",
        "created_by":"1",
        "description":null,
        "deleted":0,
        "type_id":null,
        "manufacturer_id":"c03f952a-
c7f2-11e8-b410-7831c1c14620",
        "category_id":"c1b3bf58-c7f2-11e8-92e7-7831c1c1462
0",
        "mft_part_num":"Smallville Resources Inc 362299XYZ
987",
        "vendor_part_num":null,
        "date_cost_price":null,
        "cost_price":"370.000000",
        "discount_price":"854.370000",
        "list_price":"863.000000",
        "cost_usdollar":"370.000000",
        "discount_usdollar":"854.370000",
        "list_usdollar":"863.000000",
        "status":"Available",
        "tax_class":"Taxable",
        "date_available":"2004-10-15",
        "website":null,
        "weight":"10.00",
        "qty_in_stock":106,
        "support_name":null,
        "support_description":null,

```



---

```
    "support_contact":null,
    "support_term":null,
    "pricing_formula":"PercentageDiscount",
    "pricing_factor":"1.00",
    "assigned_user_id":null,
    "currency_id":"-99",
    "base_rate":"1.000000"
  },
  {
    "id":"c1baf0e8-c7f2-11e8-ab05-7831c1c14620",
    "name":"Carley Gadget",
    "date_entered":"2018-10-04 16:28:37",
    "date_modified":"2018-10-04 16:28:37",
    "modified_user_id":"1",
    "created_by":"1",
    "description":null,
    "deleted":0,
    "type_id":null,
    "manufacturer_id":"c03f952a-
c7f2-11e8-b410-7831c1c14620",
    "category_id":"c1b8e4ec-
c7f2-11e8-b435-7831c1c14620",
    "mft_part_num":"Hollywood Diner Ltd 10023XYZ987",
    "vendor_part_num":null,
    "date_cost_price":null,
    "cost_price":"554.000000",
    "discount_price":"559.595960",
    "list_price":"927.000000",
    "cost_usdollar":"554.000000",
    "discount_usdollar":"559.595959",
    "list_usdollar":"927.000000",
    "status":"Available",
    "tax_class":"Taxable",
    "date_available":"2004-10-15",
    "website":null,
    "weight":"30.00",
    "qty_in_stock":58,
    "support_name":null,
    "support_description":null,
    "support_contact":null,
    "support_term":null,
    "pricing_formula":"ProfitMargin",
    "pricing_factor":"1.00",
    "assigned_user_id":null,
    "currency_id":"-99",
    "base_rate":"1.000000"
```

---

```
    },
    {
      "id": "c1b77544-c7f2-11e8-8347-7831c1c14620",
      "name": "Carma Gadget",
      "date_entered": "2018-10-04 16:28:37",
      "date_modified": "2018-10-04 16:28:37",
      "modified_user_id": "1",
      "created_by": "1",
      "description": null,
      "deleted": 0,
      "type_id": null,
      "manufacturer_id": "c03f952a-
c7f2-11e8-b410-7831c1c14620",
      "category_id": "c1b3bf58-c7f2-11e8-92e7-7831c1c1462
0",
      "mft_part_num": "Sea Region Inc 773472XYZ987",
      "vendor_part_num": null,
      "date_cost_price": null,
      "cost_price": "332.000000",
      "discount_price": "745.000000",
      "list_price": "822.000000",
      "cost_usdollar": "332.000000",
      "discount_usdollar": "745.000000",
      "list_usdollar": "822.000000",
      "status": "Available",
      "tax_class": "Taxable",
      "date_available": "2004-10-15",
      "website": null,
      "weight": "35.00",
      "qty_in_stock": 1,
      "support_name": null,
      "support_description": null,
      "support_contact": null,
      "support_term": null,
      "pricing_formula": "Fixed",
      "pricing_factor": "1.00",
      "assigned_user_id": null,
      "currency_id": "-99",
      "base_rate": "1.000000"
    },
    {
      "id": "c1b98c9e-c7f2-11e8-9740-7831c1c14620",
      "name": "Catrina Gadget",
      "date_entered": "2018-10-04 16:28:37",
      "date_modified": "2018-10-04 16:28:37",
      "modified_user_id": "1",
```

```

        "created_by": "1",
        "description": null,
        "deleted": 0,
        "type_id": null,
        "manufacturer_id": "c03f952a-
c7f2-11e8-b410-7831c1c14620",
        "category_id": "c1b8e4ec-
c7f2-11e8-b435-7831c1c14620",
        "mft_part_num": "Jungle Systems Inc 273034XYZ987",
        "vendor_part_num": null,
        "date_cost_price": null,
        "cost_price": "577.000000",
        "discount_price": "582.770000",
        "list_price": "946.000000",
        "cost_usdollar": "577.000000",
        "discount_usdollar": "582.770000",
        "list_usdollar": "946.000000",
        "status": "Available",
        "tax_class": "Taxable",
        "date_available": "2004-10-15",
        "website": null,
        "weight": "13.00",
        "qty_in_stock": 105,
        "support_name": null,
        "support_description": null,
        "support_contact": null,
        "support_term": null,
        "pricing_formula": "PercentageMarkup",
        "pricing_factor": "1.00",
        "assigned_user_id": null,
        "currency_id": "-99",
        "base_rate": "1.000000"
    }
]
}

```

## Change Log

| Version | Change  |
|---------|---|
| v10     | Added /Opportunities/favorites POST endpoint. |

---

Last Modified: 2021-02-17 02:44:13

## /<module>/file/vcard\_import POST

### Overview

Imports a person record from a vcard.

### Request Arguments

| Name   | Type   | Description   | Required |
|--------|--------|---|----------|
| format | String | The data format. Currently accepts 'sugar-html-json'. | True     |
| module | String | The name of the module to import the vcard to.        | True     |
| file   | String | The vcard contents.                                   | True     |

### Request

```
{  
  "format": "sugar-html-json",  
  "module": "Contacts"  
  "file": "@\path\to\ExampleContact.vcf"  
}
```

### Response Arguments

| Name | Type   | Description                   |
|------|--------|-------------------------------|
| file | String | The id of the imported vcard. |

---

## Response

```
{
  "file": "2c9e5c09-6824-0d14-f5cb-5130321ac3cf"
}
```

## Change Log

| Version | Change   |
|---------|--|
| v10     | Added /<module>/file/vcard_import POST endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /<module>/filter GET

### Overview

Lists filtered records.

### Summary

This endpoint will return a set of records filtered by an expression. The filter can be applied to multiple fields and have multiple and/or conditions in it. Alternatively, you may use an existing filter by specifying its id. If both a filter definition and a filter id are passed, the two filters will be joined with an AND. Care will need to be taken to make sure that any filters used have appropriate indexes on the server side otherwise the runtime of the endpoint will be very long. Related fields can be searched by specifying the field name as: "link\_name.remote\_field", so if you wished to search the Accounts module by a related member account you would use "members.sic\_code".

---

## Request Arguments

| Name      | Type   | Description   | Required |
|-----------|--------|---|----------|
| filter    | String | <p>The filter expression. Filter expressions are explained below. Note that JSON-encoded filters can be specified as query parameters in one of two ways for GET requests:</p> <ol style="list-style-type: none"><li>1. By specifying individual filter arguments as distinct parameters. Example: filter[0][id]=1</li><li>2. By specifying the whole filter as a single JSON-encoded string. Note that this syntax is currently not supported on certain modules. Example: filter=[{"id": "1"}].</li></ol> | False    |
| filter_id | String | Identifier for a preexisting filter. If filter is also set, the two filters are   | False    |

| Name    | Type    | Description   | Required |
|---------|---------|---|----------|
|         |         | joined with an AND.   |          |
| max_num | Integer | A maximum number of records to return. Default is 20.   | False    |
| offset  | Integer | The number of records to skip over before records are returned. Default is 0.   | False    |
| fields  | String  | <p>Comma delimited list of fields to return. Each field may be represented either by string, or by map containing field name and additional field parameters (applicable to link and collection fields). The fields id and date_modified will always be returned.</p> <p>Example: name,account_type,description,{"name":"opportunities","fields":["id","name","sales_status"],"order_by":"date_closed:desc"}</p> <p>For more details on additional field parameters, see <a href="#">Relate API</a> and <a href="#">Collection API</a>.</p> | False    |
| view    | String  | Instead of defining the fields argument, the view argument can be used instead. The   | False    |

| Name       | Type    | Description   | Required |
|------------|---------|---|----------|
|            |         | field list is constructed at the server side based on the view definition which is requested. This argument can be used in combination with the fields argument. Common views are "record" and "list".<br>Example: record |          |
| order_by   | String  | How to sort the returned records, in a comma delimited list with the direction appended to the column name after a colon.<br>Example: name:DESC,account_type:DESC,date_modified:ASC                                       | False    |
| q          | String  | A search expression, will search on this module. Cannot be used at the same time as a filter expression or id.  | False    |
| deleted    | Boolean | Boolean to show deleted records in the result set.  | False    |
| nulls_last | Boolean | Boolean to return records with null values in order_by fields last in the result set.   | False    |



---

## Filter Expressions

There are four types of filters:

### Basic

This will filter the results by checking the field "name" for value "Nelson Inc". This will only find exact matches.

### Example

```
{
  "filter": [
    {
      "name": "Nelson Inc"
    }
  ]
}
```

### Full

This expression allows you to specify what operation you want to use for filtering on the field. In the example you would match any record where the field "name" starts with the value "Nelson".

### Example

```
{
  "filter": [
    {
      "name": {
        "$starts": "Nelson"
      }
    }
  ]
}
```

Below is a list of operation types:

| Operation    | Description   |
|--------------|---|
| \$equals     | Performs an exact match on that field.  |
| \$not_equals | Performs an exact match on that field.  |
| \$not_equals | Matches on non-matching values.   |
| \$starts     | Matches on anything that starts with the value.   |
| \$ends       | Matches anything that ends with the value.  |
| \$contains   | Matches anything that contains the value  |
| \$in         | Finds anything where field matches one of the values as specified as an array.          |
| \$not_in     | Finds anything where field does not matches any of the values as specified as an array. |
| \$is_null    | Checks if the field is null. This operation does not need a value specified.            |
| \$not_null   | Checks if the field is not null. This operation does not need a value specified.        |
| \$lt         | Matches when the field is less than the value.  |
| \$lte        | Matches when the field is less than or equal to the value.                              |
| \$gt         | Matches when the field is greater than the value.                                       |
| \$gte        | Matches when the field is greater than or equal to the value.                           |

## Sub-expressions

This allows you to group filter expressions into or/and groupings. By default all expressions are and'ed together. The example expression would match if the field "name" was either "Nelson Inc" or "Nelson LLC". The only currently accepted sub-expression types are "\$and" and "\$or".

---

## Example

```
{
  "filter":[
    {
      "$or":[
        {
          "name":"Nelson Inc"
        },
        {
          "name":"Nelson LLC"
        }
      ]
    }
  ]
}
```

## Modules

There are two module expressions, they operate on modules instead of fields. The current module can be specified by either using the module name "\_this" or by leaving the module name as a blank string. The example expression would filter the records in the current module to only your favorites. The only currently accepted module expressions are "\$favorite" and "\$owner".

## Example

```
{
  "filter":[
    {
      "$favorite":"_this"
    }
  ]
}
```

## Response Arguments

| Name        | Type    | Description              |
|-------------|---------|--------------------------|
| next_offset | Integer | Displays the next offset |

| Name    | Type  | Description  |
|---------|-------|--|
|         |       | for retrieval of additional results. -1 will be returned when there are no more records. |
| records | Array | An array of results containing matched records.  |

## Response

```
{
  "next_offset": -1,
  "records": [
    {
      "id": "fa300a0e-0ad1-b322-9601-512d0983c19a",
      "name": "Dale Spivey",
      "date_modified": "2013-02-28T05:03:00+00:00",
      "description": "",
      "opportunities": [
        {
          _module: "Opportunities",
          "id": "b0701501-1fab-8ae7-3942-540da93f5017",
          "name": "360 Vacations - 228 Units",
          "date_modified": "2014-09-08T16:05:00+03:00",
          "sales_status": "New"
        }
      ],
      "_acl": {
        "fields": {
        }
      }
    }
  ],
  {
    "id": "95e17367-9b3d-0e26-22dc-512d0961fedf",
    "name": "Florence Haddock",
    "date_modified": "2013-02-26T19:12:00+00:00",
    "description": "",
    "opportunities": [
      {
        _module: "Opportunities"
        date_modified: "2014-09-08T16:05:00+03:00"
        id: "9ce7c088-8ee4-7cd3-18f1-540da944d4c0"
      }
    ]
  }
}
```

---

```
        name: "360 Vacations - 312 Units"
        sales_status: "New"
    },
],
"_acl": {
    "fields": {
    }
}
}
]
```

## Change Log

| Version | Change                               |
|---------|--------------------------------------|
| v10     | Added /<module>/filter GET endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /<module>/filter POST

### Overview

Lists filtered records.

### Summary

This endpoint will return a set of records filtered by an expression. The filter can be applied to multiple fields and have multiple and/or conditions in it. Alternatively, you may use an existing filter by specifying its id. If both a filter definition and a filter id are passed, the two filters will be joined with an AND. Care will need to be taken to make sure that any filters used have appropriate indexes on the server side otherwise the runtime of the endpoint will be very long. Related fields can be searched by specifying the field name as: "link\_name.remote\_field", so if you wished to search the Accounts module by a

---

related member account you would use "members.sic\_code".

## Request Arguments

| Name      | Type    | Description  | Required |
|-----------|---------|--|----------|
| filter    | String  | The filter expression. Filter expressions are explained below.   | False    |
| filter_id | String  | Identifier for a preexisting filter. If filter is also set, the two filters are joined with an AND.  | False    |
| max_num   | Integer | A maximum number of records to return. Default is 20.  | False    |
| offset    | Integer | The number of records to skip over before records are returned. Default is 0.  | False    |
| fields    | String  | Comma delimited list of fields to return. The field date_modified will always be returned. Example: name,account_type,description                                      | False    |
| view      | String  | Instead of defining the fields argument, the view argument can be used instead. The field list is constructed at the server side based on the view definition which is | False    |

| Name     | Type   | Description   | Required |
|----------|--------|---|----------|
|          |        | requested. This argument can be used in combination with the fields argument. Common views are "record" and "list".<br>Example: record  |          |
| order_by | String | How to sort the returned records, in a comma delimited list with the direction appended to the column name after a colon.<br>Example: name:DESC,account_type:DESC,date_modified:ASC | False    |

## Filter Expressions

There are four types of filters:

### Basic

This will filter the results by checking the field "name" for value "Nelson Inc". This will only find exact matches.

### Example

```
{
  "filter":[
    {
      "name":"Nelson Inc"
    }
  ]
}
```

---

## Full

This expression allows you to specify what operation you want to use for filtering on the field. In the example you would match any record where the field "name" starts with the value "Nelson".

## Example

```
{
  "filter": [
    {
      "name": {
        "$starts": "Nelson"
      }
    }
  ]
}
```

Below is a list of operation types:

| Operation    | Description   |
|--------------|---|
| \$equals     | Performs an exact match on that field.  |
| \$not_equals | Performs an exact match on that field.  |
| \$not_equals | Matches on non-matching values.   |
| \$starts     | Matches on anything that starts with the value.   |
| \$ends       | Matches anything that ends with the value.  |
| \$contains   | Matches anything that contains the value  |
| \$in         | Finds anything where field matches one of the values as specified as an array.          |
| \$not_in     | Finds anything where field does not matches any of the values as specified as an array. |
| \$is_null    | Checks if the field is null. This operation does not need a value specified.            |
| \$not_null   | Checks if the field is not null. This operation does not need a value                   |



| Operation | Description   |
|-----------|---|
|           | specified.  |
| \$lt      | Matches when the field is less than the value.                |
| \$lte     | Matches when the field is less than or equal to the value.    |
| \$gt      | Matches when the field is greater than the value.             |
| \$gte     | Matches when the field is greater than or equal to the value. |

## Sub-expressions

This allows you to group filter expressions into or/and groupings. By default all expressions are and'ed together. The example expression would match if the field "name" was either "Nelson Inc" or "Nelson LLC". The only currently accepted sub-expression types are "\$and" and "\$or".

### Example

```
{
  "filter": [
    {
      "$or": [
        {
          "name": "Nelson Inc"
        },
        {
          "name": "Nelson LLC"
        }
      ]
    }
  ]
}
```

## Modules

There are two module expressions, they operate on modules instead of fields. The

---

current module can be specified by either using the module name "\_this" or by leaving the module name as a blank string. The example expression would filter the records in the current module to only your favorites. The only currently accepted module expressions are "\$favorite" and "\$owner".

### Example

```
{
  "filter":[
    {
      "$favorite":"_this"
    }
  ]
}
```

## Response Arguments

| Name        | Type    | Description   |
|-------------|---------|---|
| next_offset | Integer | Displays the next offset for retrieval of additional results. -1 will be returned when there are no more records. |
| records     | Array   | An array of results containing matched records.   |

## Response

```
{
  "next_offset":-1,
  "records":[
    {
      "id":"fa300a0e-0ad1-b322-9601-512d0983c19a",
      "name":"Dale Spivey",
      "date_entered":"2013-02-26T19:12:00+00:00",
      "date_modified":"2013-02-28T05:03:00+00:00",
      "modified_user_id":"1",
      "modified_by_name":"Administrator",
```

---

```
"created_by": "1",
"created_by_name": "Administrator",
"description": "",
"img": "",
"deleted": false,
"assigned_user_id": "seed_sally_id",
"assigned_user_name": "Sally Bronsen",
"team_name": [
  {
    "id": "East",
    "name": "East",
    "name_2": "",
    "primary": false
  },
  {
    "id": 1,
    "name": "Global",
    "name_2": "",
    "primary": false
  },
  {
    "id": "West",
    "name": "West",
    "name_2": "",
    "primary": true
  }
],
"salutation": "",
"first_name": "Dale",
"last_name": "Spivey",
"full_name": "Dale Spivey",
"title": "VP Operations",
"linkedin": "",
"facebook": "",
"twitter": "",
"googleplus": "",
"department": "",
"do_not_call": false,
"phone_home": "(523) 825-4311",
"email": [
  {
    "email_address": "sugar.dev.sugar@example.co.jp",
    "opt_out": "0",
    "invalid_email": "0",
    "primary_address": "1"
  },
  {

```

---

```
    {
      "email_address": "the.support@example.biz",
      "opt_out": "0",
      "invalid_email": "0",
      "primary_address": "0"
    }
  ],
  "phone_mobile": "(373) 861-0757",
  "phone_work": "(212) 542-9596",
  "phone_other": "",
  "phone_fax": "",
  "email1": "sugar.dev.sugar@example.co.jp",
  "email2": "the.support@example.biz",
  "invalid_email": false,
  "email_opt_out": false,
  "primary_address_street": "345 Sugar Blvd.",
  "primary_address_street_2": "",
  "primary_address_street_3": "",
  "primary_address_city": "Denver",
  "primary_address_state": "CA",
  "primary_address_postalcode": "87261",
  "primary_address_country": "USA",
  "alt_address_street": "",
  "alt_address_street_2": "",
  "alt_address_street_3": "",
  "alt_address_city": "",
  "alt_address_state": "",
  "alt_address_postalcode": "",
  "alt_address_country": "",
  "assistant": "",
  "assistant_phone": "",
  "picture": "",
  "email_and_name1": "",
  "lead_source": "Campaign",
  "account_name": "Smallville Resources Inc",
  "account_id": "d5db6292-5c24-eb61-e202-512d09f0134e",
  "opportunity_role_fields": "",
  "opportunity_role_id": "",
  "opportunity_role": "",
  "reports_to_id": "",
  "report_to_name": "",
  "portal_name": "DaleSpivey97",
  "portal_active": true,
  "portal_password": "$1$yKMAONHM$Y5S.8CY.WZCZCwfGD1a1Q\\/",
  "portal_password1": "",
  "portal_app": ""
```

---

```
"preferred_language":"en_us",
"campaign_id":"",
"campaign_name":"",
"c_accept_status_fields":"",
"m_accept_status_fields":"",
"accept_status_id":"",
"accept_status_name":"",
"sync_contact":"",
"my_favorite":false,
"_acl":{
  "fields":{
    }
  }
},
{
  "id":"95e17367-9b3d-0e26-22dc-512d0961fedf",
  "name":"Florence Haddock",
  "date_entered":"2013-02-26T19:12:00+00:00",
  "date_modified":"2013-02-26T19:12:00+00:00",
  "modified_user_id":"1",
  "modified_by_name":"Administrator",
  "created_by":"1",
  "created_by_name":"Administrator",
  "description":"",
  "img":"",
  "deleted":false,
  "assigned_user_id":"seed_sally_id",
  "assigned_user_name":"Sally Bronsen",
  "team_name":[
    {
      "id":"East",
      "name":"East",
      "name_2":"",
      "primary":false
    },
    {
      "id":1,
      "name":"Global",
      "name_2":"",
      "primary":false
    },
    {
      "id":"West",
      "name":"West",
      "name_2":"",
```

---

```
        "primary":true
    }
],
"salutation":"","
"first_name":"Florence",
"last_name":"Haddock",
"full_name":"Florence Haddock",
"title":"Director Sales",
"linkedin":"","
"facebook":"","
"twitter":"","
"googleplus":"","
"department":"","
"do_not_call":false,
"phone_home":"(729) 845-3137",
"email":[
    {
        "email_address":"dev.vegan@example.de",
        "opt_out":"1",
        "invalid_email":"0",
        "primary_address":"0"
    },
    {
        "email_address":"section71@example.it",
        "opt_out":"0",
        "invalid_email":"0",
        "primary_address":"1"
    }
],
"phone_mobile":"(246) 233-1382",
"phone_work":"(565) 696-6981",
"phone_other":"","
"phone_fax":"","
"email1":"section71@example.it",
"email2":"dev.vegan@example.de",
"invalid_email":false,
"email_opt_out":false,
"primary_address_street":"111 Silicon Valley Road",
"primary_address_street_2":"","
"primary_address_street_3":"","
"primary_address_city":"Denver",
"primary_address_state":"CA",
"primary_address_postalcode":"79900",
"primary_address_country":"USA",
"alt_address_street":"","
"alt_address_street_2":"","
```

```

"alt_address_street_3":"","
"alt_address_city":"","
"alt_address_state":"","
"alt_address_postalcode":"","
"alt_address_country":"","
"assistant":"","
"assistant_phone":"","
"picture":"","
"email_and_name1":"","
"lead_source":"Support Portal User Registration",
"account_name":"Smallville Resources Inc",
"account_id":"d5db6292-5c24-eb61-e202-512d09f0134e",
"opportunity_role_fields":"","
"opportunity_role_id":"","
"opportunity_role":"","
"reports_to_id":"","
"report_to_name":"","
"portal_name":"FlorenceHaddock169",
"portal_active":true,
"portal_password":"$1$NWFhTbK6$JF9BCGSqL\NCRbhueX5ia0",
"portal_password1":"","
"portal_app":"","
"preferred_language":"en_us",
"campaign_id":"","
"campaign_name":"","
"c_accept_status_fields":"","
"m_accept_status_fields":"","
"accept_status_id":"","
"accept_status_name":"","
"sync_contact":"","
"my_favorite":false,
"_acl":{
  "fields":{
    }
  }
}
]
}

```

## Change Log

| Version | Change |
|---------|--------|
|         |        |

Last Modified: 2021-02-17 02:44:13

## /<module>/filter/count GET

### Overview

Lists filtered records.

### Summary

This endpoint will return a set of records filtered by an expression. The filter can be applied to multiple fields and have multiple and/or conditions in it. Alternatively, you may use an existing filter by specifying its id. If both a filter definition and a filter id are passed, the two filters will be joined with an AND. Care will need to be taken to make sure that any filters used have appropriate indexes on the server side otherwise the runtime of the endpoint will be very long. Related fields can be searched by specifying the field name as: "link\_name.remote\_field", so if you wished to search the Accounts module by a related member account you would use "members.sic\_code".

### Request Arguments

| Name      | Type   | Description   | Required |
|-----------|--------|---|----------|
| filter    | String | The filter expression. Filter expressions are explained below.                                      | False    |
| filter_id | String | Identifier for a preexisting filter. If filter is also set, the two filters are joined with an AND. | False    |



| Name     | Type    | Description  | Required |
|----------|---------|--|----------|
| max_num  | Integer | A maximum number of records to return. Default is 20.  | False    |
| offset   | Integer | The number of records to skip over before records are returned. Default is 0.  | False    |
| fields   | String  | Comma delimited list of fields to return. The field date_modified will always be returned. Example: name,account_type,description  | False    |
| view     | String  | Instead of defining the fields argument, the view argument can be used instead. The field list is constructed at the server side based on the view definition which is requested. This argument can be used in combination with the fields argument. Common views are "record" and "list". Example: record | False    |
| order_by | String  | How to sort the returned records, in a comma delimited list with the direction appended to the column name after   | False    |

---

| Name | Type | Description  | Required |
|------|------|--|----------|
|      |      | a colon.<br>Example: name:DESC,account_type:DESC,date_modified:ASC |          |

## Filter Expressions

There are four types of filters:

### Basic

This will filter the results by checking the field "name" for value "Nelson Inc". This will only find exact matches.

#### Example

```
{
  "filter": [
    {
      "name": "Nelson Inc"
    }
  ]
}
```

### Full

This expression allows you to specify what operation you want to use for filtering on the field. In the example you would match any record where the field "name" starts with the value "Nelson".

#### Example

```
{
  "filter": [
    {
      "name": {
        "$starts": "Nelson"
      }
    }
  ]
}
```

```

    }
  ]
}

```

Below is a list of operation types:

| Operation    | Description   |
|--------------|---|
| \$equals     | Performs an exact match on that field.  |
| \$not_equals | Performs an exact match on that field.  |
| \$not_equals | Matches on non-matching values.   |
| \$starts     | Matches on anything that starts with the value.   |
| \$ends       | Matches anything that ends with the value.  |
| \$contains   | Matches anything that contains the value  |
| \$in         | Finds anything where field matches one of the values as specified as an array.          |
| \$not_in     | Finds anything where field does not matches any of the values as specified as an array. |
| \$is_null    | Checks if the field is null. This operation does not need a value specified.            |
| \$not_null   | Checks if the field is not null. This operation does not need a value specified.        |
| \$lt         | Matches when the field is less than the value.  |
| \$lte        | Matches when the field is less than or equal to the value.                              |
| \$gt         | Matches when the field is greater than the value.                                       |
| \$gte        | Matches when the field is greater than or equal to the value.                           |

---

## Sub-expressions

This allows you to group filter expressions into or/and groupings. By default all expressions are and'ed together. The example expression would match if the field "name" was either "Nelson Inc" or "Nelson LLC". The only currently accepted sub-expression types are "\$and" and "\$or".

### Example

```
{
  "filter": [
    {
      "$or": [
        {
          "name": "Nelson Inc"
        },
        {
          "name": "Nelson LLC"
        }
      ]
    }
  ]
}
```

## Modules

There are two module expressions, they operate on modules instead of fields. The current module can be specified by either using the module name "\_this" or by leaving the module name as a blank string. The example expression would filter the records in the current module to only your favorites. The only currently accepted module expressions are "\$favorite" and "\$owner".

### Example

```
{
  "filter": [
    {
      "$favorite": "_this"
    }
  ]
}
```

---

## Response Arguments

| Name        | Type    | Description   |
|-------------|---------|---|
| next_offset | Integer | Displays the next offset for retrieval of additional results. -1 will be returned when there are no more records. |
| records     | Array   | An array of results containing matched records.   |

## Response

```
{
  "next_offset":-1,
  "records":[
    {
      "id":"fa300a0e-0ad1-b322-9601-512d0983c19a",
      "name":"Dale Spivey",
      "date_entered":"2013-02-26T19:12:00+00:00",
      "date_modified":"2013-02-28T05:03:00+00:00",
      "modified_user_id":"1",
      "modified_by_name":"Administrator",
      "created_by":"1",
      "created_by_name":"Administrator",
      "description":"",
      "img":"",
      "deleted":false,
      "assigned_user_id":"seed_sally_id",
      "assigned_user_name":"Sally Bronsen",
      "team_name":[
        {
          "id":"East",
          "name":"East",
          "name_2":"",
          "primary":false
        },
        {
          "id":1,
```

---

```
        "name": "Global",
        "name_2": "",
        "primary": false
    },
    {
        "id": "West",
        "name": "West",
        "name_2": "",
        "primary": true
    }
],
"salutation": "",
"first_name": "Dale",
"last_name": "Spivey",
"full_name": "Dale Spivey",
"title": "VP Operations",
"linkedin": "",
"facebook": "",
"twitter": "",
"googleplus": "",
"department": "",
"do_not_call": false,
"phone_home": "(523) 825-4311",
"email": [
    {
        "email_address": "sugar.dev.sugar@example.co.jp",
        "opt_out": "0",
        "invalid_email": "0",
        "primary_address": "1"
    },
    {
        "email_address": "the.support@example.biz",
        "opt_out": "0",
        "invalid_email": "0",
        "primary_address": "0"
    }
],
"phone_mobile": "(373) 861-0757",
"phone_work": "(212) 542-9596",
"phone_other": "",
"phone_fax": "",
"email1": "sugar.dev.sugar@example.co.jp",
"email2": "the.support@example.biz",
"invalid_email": false,
"email_opt_out": false,
"primary_address_street": "345 Sugar Blvd.",
```

---

```
"primary_address_street_2":"","  
"primary_address_street_3":"","  
"primary_address_city":"Denver",  
"primary_address_state":"CA",  
"primary_address_postalcode":"87261",  
"primary_address_country":"USA",  
"alt_address_street":"","  
"alt_address_street_2":"","  
"alt_address_street_3":"","  
"alt_address_city":"","  
"alt_address_state":"","  
"alt_address_postalcode":"","  
"alt_address_country":"","  
"assistant":"","  
"assistant_phone":"","  
"picture":"","  
"email_and_name1":"","  
"lead_source":"Campaign",  
"account_name":"Smallville Resources Inc",  
"account_id":"d5db6292-5c24-eb61-e202-512d09f0134e",  
"opportunity_role_fields":"","  
"opportunity_role_id":"","  
"opportunity_role":"","  
"reports_to_id":"","  
"report_to_name":"","  
"portal_name":"DaleSpivey97",  
"portal_active":true,  
"portal_password":"$1$yKMAONHM$Y5S.8CY.WZCZCwfGD1a1Q\/",  
"portal_password1":"","  
"portal_app":"","  
"preferred_language":"en_us",  
"campaign_id":"","  
"campaign_name":"","  
"c_accept_status_fields":"","  
"m_accept_status_fields":"","  
"accept_status_id":"","  
"accept_status_name":"","  
"sync_contact":"","  
"my_favorite":false,  
"_acl":{  
  "fields":{  
  
  }  
}  
,  
{
```

---

```
"id": "95e17367-9b3d-0e26-22dc-512d0961fedf",
"name": "Florence Haddock",
"date_entered": "2013-02-26T19:12:00+00:00",
"date_modified": "2013-02-26T19:12:00+00:00",
"modified_user_id": "1",
"modified_by_name": "Administrator",
"created_by": "1",
"created_by_name": "Administrator",
"description": "",
"img": "",
"deleted": false,
"assigned_user_id": "seed_sally_id",
"assigned_user_name": "Sally Bronsen",
"team_name": [
  {
    "id": "East",
    "name": "East",
    "name_2": "",
    "primary": false
  },
  {
    "id": 1,
    "name": "Global",
    "name_2": "",
    "primary": false
  },
  {
    "id": "West",
    "name": "West",
    "name_2": "",
    "primary": true
  }
],
"salutation": "",
"first_name": "Florence",
"last_name": "Haddock",
"full_name": "Florence Haddock",
"title": "Director Sales",
"linkedin": "",
"facebook": "",
"twitter": "",
"googleplus": "",
"department": "",
"do_not_call": false,
"phone_home": "(729) 845-3137",
"email": [
```



---

```
{
  "email_address": "dev.vegan@example.de",
  "opt_out": "1",
  "invalid_email": "0",
  "primary_address": "0"
},
{
  "email_address": "section71@example.it",
  "opt_out": "0",
  "invalid_email": "0",
  "primary_address": "1"
}
],
"phone_mobile": "(246) 233-1382",
"phone_work": "(565) 696-6981",
"phone_other": "",
"phone_fax": "",
"email1": "section71@example.it",
"email2": "dev.vegan@example.de",
"invalid_email": false,
"email_opt_out": false,
"primary_address_street": "111 Silicon Valley Road",
"primary_address_street_2": "",
"primary_address_street_3": "",
"primary_address_city": "Denver",
"primary_address_state": "CA",
"primary_address_postalcode": "79900",
"primary_address_country": "USA",
"alt_address_street": "",
"alt_address_street_2": "",
"alt_address_street_3": "",
"alt_address_city": "",
"alt_address_state": "",
"alt_address_postalcode": "",
"alt_address_country": "",
"assistant": "",
"assistant_phone": "",
"picture": "",
"email_and_name1": "",
"lead_source": "Support Portal User Registration",
"account_name": "Smallville Resources Inc",
"account_id": "d5db6292-5c24-eb61-e202-512d09f0134e",
"opportunity_role_fields": "",
"opportunity_role_id": "",
"opportunity_role": "",
"reports_to_id": "",
```

---

```
"report_to_name": "",
"portal_name": "FlorenceHaddock169",
"portal_active": true,
"portal_password": "$1$nWFhTbK6$JF9BCGSqL\NcrbhueX5ia0",
"portal_password1": "",
"portal_app": "",
"preferred_language": "en_us",
"campaign_id": "",
"campaign_name": "",
"c_accept_status_fields": "",
"m_accept_status_fields": "",
"accept_status_id": "",
"accept_status_name": "",
"sync_contact": "",
"my_favorite": false,
_acl": {
  "fields": {
    }
  }
}
```

## Change Log

| Version | Change                                |
|---------|---------------------------------------|
| v10     | Added /<module>/filter POST endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /<module>/filter/count POST

### Overview

Lists filtered records.

---

## Summary

This endpoint will return a set of records filtered by an expression. The filter can be applied to multiple fields and have multiple and/or conditions in it. Alternatively, you may use an existing filter by specifying its id. If both a filter definition and a filter id are passed, the two filters will be joined with an AND. Care will need to be taken to make sure that any filters used have appropriate indexes on the server side otherwise the runtime of the endpoint will be very long. Related fields can be searched by specifying the field name as: "link\_name.remote\_field", so if you wished to search the Accounts module by a related member account you would use "members.sic\_code".

## Request Arguments

| Name      | Type    | Description   | Required |
|-----------|---------|---|----------|
| filter    | String  | The filter expression. Filter expressions are explained below.  | False    |
| filter_id | String  | Identifier for a preexisting filter. If filter is also set, the two filters are joined with an AND.                               | False    |
| max_num   | Integer | A maximum number of records to return. Default is 20.   | False    |
| offset    | Integer | The number of records to skip over before records are returned. Default is 0.   | False    |
| fields    | String  | Comma delimited list of fields to return. The field date_modified will always be returned. Example: name,account_type,description | False    |

| Name     | Type   | Description   | Required |
|----------|--------|---|----------|
| view     | String | Instead of defining the fields argument, the view argument can be used instead. The field list is constructed at the server side based on the view definition which is requested. This argument can be used in combination with the fields argument. Common views are "record" and "list".<br>Example: record | False    |
| order_by | String | How to sort the returned records, in a comma delimited list with the direction appended to the column name after a colon.<br>Example: name:DESC,account_type:DESC,date_modified:ASC   | False    |

## Filter Expressions

There are four types of filters:

### Basic

This will filter the results by checking the field "name" for value "Nelson Inc". This will only find exact matches.

---

## Example

```
{
  "filter": [
    {
      "name": "Nelson Inc"
    }
  ]
}
```

## Full

This expression allows you to specify what operation you want to use for filtering on the field. In the example you would match any record where the field "name" starts with the value "Nelson".

## Example

```
{
  "filter": [
    {
      "name": {
        "$starts": "Nelson"
      }
    }
  ]
}
```

Below is a list of operation types:

| Operation                 | Description                                     |
|---------------------------|---|
| <code>\$equals</code>     | Performs an exact match on that field.          |
| <code>\$not_equals</code> | Performs an exact match on that field.          |
| <code>\$not_equals</code> | Matches on non-matching values.                 |
| <code>\$starts</code>     | Matches on anything that starts with the value. |
| <code>\$ends</code>       | Matches anything that ends with the value.      |
| <code>\$contains</code>   | Matches anything that contains the value        |

| Operation  | Description   |
|------------|---|
| \$in       | Finds anything where field matches one of the values as specified as an array.          |
| \$not_in   | Finds anything where field does not matches any of the values as specified as an array. |
| \$is_null  | Checks if the field is null. This operation does not need a value specified.            |
| \$not_null | Checks if the field is not null. This operation does not need a value specified.        |
| \$lt       | Matches when the field is less than the value.  |
| \$lte      | Matches when the field is less than or equal to the value.                              |
| \$gt       | Matches when the field is greater than the value.                                       |
| \$gte      | Matches when the field is greater than or equal to the value.                           |

## Sub-expressions

This allows you to group filter expressions into or/and groupings. By default all expressions are and'ed together. The example expression would match if the field "name" was either "Nelson Inc" or "Nelson LLC". The only currently accepted sub-expression types are "\$and" and "\$or".

### Example

```
{
  "filter": [
    {
      "$or": [
        {
          "name": "Nelson Inc"
        },
        {
          "name": "Nelson LLC"
        }
      ]
    }
  ]
}
```

---

```
    }
  ]
}
}
```

## Modules

There are two module expressions, they operate on modules instead of fields. The current module can be specified by either using the module name "\_this" or by leaving the module name as a blank string. The example expression would filter the records in the current module to only your favorites. The only currently accepted module expressions are "\$favorite" and "\$owner".

### Example

```
{
  "filter":[
    {
      "$favorite":"_this"
    }
  ]
}
```

## Response Arguments

| Name        | Type    | Description   |
|-------------|---------|---|
| next_offset | Integer | Displays the next offset for retrieval of additional results. -1 will be returned when there are no more records. |
| records     | Array   | An array of results containing matched records.   |

---

## Response

```
{
  "next_offset":-1,
  "records":[
    {
      "id":"fa300a0e-0ad1-b322-9601-512d0983c19a",
      "name":"Dale Spivey",
      "date_entered":"2013-02-26T19:12:00+00:00",
      "date_modified":"2013-02-28T05:03:00+00:00",
      "modified_user_id":"1",
      "modified_by_name":"Administrator",
      "created_by":"1",
      "created_by_name":"Administrator",
      "description":"",
      "img":"",
      "deleted":false,
      "assigned_user_id":"seed_sally_id",
      "assigned_user_name":"Sally Bronsen",
      "team_name":[
        {
          "id":"East",
          "name":"East",
          "name_2":"",
          "primary":false
        },
        {
          "id":1,
          "name":"Global",
          "name_2":"",
          "primary":false
        },
        {
          "id":"West",
          "name":"West",
          "name_2":"",
          "primary":true
        }
      ],
      "salutation":"",
      "first_name":"Dale",
      "last_name":"Spivey",
      "full_name":"Dale Spivey",
      "title":"VP Operations",
      "linkedin":"",
      "facebook":""
    }
  ]
}
```



---

```
"twitter":"","  
"googleplus":"","  
"department":"","  
"do_not_call":false,  
"phone_home":"(523) 825-4311",  
"email":[  
  {  
    "email_address":"sugar.dev.sugar@example.co.jp",  
    "opt_out":"0",  
    "invalid_email":"0",  
    "primary_address":"1"  
  },  
  {  
    "email_address":"the.support@example.biz",  
    "opt_out":"0",  
    "invalid_email":"0",  
    "primary_address":"0"  
  }  
],  
"phone_mobile":"(373) 861-0757",  
"phone_work":"(212) 542-9596",  
"phone_other":"","  
"phone_fax":"","  
"email1":"sugar.dev.sugar@example.co.jp",  
"email2":"the.support@example.biz",  
"invalid_email":false,  
"email_opt_out":false,  
"primary_address_street":"345 Sugar Blvd.",  
"primary_address_street_2":"","  
"primary_address_street_3":"","  
"primary_address_city":"Denver",  
"primary_address_state":"CA",  
"primary_address_postalcode":"87261",  
"primary_address_country":"USA",  
"alt_address_street":"","  
"alt_address_street_2":"","  
"alt_address_street_3":"","  
"alt_address_city":"","  
"alt_address_state":"","  
"alt_address_postalcode":"","  
"alt_address_country":"","  
"assistant":"","  
"assistant_phone":"","  
"picture":"","  
"email_and_name1":"","  
"lead_source":"Campaign",
```

---

```
"account_name": "Smallville Resources Inc",
"account_id": "d5db6292-5c24-eb61-e202-512d09f0134e",
"opportunity_role_fields": "",
"opportunity_role_id": "",
"opportunity_role": "",
"reports_to_id": "",
"report_to_name": "",
"portal_name": "DaleSpivey97",
"portal_active": true,
"portal_password": "$1$yKMAONHM$Y5S.8CY.WZCZCwfGD1a1Q\/",
"portal_password1": "",
"portal_app": "",
"preferred_language": "en_us",
"campaign_id": "",
"campaign_name": "",
"c_accept_status_fields": "",
"m_accept_status_fields": "",
"accept_status_id": "",
"accept_status_name": "",
"sync_contact": "",
"my_favorite": false,
"_acl": {
  "fields": {
    }
  }
},
{
  "id": "95e17367-9b3d-0e26-22dc-512d0961fedf",
  "name": "Florence Haddock",
  "date_entered": "2013-02-26T19:12:00+00:00",
  "date_modified": "2013-02-26T19:12:00+00:00",
  "modified_user_id": "1",
  "modified_by_name": "Administrator",
  "created_by": "1",
  "created_by_name": "Administrator",
  "description": "",
  "img": "",
  "deleted": false,
  "assigned_user_id": "seed_sally_id",
  "assigned_user_name": "Sally Bronsen",
  "team_name": [
    {
      "id": "East",
      "name": "East",
      "name_2": ""
    }
  ]
}
```

---

```
        "primary":false
    },
    {
        "id":1,
        "name":"Global",
        "name_2":"",
        "primary":false
    },
    {
        "id":"West",
        "name":"West",
        "name_2":"",
        "primary":true
    }
],
"salutation":"",
"first_name":"Florence",
"last_name":"Haddock",
"full_name":"Florence Haddock",
"title":"Director Sales",
"linkedin":"",
"facebook":"",
"twitter":"",
"googleplus":"",
"department":"",
"do_not_call":false,
"phone_home":"(729) 845-3137",
"email":[
    {
        "email_address":"dev.vegan@example.de",
        "opt_out":"1",
        "invalid_email":"0",
        "primary_address":"0"
    },
    {
        "email_address":"section71@example.it",
        "opt_out":"0",
        "invalid_email":"0",
        "primary_address":"1"
    }
],
"phone_mobile":"(246) 233-1382",
"phone_work":"(565) 696-6981",
"phone_other":"",
"phone_fax":"",
"email1":"section71@example.it",
```

---

```
"email2": "dev.vegan@example.de",
"invalid_email": false,
"email_opt_out": false,
"primary_address_street": "111 Silicon Valley Road",
"primary_address_street_2": "",
"primary_address_street_3": "",
"primary_address_city": "Denver",
"primary_address_state": "CA",
"primary_address_postalcode": "79900",
"primary_address_country": "USA",
"alt_address_street": "",
"alt_address_street_2": "",
"alt_address_street_3": "",
"alt_address_city": "",
"alt_address_state": "",
"alt_address_postalcode": "",
"alt_address_country": "",
"assistant": "",
"assistant_phone": "",
"picture": "",
"email_and_name1": "",
"lead_source": "Support Portal User Registration",
"account_name": "Smallville Resources Inc",
"account_id": "d5db6292-5c24-eb61-e202-512d09f0134e",
"opportunity_role_fields": "",
"opportunity_role_id": "",
"opportunity_role": "",
"reports_to_id": "",
"report_to_name": "",
"portal_name": "FlorenceHaddock169",
"portal_active": true,
"portal_password": "$1$nwFhTbK6$JF9BCGSqL\NCRbhueX5ia0",
"portal_password1": "",
"portal_app": "",
"preferred_language": "en_us",
"campaign_id": "",
"campaign_name": "",
"c_accept_status_fields": "",
"m_accept_status_fields": "",
"accept_status_id": "",
"accept_status_name": "",
"sync_contact": "",
"my_favorite": false,
"_acl": {
  "fields": {
```

```
}
  }
}
]
```

## Change Log

| Version | Change                                |
|---------|---------------------------------------|
| v10     | Added /<module>/filter POST endpoint. |

Last Modified: 2021-02-17 02:44:13

## /<module>/globalsearch GET

### Overview

Global search

### Summary

This endpoint exposes the global search capability using solely the Elasticsearch backend as an alternative to the /search endpoint. This endpoint can be used with a long list of request arguments. Instead of using GET request arguments, all described arguments can be used inside a JSON encoded request body using a the GET request. If your client has no support for GET requests with a body, the POST method can be used as an alternative.

### Request Arguments

| Name | Type   | Description                                  | Required |
|------|--------|--|----------|
| q    | String | The search expression.<br>Multiple terms can | False    |

| Name        | Type    | Description  | Required |
|-------------|---------|--|----------|
|             |         | <p>be specified at once. All enabled fields will be searched in. The results are ordered by relevance which is based on a multitude of settings based on token counts, hit ratio, (weighted) boost values and type of field. Currently no operators are supported in the search expression itself. By refining the search expression more relevant results will be returned as top results. If no search expression is given results are returned based on last modified date.</p> |          |
| module_list | String  | <p>Comma delimited list of modules to search. If omitted, all search enabled modules will be queried. Note that when consuming the endpoint /:module/globalsearch that this parameter is ignored.<br/>Example:<br/>Accounts,Contacts</p>   | False    |
| max_num     | Integer | <p>A maximum number of records to return. Default is 20.</p>   | False    |

| Name       | Type    | Description  | Required |
|------------|---------|--|----------|
| offset     | Integer | The number of records to skip over before records are returned. Default is 0.  | False    |
| highlights | Boolean | Wether or not to return highlighted results. Default is true.  | False    |
| sort       | Array   | Define the sort order of the results. By default the results are returned by relevance which is the preferred approach. Using this argument any search enabled field can be used to sort on. Keep in mind the not sorting by relevance may have a negative performance impact.<br>Example: {"date_modified":"desc","name":"asc"} | False    |

## Request

```
{
}
```

## Response Arguments

---

| Name        | Type    | Description   |
|-------------|---------|---|
| next_offset | Integer | Displays the next offset for retrieval of additional results. -1 will be returned when there are no more records. |
| records     | Array   | An array of results containing matched records.   |

## Response

```
{  
}
```

## Change Log

| Version | Change   |
|---------|--|
| v10     | Added /globalsearch GET/POST endpoint.         |
| v10     | Added /:module/globalsearch GET/POST endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /<module>/globalsearch POST

### Overview

Global search



---

## Summary

This endpoint exposes the global search capability using solely the Elasticsearch backend as an alternative to the /search endpoint. This endpoint can be used with a long list of request arguments. Instead of using GET request arguments, all described arguments can be used inside a JSON encoded request body using a the GET request. If your client has no support for GET requests with a body, the POST method can be used as an alternative.

## Request Arguments

| Name        | Type   | Description   | Required |
|-------------|--------|---|----------|
| q           | String | The search expression. Multiple terms can be specified at once. All enabled fields will be searched in. The results are ordered by relevance which is based on a multitude of settings based on token counts, hit ratio, (weighted) boost values and type of field. Currently no operators are supported in the search expression itself. By refining the search expression more relevant results will be returned as top results. If no search expression is given results are returned based on last modified date. | False    |
| module_list | String | Comma delimited list of modules to  | False    |

| Name       | Type    | Description  | Required |
|------------|---------|--|----------|
|            |         | search. If omitted, all search enabled modules will be queried. Note that when consuming the endpoint <code>/:module/globalsearch</code> that this parameter is ignored.<br>Example: Accounts, Contacts  |          |
| max_num    | Integer | A maximum number of records to return. Default is 20.  | False    |
| offset     | Integer | The number of records to skip over before records are returned. Default is 0.  | False    |
| highlights | Boolean | Whether or not to return highlighted results. Default is true.   | False    |
| sort       | Array   | Define the sort order of the results. By default the results are returned by relevance which is the preferred approach. Using this argument any search enabled field can be used to sort on. Keep in mind the not sorting by relevance may have a negative performance impact.<br>Example: <code>{"date_m</code> | False    |

| Name | Type | Description                   | Required |
|------|------|-------------------------------|----------|
|      |      | odified":"desc","name":"asc"} |          |

## Request

```
{
}
```

## Response Arguments

| Name        | Type    | Description   |
|-------------|---------|---|
| next_offset | Integer | Displays the next offset for retrieval of additional results. -1 will be returned when there are no more records. |
| records     | Array   | An array of results containing matched records.   |

## Response

```
{
}
```

## Change Log

| Version | Change   |
|---------|--|
| v10     | Added /globalsearch GET/POST endpoint.         |
| v10     | Added /:module/globalsearch GET/POST endpoint. |

---

Last Modified: 2021-02-17 02:44:13

## **/<module>/insertafter/:target POST**

### **Overview**

Insert new node after target node.

### **Request Arguments**

| Name   | Type   | Description  | Required |
|--------|--------|--|----------|
| module | String | The name of sugar module that contains a nested set data and implements the NestedSetInterface . | True     |
| target | String | The ID of record that will be used as target to insert new node after                            | True     |

### **Request**

```
{  
  "name" : "Children Node 1"  
}
```

### **Response Arguments**

This endpoint does not return any response arguments.

---

## Response

This endpoint returns a newly created bean

```
{ "my_favorite":false, "following":""," "id":"59fa8dd7-0f2c-4bfd-364f-54495f77fa3f",
"name":"Default title", "date_entered":"2014-10-23T23:03:22+03:00",
"date_modified":"2014-10-23T23:03:22+03:00", "modified_user_id":"1",
"modified_by_name":"Administrator", "created_by":"1",
"created_by_name":"Administrator", "doc_owner":""," "description":"","
"deleted":false, "source_id":""," "source_type":""," "source_meta":"","
"root":"be9b0c4a-8b78-1ffa-4f14-54481c2f6269", "lft":118, "rgt":119, "level":1,
"_acl":{"fields":{}}}, "_module":"Categories" }
```

## Change Log

| Version | Change   |
|---------|--|
| v10     | Added /<module>/insertafter/:target POST endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /<module>/insertbefore/:target POST

### Overview

Insert new node before target node.

### Request Arguments

| Name   | Type   | Description   | Required |
|--------|--------|---|----------|
| module | String | The name of sugar module that contains a nested set data and implements the NestedSetInterface. | True     |

| Name   | Type   | Description  | Required |
|--------|--------|--|----------|
| target | String | The ID of record that will be used as target to insert new node before | True     |

## Request

```
{
  "name" : "Children Node 1"
}
```

## Response Arguments

This endpoint does not return any response arguments.

## Response

This endpoint returns a newly created bean

```
{ "my_favorite":false, "following":""," "id":"59fa8dd7-0f2c-4bfd-364f-54495f77fa3f",
"name":"Default title", "date_entered":"2014-10-23T23:03:22+03:00",
"date_modified":"2014-10-23T23:03:22+03:00", "modified_user_id":"1",
"modified_by_name":"Administrator", "created_by":"1",
"created_by_name":"Administrator", "doc_owner":""," "description":"","
"deleted":false, "source_id":""," "source_type":""," "source_meta":"","
"root":"be9b0c4a-8b78-1ffa-4f14-54481c2f6269", "lft":118, "rgt":119, "level":1,
"_acl":{"fields":{}}}, "_module":"Categories" }
```

## Change Log

| Version | Change  |
|---------|---|
| v10     | Added /<module>/insertbefore/:target POST endpoint. |

Last Modified: 2021-02-17 02:44:13

---

## **/<module>/:lhs\_sync\_key\_field\_value/link\_by\_sync\_keys/:link\_name/:rhs\_sync\_key\_field\_value DELETE**

### **Overview**

Removes a relationship based on sync\_key. If both the LHS and RHS records can be found with the respective fields, and those records are related, then remove the relationship of the RHS record to the LHS record.

### **Request Arguments**

| <b>Name</b>              | <b>Type</b> | <b>Description</b>  | <b>Required</b> |
|--------------------------|-------------|---|-----------------|
| module                   | String      | The module the record belongs to                                    | True            |
| lhs_sync_key_field_value | String      | A unique ID for the LHS record identifying it in an external system | True            |
| link_name                | String      | A name for the link   | True            |
| rhs_sync_key_field_value | String      | A unique ID for the RHS record identifying it in an external system | True            |

### **Request**

/<module>/:lhs\_sync\_key\_field\_value/link\_by\_sync\_keys/:link\_name/:rhs\_sync\_key\_field\_value

### **Response Arguments**

| <b>Name</b>    | <b>Type</b> | <b>Description</b>    |
|----------------|-------------|-----------------------|
| record         | String      | The ID of the record. |
| related_record | String      | The ID of the related |

| Name | Type | Description |
|------|------|-------------|
|      |      | record.     |

## Response

### Status 200

```
{
  "record": "a0328573-a252-a27c-3530-4e4297d4c9e1",
  "related_record": "a0328573-bc54-a554-3530-4e4297d4c9e1"
}
```

### Status 422

```
{
  "error": "invalid_parameter",
  "error_message": "Could not find record with :xhs_sync_key_field_v
  alue in module: <module>"
}
```

## Change Log

| Version | Change   |
|---------|--|
| v11_10  | Added<br>/<module>/:lhs_sync_key_field_value/link_by_sync_keys/:link_name/:rhs_sync_key_field_value DELETE endpoint. |

Last Modified: 2021-02-17 02:44:13

**/<module>/:lhs\_sync\_key\_field\_value/link\_by\_sync\_keys/:link\_name/:rhs\_sync\_key\_field\_value POST**



---

## Overview

Creates a relationship based on `sync_key`. If both the LHS and RHS records can be found with the respective fields, then relate the RHS record to the LHS record.

## Request Arguments

| Name                                  | Type   | Description   | Required |
|---------------------------------------|--------|---|----------|
| <code>module</code>                   | String | The module the record belongs to                                    | True     |
| <code>lhs_sync_key_field_value</code> | String | A unique ID for the LHS record identifying it in an external system | True     |
| <code>link_name</code>                | String | A name for the link   | True     |
| <code>rhs_sync_key_field_value</code> | String | A unique ID for the RHS record identifying it in an external system | True     |

## Request

`/<module>/:lhs_sync_key_field_value/link_by_sync_keys/:link_name/:rhs_sync_key_field_value`

## Response Arguments

| Name                        | Type   | Description                   |
|-----------------------------|--------|-------------------------------|
| <code>record</code>         | String | The ID of the record.         |
| <code>related_record</code> | String | The ID of the related record. |

## Response

Status 200

---

```
{
  "record": "a0328573-a252-a27c-3530-4e4297d4c9e1",
  "related_record": "a0328573-bc54-a554-3530-4e4297d4c9e1"
}
```

## Status 422

```
{
  "error": "invalid_parameter",
  "error_message": "Could not find record with :xhs_sync_key_field_value in module: <module>"
}
```

## Change Log

| Version | Change   |
|---------|--|
| v11_10  | Added<br>/<module>/:lhs_sync_key_field_value/link_by_sync_keys/:link_name/:rhs_sync_key_field_value POST endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /<module>/prepend/:target POST

### Overview

Append new node to target node as first child.

### Request Arguments

| Name   | Type   | Description                                     | Required |
|--------|--------|---|----------|
| module | String | The name of sugar module that contains a nested | True     |

| Name   | Type   | Description  | Required |
|--------|--------|--|----------|
|        |        | set data and implements the NestedSetInterface .                 |          |
| target | String | The ID of record that will be used as target to prepend new node | True     |

## Request

```
{
  "name" : "Children Node 1"
}
```

## Response Arguments

This endpoint does not return any response arguments.

## Response

This endpoint returns a newly created record GUID

```
{ "my_favorite":false, "following":""," "id":"59fa8dd7-0f2c-4bfd-364f-54495f77fa3f",
"name":"Default title", "date_entered":"2014-10-23T23:03:22+03:00",
"date_modified":"2014-10-23T23:03:22+03:00", "modified_user_id":"1",
"modified_by_name":"Administrator", "created_by":"1",
"created_by_name":"Administrator", "doc_owner":""," "description":"","
"deleted":false, "source_id":""," "source_type":""," "source_meta":"","
"root":"be9b0c4a-8b78-1ffa-4f14-54481c2f6269", "lft":118, "rgt":119, "level":1,
"_acl":{"fields":{}}}, "_module":"Categories" }
```

## Change Log

| Version | Change   |
|---------|--|
| v10     | Added /<module>/prepend/:target POST endpoint. |

---

Last Modified: 2021-02-17 02:44:13

## **/<module>/recent-product GET**

### **Overview**

Opportunity Recent Product Help

### **Summary**

This endpoint retrieves top 10 recently used Quoted/Revenue Line Items based on the module to display them in the "Product Catalog Quick Picks" dashlet in the reverse chronological order.

### **Request Arguments**

None

### **Response Arguments**

NONE

### **Response**

```
{
  "next_offset":-1,
  "records":[
    {
      "id":"c1b4680e-c7f2-11e8-9380-7831c1c14620",
      "name":"Brain Gadget",
      "date_entered":"2018-10-04 16:28:37",
```

---

```
"date_modified":"2018-10-04 16:28:37",
"modified_user_id":"1",
"created_by":"1",
"description":null,
"deleted":0,
"type_id":null,
"manufacturer_id":"c03f952a-
c7f2-11e8-b410-7831c1c14620",
"category_id":"c1b3bf58-c7f2-11e8-92e7-7831c1c1462
0",
"mft_part_num":"Smallville Resources Inc 362299XYZ
987",
"vendor_part_num":null,
"date_cost_price":null,
"cost_price":"370.000000",
"discount_price":"854.370000",
"list_price":"863.000000",
"cost_usdollar":"370.000000",
"discount_usdollar":"854.370000",
"list_usdollar":"863.000000",
"status":"Available",
"tax_class":"Taxable",
"date_available":"2004-10-15",
"website":null,
"weight":"10.00",
```

---

```
    "qty_in_stock":106,
    "support_name":null,
    "support_description":null,
    "support_contact":null,
    "support_term":null,
    "pricing_formula":"PercentageDiscount",
    "pricing_factor":"1.00",
    "assigned_user_id":null,
    "currency_id":"-99",
    "Base_rate":"1.000000"
  },
  {
    "id":"c186a612-c7f2-11e8-9fee-7831c1c14620",
    "name":"Bradford Gadget",
    "date_entered":"2018-10-04 16:28:37",
    "date_modified":"2018-10-04 16:28:37",
    "modified_user_id":"1",
    "created_by":"1",
    "description":null,
    "deleted":0,
    "type_id":null,
    "manufacturer_id":"c03f952a-
c7f2-11e8-b410-7831c1c14620",
    "category_id":"c185dbb0-c7f2-11e8-a6b7-7831c1c1462
0",
```

---

7",

```
"mft_part_num": "Mississippi Bank Group 133834XYZ98",  
"vendor_part_num": null,  
"date_cost_price": null,  
"cost_price": "528.000000",  
"discount_price": "533.333333",  
"list_price": "745.000000",  
"cost_usdollar": "528.000000",  
"discount_usdollar": "533.333333",  
"list_usdollar": "745.000000",  
"status": "Available",  
"tax_class": "Taxable",  
"date_available": "2004-10-15",  
"website": null,  
"weight": "33.00",  
"qty_in_stock": 70,  
"support_name": null,  
"support_description": null,  
"support_contact": null,  
"support_term": null,  
"pricing_formula": "ProfitMargin",  
"pricing_factor": "1.00",  
"assigned_user_id": null,
```

---

```
    "currency_id": "-99",
    "Base_rate": "1.000000"
  },
  {
    "id": "c1b60434-c7f2-11e8-8964-7831c1c14620",
    "name": "Billie Gadget",
    "date_entered": "2018-10-04 16:28:37",
    "date_modified": "2018-10-04 16:28:37",
    "modified_user_id": "1",
    "created_by": "1",
    "description": null,
    "deleted": 0,
    "type_id": null,
    "manufacturer_id": "c03f952a-
c7f2-11e8-b410-7831c1c14620",
    "category_id": "c1b3bf58-c7f2-11e8-92e7-7831c1c1462
0",
    "mft_part_num": "Kringle Bell IncK.A. Tower \u0026
Co 694143XYZ987",
    "vendor_part_num": null,
    "date_cost_price": null,
    "cost_price": "403.000000",
    "discount_price": "927.000000",
    "list_price": "927.000000",
    "cost_usdollar": "403.000000",
    "discount_usdollar": "927.000000",
```



---

```
"list_usdollar": "927.000000",
"status": "Available",
"tax_class": "Taxable",
"date_available": "2004-10-15",
"website": null,
"weight": "16.00",
"qty_in_stock": 148,
"support_name": null,
"support_description": null,
"support_contact": null,
"support_term": null,
"pricing_formula": "IsList",
"pricing_factor": "1.00",
"assigned_user_id": null,
"currency_id": "-99",
"Base_rate": "1.000000"
},
{
  "id": "c18e0448-c7f2-11e8-86b0-7831c1c14620",
  "name": "Arla Gadget",
  "date_entered": "2018-10-04 16:28:37",
  "date_modified": "2018-10-04 16:28:37",
  "modified_user_id": "1",
  "created_by": "1",
```

---

```
"description":null,
"deleted":0,
"type_id":null,
"manufacturer_id":"c03f952a-
c7f2-11e8-b410-7831c1c14620",
"category_id":"c18b8b64-c7f2-11e8-8c1a-7831c1c1462
0",
"mft_part_num":"24\ /7 Couriers 795391XYZ987",
"vendor_part_num":null,
"date_cost_price":null,
"cost_price":"398.000000",
"discount_price":"402.020202",
"list_price":"941.000000",
"cost_usdollar":"398.000000",
"discount_usdollar":"402.020202",
"list_usdollar":"941.000000",
"status":"Available",
"tax_class":"Taxable",
"date_available":"2004-10-15",
"website":null,
"weight":"22.00",
"qty_in_stock":145,
"support_name":null,
"support_description":null,
```

---

```
    "support_contact":null,
    "support_term":null,
    "pricing_formula":"ProfitMargin",
    "pricing_factor":"1.00",
    "assigned_user_id":null,
    "currency_id":"-99",
    "Base_rate":"1.000000"
  },
  {
    "id":"c181bd32-c7f2-11e8-b4eb-7831c1c14620",
    "name":"Allyson Gadget",
    "date_entered":"2018-10-04 16:28:37",
    "date_modified":"2018-10-04 16:28:37",
    "modified_user_id":"1",
    "created_by":"1",
    "description":null,
    "deleted":0,
    "type_id":null,
    "manufacturer_id":"c03f952a-
c7f2-11e8-b410-7831c1c14620",
    "category_id":"c18112d8-c7f2-11e8-b753-7831c1c1462
0",
    "mft_part_num":"Ink Conglomerate Inc 921535XYZ987"
  ,
    "vendor_part_num":null,
```

---

```
        "date_cost_price":null,
        "cost_price":"534.000000",
        "discount_price":"842.000000",
        "list_price":"905.000000",
        "cost_usdollar":"534.000000",
        "discount_usdollar":"842.000000",
        "list_usdollar":"905.000000",
        "status":"Available",
        "tax_class":"Taxable",
        "date_available":"2004-10-15",
        "website":null,
        "weight":"20.00",
        "qty_in_stock":26,
        "support_name":null,
        "support_description":null,
        "support_contact":null,
        "support_term":null,
        "pricing_formula":"Fixed",
        "pricing_factor":"1.00",
        "assigned_user_id":null,
        "currency_id":"-99",
        "base_rate":"1.000000"
    }
]
```

---

## Change Log

| Version | Change  |
|---------|---|
| v10     | Added /Opportunities/recent_product GET endpoint. |

Last Modified: 2021-02-17 02:44:13

## /<module>/recent-product POST

### Overview

Opportunity Recent Product Help

### Summary

This endpoint retrieves top 10 recently used Quoted/Revenue Line Items based on the module to display them in the "Product Catalog Quick Picks" dashlet in the reverse chronological order.

### Request Arguments

None

### Response Arguments

NONE

### Response

---

```
{
  "next_offset":-1,
  "records":[
    {
      "id":"c1b4680e-c7f2-11e8-9380-7831c1c14620",
      "name":"Brain Gadget",
      "date_entered":"2018-10-04 16:28:37",
      "date_modified":"2018-10-04 16:28:37",
      "modified_user_id":"1",
      "created_by":"1",
      "description":null,
      "deleted":0,
      "type_id":null,
      "manufacturer_id":"c03f952a-
c7f2-11e8-b410-7831c1c14620",
      "category_id":"c1b3bf58-c7f2-11e8-92e7-7831c1c1462
0",
      "mft_part_num":"Smallville Resources Inc 362299XYZ
987",
      "vendor_part_num":null,
      "date_cost_price":null,
      "cost_price":"370.000000",
      "discount_price":"854.370000",
      "list_price":"863.000000",
      "cost_usdollar":"370.000000",
      "discount_usdollar":"854.370000",
```

---

```
    "list_usdollar": "863.000000",
    "status": "Available",
    "tax_class": "Taxable",
    "date_available": "2004-10-15",
    "website": null,
    "weight": "10.00",
    "qty_in_stock": 106,
    "support_name": null,
    "support_description": null,
    "support_contact": null,
    "support_term": null,
    "pricing_formula": "PercentageDiscount",
    "pricing_factor": "1.00",
    "assigned_user_id": null,
    "currency_id": "-99",
    "Base_rate": "1.000000"
  },
  {
    "id": "c186a612-c7f2-11e8-9fee-7831c1c14620",
    "name": "Bradford Gadget",
    "date_entered": "2018-10-04 16:28:37",
    "date_modified": "2018-10-04 16:28:37",
    "modified_user_id": "1",
    "created_by": "1",
```

---

```
"description":null,
"deleted":0,
"type_id":null,
"manufacturer_id":"c03f952a-
c7f2-11e8-b410-7831c1c14620",
"category_id":"c185dbb0-c7f2-11e8-a6b7-7831c1c1462
0",
"mft_part_num":"Mississippi Bank Group 133834XYZ98
7",
"vendor_part_num":null,
"date_cost_price":null,
"cost_price":"528.000000",
"discount_price":"533.333333",
"list_price":"745.000000",
"cost_usdollar":"528.000000",
"discount_usdollar":"533.333333",
"list_usdollar":"745.000000",
"status":"Available",
"tax_class":"Taxable",
"date_available":"2004-10-15",
"website":null,
"weight":"33.00",
"qty_in_stock":70,
"support_name":null,
```



---

```
"support_description":null,
"support_contact":null,
"support_term":null,
"pricing_formula":"ProfitMargin",
"pricing_factor":"1.00",
"assigned_user_id":null,
"currency_id":"-99",
"Base_rate":"1.000000"
},
{
  "id":"c1b60434-c7f2-11e8-8964-7831c1c14620",
  "name":"Billie Gadget",
  "date_entered":"2018-10-04 16:28:37",
  "date_modified":"2018-10-04 16:28:37",
  "modified_user_id":"1",
  "created_by":"1",
  "description":null,
  "deleted":0,
  "type_id":null,
  "manufacturer_id":"c03f952a-
c7f2-11e8-b410-7831c1c14620",
  "category_id":"c1b3bf58-c7f2-11e8-92e7-7831c1c1462
0",
  "mft_part_num":"Kringle Bell IncK.A. Tower \u0026
Co 694143XYZ987",
  "vendor_part_num":null,
```

---

```
"date_cost_price":null,  
"cost_price":"403.000000",  
"discount_price":"927.000000",  
"list_price":"927.000000",  
"cost_usdollar":"403.000000",  
"discount_usdollar":"927.000000",  
"list_usdollar":"927.000000",  
"status":"Available",  
"tax_class":"Taxable",  
"date_available":"2004-10-15",  
"website":null,  
"weight":"16.00",  
"qty_in_stock":148,  
"support_name":null,  
"support_description":null,  
"support_contact":null,  
"support_term":null,  
"pricing_formula":"IsList",  
"pricing_factor":"1.00",  
"assigned_user_id":null,  
"currency_id":"-99",  
"Base_rate":"1.000000"  
},
```

---

```
{
  "id": "c18e0448-c7f2-11e8-86b0-7831c1c14620",
  "name": "Arla Gadget",
  "date_entered": "2018-10-04 16:28:37",
  "date_modified": "2018-10-04 16:28:37",
  "modified_user_id": "1",
  "created_by": "1",
  "description": null,
  "deleted": 0,
  "type_id": null,
  "manufacturer_id": "c03f952a-
c7f2-11e8-b410-7831c1c14620",
  "category_id": "c18b8b64-c7f2-11e8-8c1a-7831c1c1462
0",
  "mft_part_num": "24\ /7 Couriers 795391XYZ987",
  "vendor_part_num": null,
  "date_cost_price": null,
  "cost_price": "398.000000",
  "discount_price": "402.020202",
  "list_price": "941.000000",
  "cost_usdollar": "398.000000",
  "discount_usdollar": "402.020202",
  "list_usdollar": "941.000000",
  "status": "Available",
  "tax_class": "Taxable",
```

---

```
    "date_available": "2004-10-15",
    "website": null,
    "weight": "22.00",
    "qty_in_stock": 145,
    "support_name": null,
    "support_description": null,
    "support_contact": null,
    "support_term": null,
    "pricing_formula": "ProfitMargin",
    "pricing_factor": "1.00",
    "assigned_user_id": null,
    "currency_id": "-99",
    "Base_rate": "1.000000"
  },
  {
    "id": "c181bd32-c7f2-11e8-b4eb-7831c1c14620",
    "name": "Allyson Gadget",
    "date_entered": "2018-10-04 16:28:37",
    "date_modified": "2018-10-04 16:28:37",
    "modified_user_id": "1",
    "created_by": "1",
    "description": null,
    "deleted": 0,
    "type_id": null,
```

---

```
        "manufacturer_id": "c03f952a-
c7f2-11e8-b410-7831c1c14620",
        "category_id": "c18112d8-c7f2-11e8-b753-7831c1c1462
0",
        "mft_part_num": "Ink Conglomerate Inc 921535XYZ987"
,
        "vendor_part_num": null,
        "date_cost_price": null,
        "cost_price": "534.000000",
        "discount_price": "842.000000",
        "list_price": "905.000000",
        "cost_usdollar": "534.000000",
        "discount_usdollar": "842.000000",
        "list_usdollar": "905.000000",
        "status": "Available",
        "tax_class": "Taxable",
        "date_available": "2004-10-15",
        "website": null,
        "weight": "20.00",
        "qty_in_stock": 26,
        "support_name": null,
        "support_description": null,
        "support_contact": null,
        "support_term": null,
```

---

```
        "pricing_formula": "Fixed",
        "pricing_factor": "1.00",
        "assigned_user_id": null,
        "currency_id": "-99",
        "base_rate": "1.000000"
    }
]
```

## Change Log

| Version | Change   |
|---------|--|
| v10     | Added /Opportunities/recent_product POST endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /<module>/:record DELETE

### Overview

Delete a record of a specified type.

### Request Arguments

This endpoint does not accept any request arguments.

### Response Arguments

---

| Name | Type   | Description                           |
|------|--------|---------------------------------------|
| id   | String | Returns the ID of the deleted record. |

## Response

```
{
  "id": "11cf0d0a-40af-8cb1-9da0-5057a5f511f9"
}
```

## Change Log

| Version | Change                                   |
|---------|--|
| v10     | Added /<module>/:record DELETE endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /<module>/:record GET

### Overview

Retrieves a record.

### Request Arguments

This endpoint does not accept any request arguments.

### Response Arguments

| Name           | Type                | Description                                 |
|----------------|---------------------|---|
| <record field> | <record field type> | Returns the fields for the selected record. |

## Response

```
{
  "id": "bdd59d85-687b-1739-b00a-512d09f6db9e",
  "name": "Insight Marketing Inc",
  "date_entered": "2013-02-26T19:12:00+00:00",
  "date_modified": "2013-02-26T19:12:00+00:00",
  "modified_user_id": "1",
  "modified_by_name": "Administrator",
  "created_by": "1",
  "created_by_name": "Administrator",
  "description": "",
  "img": "",
  "last_activity_date": "2013-02-26T19:12:00+00:00",
  "deleted": false,
  "assigned_user_id": "seed_max_id",
  "assigned_user_name": "Max Jensen",
  "team_name": [
    {
      "id": "East",
      "name": "East",
      "name_2": "",
      "primary": false
    },
    {
      "id": 1,
      "name": "Global",
      "name_2": "",
      "primary": false
    },
    {
      "id": "West",
      "name": "West",
      "name_2": "",
      "primary": true
    }
  ],
  "linkedin": "",
  "facebook": ""
}
```



---

```
"twitter": "",
"googleplus": "",
"account_type": "Customer",
"industry": "Electronics",
"annual_revenue": "",
"phone_fax": "",
"billing_address_street": "345 Sugar Blvd.",
"billing_address_street_2": "",
"billing_address_street_3": "",
"billing_address_street_4": "",
"billing_address_city": "San Mateo",
"billing_address_state": "CA",
"billing_address_postalcode": "56019",
"billing_address_country": "USA",
"rating": "",
"phone_office": "(927) 136-9572",
"phone_alternate": "",
"website": "www.sectionvegan.de",
"ownership": "",
"employees": "",
"ticker_symbol": "",
"shipping_address_street": "345 Sugar Blvd.",
"shipping_address_street_2": "",
"shipping_address_street_3": "",
"shipping_address_street_4": "",
"shipping_address_city": "San Mateo",
"shipping_address_state": "CA",
"shipping_address_postalcode": "56019",
"shipping_address_country": "USA",
"email1": "kid.support.vegan@example.info",
"parent_id": "",
"sic_code": "",
"parent_name": "",
"email_opt_out": false,
"invalid_email": false,
"email": [
  {
    "email_address": "kid.support.vegan@example.info",
    "opt_out": "0",
    "invalid_email": "0",
    "primary_address": "1"
  },
  {
    "email_address": "phone.kid@example.cn",
    "opt_out": "0",
    "invalid_email": "0",
```

```
        "primary_address": "0"
    }
],
"campaign_id": "",
"campaign_name": "",
"my_favorite": false,
"_acl": {
    "fields": {

    }
}
}
```

## Change Log

| Version | Change                                |
|---------|---------------------------------------|
| v10     | Added /<module>/:record GET endpoint. |

Last Modified: 2021-02-17 02:44:13

## /<module>/:record PUT

### Overview

Update a record of the specified type.

### Request Arguments

| Name           | Type                | Description                                | Required |
|----------------|---------------------|--|----------|
| <record field> | <record field type> | The name value list of fields to populate. | True     |

---

## Request

```
{
  "name": "New Account Name",
  "phone_office": "(555) 888-5555",
  "website": "www.newsite.com",
  "meetings": {
    {
      "add": [ "21e3385e-404f-b470-407e-54044e3d8024" ],
      "delete": [ "21e3385e-404f-b470-407e-54044e3d8023" ],
      "create": [
        {
          "name": "Test Meeting"
        }
      ]
    }
  ]
}
```

## Link fields

It is possible to add or delete record relations to other records and create new related records.

| Action | Type | Description  |
|--------|------|--|
| add    | List | List of related records ID. See <a href="#">RelateRecordApi</a> for details. |
| delete | List | List of related records ID.  |
| create | List | List of name to value arrays of related records.                             |

## Response Arguments

| Name           | Type                | Description                                |
|----------------|---------------------|--|
| <record field> | <record field type> | Returns the fields for the updated record. |

## Response

---

```
{
  "id": "f222265a-b755-da89-0bc7-512d09b800b6",
  "name": "New Account Name",
  "date_entered": "2013-02-26T19:12:00+00:00",
  "date_modified": "2013-02-27T22:49:00+00:00",
  "modified_user_id": "1",
  "modified_by_name": "Administrator",
  "created_by": "1",
  "created_by_name": "Administrator",
  "description": "",
  "img": "",
  "last_activity_date": "2013-02-26T19:12:00+00:00",
  "deleted": false,
  "assigned_user_id": "seed_sarah_id",
  "assigned_user_name": "Sarah Smith",
  "team_name": [
    {
      "id": 1,
      "name": "Global",
      "name_2": "",
      "primary": false
    },
    {
      "id": "West",
      "name": "West",
      "name_2": "",
      "primary": true
    }
  ],
  "linkedin": "",
  "facebook": "",
  "twitter": "",
  "googleplus": "",
  "account_type": "Customer",
  "industry": "Hospitality",
  "annual_revenue": "",
  "phone_fax": "",
  "billing_address_street": "9 IBM Path",
  "billing_address_street_2": "",
  "billing_address_street_3": "",
  "billing_address_street_4": "",
  "billing_address_city": "San Francisco",
  "billing_address_state": "CA",
  "billing_address_postalcode": "43635",
  "billing_address_country": "USA",
```

---

```
"rating":"","  
"phone_office":"(555) 888-5555",  
"phone_alternate":"","  
"website":"www.newsite.com",  
"ownership":"","  
"employees":"","  
"ticker_symbol":"","  
"shipping_address_street":"9 IBM Path",  
"shipping_address_street_2":"","  
"shipping_address_street_3":"","  
"shipping_address_street_4":"","  
"shipping_address_city":"San Francisco",  
"shipping_address_state":"CA",  
"shipping_address_postalcode":"43635",  
"shipping_address_country":"USA",  
"email1":"kid86@example.net",  
"parent_id":"","  
"sic_code":"","  
"parent_name":"","  
"email_opt_out":false,  
"invalid_email":false,  
"email":[  
  {  
    "email_address":"kid86@example.net",  
    "opt_out":"0",  
    "invalid_email":"0",  
    "primary_address":"1"  
  },  
  {  
    "email_address":"the.dev@example.name",  
    "opt_out":"0",  
    "invalid_email":"0",  
    "primary_address":"0"  
  }  
],  
"campaign_id":"","  
"campaign_name":"","  
"my_favorite":false,  
"_acl":{  
  "fields":{  
  
  }  
}  
}
```

---

## Change Log

| Version | Change                                |
|---------|---------------------------------------|
| v10     | Added /<module>/:record PUT endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /<module>/record\_list POST

### Overview

An API to create and save lists of records.

### Summary

Create record list. Only POST request allowed.

### Request Arguments

| Name    | Type   | Description      | Required |
|---------|--------|------------------|----------|
| module  | string | Module name      | True     |
| records | array  | Array of records | True     |

### Request Example

```
POST /rest/v10/:module/record_list
```

```
{records: ["e5c8bb3b-5eea-3d8a-c278-56c6affa6212", "e49395b4-d3b0-1e3f-600a-56c6afe7e34f"]}
```

---

## Response Arguments

| Name             | Type   | Description    |
|------------------|--------|----------------|
| id               | guid   | record list id |
| assigned_user_id | guid   | user id        |
| module_name      | string | Module name    |
| records          | array  | record ids     |
| date modified    | date   | date modified  |

## Output Example

```
{
  "id": "39d2c781-c0b7-446f-1d83-56c6e3cda510",
  "assigned_user_id": "1",
  "module_name": "Accounts",
  "records": [
    "e5c8bb3b-5eea-3d8a-c278-56c6affa6212",
    "e49395b4-d3b0-1e3f-600a-56c6afe7e34f",
    "c03ed8ee-60d3-c6a6-55c3-56c6af95e696",
    "d65573e3-c25a-f9b4-33f2-56c6afb8d856"
  ],
  "date_modified": "2016-02-19 09:42:44"
}
```

**Last Modified:** 2021-02-17 02:44:13

## /<module>/record\_list/:record\_list\_id DELETE

### Overview

An API to delete lists of records

### Summary

Delete record list. Only DELETE request allowed.

---

## Request Arguments

| Name           | Type   | Description    | Required |
|----------------|--------|----------------|----------|
| module         | string | Module name    | True     |
| record_list_id | guid   | record list id | True     |

## Request Example

```
DELETE /rest/v10/:module/record_list/:id
```

## Response Arguments

Return boolean true.

**Last Modified:** 2021-02-17 02:44:13

## /<module>/record\_list/:record\_list\_id GET

### Overview

An API to return record list data

### Summary

Get record list data. Only GET request allowed.

## Request Arguments

| Name           | Type   | Description    | Required |
|----------------|--------|----------------|----------|
| module         | string | Module name    | True     |
| record_list_id | guid   | record list id | True     |



---

## Request Example

GET /rest/v10/:module/record\_list/:id

## Response Arguments

| Name             | Type   | Description    |
|------------------|--------|----------------|
| id               | guid   | record list id |
| assigned_user_id | guid   | user id        |
| module_name      | string | Module name    |
| records          | array  | record ids     |
| date modified    | date   | date modified  |

## Output Example

```
{
  "id": "39d2c781-c0b7-446f-1d83-56c6e3cda510",
  "assigned_user_id": "1",
  "module_name": "Accounts",
  "records": [
    "e5c8bb3b-5eea-3d8a-c278-56c6affa6212",
    "e49395b4-d3b0-1e3f-600a-56c6afe7e34f",
    "c03ed8ee-60d3-c6a6-55c3-56c6af95e696",
    "d65573e3-c25a-f9b4-33f2-56c6afb8d856"
  ],
  "date_modified": "2016-02-19 09:42:44"
}
```

**Last Modified:** 2021-02-17 02:44:13

## /<module>/:record/audit GET

---

## Overview

Returns data changes for a specific record.

## Request Arguments

| Name   | Type   | Description             | Required |
|--------|--------|-------------------------|----------|
| record | String | The record id.          | True     |
| module | String | The name of the module. | True     |

## Query Parameters

| Name    | Type    | Description  | Required |
|---------|---------|--|----------|
| max_num | Integer | A maximum number of records to return. The default is all records.   | False    |
| offset  | Integer | The number of records to skip over before records are returned. The default is 0. The parameter will be ignored if the max_num parameter is missing. | False    |

## Response Arguments

| Name        | Type    | Description  |
|-------------|---------|--|
| next_offset | Integer | Displays the next offset for retrieval of additional results. -1 will be returned when there are no more |

| Name    | Type  | Description                                     |
|---------|-------|---|
|         |       | records.  |
| records | Array | An array of results containing matched records. |

## Response

```
{
  "next_offset":-1,
  "records":[
    {
      "id":"b569e480-237a-5921-4382-512ff555fee7",
      "parent_id":"ef1b40aa-5815-4f8d-e909-512d09617ac8",
      "date_created":"03\01\2013 12:26am",
      "created_by":"admin",
      "field_name":"Team ID:",
      "data_type":"team_list",
      "before_value_string":"East",
      "after_value_string":"Will"
    },
    {
      "id":"bc0bee72-8398-a0a6-d731-512ff5bfefbc7",
      "parent_id":"ef1b40aa-5815-4f8d-e909-512d09617ac8",
      "date_created":"03\01\2013 12:26am",
      "created_by":"admin",
      "field_name":"Teams",
      "data_type":"id",
      "before_value_string":"East, Global, West",
      "after_value_string":"Jim, Will"
    }
  ]
}
```

## Change Log

| Version | Change   |
|---------|--|
| v11_11  | Added optional max_num and offset parameters to /Audit GET endpoint. |
| v10     | Added /Audit GET endpoint.   |

---

Last Modified: 2021-02-17 02:44:13

## /<module>/:record/children GET

### Overview

Retrieves all children of selected record.

### Request Arguments

| Name    | Type   | Description  | Required |
|---------|--------|--|----------|
| module  | String | The name of sugar module that contains a nested set data and implements the NestedSetInterface . | True     |
| :record | String | The ID of record   | True     |

### Response Arguments

This endpoint does not return any response arguments.

### Response

```
[{
  "id": "045c1de6-327b-11e4-818b-5404a67f3363",
  "name": "Financial",
  "date_entered": null,
  "date_modified": null,
  "modified_user_id": null,
  "created_by": null,
```

---

```
"description": null,
"deleted": "0",
"source_id": null,
"source_type": null,
"source_meta": null,
"root": "935d3e07-327a-11e4-818b-5404a67f3363",
"lft": "11",
"rgt": "14",
"level": "2"
}, {
  "id": "0f65a6c7-327b-11e4-818b-5404a67f3363",
  "name": "Agreements",
  "date_entered": null,
  "date_modified": null,
  "modified_user_id": null,
  "created_by": null,
  "description": null,
  "deleted": "0",
  "source_id": null,
  "source_type": null,
  "source_meta": null,
  "root": "935d3e07-327a-11e4-818b-5404a67f3363",
  "lft": "15",
  "rgt": "16",
  "level": "2"
}, {
  "id": "14d30bf3-327b-11e4-818b-5404a67f3363",
  "name": "Clients",
  "date_entered": null,
  "date_modified": null,
  "modified_user_id": null,
  "created_by": null,
  "description": null,
  "deleted": "0",
  "source_id": null,
  "source_type": null,
  "source_meta": null,
  "root": "935d3e07-327a-11e4-818b-5404a67f3363",
  "lft": "17",
  "rgt": "18",
  "level": "2"
}]
```

---

## Change Log

| Version | Change   |
|---------|--|
| v10     | Added /<module>/:record/children GET endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /<module>/:record/collection/:collection\_name GET

### Overview

Lists related records from multiple links at a time.

### Summary

This endpoint will return a set of related records fetched from multiple links defined by :collection\_name. The records will be filtered, sorted and truncated to max\_num as a single collection. Collections may use a field mapping. For instance, the due\_date of Tasks may be referred to as date\_end. In this case the alias (date\_end) should be used in filter and order\_by expressions instead of real field name. Note that response data still contains the original fields for the module.

### Request Arguments

| Name   | Type   | Description  | Required |
|--------|--------|--|----------|
| fields | String | See <a href="#">Filter API</a> . If collection definition uses aliases, then aliases should be used instead of real field names. | False    |
| view   | String | See <a href="#">Filter API</a> .   | False    |
|        |        |  |          |

| Name     | Type    | Description  | Required |
|----------|---------|--|----------|
| max_num  | Integer | See <a href="#">Filter API</a> .   | False    |
| filter   | String  | See <a href="#">Filter API</a> . If collection definition uses aliases, then aliases should be used instead of real field names.   | False    |
| order_by | String  | See <a href="#">Filter API</a> . If collection definition uses aliases, then aliases should be used instead of real field names.   | False    |
| offset   | Map     | Individual offset for each link which the collection consists of. -1 (or any negative value) denotes that the link should be skipped. If link offset is not specified, it defaults to 0. | False    |

## Response Arguments

| Name        | Type  | Description  |
|-------------|-------|--|
| next_offset | Map   | The next offset to retrieve records. -1 will be returned for the given link when there are no more records.  |
| records     | Array | The record result set.   |
| errors      | Map   | Errors encountered while making requests for the individual links. These errors are returned for the client to consume, but do not affect the response |

---

| Name | Type | Description            |
|------|------|------------------------|
|      |      | status of the request. |

## Response

```
{
  "next_offset": {
    "calls": 1,
    "meetings": -1,
    "tasks": -1,
  },
  "records": [
    {
      "_module": "Calls",
      "_link": "calls",
      "id": "8703fbf3-0ffa-c288-8d2c-512f943ecdc3",
      "name": "Discuss review process",
      "date_end": "2014-02-26T19:12:00+00:00"
    },
    {
      "_module": "Tasks",
      "_link": "tasks",
      "id": "e1c495cb-af17-1b37-dd66-512f934fe155",
      "name": "Introduce all players",
      "due_date": "2014-02-26T19:12:00+00:00"
    },
    {
      "_module": "Tasks",
      "_link": "tasks",
      "id": "456b7848-9959-5a64-cd34-512d0938add",
      "name": "Follow-up on proposal",
      "due_date": "2014-02-26T19:12:00+00:00"
    }
  ],
  "errors": {
    "meetings": {
      "code": 403,
      "error": "not_authorized",
      "error_message": "You are not authorized to perform this action. Contact your administrator if you need access."
    }
  }
}
```



---

## Change Log

| Version | Change  |
|---------|---|
| v10     | Added /<module>/:record/collection/:collection_name GET endpoint. |

Last Modified: 2021-02-17 02:44:13

## /<module>/:record/collection/:collection\_name/count GET

### Overview

Counts related records from multiple links at a time.

### Summary

This endpoint will return count of records related by multiple links defined by :collection\_name. The records may be filtered.

### Request Arguments

| Name   | Type   | Description  | Required |
|--------|--------|--|----------|
| filter | String | See <a href="#">Filter API</a> . If collection definition uses aliases, then aliases should be used instead of real field names. | False    |

---

## Response Arguments

| Name         | Type | Description               |
|--------------|------|---------------------------|
| record_count | Map  | Count of related records. |

## Response

```
{
  "record_count": {
    "calls": 1,
    "meetings": 2,
    "tasks": 3
  }
}
```

## Change Log

| Version | Change  |
|---------|---|
| v10     | Added /<module>/:record/collection/:collection_name/count GET endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /<module>/:record/favorite DELETE

### Overview

Removes a record of a specified type as a favorite for the current user.

### Request Arguments

This endpoint does not accept any request arguments.

---

## Response Arguments

| Name           | Type                | Description                                 |
|----------------|---------------------|---|
| <record field> | <record field type> | Returns the fields for the selected record. |

## Response

```
{
  "id": "bdd59d85-687b-1739-b00a-512d09f6db9e",
  "name": "Insight Marketing Inc",
  "date_entered": "2013-02-26T19:12:00+00:00",
  "date_modified": "2013-02-26T19:12:00+00:00",
  "modified_user_id": "1",
  "modified_by_name": "Administrator",
  "created_by": "1",
  "created_by_name": "Administrator",
  "description": "",
  "img": "",
  "last_activity_date": "2013-02-26T19:12:00+00:00",
  "deleted": false,
  "assigned_user_id": "seed_max_id",
  "assigned_user_name": "Max Jensen",
  "team_name": [
    {
      "id": "East",
      "name": "East",
      "name_2": "",
      "primary": false
    },
    {
      "id": 1,
      "name": "Global",
      "name_2": "",
      "primary": false
    },
    {
      "id": "West",
      "name": "West",
      "name_2": "",
      "primary": true
    }
  ],
}
```

---

```
"linkedin":"","  
"facebook":"","  
"twitter":"","  
"googleplus":"","  
"account_type":"Customer",  
"industry":"Electronics",  
"annual_revenue":"","  
"phone_fax":"","  
"billing_address_street":"345 Sugar Blvd.",  
"billing_address_street_2":"","  
"billing_address_street_3":"","  
"billing_address_street_4":"","  
"billing_address_city":"San Mateo",  
"billing_address_state":"CA",  
"billing_address_postalcode":"56019",  
"billing_address_country":"USA",  
"rating":"","  
"phone_office":"(927) 136-9572",  
"phone_alternate":"","  
"website":"www.sectionvegan.de",  
"ownership":"","  
"employees":"","  
"ticker_symbol":"","  
"shipping_address_street":"345 Sugar Blvd.",  
"shipping_address_street_2":"","  
"shipping_address_street_3":"","  
"shipping_address_street_4":"","  
"shipping_address_city":"San Mateo",  
"shipping_address_state":"CA",  
"shipping_address_postalcode":"56019",  
"shipping_address_country":"USA",  
"email1":"kid.support.vegan@example.info",  
"parent_id":"","  
"sic_code":"","  
"parent_name":"","  
"email_opt_out":false,  
"invalid_email":false,  
"email":[  
  {  
    "email_address":"kid.support.vegan@example.info",  
    "opt_out":"0",  
    "invalid_email":"0",  
    "primary_address":"1"  
  },  
  {  
    "email_address":"phone.kid@example.cn",
```

---

```
        "opt_out": "0",
        "invalid_email": "0",
        "primary_address": "0"
    }
],
"campaign_id": "",
"campaign_name": "",
"my_favorite": false,
"_acl": {
    "fields": {
    }
}
}
```

## Change Log

| Version | Change  |
|---------|---|
| v10     | Added /<module>/:record/favorite DELETE endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /<module>/:record/favorite PUT

### Overview

Updates a record of a specified type as a favorite for the current user.

### Request Arguments

This endpoint does not accept any request arguments.

### Response Arguments

| Name           | Type                | Description                                 |
|----------------|---------------------|---|
| <record field> | <record field type> | Returns the fields for the selected record. |

## Response

```
{
  "id": "bdd59d85-687b-1739-b00a-512d09f6db9e",
  "name": "Insight Marketing Inc",
  "date_entered": "2013-02-26T19:12:00+00:00",
  "date_modified": "2013-02-26T19:12:00+00:00",
  "modified_user_id": "1",
  "modified_by_name": "Administrator",
  "created_by": "1",
  "created_by_name": "Administrator",
  "description": "",
  "img": "",
  "last_activity_date": "2013-02-26T19:12:00+00:00",
  "deleted": false,
  "assigned_user_id": "seed_max_id",
  "assigned_user_name": "Max Jensen",
  "team_name": [
    {
      "id": "East",
      "name": "East",
      "name_2": "",
      "primary": false
    },
    {
      "id": 1,
      "name": "Global",
      "name_2": "",
      "primary": false
    },
    {
      "id": "West",
      "name": "West",
      "name_2": "",
      "primary": true
    }
  ],
  "linkedin": "",
  "facebook": ""
}
```

---

```
"twitter":"","  
"googleplus":"","  
"account_type":"Customer",  
"industry":"Electronics",  
"annual_revenue":"","  
"phone_fax":"","  
"billing_address_street":"345 Sugar Blvd.",  
"billing_address_street_2":"","  
"billing_address_street_3":"","  
"billing_address_street_4":"","  
"billing_address_city":"San Mateo",  
"billing_address_state":"CA",  
"billing_address_postalcode":"56019",  
"billing_address_country":"USA",  
"rating":"","  
"phone_office":"(927) 136-9572",  
"phone_alternate":"","  
"website":"www.sectionvegan.de",  
"ownership":"","  
"employees":"","  
"ticker_symbol":"","  
"shipping_address_street":"345 Sugar Blvd.",  
"shipping_address_street_2":"","  
"shipping_address_street_3":"","  
"shipping_address_street_4":"","  
"shipping_address_city":"San Mateo",  
"shipping_address_state":"CA",  
"shipping_address_postalcode":"56019",  
"shipping_address_country":"USA",  
"email1":"kid.support.vegan@example.info",  
"parent_id":"","  
"sic_code":"","  
"parent_name":"","  
"email_opt_out":false,  
"invalid_email":false,  
"email":[  
  {  
    "email_address":"kid.support.vegan@example.info",  
    "opt_out":"0",  
    "invalid_email":"0",  
    "primary_address":"1"  
  },  
  {  
    "email_address":"phone.kid@example.cn",  
    "opt_out":"0",  
    "invalid_email":"0",
```

---

```
        "primary_address": "0"
    }
],
"campaign_id": "",
"campaign_name": "",
"my_favorite": true,
"_acl": {
    "fields": {

    }
}
}
```

## Change Log

| Version | Change   |
|---------|--|
| v10     | Added /<module>/:record/favorite PUT endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /<module>/:record/file GET

### Overview

Lists all populated fields of type "file" or of type "image" for a record.

### Request Arguments

This endpoint does not accept any request arguments.

### Response Arguments



| Name                 | Type    | Description                            |
|----------------------|---------|--|
| field                | Array   | The fields containing file properties. |
| field.content-type   | String  | The files content type.                |
| field.content-length | Integer | The files content length.              |
| field.name           | String  | The files ID.                          |
| field.width          | Integer | The width of the image.                |
| field.height         | Integer | The height of the image.               |
| field.uri            | String  | The URI of the file.                   |

## Response

```
{
  "picture": {
    "content-type": "image/png",
    "content-length": 72512,
    "name": "1a7b8f5c-b11c-0094-c8d8-512e9daaa983",
    "width": 933,
    "height": 519,
    "uri": "http://sugarcrm/rest/v10/Contacts/fa300a0e-0ad1-b322-9601-512d0983c19a/file/picture"
  },
  "record": {
    "my_favorite": false,
    "following": true,
    "id": "fa300a0e-0ad1-b322-9601-512d0983c19a",
    "name": "Test",
    "date_modified": "2014-05-16T03:49:12+02:00",
    "modified_user_id": "1",
    "modified_by_name": "admin",
    "created_by": "1",
    "created_by_name": "Administrator",
    "doc_owner": "1",
    "description": "",
    "deleted": false,
    "assigned_user_id": "1",
    "assigned_user_name": "Administrator",
    "team_count": "",
    "team_name": [
      {
        "id": 1,

```

---

```
        "name": "Global",
        "name_2": "",
        "primary": true
    }
],
"email": [],
"email1": "",
"email2": "",
"invalid_email": "",
"email_opt_out": "",
"email_addresses_non_primary": "",
"salutation": "",
"first_name": "",
"last_name": "Test",
"full_name": "Test",
"title": "",
"facebook": "",
"twitter": "",
"googleplus": "",
"department": "",
"do_not_call": false,
"phone_home": "",
"phone_mobile": "",
"phone_work": "",
"phone_other": "",
"phone_fax": "",
"primary_address_street": "",
"primary_address_city": "",
"primary_address_state": "",
"primary_address_postalcode": "",
"primary_address_country": "",
"alt_address_street": "",
"alt_address_city": "",
"alt_address_state": "",
"alt_address_postalcode": "",
"alt_address_country": "",
"assistant": "",
"assistant_phone": "",
"picture": "",
"email_and_name1": "",
"lead_source": "",
"account_name": "",
"account_id": "",
"dnb_principal_id": "",
"opportunity_role_fields": "",
"opportunity_role_id": "",
```

```
"opportunity_role": "",
"reports_to_id": "",
"report_to_name": "",
"birthdate": "",
"portal_name": "",
"portal_active": false,
"portal_password": null,
"portal_password1": null,
"portal_app": "",
"preferred_language": "en_us",
"campaign_id": "",
"campaign_name": "",
"c_accept_status_fields": "",
"m_accept_status_fields": "",
"accept_status_id": "",
"accept_status_name": "",
"accept_status_calls": "",
"accept_status_meetings": "",
"sync_contact": false,
"mkto_sync": false,
"mkto_id": null,
"mkto_lead_score": null,
"_acl": {
  "fields": {}
},
"_module": "Contacts"
}
}
```

## Change Log

| Version | Change                                     |
|---------|--|
| v10     | Added /<module>/:record/file GET endpoint. |

Last Modified: 2021-02-17 02:44:13

---

## **/<module>/:record/file/:field DELETE**

### **Overview**

Removes an attachment from a field for a record and subsequently removes the file from the file system.

### **Request Arguments**

This endpoint does not accept any request arguments.

### **Response Arguments**

| Name                 | Type    | Description                            |
|----------------------|---------|--|
| field                | Array   | The fields containing file properties. |
| field.content-type   | String  | The files content type.                |
| field.content-length | Integer | The files content length.              |
| field.name           | String  | The files ID.                          |
| field.width          | Integer | The width of the image.                |
| field.height         | Integer | The height of the image.               |
| field.uri            | String  | The URI of the file.                   |

### **Response**

```
{
  "picture": {}
}
```

### **Change Log**

| Version | Change   |
|---------|--|
| v10     | Added /<module>/:record/file/:field DELETE endpoint. |

---

Last Modified: 2021-02-17 02:44:13

## **/<module>/:record/file/:field GET**

### **Overview**

Retrieves an attached file for a specific field on a record.

### **Request Arguments**

This endpoint does not accept any request arguments.

### **Response Arguments**

The response from this request is an HTTP response with a forced download. This can be used in rendering images through the API or in offering immediate file downloads.

### **Response**

Cache-Control: no-cache, must-revalidate Connection: keep-alive Content-Encoding: gzip Content-Type: application/octet-stream Date: Mon, 30 Jan 2012 17:00:46 GMT Expires: Mon, 30 Jan 2012 17:00:45 GMT Last-Modified: Thu, 10 Nov 2011 19:01:31 GMT Transfer-Encoding: chunked Vary: Accept-Encoding...

### **Change Log**

| Version | Change  |
|---------|---|
| v10     | Added /<module>/:record/file/:field GET endpoint. |

---

Last Modified: 2021-02-17 02:44:13

## /<module>/:record/file/:field POST

### Overview

Attaches a file to a field on a record.

### Request Arguments

| Name               | Type    | Description   | Required   |
|--------------------|---------|---|--|
| format             | String  | The data format. Currently accepts 'sugar-html-json'.                                 | True   |
| delete_if_fails    | Boolean | Indicates whether the API is to mark related record deleted if the file upload fails. | False  |
| oauth_token        | String  | The oauth_token value.  | False - Required if only if delete_if_fails is true. |
| <attachment field> | String  | The field and file to populate. Example: {"": "@\path\to\ExampleDocument.txt"}        | True   |

### Request

```
{  
  "format": "sugar-html-json",  
  "delete_if_fails": true,  
}
```

---

```
"oauth_token": "43b6b327-cc70-c301-3299-512ffb99ad97",
"<attachment field>": "@\path\to\ExampleDocument.txt"
}
```

## Response Arguments

| Name           | Type    | Description               |
|----------------|---------|---------------------------|
| content-type   | String  | The files content type.   |
| content-length | Integer | The files content length. |
| name           | String  | The files name.           |
| uri            | String  | The URI of the file.      |

## Response

```
{
  "content-type": "text/plain",
  "content-length": 16,
  "name": "ExampleDocument.txt",
  "uri": "http://sugarcrm/rest/v10/Notes/ca66c92f-5a8b-28b4-4fc8-512d099b790b/file/<attachment field>?format=sugar-html-json&delete_if_fails=1&oauth_token=6ec91cf3-1f97-25b9-e0b1-512f8971b2d4"
}
```

## Change Log

| Version | Change   |
|---------|--|
| v10     | Added /<module>/:record/file/:field POST endpoint. |

**Last Modified:** 2021-02-17 02:44:13

---

## **/<module>/:record/file/:field PUT**

### **Overview**

This endpoint takes a file or image and saves it to a record that already contains an attachment in the specified field. The PUT method is very similar to the POST method but differs slightly in how the request is constructed. PUT requests should send the file data as the body of the request. Optionally, a filename query parameter can be sent with the request to assign a name. Additionally, the PUT method can accept base64 encoded file data which will be decoded by the endpoint if the `content_transfer_encoding` parameter is set to 'base64'.

**NOTE:** In lieu of the `content_transfer_encoding` parameter, a request header of `X-Content-Transfer-Encoding` can also be sent with a value of 'base64'. In the event both the content transfer encoding header and request parameter are sent, the header will be used.

### **Request Arguments**

| Name                      | Type   | Description   | Required |
|---------------------------|--------|---|----------|
| filename                  | String | Filename to save the document as  | False    |
| content_transfer_encoding | String | When set to 'base64', indicates the file contents are base64 encoded and will result in the file contents being base64 decoded before being saved | False    |

### **Request**

PUT /rest/v10/Notes/abcd-1234/file/field/ HTTP/1.1 Host: localhost Connection: keep-alive Content-Length: 23456 Content-Type: application/document-doc ...This is where the bin data would be

### **Response Arguments**



| Name                 | Type    | Description                            |
|----------------------|---------|--|
| field                | Array   | The fields containing file properties. |
| field.content-type   | String  | The files content type.                |
| field.content-length | Integer | The files content length.              |
| field.name           | String  | The files name.                        |
| field.width          | Integer | The width of the image.                |
| field.height         | Integer | The height of the image.               |
| field.uri            | String  | The URI of the file.                   |

## Response

```
{
  "picture": {
    "content-type": "image/png",
    "content-length": 72512,
    "name": "1a7b8f5c-b11c-0094-c8d8-512e9daaa983",
    "width": 933,
    "height": 519,
    "uri": "http://sugarcrm/rest/v10/Contacts/fa300a0e-0ad1-b32
2-9601-512d0983c19a/file/picture"
  }
  "attachment": {
    "content-type": "application/document-doc",
    "content-length": "873921",
    "name": "myFile.doc",
    "uri": "http://sugarcrm/rest/v10/Contacts/f2f9aa4d-99a8-
e86e-f4d5-512d0986effa/file/attachment"
  }
}
```

## Change Log

| Version | Change  |
|---------|---|
| v10     | Added /<module>/:record/file/:field PUT endpoint. |

---

Last Modified: 2021-02-17 02:44:13

## /<module>/:record/link POST

### Overview

Creates relationships to a pre-existing record.

### Request Arguments

| Name                | Type     | Description  | Required |
|---------------------|----------|--|----------|
| <relationship link> | <string> | Link between targeted and related records.   | True     |
| <record ID>         | <string> | The name value list of related records. Each item of the list may be either string equal to related item ID, or map containing record ID ("id" key is required in this case) and addition relationship properties. | True     |

### Request

```
{
  link_name: "accounts"
  ids: [
    "da6a3741-2a81-ba7f-f249-512d0932e94e",
    {
      "id": "e689173e-c953-1e14-c215-512d0927e7a2",
      "role": "owner"
    }
  ]
}
```

---

```
    }  
  ]  
}
```

## Response Arguments

| Name            | Type  | Description                           |
|-----------------|-------|---------------------------------------|
| record          | Array | The record linked to related records. |
| related_records | Array | Records that were associated.         |

## Response

```
"record": {  
  "id": "da6a3741-2a81-ba7f-f249-512d0932e94e",  
  "name": "Slender Broadband Inc - 1000 units",  
  "date_entered": "2013-02-26T19:12:00+00:00",  
  "date_modified": "2013-02-26T19:12:00+00:00",  
  "modified_user_id": "1",  
  "modified_by_name": "Administrator",  
  "created_by": "1",  
  "created_by_name": "Administrator",  
  "description": "",  
  "img": "",  
  "last_activity_date": "2013-02-28T18:21:00+00:00",  
  "deleted": false,  
  "assigned_user_id": "seed_max_id",  
  "assigned_user_name": "Max Jensen",  
  "team_name": [  
    {  
      "id": "East",  
      "name": "East",  
      "name_2": "",  
      "primary": false  
    },  
    {  
      "id": "West",  
      "name": "West",  
      "name_2": ""  
    }  
  ]  
}
```

---

```
        "primary": true
      }
    ],
    "opportunity_type": "",
    "account_name": "Slender Broadband Inc",
    "account_id": "181461c6-dc81-1115-1fe0-512d092e8f15",
    "campaign_id": "",
    "campaign_name": "",
    "lead_source": "Campaign",
    "amount": "25000",
    "base_rate": "1",
    "amount_usdollar": "25000",
    "currency_id": "-99",
    "currency_name": "",
    "currency_symbol": "",
    "date_closed": "2013-02-27",
    "date_closed_timestamp": "1361992480",
    "next_step": "",
    "sales_stage": "Needs Analysis",
    "sales_status": "New",
    "probability": "90",
    "best_case": "25000",
    "worst_case": "25000",
    "commit_stage": "include",
    "my_favorite": false,
    "_acl": {
      "fields": {
        }
      }
    },
    "related_records": [
      {
        "id": "e689173e-c953-1e14-c215-512d0927e7a2",
        "name": "Gus Dales",
        "date_entered": "2013-02-26T19:12:00+00:00",
        "date_modified": "2013-02-26T19:12:00+00:00",
        "modified_user_id": "1",
        "modified_by_name": "Administrator",
        "created_by": "1",
        "created_by_name": "Administrator",
        "description": "",
        "img": "",
        "deleted": false,
        "assigned_user_id": "seed_sally_id",
        "assigned_user_name": "Sally Bronsen",
```

---

```
"team_name": [
  {
    "id": "West",
    "name": "West",
    "name_2": "",
    "primary": true
  }
],
"salutation": "",
"first_name": "Gus",
"last_name": "Dales",
"full_name": "Gus Dales",
"title": "Director Operations",
"linkedin": "",
"facebook": "",
"twitter": "",
"googleplus": "",
"department": "",
"do_not_call": false,
"phone_home": "(661) 120-2292",
"email": [
  {
    "email_address": "section.sugar.section@example.it",
    "opt_out": "1",
    "invalid_email": "0",
    "primary_address": "0"
  },
  {
    "email_address": "support.qa.kid@example.co.uk",
    "opt_out": "0",
    "invalid_email": "0",
    "primary_address": "1"
  }
],
"phone_mobile": "(294) 447-9707",
"phone_work": "(036) 840-3216",
"phone_other": "",
"phone_fax": "",
"email1": "support.qa.kid@example.co.uk",
"email2": "section.sugar.section@example.it",
"invalid_email": false,
"email_opt_out": false,
"primary_address_street": "48920 San Carlos Ave",
"primary_address_street_2": "",
"primary_address_street_3": "",
```

---

```
"primary_address_city": "Persistence",
"primary_address_state": "CA",
"primary_address_postalcode": "54556",
"primary_address_country": "USA",
"alt_address_street": "",
"alt_address_street_2": "",
"alt_address_street_3": "",
"alt_address_city": "",
"alt_address_state": "",
"alt_address_postalcode": "",
"alt_address_country": "",
"assistant": "",
"assistant_phone": "",
"picture": "",
"email_and_name1": "",
"lead_source": "Support Portal User Registration",
"account_name": "Arts & Crafts Inc",
"account_id": "d43243c6-9b8e-2973-ae2-512d09bc34b4",
"opportunity_role_fields": "",
"opportunity_role_id": "",
"opportunity_role": "Technical Advisor",
"reports_to_id": "",
"report_to_name": "",
"portal_name": "GusDales145",
"portal_active": true,
"portal_password": "$1$JxYr6tmM$b.O6.KF42jP46RadSwz0N0",
"portal_password1": "",
"portal_app": "",
"preferred_language": "en_us",
"campaign_id": "",
"campaign_name": "",
"c_accept_status_fields": "",
"m_accept_status_fields": "",
"accept_status_id": "",
"accept_status_name": "",
"sync_contact": "",
"my_favorite": false,
"_acl": {
  "fields": {
  }
}
},
{
  "id": "da6a3741-2a81-ba7f-f249-512d0932e94e",
  "name": "Slender Broadband Inc - 1000 units",
  "date_entered": "2013-02-26T19:12:00+00:00",
```

---

```
"date_modified": "2013-02-26T19:12:00+00:00",
"modified_user_id": "1",
"modified_by_name": "Administrator",
"created_by": "1",
"created_by_name": "Administrator",
"description": "",
"img": "",
"last_activity_date": "2013-02-28T18:36:00+00:00",
"deleted": false,
"assigned_user_id": "seed_max_id",
"assigned_user_name": "Max Jensen",
"team_name": [
  {
    "id": "East",
    "name": "East",
    "name_2": "",
    "primary": false
  },
  {
    "id": "West",
    "name": "West",
    "name_2": "",
    "primary": true
  }
],
"opportunity_type": "",
"account_name": "Slender Broadband Inc",
"account_id": "181461c6-dc81-1115-1fe0-512d092e8f15",
"campaign_id": "",
"campaign_name": "",
"lead_source": "Campaign",
"amount": "25000",
"base_rate": "1",
"amount_usdollar": "25000",
"currency_id": "-99",
"currency_name": "",
"currency_symbol": "",
"date_closed": "2013-02-27",
"date_closed_timestamp": "1361992480",
"next_step": "",
"sales_stage": "Needs Analysis",
"sales_status": "New",
"probability": "90",
"best_case": "25000",
"worst_case": "25000",
"commit_stage": "include",
```

---

```
    "my_favorite": false,
    "_acl": {
      "fields": {
        }
      }
    }
  ]
}
```

## Change Log

| Version     | Change  |
|-------------|---|
| v10 (7.6.0) | Added support for additional relationship values. |
| v10 (7.1.5) | Added /<module>/:record/link POST endpoint.       |

**Last Modified:** 2021-02-17 02:44:13

## /<module>/:record/link/activities GET

Activities on a module's list view

### Summary:

This endpoint lists activities across a particular module in the system. It **does not** use a subscription model unlike the other endpoints. It can be queried as a regular bean collection, but without search, ordering or filtering.

### Query Parameters:

---



| Param   | Description   | Optional |
|---------|---|----------|
| max_num | A maximum number of records to return                     | Optional |
| offset  | How many records to skip over before records are returned | Optional |

## Input Example:

This endpoint does not accept any input

## Output Example:

```
{
  "next_offset": 20,
  "records": [{
    "id": "22fb8b16-de1d-f1dc-b15b-51240efde177",
    "date_entered": "2013-02-19T23:47:11+00:00",
    "date_modified": "2013-02-19T23:47:11+00:00",
    "created_by": "1",
    "deleted": "0",
    "parent_id": "f5bb0331-2c0f-5c7c-b4db-5123caac0056",
    "parent_type": "Contacts",
    "activity_type": "post",
    "data": {
      "value": "This is a test post on a contact I'm subscribed
to."
    },
    "comment_count": 0,
    "last_comment": {
      "deleted": 0,
```

This will be set to -1 when there are no more records after this "page".

This will be the type of activity performed.

This will be set to the total number of comments on the post.

This will be the last comment on the post, which can be used to create a comment model on the frontend.

---

```
        "data": []
    },
    "fields": [],
    "first_name": null,
    "last_name": "Administrator",
    "created_by_name":
    " Administrator" This will be the locale-
    formatted full name of the user.
    }, ... ]
}
```

**Last Modified:** 2021-02-17 02:44:13

## **/<module>/:record/link/activities/filter GET**

Activities on a module's list view

### **Summary:**

This endpoint lists activities across a particular module in the system. It **does not** use a subscription model unlike the other endpoints. It can be queried as a regular bean collection, but without search, ordering or filtering.

### **Query Parameters:**

| Param   | Description   | Optional |
|---------|---|----------|
| max_num | A maximum number of records to return                     | Optional |
| offset  | How many records to skip over before records are returned | Optional |

---

## Input Example:

This endpoint does not accept any input

## Output Example:

```
{
  "next_offset": 20,
  "records": [{
    "id": "22fb8b16-de1d-f1dc-b15b-51240efde177",
    "date_entered": "2013-02-19T23:47:11+00:00",
    "date_modified": "2013-02-19T23:47:11+00:00",
    "created_by": "1",
    "deleted": "0",
    "parent_id": "f5bb0331-2c0f-5c7c-b4db-5123caac0056",
    "parent_type": "Contacts",
    "activity_type": "post",
    "data": {
      "value": "This is a test post on a contact I'm subscribed
to."
    },
    "comment_count": 0,
    "last_comment": {
      "deleted": 0,
      "data": []
    },
    "fields": [],
    "first_name": null,
    "last_name": "Administrator",
    "created_by_name":
      " Administrator"
  }, ... ]
}
```

This will be set to -1 when there are no more records after this "page".

This will be the type of activity performed.

This will be set to the total number of comments on the post.

This will be the last comment on the post, which can be used to create a comment model on the frontend.

This will be the locale-formatted full name of the user.

---

Last Modified: 2021-02-17 02:44:13

## /<module>/:record/link/history GET

### Overview

Lists history filtered records.

### Summary

This endpoint will return a set of history modules (meetings, calls, notes, tasks, emails) records filtered by an expression.

### Request Arguments

| Name     | Type    | Description   | Required |
|----------|---------|---|----------|
| filter   | String  | The filter expression. Filter expressions are explained below.  | False    |
| max_num  | Integer | A maximum number of records to return. Default is 20.   | False    |
| offset   | Integer | The number of records to skip over before records are returned. Default is 0.   | False    |
| order_by | String  | How to sort the returned records, in a comma delimited list with the direction appended to the column name after a colon. | False    |

| Name         | Type    | Description   | Required |
|--------------|---------|---|----------|
|              |         | Example: name:DESC,account_type:DESC,date_modified:ASC  |          |
| deleted      | Boolean | Boolean to show deleted records in the result set.  | False    |
| module_list  | String  | A list of modules from the valid modules [Tasks, Calls, Emails, Notes, Meetings] that need to be included   | False    |
| alias_fields | Array   | A list of field aliases from the valid modules [Tasks, Calls, Emails, Notes, Meetings] that need to be fetched. These field aliases can also be used in 'order_by'.<br>Example: {<br>'record_date': {<br>'Calls': 'date_start',<br>'Emails': 'date_sent'<br>} } | False    |

Last Modified: 2021-02-17 02:44:13

## **/<module>/:record/link/:link\_name GET**

### **Overview**

Lists related filtered records.

---

## Summary

This endpoint will return a set of related records filtered by an expression. The filter can be applied to multiple fields and have multiple and/or conditions in it. Care will need to be taken to make sure this filter has appropriate indexes on the server side otherwise the runtime of the endpoint will be very long. Related fields can be searched by specifying the field name as: "link\_name.remote\_field", so if you wished to search the Accounts module by a related member account you would use "members.sic\_code".

## Request Arguments

| Name    | Type    | Description   | Required |
|---------|---------|---|----------|
| filter  | String  | The filter expression. Filter expressions are explained below.  | False    |
| max_num | Integer | A maximum number of records to return. Default is 20.   | False    |
| offset  | Integer | The number of records to skip over before records are returned. Default is 0.   | False    |
| fields  | String  | Comma delimited list of fields to return. The field date_modified will always be returned. This argument can be combined with the view argument. Example: name,account_type,description | False    |
| view    | String  | Instead of defining the fields argument, the view argument can be used instead. The field list is   | False    |

| Name     | Type   | Description   | Required |
|----------|--------|---|----------|
|          |        | constructed at the server side based on the view definition which is requested. This argument can be used in combination with the fields argument. Common views are "record" and "list".<br>Example: record |          |
| order_by | String | How to sort the returned records, in a comma delimited list with the direction appended to the column name after a colon.<br>Example: name:DESC,account_type:DESC,date_modified:ASC                         | False    |

## Filter Expressions

There are four types of filters:

### Basic

This will filter the results by checking the field "name" for value "Nelson Inc". This will only find exact matches.

### Example

```
{
  "filter":[
    {
      "name":"Nelson Inc"
    }
  ]
}
```

```

    }
  ]
}

```

## Full

This expression allows you to specify what operation you want to use for filtering on the field. In the example you would match any record where the field "name" starts with the value "Nelson".

## Example

```

{
  "filter":[
    {
      "name":{
        "$starts":"Nelson"
      }
    }
  ]
}

```

Below is a list of operation types:

| Operation    | Description   |
|--------------|---|
| \$equals     | Performs an exact match on that field.  |
| \$not_equals | Performs an exact match on that field.  |
| \$not_equals | Matches on non-matching values.   |
| \$starts     | Matches on anything that starts with the value.   |
| \$ends       | Matches anything that ends with the value.  |
| \$contains   | Matches anything that contains the value  |
| \$in         | Finds anything where field matches one of the values as specified as an array.          |
| \$not_in     | Finds anything where field does not matches any of the values as specified as an array. |



| Operation  | Description  |
|------------|--|
| \$is_null  | Checks if the field is null. This operation does not need a value specified.     |
| \$not_null | Checks if the field is not null. This operation does not need a value specified. |
| \$lt       | Matches when the field is less than the value.                                   |
| \$lte      | Matches when the field is less than or equal to the value.                       |
| \$gt       | Matches when the field is greater than the value.                                |
| \$gte      | Matches when the field is greater than or equal to the value.                    |

## Sub-expressions

This allows you to group filter expressions into or/and groupings. By default all expressions are and'ed together. The example expression would match if the field "name" was either "Nelson Inc" or "Nelson LLC". The only currently accepted sub-expression types are "\$and" and "\$or".

### Example

```
{
  "filter": [
    {
      "$or": [
        {
          "name": "Nelson Inc"
        },
        {
          "name": "Nelson LLC"
        }
      ]
    }
  ]
}
```

---

## Modules

There are two module expressions, they operate on modules instead of fields. The current module can be specified by either using the module name "\_this" or by leaving the module name as a blank string. The example expression would filter the records in the current module to only your favorites. The only currently accepted module expressions are "\$favorite" and "\$owner".

### Example

```
{
  "filter":[
    {
      "$favorite":"_this"
    }
  ]
}
```

## Response Arguments

| Name        | Type    | Description   |
|-------------|---------|---|
| next_offset | Integer | Displays the next offset for retrieval of additional results. -1 will be returned when there are no more records. |
| records     | Array   | An array of results containing matched records.   |

## Response

```
{
  "next_offset":-1,
  "records":[
    {
      "id":"fa300a0e-0ad1-b322-9601-512d0983c19a",

```

---

```
"name": "Dale Spivey",
"date_entered": "2013-02-26T19:12:00+00:00",
"date_modified": "2013-02-28T05:03:00+00:00",
"modified_user_id": "1",
"modified_by_name": "Administrator",
"created_by": "1",
"created_by_name": "Administrator",
"description": "",
"img": "",
"deleted": false,
"assigned_user_id": "seed_sally_id",
"assigned_user_name": "Sally Bronsen",
"team_name": [
  {
    "id": "East",
    "name": "East",
    "name_2": "",
    "primary": false
  },
  {
    "id": 1,
    "name": "Global",
    "name_2": "",
    "primary": false
  },
  {
    "id": "West",
    "name": "West",
    "name_2": "",
    "primary": true
  }
],
"salutation": "",
"first_name": "Dale",
"last_name": "Spivey",
"full_name": "Dale Spivey",
"title": "VP Operations",
"linkedin": "",
"facebook": "",
"twitter": "",
"googleplus": "",
"department": "",
"do_not_call": false,
"phone_home": "(523) 825-4311",
"email": [
  {
```

---

```
        "email_address": "sugar.dev.sugar@example.co.jp",
        "opt_out": "0",
        "invalid_email": "0",
        "primary_address": "1"
    },
    {
        "email_address": "the.support@example.biz",
        "opt_out": "0",
        "invalid_email": "0",
        "primary_address": "0"
    }
],
"phone_mobile": "(373) 861-0757",
"phone_work": "(212) 542-9596",
"phone_other": "",
"phone_fax": "",
"email1": "sugar.dev.sugar@example.co.jp",
"email2": "the.support@example.biz",
"invalid_email": false,
"email_opt_out": false,
"primary_address_street": "345 Sugar Blvd.",
"primary_address_street_2": "",
"primary_address_street_3": "",
"primary_address_city": "Denver",
"primary_address_state": "CA",
"primary_address_postalcode": "87261",
"primary_address_country": "USA",
"alt_address_street": "",
"alt_address_street_2": "",
"alt_address_street_3": "",
"alt_address_city": "",
"alt_address_state": "",
"alt_address_postalcode": "",
"alt_address_country": "",
"assistant": "",
"assistant_phone": "",
"picture": "",
"email_and_name1": "",
"lead_source": "Campaign",
"account_name": "Smallville Resources Inc",
"account_id": "d5db6292-5c24-eb61-e202-512d09f0134e",
"opportunity_role_fields": "",
"opportunity_role_id": "",
"opportunity_role": "",
"reports_to_id": "",
"report_to_name": "",
```

---

```
"portal_name":"DaleSpivey97",
"portal_active":true,
"portal_password":"$1$yKMAONHM$Y5S.8CY.WZCZCwfGD1a1Q\/",
"portal_password1":"",
"portal_app":"",
"preferred_language":"en_us",
"campaign_id":"",
"campaign_name":"",
"c_accept_status_fields":"",
"m_accept_status_fields":"",
"accept_status_id":"",
"accept_status_name":"",
"sync_contact":"",
"my_favorite":false,
"_acl":{
  "fields":{
    }
  }
},
{
  "id":"95e17367-9b3d-0e26-22dc-512d0961fedf",
  "name":"Florence Haddock",
  "date_entered":"2013-02-26T19:12:00+00:00",
  "date_modified":"2013-02-26T19:12:00+00:00",
  "modified_user_id":"1",
  "modified_by_name":"Administrator",
  "created_by":"1",
  "created_by_name":"Administrator",
  "description":"",
  "img":"",
  "deleted":false,
  "assigned_user_id":"seed_sally_id",
  "assigned_user_name":"Sally Bronsen",
  "team_name":[
    {
      "id":"East",
      "name":"East",
      "name_2":"",
      "primary":false
    },
    {
      "id":1,
      "name":"Global",
      "name_2":"",
      "primary":false
    }
  ]
}
```

---

```
    },
    {
      "id": "West",
      "name": "West",
      "name_2": "",
      "primary": true
    }
  ],
  "salutation": "",
  "first_name": "Florence",
  "last_name": "Haddock",
  "full_name": "Florence Haddock",
  "title": "Director Sales",
  "linkedin": "",
  "facebook": "",
  "twitter": "",
  "googleplus": "",
  "department": "",
  "do_not_call": false,
  "phone_home": "(729) 845-3137",
  "email": [
    {
      "email_address": "dev.vegan@example.de",
      "opt_out": "1",
      "invalid_email": "0",
      "primary_address": "0"
    },
    {
      "email_address": "section71@example.it",
      "opt_out": "0",
      "invalid_email": "0",
      "primary_address": "1"
    }
  ],
  "phone_mobile": "(246) 233-1382",
  "phone_work": "(565) 696-6981",
  "phone_other": "",
  "phone_fax": "",
  "email1": "section71@example.it",
  "email2": "dev.vegan@example.de",
  "invalid_email": false,
  "email_opt_out": false,
  "primary_address_street": "111 Silicon Valley Road",
  "primary_address_street_2": "",
  "primary_address_street_3": "",
  "primary_address_city": "Denver",
```

---

```
"primary_address_state":"CA",
"primary_address_postalcode":"79900",
"primary_address_country":"USA",
"alt_address_street":"","
"alt_address_street_2":"","
"alt_address_street_3":"","
"alt_address_city":"","
"alt_address_state":"","
"alt_address_postalcode":"","
"alt_address_country":"","
"assistant":"","
"assistant_phone":"","
"picture":"","
"email_and_name1":"","
"lead_source":"Support Portal User Registration",
"account_name":"Smallville Resources Inc",
"account_id":"d5db6292-5c24-eb61-e202-512d09f0134e",
"opportunity_role_fields":"","
"opportunity_role_id":"","
"opportunity_role":"","
"reports_to_id":"","
"report_to_name":"","
"portal_name":"FlorenceHaddock169",
"portal_active":true,
"portal_password":"$1$nWFhTbK6$JF9BCGSqL\NCRbhueX5ia0",
"portal_password1":"","
"portal_app":"","
"preferred_language":"en_us",
"campaign_id":"","
"campaign_name":"","
"c_accept_status_fields":"","
"m_accept_status_fields":"","
"accept_status_id":"","
"accept_status_name":"","
"sync_contact":"","
"my_favorite":false,
"_acl":{
  "fields":{
    }
  }
}
```

---

## Change Log

| Version | Change   |
|---------|--|
| v10     | Added<br>/<module>/:record/link/:link_name/filter<br>GET endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /<module>/:record/link/:link\_name POST

### Overview

Creates a related record.

### Request Arguments

| Name           | Type                   | Description                                      | Required |
|----------------|------------------------|--|----------|
| <record field> | <record field<br>type> | The name value<br>list of fields to<br>populate. | True     |

### Request

```
{  
  "first_name": "Bill",  
  "last_name": "Edwards"  
}
```

### Response Arguments



| Name           | Type  | Description  |
|----------------|-------|--|
| record         | Array | The record associated to the newly created record. |
| related_record | Array | The record that was created and associated.        |

## Response

```
{
  "record": {
    "id": "da6a3741-2a81-ba7f-f249-512d0932e94e",
    "name": "Slender Broadband Inc - 1000 units",
    "date_entered": "2013-02-26T19:12:00+00:00",
    "date_modified": "2013-02-26T19:12:00+00:00",
    "modified_user_id": "1",
    "modified_by_name": "Administrator",
    "created_by": "1",
    "created_by_name": "Administrator",
    "description": "",
    "img": "",
    "deleted": false,
    "assigned_user_id": "seed_max_id",
    "assigned_user_name": "Max Jensen",
    "team_name": [
      {
        "id": "East",
        "name": "East",
        "name_2": "",
        "primary": false
      },
      {
        "id": "West",
        "name": "West",
        "name_2": "",
        "primary": true
      }
    ],
    "opportunity_type": "",
    "account_name": "Slender Broadband Inc",
    "account_id": "181461c6-dc81-1115-1fe0-512d092e8f15",
    "campaign_id": "",
    "campaign_name": "",
    "lead_source": "Campaign",
  }
}
```

---

```
"amount": "25000",
"base_rate": "1",
"amount_usdollar": "25000",
"currency_id": "-99",
"currency_name": "",
"currency_symbol": "",
"date_closed": "2013-02-27",
"date_closed_timestamp": "1361992480",
"next_step": "",
"sales_stage": "Needs Analysis",
"sales_status": "New",
"probability": "90",
"best_case": "25000",
"worst_case": "25000",
"commit_stage": "include",
"my_favorite": false,
"_acl": {
  "fields": {
    }
  }
},
"related_record": {
  "id": "e1c495cb-af17-1b37-dd66-512f934fe155",
  "name": "Bill Edwards",
  "date_entered": "2013-02-28T17:25:00+00:00",
  "date_modified": "2013-02-28T17:25:00+00:00",
  "modified_user_id": "1",
  "modified_by_name": "Administrator",
  "created_by": "1",
  "created_by_name": "Administrator",
  "description": "",
  "img": "",
  "deleted": false,
  "assigned_user_id": "",
  "assigned_user_name": "",
  "team_name": [
    {
      "id": 1,
      "name": "Global",
      "name_2": "",
      "primary": true
    }
  ],
  "salutation": "",
  "first_name": "Bill",
```

---

```
"last_name":"Edwards",
"full_name":"Bill Edwards",
"title":"",
"linkedin":"",
"facebook":"",
"twitter":"",
"googleplus":"",
"department":"",
"do_not_call":false,
"phone_home":"",
"email":[
],
"phone_mobile":"",
"phone_work":"",
"phone_other":"",
"phone_fax":"",
"email1":"",
"email2":"",
"invalid_email":"",
"email_opt_out":"",
"primary_address_street":"",
"primary_address_street_2":"",
"primary_address_street_3":"",
"primary_address_city":"",
"primary_address_state":"",
"primary_address_postalcode":"",
"primary_address_country":"",
"alt_address_street":"",
"alt_address_street_2":"",
"alt_address_street_3":"",
"alt_address_city":"",
"alt_address_state":"",
"alt_address_postalcode":"",
"alt_address_country":"",
"assistant":"",
"assistant_phone":"",
"picture":"",
"email_and_name1":"",
"lead_source":"",
"account_id":"",
"opportunity_role_fields":"",
"opportunity_role_id":"",
"opportunity_role":"",
"reports_to_id":"",
"report_to_name":"",
```

```

"portal_name": "",
"portal_active": false,
"portal_password": "",
"portal_password1": "",
"portal_app": "",
"preferred_language": "en_us",
"campaign_id": "",
"campaign_name": "",
"c_accept_status_fields": "",
"m_accept_status_fields": "",
"accept_status_id": "",
"accept_status_name": "",
"sync_contact": "",
"my_favorite": false,
"_acl": {
  "fields": {
    }
  }
}

```

## Change Log

| Version | Change   |
|---------|--|
| v10     | Added<br>/<module>/:record/link/:link_name<br>POST endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /<module>/:record/link/:link\_name/add\_record\_list/:remote\_id POST

### Overview

---

Creates relationships to pre-existing record from a record list.

## URL Arguments

| Name                | Type     | Description                                | Required |
|---------------------|----------|--|----------|
| <record ID>         | <string> | Target record ID.                          | True.    |
| <report ID>         | <string> | Report ID for Saved Report.                | True.    |
| <relationship link> | <string> | Link between targeted and related records. | True.    |

## Request

## Response Arguments

| Name            | Type  | Description                           |
|-----------------|-------|---------------------------------------|
| record          | Array | The record linked to related records. |
| related_records | Array | Record IDs that were associated.      |

## Response

```
"record": {
  "id": "da6a3741-2a81-ba7f-f249-512d0932e94e",
  "name": "Slender Broadband Inc - 1000 units",
  "date_entered": "2013-02-26T19:12:00+00:00",
  "date_modified": "2013-02-26T19:12:00+00:00",
  "modified_user_id": "1",
  "modified_by_name": "Administrator",
  "created_by": "1",
  "created_by_name": "Administrator",
  "description": "",
  "img": "",
  "last_activity_date": "2013-02-28T18:21:00+00:00",
```

---

```
"deleted": false,
"assigned_user_id": "seed_max_id",
"assigned_user_name": "Max Jensen",
"team_name": [
  {
    "id": "East",
    "name": "East",
    "name_2": "",
    "primary": false
  },
  {
    "id": "West",
    "name": "West",
    "name_2": "",
    "primary": true
  }
],
"opportunity_type": "",
"account_name": "Slender Broadband Inc",
"account_id": "181461c6-dc81-1115-1fe0-512d092e8f15",
"campaign_id": "",
"campaign_name": "",
"lead_source": "Campaign",
"amount": "25000",
"base_rate": "1",
"amount_usdollar": "25000",
"currency_id": "-99",
"currency_name": "",
"currency_symbol": "",
"date_closed": "2013-02-27",
"date_closed_timestamp": "1361992480",
"next_step": "",
"sales_stage": "Needs Analysis",
"sales_status": "New",
"probability": "90",
"best_case": "25000",
"worst_case": "25000",
"commit_stage": "include",
"my_favorite": false,
"_acl": {
  "fields": {
  }
}
},
"related_records": [
```

---

```
    success: [
      "e689173e-c953-1e14-c215-512d0927e7a2",
      "da6a3741-2a81-ba7f-f249-512d0932e94e",
      "181461c6-dc81-1115-1fe0-512d092e8f15"
    ],
    error: []
  ]
}
```

## Change Log

| Version     | Change   |
|-------------|--|
| v10 (7.2.0) | Added <code>/&lt;module&gt;/:record/link/:link_name/add_record_list/:remote_id</code> POST endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## `/<module>/:record/link/:link_name/count` GET

### Overview

Lists related filtered records.

### Summary

This endpoint will return a set of related records filtered by an expression. The filter can be applied to multiple fields and have multiple and/or conditions in it. Care will need to be taken to make sure this filter has appropriate indexes on the server side otherwise the runtime of the endpoint will be very long. Related fields can be searched by specifying the field name as: `"link_name.remote_field"`, so if you wished to search the Accounts module by a related member account you would use `"members.sic_code"`.

---

## Request Arguments

| Name    | Type    | Description  | Required |
|---------|---------|--|----------|
| filter  | String  | The filter expression. Filter expressions are explained below.   | False    |
| max_num | Integer | A maximum number of records to return. Default is 20.  | False    |
| offset  | Integer | The number of records to skip over before records are returned. Default is 0.  | False    |
| fields  | String  | Comma delimited list of fields to return. The field date_modified will always be returned. This argument can be combined with the view argument. Example: name,account_type,description  | False    |
| view    | String  | Instead of defining the fields argument, the view argument can be used instead. The field list is constructed at the server side based on the view definition which is requested. This argument can be used in combination with the fields argument. Common views are "record" | False    |



| Name     | Type   | Description   | Required |
|----------|--------|---|----------|
|          |        | and "list".<br>Example: record  |          |
| order_by | String | How to sort the returned records, in a comma delimited list with the direction appended to the column name after a colon.<br>Example: name:DESC,account_type:DESC,date_modified:ASC | False    |

## Filter Expressions

There are four types of filters:

### Basic

This will filter the results by checking the field "name" for value "Nelson Inc". This will only find exact matches.

### Example

```
{
  "filter":[
    {
      "name":"Nelson Inc"
    }
  ]
}
```

### Full

This expression allows you to specify what operation you want to use for filtering on the field. In the example you would match any record where the field "name"

---

starts with the value "Nelson".

**Example**

```
{
  "filter": [
    {
      "name": {
        "$starts": "Nelson"
      }
    }
  ]
}
```

Below is a list of operation types:

| Operation    | Description   |
|--------------|---|
| \$equals     | Performs an exact match on that field.  |
| \$not_equals | Performs an exact match on that field.  |
| \$not_equals | Matches on non-matching values.   |
| \$starts     | Matches on anything that starts with the value.   |
| \$ends       | Matches anything that ends with the value.  |
| \$contains   | Matches anything that contains the value  |
| \$in         | Finds anything where field matches one of the values as specified as an array.          |
| \$not_in     | Finds anything where field does not matches any of the values as specified as an array. |
| \$is_null    | Checks if the field is null. This operation does not need a value specified.            |
| \$not_null   | Checks if the field is not null. This operation does not need a value specified.        |
| \$lt         | Matches when the field is less than the value.  |
| \$lte        | Matches when the field is less than or  |

| Operation | Description   |
|-----------|---|
|           | equal to the value.   |
| \$gt      | Matches when the field is greater than the value.             |
| \$gte     | Matches when the field is greater than or equal to the value. |

## Sub-expressions

This allows you to group filter expressions into or/and groupings. By default all expressions are and'ed together. The example expression would match if the field "name" was either "Nelson Inc" or "Nelson LLC". The only currently accepted sub-expression types are "\$and" and "\$or".

### Example

```
{
  "filter": [
    {
      "$or": [
        {
          "name": "Nelson Inc"
        },
        {
          "name": "Nelson LLC"
        }
      ]
    }
  ]
}
```

## Modules

There are two module expressions, they operate on modules instead of fields. The current module can be specified by either using the module name "\_this" or by leaving the module name as a blank string. The example expression would filter the records in the current module to only your favorites. The only currently accepted module expressions are "\$favorite" and "\$owner".

---

## Example

```
{
  "filter":[
    {
      "$favorite":"_this"
    }
  ]
}
```

## Response Arguments

| Name        | Type    | Description   |
|-------------|---------|---|
| next_offset | Integer | Displays the next offset for retrieval of additional results. -1 will be returned when there are no more records. |
| records     | Array   | An array of results containing matched records.   |

## Response

```
{
  "next_offset":-1,
  "records":[
    {
      "id":"fa300a0e-0ad1-b322-9601-512d0983c19a",
      "name":"Dale Spivey",
      "date_entered":"2013-02-26T19:12:00+00:00",
      "date_modified":"2013-02-28T05:03:00+00:00",
      "modified_user_id":"1",
      "modified_by_name":"Administrator",
      "created_by":"1",
      "created_by_name":"Administrator",
      "description":"",
      "img":"",
      "deleted":false,
      "assigned_user_id":"seed_sally_id",
    }
  ]
}
```

---

```
"assigned_user_name": "Sally Bronsen",
"team_name": [
  {
    "id": "East",
    "name": "East",
    "name_2": "",
    "primary": false
  },
  {
    "id": 1,
    "name": "Global",
    "name_2": "",
    "primary": false
  },
  {
    "id": "West",
    "name": "West",
    "name_2": "",
    "primary": true
  }
],
"salutation": "",
"first_name": "Dale",
"last_name": "Spivey",
"full_name": "Dale Spivey",
"title": "VP Operations",
"linkedin": "",
"facebook": "",
"twitter": "",
"googleplus": "",
"department": "",
"do_not_call": false,
"phone_home": "(523) 825-4311",
"email": [
  {
    "email_address": "sugar.dev.sugar@example.co.jp",
    "opt_out": "0",
    "invalid_email": "0",
    "primary_address": "1"
  },
  {
    "email_address": "the.support@example.biz",
    "opt_out": "0",
    "invalid_email": "0",
    "primary_address": "0"
  }
]
```

---

```
],
"phone_mobile": "(373) 861-0757",
"phone_work": "(212) 542-9596",
"phone_other": "",
"phone_fax": "",
"email1": "sugar.dev.sugar@example.co.jp",
"email2": "the.support@example.biz",
"invalid_email": false,
"email_opt_out": false,
"primary_address_street": "345 Sugar Blvd.",
"primary_address_street_2": "",
"primary_address_street_3": "",
"primary_address_city": "Denver",
"primary_address_state": "CA",
"primary_address_postalcode": "87261",
"primary_address_country": "USA",
"alt_address_street": "",
"alt_address_street_2": "",
"alt_address_street_3": "",
"alt_address_city": "",
"alt_address_state": "",
"alt_address_postalcode": "",
"alt_address_country": "",
"assistant": "",
"assistant_phone": "",
"picture": "",
"email_and_name1": "",
"lead_source": "Campaign",
"account_name": "Smallville Resources Inc",
"account_id": "d5db6292-5c24-eb61-e202-512d09f0134e",
"opportunity_role_fields": "",
"opportunity_role_id": "",
"opportunity_role": "",
"reports_to_id": "",
"report_to_name": "",
"portal_name": "DaleSpivey97",
"portal_active": true,
"portal_password": "$1$yKMAONHM$Y5S.8CY.WZCZCwfGD1a1Q\/",
"portal_password1": "",
"portal_app": "",
"preferred_language": "en_us",
"campaign_id": "",
"campaign_name": "",
"c_accept_status_fields": "",
"m_accept_status_fields": "",
"accept_status_id": "",
```

---

```

    "accept_status_name": "",
    "sync_contact": "",
    "my_favorite": false,
    "_acl": {
      "fields": {
        }
      }
    },
    {
      "id": "95e17367-9b3d-0e26-22dc-512d0961fedf",
      "name": "Florence Haddock",
      "date_entered": "2013-02-26T19:12:00+00:00",
      "date_modified": "2013-02-26T19:12:00+00:00",
      "modified_user_id": "1",
      "modified_by_name": "Administrator",
      "created_by": "1",
      "created_by_name": "Administrator",
      "description": "",
      "img": "",
      "deleted": false,
      "assigned_user_id": "seed_sally_id",
      "assigned_user_name": "Sally Bronsen",
      "team_name": [
        {
          "id": "East",
          "name": "East",
          "name_2": "",
          "primary": false
        },
        {
          "id": "1",
          "name": "Global",
          "name_2": "",
          "primary": false
        },
        {
          "id": "West",
          "name": "West",
          "name_2": "",
          "primary": true
        }
      ],
      "salutation": "",
      "first_name": "Florence",
      "last_name": "Haddock",

```

---

```
"full_name": "Florence Haddock",
"title": "Director Sales",
"linkedin": "",
"facebook": "",
"twitter": "",
"googleplus": "",
"department": "",
"do_not_call": false,
"phone_home": "(729) 845-3137",
"email": [
  {
    "email_address": "dev.vegan@example.de",
    "opt_out": "1",
    "invalid_email": "0",
    "primary_address": "0"
  },
  {
    "email_address": "section71@example.it",
    "opt_out": "0",
    "invalid_email": "0",
    "primary_address": "1"
  }
],
"phone_mobile": "(246) 233-1382",
"phone_work": "(565) 696-6981",
"phone_other": "",
"phone_fax": "",
"email1": "section71@example.it",
"email2": "dev.vegan@example.de",
"invalid_email": false,
"email_opt_out": false,
"primary_address_street": "111 Silicon Valley Road",
"primary_address_street_2": "",
"primary_address_street_3": "",
"primary_address_city": "Denver",
"primary_address_state": "CA",
"primary_address_postalcode": "79900",
"primary_address_country": "USA",
"alt_address_street": "",
"alt_address_street_2": "",
"alt_address_street_3": "",
"alt_address_city": "",
"alt_address_state": "",
"alt_address_postalcode": "",
"alt_address_country": "",
"assistant": "",
```



```

"assistant_phone":"","
"picture":"","
"email_and_name1":"","
"lead_source":"Support Portal User Registration",
"account_name":"Smallville Resources Inc",
"account_id":"d5db6292-5c24-eb61-e202-512d09f0134e",
"opportunity_role_fields":"","
"opportunity_role_id":"","
"opportunity_role":"","
"reports_to_id":"","
"report_to_name":"","
"portal_name":"FlorenceHaddock169",
"portal_active":true,
"portal_password":"$1$NWFhTbK6$JF9BCGSqL\NCRbhueX5ia0",
"portal_password1":"","
"portal_app":"","
"preferred_language":"en_us",
"campaign_id":"","
"campaign_name":"","
"c_accept_status_fields":"","
"m_accept_status_fields":"","
"accept_status_id":"","
"accept_status_name":"","
"sync_contact":"","
"my_favorite":false,
"_acl":{
  "fields":{
    }
  }
}
]
}

```

## Change Log

| Version | Change   |
|---------|--|
| v10     | Added<br>/<module>/:record/link/:link_name/filter<br>GET endpoint. |

## **/<module>/:record/link/:link\_name/filter GET**

### **Overview**

Lists related filtered records.

### **Summary**

This endpoint will return a set of related records filtered by an expression. The filter can be applied to multiple fields and have multiple and/or conditions in it. Care will need to be taken to make sure this filter has appropriate indexes on the server side otherwise the runtime of the endpoint will be very long. Related fields can be searched by specifying the field name as: "link\_name.remote\_field", so if you wished to search the Accounts module by a related member account you would use "members.sic\_code".

### **Request Arguments**

| Name    | Type    | Description   | Required |
|---------|---------|---|----------|
| filter  | String  | The filter expression. Filter expressions are explained below.                | False    |
| max_num | Integer | A maximum number of records to return. Default is 20.                         | False    |
| offset  | Integer | The number of records to skip over before records are returned. Default is 0. | False    |
| fields  | String  | Comma delimited list of fields to return. The field date_modified will        | False    |

| Name     | Type   | Description  | Required |
|----------|--------|--|----------|
|          |        | always be returned. This argument can be combined with the view argument. Example: name,account_type,description   |          |
| view     | String | Instead of defining the fields argument, the view argument can be used instead. The field list is constructed at the server side based on the view definition which is requested. This argument can be used in combination with the fields argument. Common views are "record" and "list". Example: record | False    |
| order_by | String | How to sort the returned records, in a comma delimited list with the direction appended to the column name after a colon. Example: name:DESC,account_type:DESC,date_modified:ASC   | False    |

## Filter Expressions

There are four types of filters:

---

## Basic

This will filter the results by checking the field "name" for value "Nelson Inc". This will only find exact matches.

### Example

```
{
  "filter": [
    {
      "name": "Nelson Inc"
    }
  ]
}
```

## Full

This expression allows you to specify what operation you want to use for filtering on the field. In the example you would match any record where the field "name" starts with the value "Nelson".

### Example

```
{
  "filter": [
    {
      "name": {
        "$starts": "Nelson"
      }
    }
  ]
}
```

Below is a list of operation types:

| Operation                 | Description                            |
|---------------------------|--|
| <code>\$equals</code>     | Performs an exact match on that field. |
| <code>\$not_equals</code> | Performs an exact match on that field. |
| <code>\$not_equals</code> | Matches on non-matching values.        |
| <code>\$starts</code>     | Matches on anything that starts with   |

| Operation  | Description   |
|------------|---|
|            | the value.  |
| \$ends     | Matches anything that ends with the value.  |
| \$contains | Matches anything that contains the value  |
| \$in       | Finds anything where field matches one of the values as specified as an array.          |
| \$not_in   | Finds anything where field does not matches any of the values as specified as an array. |
| \$is_null  | Checks if the field is null. This operation does not need a value specified.            |
| \$not_null | Checks if the field is not null. This operation does not need a value specified.        |
| \$lt       | Matches when the field is less than the value.  |
| \$lte      | Matches when the field is less than or equal to the value.                              |
| \$gt       | Matches when the field is greater than the value.                                       |
| \$gte      | Matches when the field is greater than or equal to the value.                           |

## Sub-expressions

This allows you to group filter expressions into or/and groupings. By default all expressions are and'ed together. The example expression would match if the field "name" was either "Nelson Inc" or "Nelson LLC". The only currently accepted sub-expression types are "\$and" and "\$or".

### Example

```
{
  "filter": [
    {
```

```

    "$or": [
      {
        "name": "Nelson Inc"
      },
      {
        "name": "Nelson LLC"
      }
    ]
  }
]
}

```

## Modules

There are two module expressions, they operate on modules instead of fields. The current module can be specified by either using the module name "\_this" or by leaving the module name as a blank string. The example expression would filter the records in the current module to only your favorites. The only currently accepted module expressions are "\$favorite" and "\$owner".

### Example

```

{
  "filter": [
    {
      "$favorite": "_this"
    }
  ]
}

```

## Response Arguments

| Name        | Type    | Description   |
|-------------|---------|---|
| next_offset | Integer | Displays the next offset for retrieval of additional results. -1 will be returned when there are no more records. |
|             |         |   |

---

| Name    | Type  | Description                                     |
|---------|-------|---|
| records | Array | An array of results containing matched records. |

## Response

```
{
  "next_offset":-1,
  "records":[
    {
      "id":"fa300a0e-0ad1-b322-9601-512d0983c19a",
      "name":"Dale Spivey",
      "date_entered":"2013-02-26T19:12:00+00:00",
      "date_modified":"2013-02-28T05:03:00+00:00",
      "modified_user_id":"1",
      "modified_by_name":"Administrator",
      "created_by":"1",
      "created_by_name":"Administrator",
      "description":"",
      "img":"",
      "deleted":false,
      "assigned_user_id":"seed_sally_id",
      "assigned_user_name":"Sally Bronsen",
      "team_name":[
        {
          "id":"East",
          "name":"East",
          "name_2":"",
          "primary":false
        },
        {
          "id":1,
          "name":"Global",
          "name_2":"",
          "primary":false
        },
        {
          "id":"West",
          "name":"West",
          "name_2":"",
          "primary":true
        }
      ]
    }
  ]
}
```

---

```
],
"salutation": "",
"first_name": "Dale",
"last_name": "Spivey",
"full_name": "Dale Spivey",
"title": "VP Operations",
"linkedin": "",
"facebook": "",
"twitter": "",
"googleplus": "",
"department": "",
"do_not_call": false,
"phone_home": "(523) 825-4311",
"email": [
  {
    "email_address": "sugar.dev.sugar@example.co.jp",
    "opt_out": "0",
    "invalid_email": "0",
    "primary_address": "1"
  },
  {
    "email_address": "the.support@example.biz",
    "opt_out": "0",
    "invalid_email": "0",
    "primary_address": "0"
  }
],
"phone_mobile": "(373) 861-0757",
"phone_work": "(212) 542-9596",
"phone_other": "",
"phone_fax": "",
"email1": "sugar.dev.sugar@example.co.jp",
"email2": "the.support@example.biz",
"invalid_email": false,
"email_opt_out": false,
"primary_address_street": "345 Sugar Blvd.",
"primary_address_street_2": "",
"primary_address_street_3": "",
"primary_address_city": "Denver",
"primary_address_state": "CA",
"primary_address_postalcode": "87261",
"primary_address_country": "USA",
"alt_address_street": "",
"alt_address_street_2": "",
"alt_address_street_3": "",
"alt_address_city": "",
```



---

```
"alt_address_state":"","
"alt_address_postalcode":"","
"alt_address_country":"","
"assistant":"","
"assistant_phone":"","
"picture":"","
"email_and_name1":"","
"lead_source":"Campaign",
"account_name":"Smallville Resources Inc",
"account_id":"d5db6292-5c24-eb61-e202-512d09f0134e",
"opportunity_role_fields":"","
"opportunity_role_id":"","
"opportunity_role":"","
"reports_to_id":"","
"report_to_name":"","
"portal_name":"DaleSpivey97",
"portal_active":true,
"portal_password":"$1$yKMAONHM$Y5S.8CY.WZCZCwfGD1a1Q\/",
"portal_password1":"","
"portal_app":"","
"preferred_language":"en_us",
"campaign_id":"","
"campaign_name":"","
"c_accept_status_fields":"","
"m_accept_status_fields":"","
"accept_status_id":"","
"accept_status_name":"","
"sync_contact":"","
"my_favorite":false,
"_acl":{
  "fields":{
    }
  }
},
{
  "id":"95e17367-9b3d-0e26-22dc-512d0961fedf",
  "name":"Florence Haddock",
  "date_entered":"2013-02-26T19:12:00+00:00",
  "date_modified":"2013-02-26T19:12:00+00:00",
  "modified_user_id":"1",
  "modified_by_name":"Administrator",
  "created_by":"1",
  "created_by_name":"Administrator",
  "description":"","
  "img":"","
```

---

```
"deleted":false,
"assigned_user_id":"seed_sally_id",
"assigned_user_name":"Sally Bronsen",
"team_name":[
  {
    "id":"East",
    "name":"East",
    "name_2":"",
    "primary":false
  },
  {
    "id":1,
    "name":"Global",
    "name_2":"",
    "primary":false
  },
  {
    "id":"West",
    "name":"West",
    "name_2":"",
    "primary":true
  }
],
"salutation":"",
"first_name":"Florence",
"last_name":"Haddock",
"full_name":"Florence Haddock",
"title":"Director Sales",
"linkedin":"",
"facebook":"",
"twitter":"",
"googleplus":"",
"department":"",
"do_not_call":false,
"phone_home":"(729) 845-3137",
"email":[
  {
    "email_address":"dev.vegan@example.de",
    "opt_out":"1",
    "invalid_email":"0",
    "primary_address":"0"
  },
  {
    "email_address":"section71@example.it",
    "opt_out":"0",
    "invalid_email":"0",
```

---

```
        "primary_address": "1"
    }
],
"phone_mobile": "(246) 233-1382",
"phone_work": "(565) 696-6981",
"phone_other": "",
"phone_fax": "",
"email1": "section71@example.it",
"email2": "dev.vegan@example.de",
"invalid_email": false,
"email_opt_out": false,
"primary_address_street": "111 Silicon Valley Road",
"primary_address_street_2": "",
"primary_address_street_3": "",
"primary_address_city": "Denver",
"primary_address_state": "CA",
"primary_address_postalcode": "79900",
"primary_address_country": "USA",
"alt_address_street": "",
"alt_address_street_2": "",
"alt_address_street_3": "",
"alt_address_city": "",
"alt_address_state": "",
"alt_address_postalcode": "",
"alt_address_country": "",
"assistant": "",
"assistant_phone": "",
"picture": "",
"email_and_name1": "",
"lead_source": "Support Portal User Registration",
"account_name": "Smallville Resources Inc",
"account_id": "d5db6292-5c24-eb61-e202-512d09f0134e",
"opportunity_role_fields": "",
"opportunity_role_id": "",
"opportunity_role": "",
"reports_to_id": "",
"report_to_name": "",
"portal_name": "FlorenceHaddock169",
"portal_active": true,
"portal_password": "$1$NWFhTbK6$JF9BCGSqL\NCRbhueX5ia0",
"portal_password1": "",
"portal_app": "",
"preferred_language": "en_us",
"campaign_id": "",
"campaign_name": "",
"c_accept_status_fields": "",
```

---

```
    "m_accept_status_fields": "",
    "accept_status_id": "",
    "accept_status_name": "",
    "sync_contact": "",
    "my_favorite": false,
    "_acl": {
      "fields": {
        }
      }
    ]
  }
```

## Change Log

| Version | Change   |
|---------|--|
| v10     | Added<br>/<module>/:record/link/:link_name/filter<br>GET endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /<module>/:record/link/:link\_name/filter/count GET

### Overview

Lists related filtered records.

### Summary

This endpoint will return a set of related records filtered by an expression. The filter can be applied to multiple fields and have multiple and/or conditions in it. Care will need to be taken to make sure this filter has appropriate indexes on the

---

server side otherwise the runtime of the endpoint will be very long. Related fields can be searched by specifying the field name as: "link\_name.remote\_field", so if you wished to search the Accounts module by a related member account you would use "members.sic\_code".

## Request Arguments

| Name    | Type    | Description   | Required |
|---------|---------|---|----------|
| filter  | String  | The filter expression. Filter expressions are explained below.  | False    |
| max_num | Integer | A maximum number of records to return. Default is 20.   | False    |
| offset  | Integer | The number of records to skip over before records are returned. Default is 0.   | False    |
| fields  | String  | Comma delimited list of fields to return. The field date_modified will always be returned. This argument can be combined with the view argument. Example: name,account_type,description | False    |
| view    | String  | Instead of defining the fields argument, the view argument can be used instead. The field list is constructed at the server side based on the view definition which is requested. This  | False    |

| Name     | Type   | Description   | Required |
|----------|--------|---|----------|
|          |        | argument can be used in combination with the fields argument. Common views are "record" and "list".<br>Example: record  |          |
| order_by | String | How to sort the returned records, in a comma delimited list with the direction appended to the column name after a colon.<br>Example: name:DESC,account_type:DESC,date_modified:ASC | False    |

## Filter Expressions

There are four types of filters:

### Basic

This will filter the results by checking the field "name" for value "Nelson Inc". This will only find exact matches.

### Example

```
{
  "filter":[
    {
      "name":"Nelson Inc"
    }
  ]
}
```

---

## Full

This expression allows you to specify what operation you want to use for filtering on the field. In the example you would match any record where the field "name" starts with the value "Nelson".

### Example

```
{
  "filter": [
    {
      "name": {
        "$starts": "Nelson"
      }
    }
  ]
}
```

Below is a list of operation types:

| Operation                 | Description   |
|---------------------------|---|
| <code>\$equals</code>     | Performs an exact match on that field.  |
| <code>\$not_equals</code> | Performs an exact match on that field.  |
| <code>\$not_equals</code> | Matches on non-matching values.   |
| <code>\$starts</code>     | Matches on anything that starts with the value.   |
| <code>\$ends</code>       | Matches anything that ends with the value.  |
| <code>\$contains</code>   | Matches anything that contains the value  |
| <code>\$in</code>         | Finds anything where field matches one of the values as specified as an array.          |
| <code>\$not_in</code>     | Finds anything where field does not matches any of the values as specified as an array. |
| <code>\$is_null</code>    | Checks if the field is null. This operation does not need a value specified.            |
| <code>\$not_null</code>   | Checks if the field is not null. This operation does not need a value specified.        |

---

| Operation | Description   |
|-----------|---|
| \$lt      | Matches when the field is less than the value.                |
| \$lte     | Matches when the field is less than or equal to the value.    |
| \$gt      | Matches when the field is greater than the value.             |
| \$gte     | Matches when the field is greater than or equal to the value. |

## Sub-expressions

This allows you to group filter expressions into or/and groupings. By default all expressions are and'ed together. The example expression would match if the field "name" was either "Nelson Inc" or "Nelson LLC". The only currently accepted sub-expression types are "\$and" and "\$or".

### Example

```
{
  "filter": [
    {
      "$or": [
        {
          "name": "Nelson Inc"
        },
        {
          "name": "Nelson LLC"
        }
      ]
    }
  ]
}
```

## Modules

There are two module expressions, they operate on modules instead of fields. The current module can be specified by either using the module name "\_this" or by



---

leaving the module name as a blank string. The example expression would filter the records in the current module to only your favorites. The only currently accepted module expressions are "\$favorite" and "\$owner".

### Example

```
{
  "filter":[
    {
      "$favorite":"_this"
    }
  ]
}
```

## Response Arguments

| Name        | Type    | Description   |
|-------------|---------|---|
| next_offset | Integer | Displays the next offset for retrieval of additional results. -1 will be returned when there are no more records. |
| records     | Array   | An array of results containing matched records.   |

## Response

```
{
  "next_offset":-1,
  "records":[
    {
      "id":"fa300a0e-0ad1-b322-9601-512d0983c19a",
      "name":"Dale Spivey",
      "date_entered":"2013-02-26T19:12:00+00:00",
      "date_modified":"2013-02-28T05:03:00+00:00",
      "modified_user_id":"1",
      "modified_by_name":"Administrator",
      "created_by":"1",
```

---

```
"created_by_name": "Administrator",
"description": "",
"img": "",
"deleted": false,
"assigned_user_id": "seed_sally_id",
"assigned_user_name": "Sally Bronsen",
"team_name": [
  {
    "id": "East",
    "name": "East",
    "name_2": "",
    "primary": false
  },
  {
    "id": 1,
    "name": "Global",
    "name_2": "",
    "primary": false
  },
  {
    "id": "West",
    "name": "West",
    "name_2": "",
    "primary": true
  }
],
"salutation": "",
"first_name": "Dale",
"last_name": "Spivey",
"full_name": "Dale Spivey",
"title": "VP Operations",
"linkedin": "",
"facebook": "",
"twitter": "",
"googleplus": "",
"department": "",
"do_not_call": false,
"phone_home": "(523) 825-4311",
"email": [
  {
    "email_address": "sugar.dev.sugar@example.co.jp",
    "opt_out": "0",
    "invalid_email": "0",
    "primary_address": "1"
  },
  {
```

---

```
        "email_address": "the.support@example.biz",
        "opt_out": "0",
        "invalid_email": "0",
        "primary_address": "0"
    }
],
"phone_mobile": "(373) 861-0757",
"phone_work": "(212) 542-9596",
"phone_other": "",
"phone_fax": "",
"email1": "sugar.dev.sugar@example.co.jp",
"email2": "the.support@example.biz",
"invalid_email": false,
"email_opt_out": false,
"primary_address_street": "345 Sugar Blvd.",
"primary_address_street_2": "",
"primary_address_street_3": "",
"primary_address_city": "Denver",
"primary_address_state": "CA",
"primary_address_postalcode": "87261",
"primary_address_country": "USA",
"alt_address_street": "",
"alt_address_street_2": "",
"alt_address_street_3": "",
"alt_address_city": "",
"alt_address_state": "",
"alt_address_postalcode": "",
"alt_address_country": "",
"assistant": "",
"assistant_phone": "",
"picture": "",
"email_and_name1": "",
"lead_source": "Campaign",
"account_name": "Smallville Resources Inc",
"account_id": "d5db6292-5c24-eb61-e202-512d09f0134e",
"opportunity_role_fields": "",
"opportunity_role_id": "",
"opportunity_role": "",
"reports_to_id": "",
"report_to_name": "",
"portal_name": "DaleSpivey97",
"portal_active": true,
"portal_password": "$1$yKMAONHM$Y5S.8CY.WZCZCwfGD1a1Q\\/",
"portal_password1": "",
"portal_app": "",
"preferred_language": "en_us",
```

---

```
"campaign_id":"","  
"campaign_name":"","  
"c_accept_status_fields":"","  
"m_accept_status_fields":"","  
"accept_status_id":"","  
"accept_status_name":"","  
"sync_contact":"","  
"my_favorite":false,  
"_acl":{  
  "fields":{  
  
  }  
}  
},  
{  
  "id":"95e17367-9b3d-0e26-22dc-512d0961fedf",  
  "name":"Florence Haddock",  
  "date_entered":"2013-02-26T19:12:00+00:00",  
  "date_modified":"2013-02-26T19:12:00+00:00",  
  "modified_user_id":"1",  
  "modified_by_name":"Administrator",  
  "created_by":"1",  
  "created_by_name":"Administrator",  
  "description":"","  
  "img":"","  
  "deleted":false,  
  "assigned_user_id":"seed_sally_id",  
  "assigned_user_name":"Sally Bronsen",  
  "team_name":[  
    {  
      "id":"East",  
      "name":"East",  
      "name_2":"","  
      "primary":false  
    },  
    {  
      "id":1,  
      "name":"Global",  
      "name_2":"","  
      "primary":false  
    },  
    {  
      "id":"West",  
      "name":"West",  
      "name_2":"","  
      "primary":true  
    }  
  ]  
}
```

---

```
    }
  ],
  "salutation": "",
  "first_name": "Florence",
  "last_name": "Haddock",
  "full_name": "Florence Haddock",
  "title": "Director Sales",
  "linkedin": "",
  "facebook": "",
  "twitter": "",
  "googleplus": "",
  "department": "",
  "do_not_call": false,
  "phone_home": "(729) 845-3137",
  "email": [
    {
      "email_address": "dev.vegan@example.de",
      "opt_out": "1",
      "invalid_email": "0",
      "primary_address": "0"
    },
    {
      "email_address": "section71@example.it",
      "opt_out": "0",
      "invalid_email": "0",
      "primary_address": "1"
    }
  ],
  "phone_mobile": "(246) 233-1382",
  "phone_work": "(565) 696-6981",
  "phone_other": "",
  "phone_fax": "",
  "email1": "section71@example.it",
  "email2": "dev.vegan@example.de",
  "invalid_email": false,
  "email_opt_out": false,
  "primary_address_street": "111 Silicon Valley Road",
  "primary_address_street_2": "",
  "primary_address_street_3": "",
  "primary_address_city": "Denver",
  "primary_address_state": "CA",
  "primary_address_postalcode": "79900",
  "primary_address_country": "USA",
  "alt_address_street": "",
  "alt_address_street_2": "",
  "alt_address_street_3": "",
```

---

```

"alt_address_city":"","
"alt_address_state":"","
"alt_address_postalcode":"","
"alt_address_country":"","
"assistant":"","
"assistant_phone":"","
"picture":"","
"email_and_name1":"","
"lead_source":"Support Portal User Registration",
"account_name":"Smallville Resources Inc",
"account_id":"d5db6292-5c24-eb61-e202-512d09f0134e",
"opportunity_role_fields":"","
"opportunity_role_id":"","
"opportunity_role":"","
"reports_to_id":"","
"report_to_name":"","
"portal_name":"FlorenceHaddock169",
"portal_active":true,
"portal_password":"$1$nWFhTbK6$JF9BCGSqL\NCRbhueX5ia0",
"portal_password1":"","
"portal_app":"","
"preferred_language":"en_us",
"campaign_id":"","
"campaign_name":"","
"c_accept_status_fields":"","
"m_accept_status_fields":"","
"accept_status_id":"","
"accept_status_name":"","
"sync_contact":"","
"my_favorite":false,
"_acl":{
  "fields":{
    }
  }
}
]
}

```

## Change Log

| Version | Change |
|---------|--------|
| v10     | Added  |

---

|   |
|---|
| /<module>/:record/link/:link_name/filter<br>GET endpoint. |
|---|

Last Modified: 2021-02-17 02:44:13

## /<module>/:record/link/:link\_name/filter/leancount GET

### Overview

Lists related filtered records.

### Summary

This endpoint will return a set of related records filtered by an expression. The filter can be applied to multiple fields and have multiple and/or conditions in it. Care will need to be taken to make sure this filter has appropriate indexes on the server side otherwise the runtime of the endpoint will be very long. Related fields can be searched by specifying the field name as: "link\_name.remote\_field", so if you wished to search the Accounts module by a related member account you would use "members.sic\_code".

### Request Arguments

| Name    | Type    | Description  | Required |
|---------|---------|--|----------|
| filter  | String  | The filter expression. Filter expressions are explained below. | False    |
| max_num | Integer | A maximum number of records to return. Default is 20.          | False    |
| offset  | Integer | The number of records to skip over                             | False    |

| Name     | Type   | Description  | Required |
|----------|--------|--|----------|
|          |        | before records are returned. Default is 0.   |          |
| fields   | String | Comma delimited list of fields to return. The field date_modified will always be returned. This argument can be combined with the view argument. Example: name,account_type,description  | False    |
| view     | String | Instead of defining the fields argument, the view argument can be used instead. The field list is constructed at the server side based on the view definition which is requested. This argument can be used in combination with the fields argument. Common views are "record" and "list". Example: record | False    |
| order_by | String | How to sort the returned records, in a comma delimited list with the direction appended to the column name after a colon. Example: name:DESC,account_type:D  | False    |



---

| Name | Type | Description               | Required |
|------|------|---------------------------|----------|
|      |      | ESC,date_modified:<br>ASC |          |

## Filter Expressions

There are four types of filters:

### Basic

This will filter the results by checking the field "name" for value "Nelson Inc". This will only find exact matches.

#### Example

```
{
  "filter": [
    {
      "name": "Nelson Inc"
    }
  ]
}
```

### Full

This expression allows you to specify what operation you want to use for filtering on the field. In the example you would match any record where the field "name" starts with the value "Nelson".

#### Example

```
{
  "filter": [
    {
      "name": {
        "$starts": "Nelson"
      }
    }
  ]
}
```

}

Below is a list of operation types:

| Operation    | Description   |
|--------------|---|
| \$equals     | Performs an exact match on that field.  |
| \$not_equals | Performs an exact match on that field.  |
| \$not_equals | Matches on non-matching values.   |
| \$starts     | Matches on anything that starts with the value.   |
| \$ends       | Matches anything that ends with the value.  |
| \$contains   | Matches anything that contains the value  |
| \$in         | Finds anything where field matches one of the values as specified as an array.          |
| \$not_in     | Finds anything where field does not matches any of the values as specified as an array. |
| \$is_null    | Checks if the field is null. This operation does not need a value specified.            |
| \$not_null   | Checks if the field is not null. This operation does not need a value specified.        |
| \$lt         | Matches when the field is less than the value.  |
| \$lte        | Matches when the field is less than or equal to the value.                              |
| \$gt         | Matches when the field is greater than the value.                                       |
| \$gte        | Matches when the field is greater than or equal to the value.                           |

## Sub-expressions

This allows you to group filter expressions into or/and groupings. By default all expressions are and'ed together. The example expression would match if the field

---

"name" was either "Nelson Inc" or "Nelson LLC". The only currently accepted sub-expression types are "\$and" and "\$or".

### Example

```
{
  "filter": [
    {
      "$or": [
        {
          "name": "Nelson Inc"
        },
        {
          "name": "Nelson LLC"
        }
      ]
    }
  ]
}
```

### Modules

There are two module expressions, they operate on modules instead of fields. The current module can be specified by either using the module name "\_this" or by leaving the module name as a blank string. The example expression would filter the records in the current module to only your favorites. The only currently accepted module expressions are "\$favorite" and "\$owner".

### Example

```
{
  "filter": [
    {
      "$favorite": "_this"
    }
  ]
}
```

---

## Response Arguments

| Name        | Type    | Description   |
|-------------|---------|---|
| next_offset | Integer | Displays the next offset for retrieval of additional results. -1 will be returned when there are no more records. |
| records     | Array   | An array of results containing matched records.   |

## Response

```
{
  "next_offset":-1,
  "records":[
    {
      "id":"fa300a0e-0ad1-b322-9601-512d0983c19a",
      "name":"Dale Spivey",
      "date_entered":"2013-02-26T19:12:00+00:00",
      "date_modified":"2013-02-28T05:03:00+00:00",
      "modified_user_id":"1",
      "modified_by_name":"Administrator",
      "created_by":"1",
      "created_by_name":"Administrator",
      "description":"",
      "img":"",
      "deleted":false,
      "assigned_user_id":"seed_sally_id",
      "assigned_user_name":"Sally Bronsen",
      "team_name":[
        {
          "id":"East",
          "name":"East",
          "name_2":"",
          "primary":false
        },
        {
          "id":1,
          "name":"Global",
          "name_2":"",

```

---

```
        "primary":false
    },
    {
        "id":"West",
        "name":"West",
        "name_2":"",
        "primary":true
    }
],
"salutation":"",
"first_name":"Dale",
"last_name":"Spivey",
"full_name":"Dale Spivey",
"title":"VP Operations",
"linkedin":"",
"facebook":"",
"twitter":"",
"googleplus":"",
"department":"",
"do_not_call":false,
"phone_home":"(523) 825-4311",
"email":[
    {
        "email_address":"sugar.dev.sugar@example.co.jp",
        "opt_out":"0",
        "invalid_email":"0",
        "primary_address":"1"
    },
    {
        "email_address":"the.support@example.biz",
        "opt_out":"0",
        "invalid_email":"0",
        "primary_address":"0"
    }
],
"phone_mobile":"(373) 861-0757",
"phone_work":"(212) 542-9596",
"phone_other":"",
"phone_fax":"",
"email1":"sugar.dev.sugar@example.co.jp",
"email2":"the.support@example.biz",
"invalid_email":false,
"email_opt_out":false,
"primary_address_street":"345 Sugar Blvd.",
"primary_address_street_2":"",
"primary_address_street_3":"",
```

---

```
"primary_address_city": "Denver",
"primary_address_state": "CA",
"primary_address_postalcode": "87261",
"primary_address_country": "USA",
"alt_address_street": "",
"alt_address_street_2": "",
"alt_address_street_3": "",
"alt_address_city": "",
"alt_address_state": "",
"alt_address_postalcode": "",
"alt_address_country": "",
"assistant": "",
"assistant_phone": "",
"picture": "",
"email_and_name1": "",
"lead_source": "Campaign",
"account_name": "Smallville Resources Inc",
"account_id": "d5db6292-5c24-eb61-e202-512d09f0134e",
"opportunity_role_fields": "",
"opportunity_role_id": "",
"opportunity_role": "",
"reports_to_id": "",
"report_to_name": "",
"portal_name": "DaleSpivey97",
"portal_active": true,
"portal_password": "$1$yKMAONHM$Y5S.8CY.WZCZCwfGD1a1Q\/",
"portal_password1": "",
"portal_app": "",
"preferred_language": "en_us",
"campaign_id": "",
"campaign_name": "",
"c_accept_status_fields": "",
"m_accept_status_fields": "",
"accept_status_id": "",
"accept_status_name": "",
"sync_contact": "",
"my_favorite": false,
"_acl": {
  "fields": {
    }
  }
},
{
  "id": "95e17367-9b3d-0e26-22dc-512d0961fedf",
  "name": "Florence Haddock",
```

---

```
"date_entered": "2013-02-26T19:12:00+00:00",
"date_modified": "2013-02-26T19:12:00+00:00",
"modified_user_id": "1",
"modified_by_name": "Administrator",
"created_by": "1",
"created_by_name": "Administrator",
"description": "",
"img": "",
"deleted": false,
"assigned_user_id": "seed_sally_id",
"assigned_user_name": "Sally Bronsen",
"team_name": [
  {
    "id": "East",
    "name": "East",
    "name_2": "",
    "primary": false
  },
  {
    "id": 1,
    "name": "Global",
    "name_2": "",
    "primary": false
  },
  {
    "id": "West",
    "name": "West",
    "name_2": "",
    "primary": true
  }
],
"salutation": "",
"first_name": "Florence",
"last_name": "Haddock",
"full_name": "Florence Haddock",
"title": "Director Sales",
"linkedin": "",
"facebook": "",
"twitter": "",
"googleplus": "",
"department": "",
"do_not_call": false,
"phone_home": "(729) 845-3137",
"email": [
  {
    "email_address": "dev.vegan@example.de",
```

---

```
        "opt_out": "1",
        "invalid_email": "0",
        "primary_address": "0"
    },
    {
        "email_address": "section71@example.it",
        "opt_out": "0",
        "invalid_email": "0",
        "primary_address": "1"
    }
],
"phone_mobile": "(246) 233-1382",
"phone_work": "(565) 696-6981",
"phone_other": "",
"phone_fax": "",
"email1": "section71@example.it",
"email2": "dev.vegan@example.de",
"invalid_email": false,
"email_opt_out": false,
"primary_address_street": "111 Silicon Valley Road",
"primary_address_street_2": "",
"primary_address_street_3": "",
"primary_address_city": "Denver",
"primary_address_state": "CA",
"primary_address_postalcode": "79900",
"primary_address_country": "USA",
"alt_address_street": "",
"alt_address_street_2": "",
"alt_address_street_3": "",
"alt_address_city": "",
"alt_address_state": "",
"alt_address_postalcode": "",
"alt_address_country": "",
"assistant": "",
"assistant_phone": "",
"picture": "",
"email_and_name1": "",
"lead_source": "Support Portal User Registration",
"account_name": "Smallville Resources Inc",
"account_id": "d5db6292-5c24-eb61-e202-512d09f0134e",
"opportunity_role_fields": "",
"opportunity_role_id": "",
"opportunity_role": "",
"reports_to_id": "",
"report_to_name": "",
"portal_name": "FlorenceHaddock169",
```



```

"portal_active":true,
"portal_password":"$1$nWFhTbK6$JF9BCGSqL\NCRbhueX5ia0",
"portal_password1":"","
"portal_app":"","
"preferred_language":"en_us",
"campaign_id":"","
"campaign_name":"","
"c_accept_status_fields":"","
"m_accept_status_fields":"","
"accept_status_id":"","
"accept_status_name":"","
"sync_contact":"","
"my_favorite":false,
"_acl":{
  "fields":{
    }
  }
}
]
}

```

## Change Log

| Version | Change   |
|---------|--|
| v10     | Added<br>/<module>/:record/link/:link_name/filter<br>GET endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /<module>/:record/link/:link\_name/leancount GET

### Overview

Lists related filtered records.

---

## Summary

This endpoint will return a set of related records filtered by an expression. The filter can be applied to multiple fields and have multiple and/or conditions in it. Care will need to be taken to make sure this filter has appropriate indexes on the server side otherwise the runtime of the endpoint will be very long. Related fields can be searched by specifying the field name as: "link\_name.remote\_field", so if you wished to search the Accounts module by a related member account you would use "members.sic\_code".

## Request Arguments

| Name    | Type    | Description   | Required |
|---------|---------|---|----------|
| filter  | String  | The filter expression. Filter expressions are explained below.  | False    |
| max_num | Integer | A maximum number of records to return. Default is 20.   | False    |
| offset  | Integer | The number of records to skip over before records are returned. Default is 0.   | False    |
| fields  | String  | Comma delimited list of fields to return. The field date_modified will always be returned. This argument can be combined with the view argument. Example: name,account_type,description | False    |
| view    | String  | Instead of defining the fields argument, the view argument can be used instead. The field list is   | False    |

| Name     | Type   | Description   | Required |
|----------|--------|---|----------|
|          |        | constructed at the server side based on the view definition which is requested. This argument can be used in combination with the fields argument. Common views are "record" and "list".<br>Example: record |          |
| order_by | String | How to sort the returned records, in a comma delimited list with the direction appended to the column name after a colon.<br>Example: name:DESC,account_type:DESC,date_modified:ASC                         | False    |

## Filter Expressions

There are four types of filters:

### Basic

This will filter the results by checking the field "name" for value "Nelson Inc". This will only find exact matches.

### Example

```
{
  "filter":[
    {
      "name":"Nelson Inc"
    }
  ]
}
```

```
}
  ]
}
```

## Full

This expression allows you to specify what operation you want to use for filtering on the field. In the example you would match any record where the field "name" starts with the value "Nelson".

## Example

```
{
  "filter":[
    {
      "name":{
        "$starts":"Nelson"
      }
    }
  ]
}
```

Below is a list of operation types:

| Operation                 | Description   |
|---------------------------|---|
| <code>\$equals</code>     | Performs an exact match on that field.  |
| <code>\$not_equals</code> | Performs an exact match on that field.  |
| <code>\$not_equals</code> | Matches on non-matching values.   |
| <code>\$starts</code>     | Matches on anything that starts with the value.   |
| <code>\$ends</code>       | Matches anything that ends with the value.  |
| <code>\$contains</code>   | Matches anything that contains the value  |
| <code>\$in</code>         | Finds anything where field matches one of the values as specified as an array.          |
| <code>\$not_in</code>     | Finds anything where field does not matches any of the values as specified as an array. |
|                           |   |

| Operation  | Description  |
|------------|--|
| \$is_null  | Checks if the field is null. This operation does not need a value specified.     |
| \$not_null | Checks if the field is not null. This operation does not need a value specified. |
| \$lt       | Matches when the field is less than the value.                                   |
| \$lte      | Matches when the field is less than or equal to the value.                       |
| \$gt       | Matches when the field is greater than the value.                                |
| \$gte      | Matches when the field is greater than or equal to the value.                    |

## Sub-expressions

This allows you to group filter expressions into or/and groupings. By default all expressions are and'ed together. The example expression would match if the field "name" was either "Nelson Inc" or "Nelson LLC". The only currently accepted sub-expression types are "\$and" and "\$or".

### Example

```
{
  "filter": [
    {
      "$or": [
        {
          "name": "Nelson Inc"
        },
        {
          "name": "Nelson LLC"
        }
      ]
    }
  ]
}
```

---

## Modules

There are two module expressions, they operate on modules instead of fields. The current module can be specified by either using the module name "\_this" or by leaving the module name as a blank string. The example expression would filter the records in the current module to only your favorites. The only currently accepted module expressions are "\$favorite" and "\$owner".

### Example

```
{
  "filter":[
    {
      "$favorite":"_this"
    }
  ]
}
```

## Response Arguments

| Name        | Type    | Description   |
|-------------|---------|---|
| next_offset | Integer | Displays the next offset for retrieval of additional results. -1 will be returned when there are no more records. |
| records     | Array   | An array of results containing matched records.   |

## Response

```
{
  "next_offset":-1,
  "records":[
    {
      "id":"fa300a0e-0ad1-b322-9601-512d0983c19a",

```

---

```
"name": "Dale Spivey",
"date_entered": "2013-02-26T19:12:00+00:00",
"date_modified": "2013-02-28T05:03:00+00:00",
"modified_user_id": "1",
"modified_by_name": "Administrator",
"created_by": "1",
"created_by_name": "Administrator",
"description": "",
"img": "",
"deleted": false,
"assigned_user_id": "seed_sally_id",
"assigned_user_name": "Sally Bronsen",
"team_name": [
  {
    "id": "East",
    "name": "East",
    "name_2": "",
    "primary": false
  },
  {
    "id": 1,
    "name": "Global",
    "name_2": "",
    "primary": false
  },
  {
    "id": "West",
    "name": "West",
    "name_2": "",
    "primary": true
  }
],
"salutation": "",
"first_name": "Dale",
"last_name": "Spivey",
"full_name": "Dale Spivey",
"title": "VP Operations",
"linkedin": "",
"facebook": "",
"twitter": "",
"googleplus": "",
"department": "",
"do_not_call": false,
"phone_home": "(523) 825-4311",
"email": [
  {
```

---

```
        "email_address": "sugar.dev.sugar@example.co.jp",
        "opt_out": "0",
        "invalid_email": "0",
        "primary_address": "1"
    },
    {
        "email_address": "the.support@example.biz",
        "opt_out": "0",
        "invalid_email": "0",
        "primary_address": "0"
    }
],
"phone_mobile": "(373) 861-0757",
"phone_work": "(212) 542-9596",
"phone_other": "",
"phone_fax": "",
"email1": "sugar.dev.sugar@example.co.jp",
"email2": "the.support@example.biz",
"invalid_email": false,
"email_opt_out": false,
"primary_address_street": "345 Sugar Blvd.",
"primary_address_street_2": "",
"primary_address_street_3": "",
"primary_address_city": "Denver",
"primary_address_state": "CA",
"primary_address_postalcode": "87261",
"primary_address_country": "USA",
"alt_address_street": "",
"alt_address_street_2": "",
"alt_address_street_3": "",
"alt_address_city": "",
"alt_address_state": "",
"alt_address_postalcode": "",
"alt_address_country": "",
"assistant": "",
"assistant_phone": "",
"picture": "",
"email_and_name1": "",
"lead_source": "Campaign",
"account_name": "Smallville Resources Inc",
"account_id": "d5db6292-5c24-eb61-e202-512d09f0134e",
"opportunity_role_fields": "",
"opportunity_role_id": "",
"opportunity_role": "",
"reports_to_id": "",
"report_to_name": "",
```



---

```
"portal_name":"DaleSpivey97",
"portal_active":true,
"portal_password":"$1$yKMAONHM$Y5S.8CY.WZCZCwfGD1a1Q\/",
"portal_password1":"",
"portal_app":"",
"preferred_language":"en_us",
"campaign_id":"",
"campaign_name":"",
"c_accept_status_fields":"",
"m_accept_status_fields":"",
"accept_status_id":"",
"accept_status_name":"",
"sync_contact":"",
"my_favorite":false,
"_acl":{
  "fields":{
    }
  }
},
{
  "id":"95e17367-9b3d-0e26-22dc-512d0961fedf",
  "name":"Florence Haddock",
  "date_entered":"2013-02-26T19:12:00+00:00",
  "date_modified":"2013-02-26T19:12:00+00:00",
  "modified_user_id":"1",
  "modified_by_name":"Administrator",
  "created_by":"1",
  "created_by_name":"Administrator",
  "description":"",
  "img":"",
  "deleted":false,
  "assigned_user_id":"seed_sally_id",
  "assigned_user_name":"Sally Bronsen",
  "team_name":[
    {
      "id":"East",
      "name":"East",
      "name_2":"",
      "primary":false
    },
    {
      "id":1,
      "name":"Global",
      "name_2":"",
      "primary":false
    }
  ]
}
```

---

```
    },
    {
      "id": "West",
      "name": "West",
      "name_2": "",
      "primary": true
    }
  ],
  "salutation": "",
  "first_name": "Florence",
  "last_name": "Haddock",
  "full_name": "Florence Haddock",
  "title": "Director Sales",
  "linkedin": "",
  "facebook": "",
  "twitter": "",
  "googleplus": "",
  "department": "",
  "do_not_call": false,
  "phone_home": "(729) 845-3137",
  "email": [
    {
      "email_address": "dev.vegan@example.de",
      "opt_out": "1",
      "invalid_email": "0",
      "primary_address": "0"
    },
    {
      "email_address": "section71@example.it",
      "opt_out": "0",
      "invalid_email": "0",
      "primary_address": "1"
    }
  ],
  "phone_mobile": "(246) 233-1382",
  "phone_work": "(565) 696-6981",
  "phone_other": "",
  "phone_fax": "",
  "email1": "section71@example.it",
  "email2": "dev.vegan@example.de",
  "invalid_email": false,
  "email_opt_out": false,
  "primary_address_street": "111 Silicon Valley Road",
  "primary_address_street_2": "",
  "primary_address_street_3": "",
  "primary_address_city": "Denver",
```

---

```
"primary_address_state":"CA",
"primary_address_postalcode":"79900",
"primary_address_country":"USA",
"alt_address_street":"",
"alt_address_street_2":"",
"alt_address_street_3":"",
"alt_address_city":"",
"alt_address_state":"",
"alt_address_postalcode":"",
"alt_address_country":"",
"assistant":"",
"assistant_phone":"",
"picture":"",
"email_and_name1":"",
"lead_source":"Support Portal User Registration",
"account_name":"Smallville Resources Inc",
"account_id":"d5db6292-5c24-eb61-e202-512d09f0134e",
"opportunity_role_fields":"",
"opportunity_role_id":"",
"opportunity_role":"",
"reports_to_id":"",
"report_to_name":"",
"portal_name":"FlorenceHaddock169",
"portal_active":true,
"portal_password":"$1$nWFhTbK6$JF9BCGSqL\NCRbhueX5ia0",
"portal_password1":"",
"portal_app":"",
"preferred_language":"en_us",
"campaign_id":"",
"campaign_name":"",
"c_accept_status_fields":"",
"m_accept_status_fields":"",
"accept_status_id":"",
"accept_status_name":"",
"sync_contact":"",
"my_favorite":false,
"_acl":{
  "fields":{
    }
  }
}
```

---

## Change Log

| Version | Change   |
|---------|--|
| v10     | Added<br>/<module>/:record/link/:link_name/filter<br>GET endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /<module>/:record/link/:link\_name/:remote\_id DELETE

### Overview

Deletes an existing relationship between two records.

### Request Arguments

This endpoint does not accept any arguments.

### Response Arguments

| Name           | Type  | Description   |
|----------------|-------|---|
| record         | Array | The record to disassociate from the related record. |
| related_record | Array | The record that was disassociated.                  |

### Response

```
{  
  "record": {
```

---

```
"id": "da6a3741-2a81-ba7f-f249-512d0932e94e",
"name": "Slender Broadband Inc - 1000 units",
"date_entered": "2013-02-26T19:12:00+00:00",
"date_modified": "2013-02-26T19:12:00+00:00",
"modified_user_id": "1",
"modified_by_name": "Administrator",
"created_by": "1",
"created_by_name": "Administrator",
"description": "",
"img": "",
"last_activity_date": "2013-02-28T18:36:00+00:00",
"deleted": false,
"assigned_user_id": "seed_max_id",
"assigned_user_name": "Max Jensen",
"team_name": [
  {
    "id": "East",
    "name": "East",
    "name_2": "",
    "primary": false
  },
  {
    "id": "West",
    "name": "West",
    "name_2": "",
    "primary": true
  }
],
"opportunity_type": "",
"account_name": "Slender Broadband Inc",
"account_id": "181461c6-dc81-1115-1fe0-512d092e8f15",
"campaign_id": "",
"campaign_name": "",
"lead_source": "Campaign",
"amount": "25000",
"base_rate": "1",
"amount_usdollar": "25000",
"currency_id": "-99",
"currency_name": "",
"currency_symbol": "",
"date_closed": "2013-02-27",
"date_closed_timestamp": "1361992480",
"next_step": "",
"sales_stage": "Needs Analysis",
"sales_status": "New",
"probability": "90",
```

---

```
"best_case": "25000",
"worst_case": "25000",
"commit_stage": "include",
"my_favorite": false,
"_acl": {
  "fields": {

  }
}
},
"related_record": {
  "id": "e689173e-c953-1e14-c215-512d0927e7a2",
  "name": "Gus Dales",
  "date_entered": "2013-02-26T19:12:00+00:00",
  "date_modified": "2013-02-26T19:12:00+00:00",
  "modified_user_id": "1",
  "modified_by_name": "Administrator",
  "created_by": "1",
  "created_by_name": "Administrator",
  "description": "",
  "img": "",
  "deleted": false,
  "assigned_user_id": "seed_sally_id",
  "assigned_user_name": "Sally Bronsen",
  "team_name": [
    {
      "id": "West",
      "name": "West",
      "name_2": "",
      "primary": true
    }
  ],
  "salutation": "",
  "first_name": "Gus",
  "last_name": "Dales",
  "full_name": "Gus Dales",
  "title": "Director Operations",
  "linkedin": "",
  "facebook": "",
  "twitter": "",
  "googleplus": "",
  "department": "",
  "do_not_call": false,
  "phone_home": "(661) 120-2292",
  "email": [
    {
```

---

```
    "email_address": "section.sugar.section@example.it",
    "opt_out": "1",
    "invalid_email": "0",
    "primary_address": "0"
  },
  {
    "email_address": "support.qa.kid@example.co.uk",
    "opt_out": "0",
    "invalid_email": "0",
    "primary_address": "1"
  }
],
"phone_mobile": "(294) 447-9707",
"phone_work": "(036) 840-3216",
"phone_other": "",
"phone_fax": "",
"email1": "support.qa.kid@example.co.uk",
"email2": "section.sugar.section@example.it",
"invalid_email": false,
"email_opt_out": false,
"primary_address_street": "48920 San Carlos Ave",
"primary_address_street_2": "",
"primary_address_street_3": "",
"primary_address_city": "Persistence",
"primary_address_state": "CA",
"primary_address_postalcode": "54556",
"primary_address_country": "USA",
"alt_address_street": "",
"alt_address_street_2": "",
"alt_address_street_3": "",
"alt_address_city": "",
"alt_address_state": "",
"alt_address_postalcode": "",
"alt_address_country": "",
"assistant": "",
"assistant_phone": "",
"picture": "",
"email_and_name1": "",
"lead_source": "Support Portal User Registration",
"account_name": "Arts & Crafts Inc",
"account_id": "d43243c6-9b8e-2973-ae2-512d09bc34b4",
"opportunity_role_fields": "",
"opportunity_role_id": "",
"opportunity_role": "",
"reports_to_id": "",
"report_to_name": "",
```

```

"portal_name": "GusDales145",
"portal_active": true,
"portal_password": "$1$JxYr6tmM$b.06.KF42jP46RadSwz0N0",
"portal_password1": "",
"portal_app": "",
"preferred_language": "en_us",
"campaign_id": "",
"campaign_name": "",
"c_accept_status_fields": "",
"m_accept_status_fields": "",
"accept_status_id": "",
"accept_status_name": "",
"sync_contact": "",
"my_favorite": false,
"_acl": {
  "fields": {
    }
  }
}

```

## Change Log

| Version | Change  |
|---------|---|
| v10     | Added /<module>/:record/link/:link_name/:remote_id DELETE endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /<module>/:record/link/:link\_name/:remote\_id GET

### Overview

Retrieves a related record with relationship role information.



---

## Request Arguments

This endpoint does not accept any arguments.

## Response Arguments

| Name           | Type                | Description                                      |
|----------------|---------------------|--|
| <record field> | <record field type> | Returns the fields for the newly created record. |

## Response

```
{
  "id": "e689173e-c953-1e14-c215-512d0927e7a2",
  "name": "Gus Dales",
  "date_entered": "2013-02-26T19:12:00+00:00",
  "date_modified": "2013-02-26T19:12:00+00:00",
  "modified_user_id": "1",
  "modified_by_name": "Administrator",
  "created_by": "1",
  "created_by_name": "Administrator",
  "description": "",
  "img": "",
  "deleted": false,
  "assigned_user_id": "seed_sally_id",
  "assigned_user_name": "Sally Bronsen",
  "team_name": [
    {
      "id": "West",
      "name": "West",
      "name_2": "",
      "primary": true
    }
  ],
  "salutation": "",
  "first_name": "Gus",
  "last_name": "Dales",
  "full_name": "Gus Dales",
  "title": "Director Operations",
  "linkedin": "",
  "facebook": "",
  "twitter": ""
}
```

---

```
"googleplus": "",
"department": "",
"do_not_call": false,
"phone_home": "(661) 120-2292",
"email": [
  {
    "email_address": "section.sugar.section@example.it",
    "opt_out": "1",
    "invalid_email": "0",
    "primary_address": "0"
  },
  {
    "email_address": "support.qa.kid@example.co.uk",
    "opt_out": "0",
    "invalid_email": "0",
    "primary_address": "1"
  }
],
"phone_mobile": "(294) 447-9707",
"phone_work": "(036) 840-3216",
"phone_other": "",
"phone_fax": "",
"email1": "support.qa.kid@example.co.uk",
"email2": "section.sugar.section@example.it",
"invalid_email": false,
"email_opt_out": false,
"primary_address_street": "48920 San Carlos Ave",
"primary_address_street_2": "",
"primary_address_street_3": "",
"primary_address_city": "Persistence",
"primary_address_state": "CA",
"primary_address_postalcode": "54556",
"primary_address_country": "USA",
"alt_address_street": "",
"alt_address_street_2": "",
"alt_address_street_3": "",
"alt_address_city": "",
"alt_address_state": "",
"alt_address_postalcode": "",
"alt_address_country": "",
"assistant": "",
"assistant_phone": "",
"picture": "",
"email_and_name1": "",
"lead_source": "Support Portal User Registration",
"account_name": "Arts & Crafts Inc",
```

---

```
"account_id": "d43243c6-9b8e-2973-ae2-512d09bc34b4",
"opportunity_role_fields": "",
"opportunity_role_id": "",
"opportunity_role": "Technical Advisor",
"reports_to_id": "",
"report_to_name": "",
"portal_name": "GusDales145",
"portal_active": true,
"portal_password": "$1$JxYr6tmM$b.O6.KF42jP46RadSwz0N0",
"portal_password1": "",
"portal_app": "",
"preferred_language": "en_us",
"campaign_id": "",
"campaign_name": "",
"c_accept_status_fields": "",
"m_accept_status_fields": "",
"accept_status_id": "",
"accept_status_name": "",
"sync_contact": "",
"my_favorite": false,
"_acl": {
  "fields": {
    }
  }
}
```

## Change Log

| Version | Change   |
|---------|--|
| v10     | Added /<module>/:record/link/:link_name/:remote_id GET endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /<module>/:record/link/:link\_name/:remote\_id POST

---

## Overview

Creates a relationship to a pre-existing record.

## Query String Parameters

This endpoint does not accept any arguments.

## Response Arguments

| Name           | Type  | Description                              |
|----------------|-------|--|
| record         | Array | The record linked to the related record. |
| related_record | Array | The record that was associated.          |

## Response

```
{
  "record": {
    "id": "da6a3741-2a81-ba7f-f249-512d0932e94e",
    "name": "Slender Broadband Inc - 1000 units",
    "date_entered": "2013-02-26T19:12:00+00:00",
    "date_modified": "2013-02-26T19:12:00+00:00",
    "modified_user_id": "1",
    "modified_by_name": "Administrator",
    "created_by": "1",
    "created_by_name": "Administrator",
    "description": "",
    "img": "",
    "last_activity_date": "2013-02-28T18:21:00+00:00",
    "deleted": false,
    "assigned_user_id": "seed_max_id",
    "assigned_user_name": "Max Jensen",
    "team_name": [
      {
        "id": "East",
        "name": "East",
        "name_2": ""
      }
    ]
  }
}
```

---

```
        "primary":false
      },
      {
        "id":"West",
        "name":"West",
        "name_2":"",
        "primary":true
      }
    ],
    "opportunity_type":"",
    "account_name":"Slender Broadband Inc",
    "account_id":"181461c6-dc81-1115-1fe0-512d092e8f15",
    "campaign_id":"",
    "campaign_name":"",
    "lead_source":"Campaign",
    "amount":"25000",
    "base_rate":"1",
    "amount_usdollar":"25000",
    "currency_id":"-99",
    "currency_name":"",
    "currency_symbol":"",
    "date_closed":"2013-02-27",
    "date_closed_timestamp":"1361992480",
    "next_step":"",
    "sales_stage":"Needs Analysis",
    "sales_status":"New",
    "probability":"90",
    "best_case":"25000",
    "worst_case":"25000",
    "commit_stage":"include",
    "my_favorite":false,
    "_acl":{
      "fields":{
        }
      }
    },
    "related_record":{
      "id":"e689173e-c953-1e14-c215-512d0927e7a2",
      "name":"Gus Dales",
      "date_entered":"2013-02-26T19:12:00+00:00",
      "date_modified":"2013-02-26T19:12:00+00:00",
      "modified_user_id":"1",
      "modified_by_name":"Administrator",
      "created_by":"1",
      "created_by_name":"Administrator",
```

---

```
"description":"","  
"img":"","  
"deleted":false,  
"assigned_user_id":"seed_sally_id",  
"assigned_user_name":"Sally Bronsen",  
"team_name":[  
  {  
    "id":"West",  
    "name":"West",  
    "name_2":"","  
    "primary":true  
  }  
],  
"salutation":"","  
"first_name":"Gus",  
"last_name":"Dales",  
"full_name":"Gus Dales",  
"title":"Director Operations",  
"linkedin":"","  
"facebook":"","  
"twitter":"","  
"googleplus":"","  
"department":"","  
"do_not_call":false,  
"phone_home":"(661) 120-2292",  
"email":[  
  {  
    "email_address":"section.sugar.section@example.it",  
    "opt_out":"1",  
    "invalid_email":"0",  
    "primary_address":"0"  
  },  
  {  
    "email_address":"support.qa.kid@example.co.uk",  
    "opt_out":"0",  
    "invalid_email":"0",  
    "primary_address":"1"  
  }  
],  
"phone_mobile":"(294) 447-9707",  
"phone_work":"(036) 840-3216",  
"phone_other":"","  
"phone_fax":"","  
"email1":"support.qa.kid@example.co.uk",  
"email2":"section.sugar.section@example.it",  
"invalid_email":false,
```

---

```
"email_opt_out":false,
"primary_address_street":"48920 San Carlos Ave",
"primary_address_street_2":"","
"primary_address_street_3":"","
"primary_address_city":"Persistence",
"primary_address_state":"CA",
"primary_address_postalcode":"54556",
"primary_address_country":"USA",
"alt_address_street":"","
"alt_address_street_2":"","
"alt_address_street_3":"","
"alt_address_city":"","
"alt_address_state":"","
"alt_address_postalcode":"","
"alt_address_country":"","
"assistant":"","
"assistant_phone":"","
"picture":"","
"email_and_name1":"","
"lead_source":"Support Portal User Registration",
"account_name":"Arts & Crafts Inc",
"account_id":"d43243c6-9b8e-2973-ae2-512d09bc34b4",
"opportunity_role_fields":"","
"opportunity_role_id":"","
"opportunity_role":"Technical Advisor",
"reports_to_id":"","
"report_to_name":"","
"portal_name":"GusDales145",
"portal_active":true,
"portal_password":"$1$JxYr6tmM$b.O6.KF42jP46RadSwz0N0",
"portal_password1":"","
"portal_app":"","
"preferred_language":"en_us",
"campaign_id":"","
"campaign_name":"","
"c_accept_status_fields":"","
"m_accept_status_fields":"","
"accept_status_id":"","
"accept_status_name":"","
"sync_contact":"","
"my_favorite":false,
"_acl":{
  "fields":{
  }
}
```

```
}  
}
```

## Change Log

| Version | Change  |
|---------|---|
| v10     | Added /<module>/:record/link/:link_name/:remote_id POST endpoint. |

Last Modified: 2021-02-17 02:44:13

## /<module>/:record/link/:link\_name/:remote\_id PUT

### Overview

Updates relationship specific information on an existing relationship.

### Request Arguments

| Name                 | Type                      | Description   | Required |
|----------------------|---------------------------|---|----------|
| <relationship field> | <relationship field type> | The name value list of relationship fields to populate. An example is the contact_role field on Opportunities and Contacts. | True     |

### Request

```
{
```



---

```
    "contact_role": "Primary Decision Maker"
  }
```

## Response Arguments

| Name           | Type  | Description                              |
|----------------|-------|--|
| record         | Array | The record linked to the related record. |
| related_record | Array | The record that was associated.          |

## Response

```
{
  "record": {
    "id": "da6a3741-2a81-ba7f-f249-512d0932e94e",
    "name": "Slender Broadband Inc - 1000 units",
    "date_entered": "2013-02-26T19:12:00+00:00",
    "date_modified": "2013-02-26T19:12:00+00:00",
    "modified_user_id": "1",
    "modified_by_name": "Administrator",
    "created_by": "1",
    "created_by_name": "Administrator",
    "description": "",
    "img": "",
    "deleted": false,
    "assigned_user_id": "seed_max_id",
    "assigned_user_name": "Max Jensen",
    "team_name": [
      {
        "id": "East",
        "name": "East",
        "name_2": "",
        "primary": false
      },
      {
        "id": "West",
        "name": "West",
        "name_2": "",
        "primary": true
      }
    ]
  }
}
```

---

```
    }
  ],
  "opportunity_type": "",
  "account_name": "Slender Broadband Inc",
  "account_id": "181461c6-dc81-1115-1fe0-512d092e8f15",
  "campaign_id": "",
  "campaign_name": "",
  "lead_source": "Campaign",
  "amount": "25000",
  "base_rate": "1",
  "amount_usdollar": "25000",
  "currency_id": "-99",
  "currency_name": "",
  "currency_symbol": "",
  "date_closed": "2013-02-27",
  "date_closed_timestamp": "1361992480",
  "next_step": "",
  "sales_stage": "Needs Analysis",
  "sales_status": "New",
  "probability": "90",
  "best_case": "25000",
  "worst_case": "25000",
  "commit_stage": "include",
  "my_favorite": false,
  "_acl": {
    "fields": {
      }
    }
  },
  "related_record": {
    "id": "e1c495cb-af17-1b37-dd66-512f934fe155",
    "name": "Bill Edwards",
    "date_entered": "2013-02-28T17:25:00+00:00",
    "date_modified": "2013-02-28T17:25:00+00:00",
    "modified_user_id": "1",
    "modified_by_name": "Administrator",
    "created_by": "1",
    "created_by_name": "Administrator",
    "description": "",
    "img": "",
    "deleted": false,
    "assigned_user_id": "",
    "assigned_user_name": "",
    "team_name": [
      {

```

---

```
        "id":1,
        "name":"Global",
        "name_2":"","
        "primary":true
    }
],
"salutation":"","
"first_name":"Bill",
"last_name":"Edwards",
"full_name":"Bill Edwards",
"title":"","
"linkedin":"","
"facebook":"","
"twitter":"","
"googleplus":"","
"department":"","
"do_not_call":false,
"phone_home":"","
"email":[

],
"phone_mobile":"","
"phone_work":"","
"phone_other":"","
"phone_fax":"","
"email1":"","
"email2":"","
"invalid_email":"","
"email_opt_out":"","
"primary_address_street":"","
"primary_address_street_2":"","
"primary_address_street_3":"","
"primary_address_city":"","
"primary_address_state":"","
"primary_address_postalcode":"","
"primary_address_country":"","
"alt_address_street":"","
"alt_address_street_2":"","
"alt_address_street_3":"","
"alt_address_city":"","
"alt_address_state":"","
"alt_address_postalcode":"","
"alt_address_country":"","
"assistant":"","
"assistant_phone":"","
"picture":"","
```

```
"email_and_name1": "",
"lead_source": "",
"account_id": "",
"opportunity_role_fields": "",
"opportunity_role_id": "",
"opportunity_role": "Primary Decision Maker",
"reports_to_id": "",
"report_to_name": "",
"portal_name": "",
"portal_active": false,
"portal_password": "",
"portal_password1": "",
"portal_app": "",
"preferred_language": "en_us",
"campaign_id": "",
"campaign_name": "",
"c_accept_status_fields": "",
"m_accept_status_fields": "",
"accept_status_id": "",
"accept_status_name": "",
"sync_contact": "",
"my_favorite": false,
"_acl": {
  "fields": {
    }
  }
}
```

## Change Log

| Version | Change   |
|---------|--|
| v10     | Added /<module>/:record/link/:link_name/:remote_id PUT endpoint. |

**Last Modified:** 2021-02-17 02:44:13

---

## **/<module>/:record/link/related\_activities GET**

### **Overview**

Returns related activity records for a specified record.

### **Request Arguments**

| <b>Name</b> | <b>Type</b> | <b>Description</b>   | <b>Required</b> |
|-------------|-------------|--|-----------------|
| module_list | String      | A list of modules from the valid modules [Tasks, Calls, Emails, Notes, Meetings] that need to be included.<br><br>Example:<br>Meetings,Calls,Emails,Notes                                  | False           |
| order_by    | String      | How to sort the returned records, in a comma-delimited list with the direction appended to the column name after a colon.<br><br>Example:<br>name:DESC,account_type:DESC,date_modified:ASC | False           |
| max_num     | String      | A maximum number of records to return. Default is 20.  | False           |
| offset      | Integer     | The number of records to skip over before records are returned. Default is   | False           |

|              |         |   |       |
|--------------|---------|---|-------|
|              |         | 0.  |       |
| deleted      | Boolean | Boolean to show deleted records in the result set. Default is false.  | False |
| alias_fields | Array   | A list of field aliases from the valid modules [Tasks, Calls, Emails, Notes, Meetings] that need to be fetched. These field aliases can also be used in 'order_by'.<br><br>Example:<br>{ 'record_date': {<br>'Calls': 'date_start',<br>'Emails': 'date_sent'<br>} } | False |

## Response Arguments

| Name        | Type    | Description   |
|-------------|---------|---|
| next_offset | Integer | Displays the next offset for retrieval of additional results. -1 will be returned when there are no more records. |
| records     | Array   | An array of results containing matched records.   |

## Response

```
{
  next_offset": -1,
  "records": [
```

---

```
{
  "id":"2f9abe52-f03f-11e9-858c-3c15c2d57622",
  "name":"test call",
  "date_entered":"2019-10-16T11:02:57-07:00",
  "date_modified":"2019-10-16T11:02:57-07:00",
  "description":"",
  "date_start":"2019-10-25T11:30:00-07:00",
  "status":"Planned",
  "contact_name":"",
  "contacts":{
    "name":"",
    "id":"",
    "_acl":{
      "fields":[
      ],
      "_hash":"654d337e0e912edaa00dbb0fb3dc3c17"
    }
  },
  "contact_id":"",
  "locked_fields":[
  ],
  "assigned_user_id":"1",
  "assigned_user_name":"Administrator",
  "assigned_user_link":{
    "full_name":"Administrator",
    "id":"1",
    "_acl":{
      "fields":{
        "pwd_last_changed":{
          "write":"no",
          "create":"no"
        },
        "last_login":{
          "write":"no",
          "create":"no"
        }
      },
      "delete":"no",
      "_hash":"08b99a97c2e8d792f7a44d8882b5af6d"
    }
  },
  "_acl":{
    "fields":{
    }
  },
  "_module":"Calls",
```

```
        "moduleNameSingular": "Call",
        "moduleName": "Calls"
    },
]
}
```

## Change Log

| Version | Change  |
|---------|---|
| v11.7   | Added /<module>/:record/link/related_activities GET endpoint. |

Last Modified: 2021-02-17 02:44:13

## /<module>/:record/moveafter/:target PUT

### Overview

Move existing node after target node.

### Request Arguments

| Name   | Type   | Description  | Required |
|--------|--------|--|----------|
| module | String | The name of sugar module that contains a nested set data and implements the NestedSetInterface . | True     |
| target | String | The ID of record that will be used as target to move node after                                  | True     |



---

## Response Arguments

This endpoint does not return any response arguments.

## Response

This endpoint return a record GUID that was moved  
"1b7b868d-7357-2e29-7513-54169bdc444d"

## Change Log

| Version | Change  |
|---------|---|
| v10     | Added /<module>/moveafter/:target PUT endpoint. |

Last Modified: 2021-02-17 02:44:13

## /<module>/:record/movebefore/:target PUT

### Overview

Move existing node before target node.

### Request Arguments

| Name   | Type   | Description  | Required |
|--------|--------|--|----------|
| module | String | The name of sugar module that contains a nested set data and implements the NestedSetInterface . | True     |
| target | String | The ID of record   | True     |

---

| Name | Type | Description                                     | Required |
|------|------|---|----------|
|      |      | that will be used as target to move node before |          |

## Response Arguments

This endpoint does not return any response arguments.

## Response

This endpoint return a record GUID that was moved  
"1b7b868d-7357-2e29-7513-54169bdc444d"

## Change Log

| Version | Change   |
|---------|--|
| v10     | Added /<module>/movebefore/:target PUT endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /<module>/:record/movefirst/:target PUT

### Overview

Move existing node as first child of target node.

### Request Arguments

| Name   | Type   | Description       | Required |
|--------|--------|-------------------|----------|
| module | String | The name of sugar | True     |

| Name   | Type   | Description  | Required |
|--------|--------|--|----------|
|        |        | module that contains a nested set data and implements the NestedSetInterface . |          |
| target | String | The ID of record that will be used as target to move node as first child       | True     |

## Response Arguments

This endpoint does not return any response arguments.

## Response

This endpoint return a record GUID that was moved  
 "1b7b868d-7357-2e29-7513-54169bdc444d"

## Change Log

| Version | Change  |
|---------|---|
| v10     | Added /<module>/movefirst/:target PUT endpoint. |

Last Modified: 2021-02-17 02:44:13

## /<module>/:record/movelast/:target PUT

## Overview

---

Move existing node as last child of target node.

## Request Arguments

| Name   | Type   | Description  | Required |
|--------|--------|--|----------|
| module | String | The name of sugar module that contains a nested set data and implements the NestedSetInterface . | True     |
| target | String | The ID of record that will be used as target to move node as last child                          | True     |

## Response Arguments

This endpoint does not return any response arguments.

## Response

This endpoint return a record GUID that was moved  
"1b7b868d-7357-2e29-7513-54169bdc444d"

## Change Log

| Version | Change   |
|---------|--|
| v10     | Added /<module>/movelast/:target PUT endpoint. |

**Last Modified:** 2021-02-17 02:44:13

---

## /<module>/:record/next GET

### Overview

Retrieves next sibling of selected record.

### Request Arguments

| Name    | Type   | Description  | Required |
|---------|--------|--|----------|
| module  | String | The name of sugar module that contains a nested set data and implements the NestedSetInterface . | True     |
| :record | String | The ID of record   | True     |

### Response Arguments

This endpoint does not return any response arguments.

### Response

```
{
  id: "e1ae8646-ac90-104a-59d6-5412cf5009b2"
  name: "SugarCategoryExample"
  date_entered: "2014-09-12 10:47:46"
  date_modified: "2014-09-12 10:47:46"
  modified_user_id: "9c9ad14e-1789-3340-f88d-5412cf551d3b"
  created_by: "9c9ad14e-1789-3340-f88d-5412cf551d3b"
  description: null
  deleted: "0"
  source_id: null
  source_type: null
  source_meta: null
  root: "e1ae8646-ac90-104a-59d6-5412cf5009b2"
  lft: "6"
  rgt: "11"
```

---

```
    level: "1"  
}
```

## Change Log

| Version | Change                                     |
|---------|--|
| v10     | Added /<module>/:record/next GET endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /<module>/:record/parent GET

### Overview

Retrieves parent node for selected record.

### Request Arguments

| Name    | Type   | Description  | Required |
|---------|--------|--|----------|
| module  | String | The name of sugar module that contains a nested set data and implements the NestedSetInterface . | True     |
| :record | String | The ID of record   | True     |

### Response Arguments

This endpoint does not return any response arguments.

---

## Response

```
{
  id: "e1ae8646-ac90-104a-59d6-5412cf5009b2"
  name: "SugarCategoryExample"
  date_entered: "2014-09-12 10:47:46"
  date_modified: "2014-09-12 10:47:46"
  modified_user_id: "9c9ad14e-1789-3340-f88d-5412cf551d3b"
  created_by: "9c9ad14e-1789-3340-f88d-5412cf551d3b"
  description: null
  deleted: "0"
  source_id: null
  source_type: null
  source_meta: null
  root: "e1ae8646-ac90-104a-59d6-5412cf5009b2"
  lft: "6"
  rgt: "11"
  level: "1"
}
```

## Change Log

| Version | Change                                       |
|---------|--|
| v10     | Added /<module>/:record/parent GET endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /<module>/:record/path GET

### Overview

Retrieves all parents of selected record.

### Request Arguments

---

| Name    | Type   | Description  | Required |
|---------|--------|--|----------|
| module  | String | The name of sugar module that contains a nested set data and implements the NestedSetInterface . | True     |
| :record | String | The ID of record   | True     |

## Response Arguments

This endpoint does not return any response arguments.

## Response

```
[{
  "id": "045c03b9-327b-11e4-818b-5404a67f3363",
  "name": "Audit",
  "date_entered": null,
  "date_modified": null,
  "modified_user_id": null,
  "created_by": null,
  "description": null,
  "deleted": "0",
  "source_id": null,
  "source_type": null,
  "source_meta": null,
  "root": "935d3e07-327a-11e4-818b-5404a67f3363",
  "lft": "10",
  "rgt": "19",
  "level": "1"
}, {
  "id": "045c1de6-327b-11e4-818b-5404a67f3363",
  "name": "Financial",
  "date_entered": null,
  "date_modified": null,
  "modified_user_id": null,
  "created_by": null,
  "description": null,
  "deleted": "0",
```



---

```
"source_id": null,
"source_type": null,
"source_meta": null,
"root": "935d3e07-327a-11e4-818b-5404a67f3363",
"lft": "11",
"rgt": "14",
"level": "2"
}]
```

## Change Log

| Version | Change                                     |
|---------|--|
| v10     | Added /<module>/:record/path GET endpoint. |

Last Modified: 2021-02-17 02:44:13

## /<module>/:record/pii GET

### Overview

Returns personally identifiable information (pii) fields with current data and source of data capture for a specific record.

### Version Requirements

Minimum REST API Version required - 11.1

### Request Arguments

| Name   | Type   | Description             | Required |
|--------|--------|-------------------------|----------|
| module | String | The name of the module. | True     |

---

| Name   | Type   | Description    | Required |
|--------|--------|----------------|----------|
| record | String | The record id. | True     |

## Response Arguments

| Name    | Type   | Description   |
|---------|--------|---|
| records | String | Returns the set of PII field records for the given module record. |

## Response

```
{
  "fields": [
    {
      "field_name": "phone_mobile",
      "value": "(645) 604-0128",
      "event_type": "update",
      "date_modified": "2018-02-21T19:56:42+00:00",
      "source": {
        "subject": {
          "_type": "user",
          "id": "999b3b50-16dc-11e8-9c03-a45e60e64123",
          "_module": "Users",
          "client": {
            "_type": "rest-api"
          },
          "first_name": "Tim",
          "last_name": "Zhang",
          "name": "Tim Zhang"
        },
        "attributes": {
          "platform": "base"
        }
      }
    },
    {
      "field_name": "phone_work",
      "value": "(212) 692-3480",
      "event_type": "update",
```

---

```
"date_modified": "2018-02-21T19:56:42+00:00",
"source": {
  "subject": {
    "_type": "user",
    "id": "654b3b50-16dc-11e8-9c03-a45e60e64465",
    "_module": "Users",
    "client": {
      "_type": "rest-api"
    },
    "first_name": "Jim",
    "last_name": "Conners",
    "name": "Jim Conners"
  },
  "attributes": {
    "platform": "base"
  }
}
]
```

## Change Log

| Version | Change                   |
|---------|--------------------------|
| 11.1    | Added /pii GET endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /<module>/:record/prev GET

### Overview

Retrieves previous sibling of selected record.

### Request Arguments

| Name    | Type   | Description  | Required |
|---------|--------|--|----------|
| module  | String | The name of sugar module that contains a nested set data and implements the NestedSetInterface . | True     |
| :record | String | The ID of record   | True     |

## Response Arguments

This endpoint does not return any response arguments.

## Response

```
{
  id: "e1ae8646-ac90-104a-59d6-5412cf5009b2"
  name: "SugarCategoryExample"
  date_entered: "2014-09-12 10:47:46"
  date_modified: "2014-09-12 10:47:46"
  modified_user_id: "9c9ad14e-1789-3340-f88d-5412cf551d3b"
  created_by: "9c9ad14e-1789-3340-f88d-5412cf551d3b"
  description: null
  deleted: "0"
  source_id: null
  source_type: null
  source_meta: null
  root: "e1ae8646-ac90-104a-59d6-5412cf5009b2"
  lft: "6"
  rgt: "11"
  level: "1"
}
```

## Change Log

| Version | Change                                     |
|---------|--|
| v10     | Added /<module>/:record/prev GET endpoint. |

---

**Last Modified:** 2021-02-17 02:44:13

## **/<module>/:record/subscribe POST**

### **Summary:**

This endpoint creates a subscription record in the Subscriptions table, from a specified record and module. It allows the user to be subscribed to activity stream messages for the record being subscribed to, or "followed".

### **Query Parameters:**

This endpoint does not accept any parameters.

### **Input Example:**

This endpoint does not accept any input.

### **Output Example:**

If successful, the endpoint responds with the GUID of the subscription record.  
"96ad733c-df51-dd9d-1888-514112ef0595"

**Last Modified:** 2021-02-17 02:44:13

---

## **/<module>/:record/unfavorite PUT**

### **Overview**

Removes a record of a specified type as a favorite for the current user.

### **Request Arguments**

This endpoint does not accept any request arguments.

### **Response Arguments**

| Name           | Type                | Description                                 |
|----------------|---------------------|---|
| <record field> | <record field type> | Returns the fields for the selected record. |

### **Response**

```
{
  "id": "bdd59d85-687b-1739-b00a-512d09f6db9e",
  "name": "Insight Marketing Inc",
  "date_entered": "2013-02-26T19:12:00+00:00",
  "date_modified": "2013-02-26T19:12:00+00:00",
  "modified_user_id": "1",
  "modified_by_name": "Administrator",
  "created_by": "1",
  "created_by_name": "Administrator",
  "description": "",
  "img": "",
  "last_activity_date": "2013-02-26T19:12:00+00:00",
  "deleted": false,
  "assigned_user_id": "seed_max_id",
  "assigned_user_name": "Max Jensen",
  "team_name": [
    {
      "id": "East",
      "name": "East",
      "name_2": "",
      "primary": false
    }
  ]
}
```

---

```
    },
    {
      "id":1,
      "name":"Global",
      "name_2":"",
      "primary":false
    },
    {
      "id":"West",
      "name":"West",
      "name_2":"",
      "primary":true
    }
  ],
  "linkedin":"","
  "facebook":"","
  "twitter":"","
  "googleplus":"","
  "account_type":"Customer",
  "industry":"Electronics",
  "annual_revenue":"","
  "phone_fax":"","
  "billing_address_street":"345 Sugar Blvd.",
  "billing_address_street_2":"","
  "billing_address_street_3":"","
  "billing_address_street_4":"","
  "billing_address_city":"San Mateo",
  "billing_address_state":"CA",
  "billing_address_postalcode":"56019",
  "billing_address_country":"USA",
  "rating":"","
  "phone_office":"(927) 136-9572",
  "phone_alternate":"","
  "website":"www.sectionvegan.de",
  "ownership":"","
  "employees":"","
  "ticker_symbol":"","
  "shipping_address_street":"345 Sugar Blvd.",
  "shipping_address_street_2":"","
  "shipping_address_street_3":"","
  "shipping_address_street_4":"","
  "shipping_address_city":"San Mateo",
  "shipping_address_state":"CA",
  "shipping_address_postalcode":"56019",
  "shipping_address_country":"USA",
  "email1":"kid.support.vegan@example.info",
```

---

```
"parent_id":"","  
"sic_code":"","  
"parent_name":"","  
"email_opt_out":false,  
"invalid_email":false,  
"email":[  
  {  
    "email_address":"kid.support.vegan@example.info",  
    "opt_out":"0",  
    "invalid_email":"0",  
    "primary_address":"1"  
  },  
  {  
    "email_address":"phone.kid@example.cn",  
    "opt_out":"0",  
    "invalid_email":"0",  
    "primary_address":"0"  
  }  
],  
"campaign_id":"","  
"campaign_name":"","  
"my_favorite":false,  
"_acl":{  
  "fields":{  
  
  }  
}  
}
```

## Change Log

| Version | Change  |
|---------|---|
| v10     | Added /<module>/:record/favorite DELETE endpoint. |

**Last Modified:** 2021-02-17 02:44:13



---

## **/<module>/:record/unsubscribe DELETE**

### **Summary:**

This endpoint deletes a subscription record in the Subscriptions table, from a specified record and module. It allows the user to be unsubscribe from activity stream messages for the record being subscribed to, or "followed".

### **Query Parameters:**

This endpoint does not accept any parameters.

### **Input Example:**

This endpoint does not accept any input.

### **Output Example:**

If successful, the endpoint responds with a bool of true.

**Last Modified:** 2021-02-17 02:44:13

## **/<module>/:record/vcard GET**

### **Overview**

Downloads a vCard.

---

## Request Arguments

This endpoint does not accept any arguments.

## Response Arguments

| Name                | Type    | Description            |
|---------------------|---------|------------------------|
| <vcard information> | String; | Record in vcard format |

## Response

```
BEGIN:VCARD
N;CHARSET=utf-8:Leone;Rosemarie;;
FN;CHARSET=utf-8: Rosemarie Leone
BDAY:
TEL;WORK;FAX:
TEL;HOME;CHARSET=utf-8:(692) 586-8287
TEL;CELL;CHARSET=utf-8:(117) 577-0969
TEL;WORK;CHARSET=utf-8:(844) 325-7679
EMAIL;INTERNET;CHARSET=utf-8:support.im@example.it
ADR;WORK;CHARSET=utf-8;;;777 West Filmore Ln;San Mateo;CA;74984;USA
ORG;CHARSET=utf-8:Q.R.&E. Corp;
TITLE;CHARSET=utf-8:Director Sales
END:VCARD
}
```

## Change Log

| Version | Change                                      |
|---------|---|
| v10     | Added /<module>/:record/vcard GET endpoint. |

**Last Modified:** 2021-02-17 02:44:13

---

## /<module>/:root/tree GET

### Overview

Retrieves full tree for selected root record.

### Request Arguments

| Name    | Type   | Description  | Required |
|---------|--------|--|----------|
| module  | String | The name of sugar module that contains a nested set data and implements the NestedSetInterface . | True     |
| :record | String | The ID of record   | True     |

### Response Arguments

This endpoint does not return any response arguments.

### Response

```
{
  "next_offset": -1,
  "records": [{
    "id": "ad4ddf76-327a-11e4-818b-5404a67f3363",
    "name": "Documents",
    "date_entered": null,
    "date_modified": null,
    "modified_user_id": null,
    "created_by": null,
    "description": null,
    "deleted": "0",
    "source_id": null,
    "source_type": null,
    "source_meta": null,
    "root": "935d3e07-327a-11e4-818b-5404a67f3363",
```

---

```
"lft": "2",
"rgt": "9",
"level": "1",
"children": {
  "next_offset": -1,
  "records": [{
    "id": "ad4e03f1-327a-11e4-818b-5404a67f3363",
    "name": "Engeneering",
    "date_entered": null,
    "date_modified": null,
    "modified_user_id": null,
    "created_by": null,
    "description": null,
    "deleted": "0",
    "source_id": null,
    "source_type": null,
    "source_meta": null,
    "root": "935d3e07-327a-11e4-818b-5404a67f3363",
    "lft": "3",
    "rgt": "4",
    "level": "2",
    "children": {
      "next_offset": -1,
      "records": []
    }
  }
}, {
  "id": "f482dd1b-327a-11e4-818b-5404a67f3363",
  "name": "Testing",
  "date_entered": null,
  "date_modified": null,
  "modified_user_id": null,
  "created_by": null,
  "description": null,
  "deleted": "0",
  "source_id": null,
  "source_type": null,
  "source_meta": null,
  "root": "935d3e07-327a-11e4-818b-5404a67f3363",
  "lft": "5",
  "rgt": "6",
  "level": "2",
  "children": {
    "next_offset": -1,
    "records": []
  }
}, {
```

---

```
"id": "f482fb7a-327a-11e4-818b-5404a67f3363",
"name": "Management",
"date_entered": null,
"date_modified": null,
"modified_user_id": null,
"created_by": null,
"description": null,
"deleted": "0",
"source_id": null,
"source_type": null,
"source_meta": null,
"root": "935d3e07-327a-11e4-818b-5404a67f3363",
"lft": "7",
"rgt": "8",
"level": "2",
"children": {
  "next_offset": -1,
  "records": []
}
}]
}
}, {
  "id": "045c03b9-327b-11e4-818b-5404a67f3363",
  "name": "Audit",
  "date_entered": null,
  "date_modified": null,
  "modified_user_id": null,
  "created_by": null,
  "description": null,
  "deleted": "0",
  "source_id": null,
  "source_type": null,
  "source_meta": null,
  "root": "935d3e07-327a-11e4-818b-5404a67f3363",
  "lft": "10",
  "rgt": "19",
  "level": "1",
  "children": {
    "next_offset": -1,
    "records": [{
      "id": "045c1de6-327b-11e4-818b-5404a67f3363",
      "name": "Financial",
      "date_entered": null,
      "date_modified": null,
      "modified_user_id": null,
      "created_by": null,
```

---

```
"description": null,
"deleted": "0",
"source_id": null,
"source_type": null,
"source_meta": null,
"root": "935d3e07-327a-11e4-818b-5404a67f3363",
"lft": "11",
"rgt": "14",
"level": "2",
"children": {
  "next_offset": -1,
  "records": [{
    "id": "0f658847-327b-11e4-818b-5404a67f3363",
    "name": "Invoices",
    "date_entered": null,
    "date_modified": null,
    "modified_user_id": null,
    "created_by": null,
    "description": null,
    "deleted": "0",
    "source_id": null,
    "source_type": null,
    "source_meta": null,
    "root": "935d3e07-327a-11e4-818b-5404a67f3363",
    "lft": "12",
    "rgt": "13",
    "level": "3",
    "children": {
      "next_offset": -1,
      "records": []
    }
  }]
}
}, {
  "id": "0f65a6c7-327b-11e4-818b-5404a67f3363",
  "name": "Agreements",
  "date_entered": null,
  "date_modified": null,
  "modified_user_id": null,
  "created_by": null,
  "description": null,
  "deleted": "0",
  "source_id": null,
  "source_type": null,
  "source_meta": null,
  "root": "935d3e07-327a-11e4-818b-5404a67f3363",
```

```

    "lft": "15",
    "rgt": "16",
    "level": "2",
    "children": {
        "next_offset": -1,
        "records": []
    }
}, {
    "id": "14d30bf3-327b-11e4-818b-5404a67f3363",
    "name": "Clients",
    "date_entered": null,
    "date_modified": null,
    "modified_user_id": null,
    "created_by": null,
    "description": null,
    "deleted": "0",
    "source_id": null,
    "source_type": null,
    "source_meta": null,
    "root": "935d3e07-327a-11e4-818b-5404a67f3363",
    "lft": "17",
    "rgt": "18",
    "level": "2",
    "children": {
        "next_offset": -1,
        "records": []
    }
}]
}
}]
}

```

## Change Log

| Version | Change                                     |
|---------|--|
| v10     | Added /<module>/:record/tree GET endpoint. |

Last Modified: 2021-02-17 02:44:13

---

## **/<module>/sync\_key/:sync\_key\_field\_value DELETE**

### **Overview**

Deletes the record with the given sync\_key.

### **Request Arguments**

| <b>Name</b>          | <b>Type</b> | <b>Description</b>  | <b>Required</b> |
|----------------------|-------------|---|-----------------|
| module               | String      | The module the record belongs to                                | True            |
| sync_key_field_value | String      | A unique ID for the record identifying it in an external system | True            |

### **Request**

/<module>/sync\_key/:sync\_key\_field\_value

### **Response Arguments**

| <b>Name</b> | <b>Type</b> | <b>Description</b>                     |
|-------------|-------------|--|
| record      | String      | The ID of the record that was deleted. |

### **Response**

Status 200

```
{  
  "id": "a0328573-a252-a27c-3530-4e4297d4c9e1"  
}
```



---

## Change Log

| Version | Change   |
|---------|--|
| v11_10  | Added<br>/<module>/sync_key/:sync_key_field_value DELETE endpoint. |

Last Modified: 2021-02-17 02:44:13

## /<module>/sync\_key/:sync\_key\_field\_value GET

### Overview

Retrieves the record with the given sync\_key.

### Request Arguments

| Name                 | Type   | Description   | Required |
|----------------------|--------|---|----------|
| module               | String | The module the record belongs to                                | True     |
| sync_key_field_value | String | A unique ID for the record identifying it in an external system | True     |

### Request

/<module>/sync\_key/:sync\_key\_field\_value

---

## Response Arguments

Body: formatted JSON object.

### Response

#### Successful Response

Status 200

#### Failed Response

Status 422

```
{
  "error": "invalid_parameter",
  "error_message": "Could not find record with :sync_key_field_value
in module: <module>"
}
```

## Change Log

| Version | Change  |
|---------|---|
| v11_10  | Added<br>/<module>/sync_ke<br>y/:sync_key_field_value GET endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /<module>/sync\_key/:sync\_key\_field\_value PATCH

### Overview

Upserts based on sync\_key. If a record can be found with sync\_key, then update. If the record does not exist, then create it.

---

**Note:** This endpoint cannot be used to set the `sync_key` for an existing Sugar record. To do so, it is recommended to use the [set sync key endpoint](#) to update the matching Sugar record ID. Once the `sync_key` is set for the record, then it is possible to leverage this endpoint.

## Request Arguments

| Name                 | Type   | Description   | Required |
|----------------------|--------|---|----------|
| module               | String | The module the record belongs to                                | True     |
| sync_key_field_value | String | A unique ID for the record identifying it in an external system | True     |

## Request

`/<module>/sync_key/:sync_key_field_value`

## Response Arguments

| Name   | Type   | Description                             |
|--------|--------|---|
| record | String | The ID of the record that was upserted. |

## Response

- Status 201: For a created record
- Status 200: For an updated record

```
{  
  record: "a0328573-a252-a27c-3530-4e4297d4c9e1"  
}
```

## Change Log

| Version | Change  |
|---------|---|
| v11_10  | Added<br>/<module>/sync_key/:sync_key_field_value PATCH endpoint. |

Last Modified: 2021-02-17 02:44:13

## /<module>/sync\_key/:sync\_key\_field\_value PUT

### Overview

Upserts based on sync\_key. If a record can be found with sync\_key, then update. If the record does not exist, then create it. Note that the [PATCH method](#) is recommended over the PUT method.

**Note:** This endpoint cannot be used to set the sync\_key for an existing Sugar record. To do so, it is recommended to use the [set sync key endpoint](#) to update the matching Sugar record ID. Once the sync\_key is set for the record, then it is possible to leverage this endpoint.

### Request Arguments

| Name                 | Type   | Description   | Required |
|----------------------|--------|---|----------|
| module               | String | The module the record belongs to                                | True     |
| sync_key_field_value | String | A unique ID for the record identifying it in an external system | True     |

### Request

/<module>/sync\_key/:sync\_key\_field\_value

---

## Response Arguments

| Name   | Type   | Description                             |
|--------|--------|---|
| record | String | The ID of the record that was upserted. |

## Response

- Status 201: For a created record
- Status 200: For an updated record

```
{  
  record: "a0328573-a252-a27c-3530-4e4297d4c9e1"  
}
```

## Change Log

| Version | Change  |
|---------|---|
| v11_10  | Added <code>/&lt;module&gt;/sync_key/:sync_key_field_value</code> PUT endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## `/<module>/temp/file/:field` POST

### Overview

Saves an image to a temporary folder.

## Request Arguments

| Name            | Type    | Description   | Required   |
|-----------------|---------|---|--|
| format          | String  | The data format. Currently accepts 'sugar-html-json'.                                 | True   |
| delete_if_fails | Boolean | Indicates whether the API is to mark related record deleted if the file upload fails. | False  |
| oauth_token     | String  | The oauth_token value.  | False - Required if only if delete_if_fails is true. |
| <image field>   | String  | The field and file to populate. Example: {"": "@\path\to\ExampleImage.png"}           | True   |

## Request

```
{
  "format": "sugar-html-json",
  "delete_if_fails": true,
  "oauth_token": "8d240d9d-04ea-571b-35ea-513037ed5857",
  "<image field>": "@\path\to\ExampleImage.png"
}
```

## Response Arguments

| Name | Type   | Description               |
|------|--------|---------------------------|
| guid | String | The temp ID of the image. |

## Response

```
{
  "picture": {
```

---

```
    "guid": "50a8760d-966f-9d7e-f45c-513037fac8fc"
  }
}
```

## Change Log

| Version | Change  |
|---------|---|
| v10     | Added /<module>/temp/file/:field POST endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /<module>/temp/file/:field/:temp\_id GET

### Overview

Reads a temporary image and deletes it.

### Request Arguments

This endpoint does not accept any arguments.

### Response Arguments

| Name         | Type    | Description   |
|--------------|---------|---|
| <image file> | String; | Returns the image content with the content headers. |

### Response

result: HTTP/1.1 200 OK  
Date: Fri, 01 Mar 2013 05:36:24 GMT  
Server: Apache/2.2.22 (Unix) DAV/2 PHP/5.3.17  
X-Powered-By: PHP/5.3.17  
Expires: Sun, 31 Mar 2013 05:36:24 GMT  
Cache-Control: max-age=1, post-check=0, pre-check=0  
Pragma: public  
X-Content-Type-Options: nosniff  
Content-Length: 2072  
ETag: d41d8cd98f00b204e9800998ecf8427e  
Connection: close  
Content-Type: image/png

%PNG

IHDRIIqsÜßIDATxæíæ}hUÇÇ? >ëiðl<Ñ ðè, ¨šS'âD,ÉÈ4+^Öv Mö['v1 wéÝ -m  
ÈMŠÖ- jBWDD\$Ý,^dR L\$^~/!^sï9çùí ç^st7×crßÚž\î%Üæû çy y~ ~~~~êA\*Ý€ x"÷r  
! p€p  
H ýwEÚ- b'Brj 6` h ýŽç i æ J  
%IMX)ÝÈ>?  
\$Co÷ àðÝ}ž"WXY\$ÝwK cSÓ Â&éA €Ødã l bI%eå\$€àÀF X4fp à  
p> "À%À"RVÑ%...RS ÆŠéZ%-š L Ì ë0ÅOWÑ\$...RÓLÂÊY† æ'š à\*p+ë`€" k^'B ù(v é  
•75Q™PÃ > I~\_ æ\$)+'%MM'Ð ">5Q1ØuÖàiÀ6]p\dE-JM=v é `Sã6]CÀQ` ÑÓö@I Ô  
` äRÓ@u &\* HÆŽ]fDLWAI# \$ù  
ßXÁ ÷+`Ö- wÍ/Îúæ,IX P ÝX JR<ÛØÊ éÍOâ{IÔ|û IrÝ æW M5|Ìh 'ôX J#BB] Ú 5  
ÚÅ ì÷éç-é ß\_-€YÁÖ OàýÖ }tÝ )ÛŠòt ù'€ÁÝ ÓãÛS™áiè '6Eka V- "vscžúîîq}vg  
3 ßE4 AdÈ+ ÕÀ€ j UNgÐ Ê™7n'-u=è5ÈzÄnP "] > Ài' Û@&Ýfê: >l K.../ ù\$,,  
e'Ý <èŽG"İ 0 wIÝqý ngö ÒM é'vUæL•K~ šÎ~s\ ùÛ,,îØB+~ð5 n UTäž-5a' Ñ|x  
.šÉd!j ŌIHWØsdá,S -\p" ~éfê OÆö...P¥4ið3J,ÈÖK 'ñü~mpä^yù „ôÔlÀKÿP2™  
.>éÆÿ &O\_g~ÏtžxTDv8 Ū.~ aÑgúzíd ûÛT Ñfî@Ø V încñ 9lrt  
!ú@Í s•İnlÁóöJàux+ÁİdùÄD (kq€ r"= îépZ / úÖ/n 7ùÆ  
Đž@d |^érö 1Q=EôèÊæasà7u'LlÄËô N Í.oæ!'GQ† „eÛŌn„ }<  
zðÆgðP oMN7ØÀÓÛ™ > jö äfö>Ày,à^&j†ôÇ/^ç 5mxPób -dh >(Šæ%[=gÓŌ\*J<f>sŌIž  
Ý ô#}5 ? •zýqß ûHo lš'án „} 1€ fïŌŌ'î™ jas65.  
2ó %éKÉ \*\$Y\*Đí nA{añ Áô Nû?z~ðN ÂV]F I -tæ 8 ÉäÛúËý7ùTk™ô>ñò[ jÛ^"1aJ  
)Û... é,-GT xÁ 9 {iÝ% 2øÓ[ ?7ùf /R+ž?Í"-Sæ×?k"'èÆ÷ HO ŌúĐAJÝô Td 'z N  
Ý ð /ÚCäDwvî4]Ý]IRwøß\_>î ÈbÂTä Ž{ \*IiIÀ̀pc6 oÛ@n ^1?ŌD'^TLT×÷AM Ūqæ  
:`" • š\$ ,`v<P5T•\$ jTaf 'XRbI^%E - XRbI^%E - XRbI^%E - XRbI^%E - XRb  
I(\$éÃ&pŌpásàîÏÿlM)>  
IÅžsp0ð T,/...\$]b<[>È\^ @?óJ~7÷ðoÀXÈ™™7 ÒLctöoBp" P IYQ>ðGlÉBìÅ à%WTø&  
ðMlçÝ6Að€S%YQÆu;. Äİúuc "\*"Q ò LcÛÿ ji„l%W!99" Ý~" Ūq[Ëy[2Û<-È™kÉh - ö  
aKQ/&š~0}>)w nçvöû÷÷ `'+ÅvfÄŽ -j~X99æ|^+ " )×í8 =Uÿ;f  
'7bÈ-#][`ûÈäç\*&LQN ...Æ KÀ!î ØŽ ùİ)×Íz "KÍö- À



---

## Change Log

| Version | Change                                    |
|---------|---|
| v10     | Added /<module>/enum/:field GET endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /mostactiveusers GET

### Overview

Fetches the most active users for meetings, calls, inbound emails, and outbound emails.

### Request Arguments

| Name | Type    | Description  | Required |
|------|---------|--|----------|
| days | Integer | Returns most active users for the last specified quantity of days. Defaults to 30 days if not specified. | False    |

### Request

`http://{site_url}/rest/v10/mostactiveusers?days=30`

**Note:** GET endpoint parameters are passed in the form of a query string.

### Response Arguments

---

## Response

```
{
  "meetings":{
    "user_id":"seed_sarah_id",
    "count":"20",
    "first_name":"Sarah",
    "last_name":"Smith"
  },
  "calls":{
    "user_id":"seed_will_id",
    "count":"7",
    "first_name":"Will",
    "last_name":"Westin"
  },
  "inbound_emails":{
    "user_id":"seed_sarah_id",
    "count":"20",
    "first_name":"Sarah",
    "last_name":"Smith"
  },
  "outbound_emails":{
    "user_id":"seed_max_id",
    "count":"17",
    "first_name":"Max",
    "last_name":"Jensen"
  }
}
```

## Change Log

| Version | Change                               |
|---------|--------------------------------------|
| v10     | Added /mostactiveusers GET endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /oauth2/bwc/login POST

---

## ATTENTION: FOR INTERNAL USAGE ONLY

This endpoint is subject to change.

### Overview

Retrieves a cookie from the OAuth token.

**Last Modified:** 2021-02-17 02:44:13

## /oauth2/logout POST

### Overview

Expires the token portion of the OAuth 2.0 specification.

### Request Arguments

This endpoint does not accept any arguments.

### Response Arguments

| Name    | Type    | Description                |
|---------|---------|----------------------------|
| success | Boolean | The success of the logout. |

### Response

```
{  
  "success": true  
}
```

---

## Change Log

| Version | Change                              |
|---------|-------------------------------------|
| v10     | Added /oauth2/logout POST endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /oauth2/sudo/:user\_name POST

### Overview

Get an access token as another user. The current user must be an admin in order to access this endpoint. This method is useful for integrations in order to be able to access the system with the same permission restrictions as a specified user. The calling user does not lose their existing token, this one is granted in addition.

### Request Arguments

| Name      | Type   | Description  | Required |
|-----------|--------|--|----------|
| platform  | String | Which platform on the session, defaults to "base"  | False    |
| client_id | String | The client id for the session, defaults to "sugar" | False    |

### Request

```
{
  "client_id": "sugar",
  "platform": "base"
}
```

---

## Response Arguments

| Name         | Type    | Description   |
|--------------|---------|---|
| access_token | String  | The access token needed to authenticate for other methods.        |
| expires_in   | Integer | The length of time until the access_token expires.                |
| token_type   | String  | Should always be bearer.  |
| scope        | String  | There is no scope implementation in the current release of Sugar. |

## Response

```
{
  "access_token": "c19fff9b-b767-233e-ebb4-512e369d3e39",
  "expires_in": 3600,
  "token_type": "bearer",
  "scope": null
}
```

## Change Log

| Version | Change  |
|---------|---|
| v10     | Added /oauth2/token/sudo/:user POST endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /oauth2/token POST

---

## Overview

Retrieves the token portion of the OAuth 2.0 specification.

## Request Arguments

| Name           | Type   | Description   | Required |
|----------------|--------|---|----------|
| grant_type     | String | Type of request. Available grant types are "password" and "refresh_token".  | True     |
| client_id      | String | Used to identify the client. A client_id of "sugar" will automatically create an OAuth Key in the system that is used for "password" authentication. A client_id of "support_portal" will create an OAuth Key that will allow for portal authentication. Additional client_id's can be created by the administrator in Admin > OAuth Keys to allow for additional grant types. If the client secret is populated, it will be validated against the client id. | True     |
| client_secret; | String | The clients secret key.   | True     |
| username       | String | The username of the user  | True     |

| Name     | Type   | Description  | Required |
|----------|--------|--|----------|
|          |        | authenticating to the system.  |          |
| password | String | The plaintext password the user authenticating to the system.          | True     |
| platform | String | The platform type. Available types are "base", "mobile", and "portal". | True     |

## Request for Password Grant Types

```
{
  "grant_type": "password",
  "client_id": "sugar",
  "client_secret": "",
  "username": "admin",
  "password": "password",
  "platform": "base"
}
```

## Request for Refresh Token Grant Types

```
{
  "grant_type": "refresh_token",
  "refresh_token": "c1be5132-655b-1ca3-fb44-512e36709871",
  "client_id": "sugar",
  "client_secret": "",
  "platform": "base"
}
```

## Response Arguments

| Name         | Type   | Description             |
|--------------|--------|-------------------------|
| access_token | String | The access token needed |

| Name               | Type    | Description   |
|--------------------|---------|---|
|                    |         | to authenticate for other methods.                              |
| expires_in         | Integer | The length of time until access_token expires in seconds.       |
| token_type         | String  | The token type. Currently only "bearer" is supported.           |
| null               |         | The Oauth scope. Normally returned as null.                     |
| refresh_token      | String  | The token needed to extend the access_token expiration timeout. |
| refresh_expires_in | Integer | The length of time until refresh_token expires in seconds.      |
| download_token     | String  | The token used to download images and files.                    |

## Response

```
{
  "access_token": "802b64c0-5eac-8431-a541-5342d38ac527",
  "expires_in": 3600,
  "token_type": "bearer",
  "scope": null,
  "refresh_token": "85053198-24b1-4521-b1a1-5342d382e0b7",
  "refresh_expires_in": 1209600,
  "download_token": "8c9b5461-0d95-8d87-6084-5342d357b39e"
}
```

## Change Log

| Version | Change                             |
|---------|------------------------------------|
| v10     | Added /oauth2/token POST endpoint. |



---

Last Modified: 2021-02-17 02:44:13

## /password/request GET

### Overview

Sends an email request to reset a users password.

### Request Arguments

| Name     | Type   | Description               | Required |
|----------|--------|---------------------------|----------|
| email    | String | The email of the user.    | True     |
| username | String | The username of the user. | True     |

### Request

`http://{site_url}/rest/v10/password/request?email=admin@sugar.crm&username=admin`

**Note:** GET endpoint parameters are passed in the form of a query string.

### Response Arguments

| Name    | Type    | Description                              |
|---------|---------|--|
| Success | boolean | Returns the result of sending the email. |

### Response

---

true

## Change Log

| Version | Change                                 |
|---------|--|
| v10     | Added /password/request POST endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /ping GET

### Overview

Responds with "pong" if the `access_token` is valid.

### Request Arguments

This endpoint does not accept any arguments.

### Response Arguments

| Name       | Type   | Description                    |
|------------|--------|--------------------------------|
| <response> | String | Returns pong is authenticated. |

### Response

pong

---

## Change Log

| Version | Change                    |
|---------|---------------------------|
| v10     | Added /ping GET endpoint. |

Last Modified: 2021-02-17 02:44:13

## /ping/whattimeisit GET

### Overview

Responds with the current time in server format.

### Request Arguments

This endpoint does not accept any arguments.

### Response Arguments

| Name          | Type   | Description               |
|---------------|--------|---------------------------|
| <server time> | String | Returns the servers time. |

### Response

<time>

## Change Log

| Version | Change                                 |
|---------|--|
| v10     | Added /ping/whattimeisit GET endpoint. |

---

Last Modified: 2021-02-17 02:44:13

## /pmse\_Business\_Rules GET

### Overview

Lists filtered records.

### Summary

This endpoint will return a set of records filtered by an expression. The filter can be applied to multiple fields and have multiple and/or conditions in it. Alternatively, you may use an existing filter by specifying its id. If both a filter definition and a filter id are passed, the two filters will be joined with an AND. Care will need to be taken to make sure that any filters used have appropriate indexes on the server side otherwise the runtime of the endpoint will be very long. Related fields can be searched by specifying the field name as: "link\_name.remote\_field", so if you wished to search the Accounts module by a related member account you would use "members.sic\_code".

### Request Arguments

| Name   | Type   | Description  | Required |
|--------|--------|--|----------|
| filter | String | The filter expression. Filter expressions are explained below. Note that JSON-encoded filters can be specified as query parameters in one of two ways for GET requests:<br><br>1. By | False    |

| Name      | Type    | Description  | Required |
|-----------|---------|--|----------|
|           |         | <p>specifying individual filter arguments as distinct parameters. Example: filter[0][id]=1</p> <p>2. By specifying the whole filter as a single JSON-encoded string. Note that this syntax is currently not supported on certain modules. Example: filter=[{"id": "1"}].</p> |          |
| filter_id | String  | Identifier for a preexisting filter. If filter is also set, the two filters are joined with an AND.  | False    |
| max_num   | Integer | A maximum number of records to return. Default is 20.  | False    |
| offset    | Integer | The number of records to skip over before records are returned. Default is 0.  | False    |
| fields    | String  | Comma delimited list of fields to  | False    |

| Name | Type   | Description   | Required |
|------|--------|---|----------|
|      |        | <p>return. Each field may be represented either by string, or by map containing field name and additional field parameters (applicable to link and collection fields). The fields id and date_modified will always be returned.</p> <p>Example: name,account_type,description,{"name":"opportunities","fields":{"id","name","sales_status"},"order_by":"date_closed:desc"}</p> <p>For more details on additional field parameters, see <a href="#">Relate API</a> and <a href="#">Collection API</a>.</p> |          |
| view | String | <p>Instead of defining the fields argument, the view argument can be used instead. The field list is constructed at the server side based on the view definition which is requested. This argument can be used in combination with the fields argument. Common views are "record" and "list".</p> <p>Example: record</p>  | False    |

| Name       | Type    | Description   | Required |
|------------|---------|---|----------|
| order_by   | String  | How to sort the returned records, in a comma delimited list with the direction appended to the column name after a colon.<br>Example: name:DESC,account_type:DESC,date_modified:ASC | False    |
| q          | String  | A search expression, will search on this module. Cannot be used at the same time as a filter expression or id.  | False    |
| deleted    | Boolean | Boolean to show deleted records in the result set.  | False    |
| nulls_last | Boolean | Boolean to return records with null values in order_by fields last in the result set.   | False    |

## Filter Expressions

There are four types of filters:

### Basic

This will filter the results by checking the field "name" for value "Nelson Inc". This will only find exact matches.

### Example

```
{
```

```

    "filter":[
      {
        "name":"Nelson Inc"
      }
    ]
  }

```

## Full

This expression allows you to specify what operation you want to use for filtering on the field. In the example you would match any record where the field "name" starts with the value "Nelson".

## Example

```

{
  "filter":[
    {
      "name":{
        "$starts":"Nelson"
      }
    }
  ]
}

```

Below is a list of operation types:

| Operation    | Description  |
|--------------|--|
| \$equals     | Performs an exact match on that field.   |
| \$not_equals | Performs an exact match on that field.   |
| \$not_equals | Matches on non-matching values.  |
| \$starts     | Matches on anything that starts with the value.                                |
| \$ends       | Matches anything that ends with the value.                                     |
| \$contains   | Matches anything that contains the value                                       |
| \$in         | Finds anything where field matches one of the values as specified as an array. |
|              |  |



| Operation  | Description   |
|------------|---|
| \$not_in   | Finds anything where field does not matches any of the values as specified as an array. |
| \$is_null  | Checks if the field is null. This operation does not need a value specified.            |
| \$not_null | Checks if the field is not null. This operation does not need a value specified.        |
| \$lt       | Matches when the field is less than the value.  |
| \$lte      | Matches when the field is less than or equal to the value.                              |
| \$gt       | Matches when the field is greater than the value.                                       |
| \$gte      | Matches when the field is greater than or equal to the value.                           |

## Sub-expressions

This allows you to group filter expressions into or/and groupings. By default all expressions are and'ed together. The example expression would match if the field "name" was either "Nelson Inc" or "Nelson LLC". The only currently accepted sub-expression types are "\$and" and "\$or".

### Example

```
{
  "filter": [
    {
      "$or": [
        {
          "name": "Nelson Inc"
        },
        {
          "name": "Nelson LLC"
        }
      ]
    }
  ]
}
```

---

```
  ]  
}
```

## Modules

There are two module expressions, they operate on modules instead of fields. The current module can be specified by either using the module name "\_this" or by leaving the module name as a blank string. The example expression would filter the records in the current module to only your favorites. The only currently accepted module expressions are "\$favorite" and "\$owner".

### Example

```
{  
  "filter": [  
    {  
      "$favorite": "_this"  
    }  
  ]  
}
```

## Response Arguments

| Name        | Type    | Description   |
|-------------|---------|---|
| next_offset | Integer | Displays the next offset for retrieval of additional results. -1 will be returned when there are no more records. |
| records     | Array   | An array of results containing matched records.   |

## Response

```
{
```

---

```
"next_offset":-1,
"records":[
  {
    "id":"fa300a0e-0ad1-b322-9601-512d0983c19a",
    "name":"Dale Spivey",
    "date_modified":"2013-02-28T05:03:00+00:00",
    "description":"",
    "opportunities": [
      {
        _module: "Opportunities",
        "id": "b0701501-1fab-8ae7-3942-540da93f5017",
        "name": "360 Vacations - 228 Units",
        "date_modified": "2014-09-08T16:05:00+03:00",
        "sales_status": "New"
      },
    ],
    "_acl": {
      "fields": {
      }
    }
  },
  {
    "id":"95e17367-9b3d-0e26-22dc-512d0961fedf",
    "name":"Florence Haddock",
    "date_modified":"2013-02-26T19:12:00+00:00",
    "description":"",
    "opportunities": [
      {
        _module: "Opportunities"
        date_modified: "2014-09-08T16:05:00+03:00"
        id: "9ce7c088-8ee4-7cd3-18f1-540da944d4c0"
        name: "360 Vacations - 312 Units"
        sales_status: "New"
      },
    ],
    "_acl": {
      "fields": {
      }
    }
  }
]
}
```

---

## Change Log

| Version | Change                               |
|---------|--------------------------------------|
| v10     | Added /<module>/filter GET endpoint. |

Last Modified: 2021-02-17 02:44:13

## /pmse\_Business\_Rules/file/businessrules\_import POST

### Overview

Imports a Process Business Rules definition from a .pbr file

### Summary

This endpoint will import a Process Business Rules definition from the uploaded .pbr file containing JSON encoded data.

### Request Arguments

| Name | Type | Description | Required |
|------|------|-------------|----------|
| N/A  |      |             |          |

### Request

**Note:** A JSON encoded .pbr file attachment should be included with the request as part of the form-data.

### Response Arguments

---

| Name                 | Type   | Description                    |
|----------------------|--------|--------------------------------|
| businessrules_import | Object | Result of the import operation |

## Response

```
{
  "businessrules_import":
  {
    "success":true,
    "id":"e4396c91-81cd-c097-8149-5733bab68316"
  }
}
```

**Last Modified:** 2021-02-17 02:44:13

## /pmse\_Business\_Rules/:record/brules GET

### Overview

Exports a .pbr file with a Process Business Rules definition

### Summary

This endpoint will retrieve a .pbr file containing JSON encoded data of a Process Business Rules definition identified by the record input parameter.

### Request Arguments

| Name   | Type   | Description                         | Required |
|--------|--------|-------------------------------------|----------|
| record | String | The Process Business Rule record ID | True     |

---

## Response Arguments

| Name | Type | Description |
|------|------|-------------|
| N/A  |      |             |

## Response

**Note:** The response is a MIME type application/pbr file attachment without any response parameters.

**Last Modified:** 2021-02-17 02:44:13

## /pmse\_Emails\_Templates GET

### Overview

Lists filtered records.

### Summary

This endpoint will return a set of records filtered by an expression. The filter can be applied to multiple fields and have multiple and/or conditions in it. Alternatively, you may use an existing filter by specifying its id. If both a filter definition and a filter id are passed, the two filters will be joined with an AND. Care will need to be taken to make sure that any filters used have appropriate indexes on the server side otherwise the runtime of the endpoint will be very long. Related fields can be searched by specifying the field name as: "link\_name.remote\_field", so if you wished to search the Accounts module by a related member account you would use "members.sic\_code".

### Request Arguments

| Name   | Type   | Description                   | Required |
|--------|--------|-------------------------------|----------|
| filter | String | The filter expression. Filter | False    |

| Name      | Type    | Description  | Required |
|-----------|---------|--|----------|
|           |         | <p>expressions are explained below. Note that JSON-encoded filters can be specified as query parameters in one of two ways for GET requests:</p> <ol style="list-style-type: none"> <li>1. By specifying individual filter arguments as distinct parameters. Example: filter[0][id]=1</li> <li>2. By specifying the whole filter as a single JSON-encoded string. Note that this syntax is currently not supported on certain modules. Example: filter=[{"id": "1"}].</li> </ol> |          |
| filter_id | String  | Identifier for a preexisting filter. If filter is also set, the two filters are joined with an AND.  | False    |
| max_num   | Integer | A maximum number of records  | False    |

| Name   | Type    | Description   | Required |
|--------|---------|---|----------|
|        |         | to return. Default is 20.   |          |
| offset | Integer | The number of records to skip over before records are returned. Default is 0.   | False    |
| fields | String  | <p>Comma delimited list of fields to return. Each field may be represented either by string, or by map containing field name and additional field parameters (applicable to link and collection fields). The fields id and date_modified will always be returned.</p> <p>Example: name,account_type,description,{"name":"opportunities","fields":["id","name","sales_status"],"order_by":"date_closed:desc"}</p> <p>For more details on additional field parameters, see <a href="#">Relate API</a> and <a href="#">Collection API</a>.</p> | False    |
| view   | String  | Instead of defining the fields argument, the view argument can be used instead. The field list is constructed at the server side based on the view  | False    |



| Name       | Type    | Description   | Required |
|------------|---------|---|----------|
|            |         | definition which is requested. This argument can be used in combination with the fields argument. Common views are "record" and "list".<br>Example: record                          |          |
| order_by   | String  | How to sort the returned records, in a comma delimited list with the direction appended to the column name after a colon.<br>Example: name:DESC,account_type:DESC,date_modified:ASC | False    |
| q          | String  | A search expression, will search on this module. Cannot be used at the same time as a filter expression or id.  | False    |
| deleted    | Boolean | Boolean to show deleted records in the result set.  | False    |
| nulls_last | Boolean | Boolean to return records with null values in order_by fields last in the result set.   | False    |

## Filter Expressions

There are four types of filters:

---

## Basic

This will filter the results by checking the field "name" for value "Nelson Inc". This will only find exact matches.

### Example

```
{
  "filter": [
    {
      "name": "Nelson Inc"
    }
  ]
}
```

## Full

This expression allows you to specify what operation you want to use for filtering on the field. In the example you would match any record where the field "name" starts with the value "Nelson".

### Example

```
{
  "filter": [
    {
      "name": {
        "$starts": "Nelson"
      }
    }
  ]
}
```

Below is a list of operation types:

| Operation                 | Description                            |
|---------------------------|--|
| <code>\$equals</code>     | Performs an exact match on that field. |
| <code>\$not_equals</code> | Performs an exact match on that field. |
| <code>\$not_equals</code> | Matches on non-matching values.        |
| <code>\$starts</code>     | Matches on anything that starts with   |

| Operation  | Description   |
|------------|---|
|            | the value.  |
| \$ends     | Matches anything that ends with the value.  |
| \$contains | Matches anything that contains the value  |
| \$in       | Finds anything where field matches one of the values as specified as an array.          |
| \$not_in   | Finds anything where field does not matches any of the values as specified as an array. |
| \$is_null  | Checks if the field is null. This operation does not need a value specified.            |
| \$not_null | Checks if the field is not null. This operation does not need a value specified.        |
| \$lt       | Matches when the field is less than the value.  |
| \$lte      | Matches when the field is less than or equal to the value.                              |
| \$gt       | Matches when the field is greater than the value.                                       |
| \$gte      | Matches when the field is greater than or equal to the value.                           |

## Sub-expressions

This allows you to group filter expressions into or/and groupings. By default all expressions are and'ed together. The example expression would match if the field "name" was either "Nelson Inc" or "Nelson LLC". The only currently accepted sub-expression types are "\$and" and "\$or".

### Example

```
{
  "filter": [
    {
```

```

    "$or": [
      {
        "name": "Nelson Inc"
      },
      {
        "name": "Nelson LLC"
      }
    ]
  }
]
}

```

## Modules

There are two module expressions, they operate on modules instead of fields. The current module can be specified by either using the module name "\_this" or by leaving the module name as a blank string. The example expression would filter the records in the current module to only your favorites. The only currently accepted module expressions are "\$favorite" and "\$owner".

### Example

```

{
  "filter": [
    {
      "$favorite": "_this"
    }
  ]
}

```

## Response Arguments

| Name        | Type    | Description   |
|-------------|---------|---|
| next_offset | Integer | Displays the next offset for retrieval of additional results. -1 will be returned when there are no more records. |
|             |         |   |

| Name    | Type  | Description                                     |
|---------|-------|---|
| records | Array | An array of results containing matched records. |

## Response

```
{
  "next_offset": -1,
  "records": [
    {
      "id": "fa300a0e-0ad1-b322-9601-512d0983c19a",
      "name": "Dale Spivey",
      "date_modified": "2013-02-28T05:03:00+00:00",
      "description": "",
      "opportunities": [
        {
          _module: "Opportunities",
          "id": "b0701501-1fab-8ae7-3942-540da93f5017",
          "name": "360 Vacations - 228 Units",
          "date_modified": "2014-09-08T16:05:00+03:00",
          "sales_status": "New"
        }
      ],
      "_acl": {
        "fields": {
        }
      }
    }
  ],
  {
    "id": "95e17367-9b3d-0e26-22dc-512d0961fedf",
    "name": "Florence Haddock",
    "date_modified": "2013-02-26T19:12:00+00:00",
    "description": "",
    "opportunities": [
      {
        _module: "Opportunities"
        date_modified: "2014-09-08T16:05:00+03:00"
        id: "9ce7c088-8ee4-7cd3-18f1-540da944d4c0"
        name: "360 Vacations - 312 Units"
        sales_status: "New"
      }
    ],
  ],
}
```

---

```
    "_acl": {
      "fields": {
      }
    }
  }
]
}
```

## Change Log

| Version | Change                               |
|---------|--------------------------------------|
| v10     | Added /<module>/filter GET endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /pmse\_Emails\_Templates/file/emailtemplates\_import POST

### Overview

Imports a Process Email Templates definition from a .pet file

### Summary

This endpoint will import a Process Email Templates definition from the uploaded .pet file containing JSON encoded data.

### Request Arguments

| Name | Type | Description | Required |
|------|------|-------------|----------|
| N/A  |      |             |          |

---

## Request

**Note:** A JSON encoded .pet file attachment should be included with the request as part of the form-data.

## Response Arguments

| Name                  | Type   | Description                    |
|-----------------------|--------|--------------------------------|
| emailtemplates_import | Object | Result of the import operation |

## Response

```
{
  "emailtemplates_import":
  {
    "success":true,
    "id":"aa5f7fd9-73a9-8338-fd1a-573635ce5c51"
  }
}
```

**Last Modified:** 2021-02-17 02:44:13

## /pmse\_Emails\_Templates/://find\_modules GET

### Overview

Get the related module list for a module

### Summary

This endpoint will retrieve a list of related modules that can be accessed in the Process Email Templates definition from the specified module. Input parameters are passed in as the URL query string. Pagination is supported.

---

## Request Arguments

| Name        | Type   | Description   | Required |
|-------------|--------|---|----------|
| module_list | String | The name of the module the retrieved module list is related to. | True     |

## Request

rest/v11/pmse\_Emails\_Templates/Quotes/find\_modules?module\_list=Quotes

## Response Arguments

| Name    | Type    | Description  |
|---------|---------|--|
| search  | String  | The value of the input module_list parameter.                    |
| success | Boolean | Whether the related module list has been successfully retrieved. |
| result  | Array   | An array of related module objects.                              |

## Response

```
{
  "search": "Quotes",
  "success": true,
  "result": [
    {
      "value": "Quotes",
      "text": "\u003CQuotes\u003E",
      "module": "Quotes",
      "module_label": "Quotes",
      "module_name": "Quotes",
      "relationship": "Quotes"
    }
  ],
}
```



---

```
{
  "value": "billing_accounts",
  "text": "Accounts (Bill to Account: billing_accounts)",
  "module": "Accounts",
  "module_label": "Accounts",
  "module_name": "Accounts",
  "relationship": "quotes_billto_accounts"
},
{
  "value": "shipping_accounts",
  "text": "Accounts (Ship to Account: shipping_accounts)",
  "module": "Accounts",
  "module_label": "Accounts",
  "module_name": "Accounts",
  "relationship": "quotes_shipto_accounts"
},
{
  "value": "billing_contacts",
  "text": "Contacts (Bill to Contact: billing_contacts)",
  "module": "Contacts",
  "module_label": "Contacts",
  "module_name": "Contacts",
  "relationship": "quotes_contacts_billto"
},
{
  "value": "shipping_contacts",
  "text": "Contacts (Ship to Contact: shipping_contacts)",
  "module": "Contacts",
  "module_label": "Contacts",
  "module_name": "Contacts",
  "relationship": "quotes_contacts_shipto"
},
{
  "value": "contracts",
  "text": "Contracts (Contracts: contracts)",
  "module": "Contracts",
  "module_label": "Contracts",
  "module_name": "Contracts",
  "relationship": "contracts_quotes"
},
{
  "value": "opportunities",
  "text": "Opportunities (Opportunity: opportunities)",
  "module": "Opportunities",
  "module_label": "Opportunities",
  "module_name": "Opportunities",
```

---

```
    "relationship": "quotes_opportunities"
  },
  {
    "value": "assigned_user_link",
    "text": "Users (Assigned to User: assigned_user_link)",
    "module": "Users",
    "module_label": "Users",
    "module_name": "Users",
    "relationship": "quotes_assigned_user"
  },
  {
    "value": "created_by_link",
    "text": "Users (Created by User: created_by_link)",
    "module": "Users",
    "module_label": "Users",
    "module_name": "Users",
    "relationship": "quotes_created_by"
  },
  {
    "value": "modified_user_link",
    "text": "Users (Modified by User: modified_user_link)",
    "module": "Users",
    "module_label": "Users",
    "module_name": "Users",
    "relationship": "quotes_modified_user"
  }
]
}
```

**Last Modified:** 2021-02-17 02:44:13

## **/pmse\_Emails\_Templates/:record/etemplate GET**

### **Overview**

Exports a .pet file with a Process Email Templates definition

### **Summary**

---

This endpoint will retrieve a .pet file containing JSON encoded data of a Process Email Templates definition identified by the record input parameter.

## Request Arguments

| Name   | Type   | Description                          | Required |
|--------|--------|--------------------------------------|----------|
| record | String | The Process Email Template record ID | True     |

## Response Arguments

| Name | Type | Description |
|------|------|-------------|
| N/A  |      |             |

## Response

**Note:** The response is a MIME type application/pet file attachment without any response parameters.

**Last Modified:** 2021-02-17 02:44:13

# /pmse\_Emails\_Templates/variables/find GET

## Overview

Get the variable list for a module

## Summary

This endpoint will retrieve a list of variables that can be used in the Process Email Templates definition from the specified module. Input parameters are passed in as the URL query string. Pagination is supported.

---

## Request Arguments

| Name        | Type    | Description   | Required |
|-------------|---------|---|----------|
| base_module | String  | The name of the target module of the Process Email Templates definition.  | True     |
| module_list | String  | The name of the module the variable list is retrieved from. Should be related to the base_module.   | True     |
| q           | String  | Only variables with name containing this search string will be returned.  | False    |
| max_num     | Integer | Maximum number of variables to return for this request.   | False    |
| offset      | Integer | The index of the first variable in the whole list to return for this request. Use "end" to indicate no variable should be returned.             | False    |
| order_by    | String  | Property to sort the variable list by. For example, "name:asc,id:desc" will sort the returned variable list by name ASC first and then id DESC. | False    |

## Request

---

rest/v11/pmse\_Emails\_Templates/variables/find?max\_num=20&order\_by=date\_modified%3Adesc&module\_list=Quotes&base\_module=Quotes

## Response Arguments

| Name        | Type    | Description  |
|-------------|---------|--|
| next_offset | Integer | The offset value that should be used to retrieve the next batch of the list. |
| records     | Array   | A sorted array of variable objects.  |

## Response

```
{
  "next_offset": 20,
  "records": [
    {
      "id": "date_quote_expected_closed",
      "_module": "Quotes",
      "name": "Valid Until",
      "rhs_module": "Quotes"
    },
    {
      "id": "total_usdollar",
      "_module": "Quotes",
      "name": "Total (US Dollar)",
      "rhs_module": "Quotes"
    },
    {
      "id": "total",
      "_module": "Quotes",
      "name": "Total",
      "rhs_module": "Quotes"
    },
    {
      "id": "tax_usdollar",
      "_module": "Quotes",
      "name": "Tax (US Dollar)",
      "rhs_module": "Quotes"
    }
  ]
}
```

---

```
    },
    {
      "id": "tax",
      "_module": "Quotes",
      "name": "Tax",
      "rhs_module": "Quotes"
    },
    {
      "id": "subtotal_usdollar",
      "_module": "Quotes",
      "name": "Subtotal (US Dollar)",
      "rhs_module": "Quotes"
    },
    {
      "id": "subtotal",
      "_module": "Quotes",
      "name": "Subtotal",
      "rhs_module": "Quotes"
    },
    {
      "id": "shipping_address_state",
      "_module": "Quotes",
      "name": "Shipping State",
      "rhs_module": "Quotes"
    },
    {
      "id": "shipping_address_postalcode",
      "_module": "Quotes",
      "name": "Shipping Postal Code",
      "rhs_module": "Quotes"
    },
    {
      "id": "shipping_address_country",
      "_module": "Quotes",
      "name": "Shipping Country",
      "rhs_module": "Quotes"
    },
    {
      "id": "shipping_address_city",
      "_module": "Quotes",
      "name": "Shipping City",
      "rhs_module": "Quotes"
    },
    {
      "id": "shipping_address_street",
      "_module": "Quotes",
```

---

```
    "name": "Shipping Address",
    "rhs_module": "Quotes"
  },
  {
    "id": "shipping_usdollar",
    "_module": "Quotes",
    "name": "Shipping (US Dollar)",
    "rhs_module": "Quotes"
  },
  {
    "id": "shipping",
    "_module": "Quotes",
    "name": "Shipping",
    "rhs_module": "Quotes"
  },
  {
    "id": "quote_type",
    "_module": "Quotes",
    "name": "Quote Type",
    "rhs_module": "Quotes"
  },
  {
    "id": "name",
    "_module": "Quotes",
    "name": "Quote Subject",
    "rhs_module": "Quotes"
  },
  {
    "id": "quote_stage",
    "_module": "Quotes",
    "name": "Quote Stage",
    "rhs_module": "Quotes"
  },
  {
    "id": "quote_num",
    "_module": "Quotes",
    "name": "Quote Number",
    "rhs_module": "Quotes"
  },
  {
    "id": "purchase_order_num",
    "_module": "Quotes",
    "name": "Purchase Order Num",
    "rhs_module": "Quotes"
  },
  {
```

---

```
    "id": "payment_terms",
    "_module": "Quotes",
    "name": "Payment Terms",
    "rhs_module": "Quotes"
  }
]
```

**Last Modified:** 2021-02-17 02:44:13

## **/pmse\_Inbox/AdhocReassign PUT**

### **Overview**

Deprecated endpoint.

### **Summary**

This endpoint is deprecated and will be removed in a future release.

**Last Modified:** 2021-02-17 02:44:13

## **/pmse\_Inbox/AdhocReassign/:data/:flowId GET**

### **Overview**

Deprecated endpoint.

### **Summary**

This endpoint is deprecated and will be removed in a future release.



---

**Last Modified:** 2021-02-17 02:44:13

## **/pmse\_Inbox/ReassignForm PUT**

### **Overview**

Deprecated endpoint.

### **Summary**

This endpoint is deprecated and will be removed in a future release.

**Last Modified:** 2021-02-17 02:44:13

## **/pmse\_Inbox/ReassignForm/:data/:flowId GET**

### **Overview**

Deprecated endpoint.

### **Summary**

This endpoint is deprecated and will be removed in a future release.

**Last Modified:** 2021-02-17 02:44:13

## **/pmse\_Inbox GET**

---

## Overview

Returns a list of Processes by user using filters

## Summary

This endpoint gets a list of processes by user using filters

## Request Arguments

| Name      | Type    | Description   | Required |
|-----------|---------|---|----------|
| order_by  | string  | How to sort the returned records, in a comma delimited list with the direction appended to the column name after a colon. | false    |
| q         | string  | A search expression, will search on this module. Cannot be used at the same time as a filter expression or id.            | false    |
| filter    | string  | The filter expression   | false    |
| filter_id | string  | Identifier for a preexisting filter. If filter is also set, the two filters are joined with an AND                        | false    |
| max_num   | integer | A maximum number of records to return. Default is 20.   | false    |
| offset    | integer | The number of records to skip over before records are returned. Default is  | false    |

| Name    | Type    | Description  | Required |
|---------|---------|--|----------|
|         |         | 0.   |          |
| fields  | string  | Comma delimited list of fields to return           | false    |
| deleted | boolean | Boolean to show deleted records in the result set. | false    |

## Response Arguments

| Name        | Type            | Description             |
|-------------|-----------------|-------------------------|
| records     | <field>:<value> | Process records         |
| next_offset | integer         | Next offset for results |

## Response

```
{
  "next_offset":-1,
  "records":
  [
    {
      "id":"839ccd22-2925-11e6-83f3-6c4008960436",
      "date_modified":"2016-06-02T17:52:55-07:00",
      "created_by":"1",
      "cas_finish_date":"",
      "assigned_user_id":"1",
      "assigned_user_name":"Administrator",
      "assigned_user_link":
      {
        "full_name":"Administrator",
        "id":"1",
        "_acl":
        {
          "fields":
          {
            "pwd_last_changed":
            {
              "write":"no",
```

```

        "create": "no"
    },
    "last_login":
    {
        "write": "no",
        "create": "no"
    }
},
"delete": "no",
"_hash": "08b99a97c2e8d792f7a44d8882b5af6d"
}
},
"_acl":
{
    "fields": {}
},
"_module": "pmse_Project/pmse_BpmFlow",
"_locked_fields": [],
"cas_id": "4",
"act_assignment_method": "static",
"cas_title": "PQR1",
"pro_title": "PD1",
"date_entered": "2016-06-02T17:52:55-07:00",
"name": "PQR1",
"cas_create_date": "2016-06-02T17:52:55-07:00",
"flow_id": "839ccd22-2925-11e6-83f3-6c4008960436",
"id2": "8380e512-2925-11e6-9600-6c4008960436",
"task_name": "Activity # 1",
"cas_assignment_method": "static",
"cas_sugar_module": "Accounts",
"cas_sugar_object_id": "82d5c470-2925-11e6-a269-6c400896043
6",
"prj_id": "6e025038-2842-11e6-b4f7-6c4008960436",
"in_time": true,
"cas_user_id": "1",
"prj_created_by": "1",
"cas_user_id_full_name": "Administrator",
"prj_user_id_full_name": "Administrator"
},
]
}

```

**Last Modified:** 2021-02-17 02:44:13

---

## /pmse\_Inbox/cancelCases PUT

### Overview

Call methods to cancel a process

### Summary

This endpoint cancels one or more processes.

### Request Arguments

| Name   | Type  | Description                                | Required |
|--------|-------|--|----------|
| cas_id | array | Collection of process trigger sequence ids | true     |

### Response Arguments

| Name    | Type    | Description                    |
|---------|---------|--------------------------------|
| success | boolean | Result of the cancel operation |

### Response

```
{  
  "success":true  
}
```

**Last Modified:** 2021-02-17 02:44:13

---

## /pmse\_Inbox/case/:id/:idflow GET

### Overview

Retrieve information of the process record

### Summary

This endpoint gets information for a process record

### Request Arguments

| Name   | Type   | Description                            | Required |
|--------|--------|--|----------|
| id     | string | The id of the process requiring action | true     |
| idflow | string | The id of the process trigger sequence | true     |

### Response Arguments

| Name | Type   | Description    |
|------|--------|----------------|
| case | object | Process record |

### Response

```
{
  "case":
  {
    "flow":
    {
      "id": "b2d418ba-28ef-11e6-8ae6-6c4008960436",
      "name": "",
      "date_entered": "2016-06-02 18:27:42",
      "date_modified": "2016-06-02 18:27:42",
```

---

```
"modified_user_id": "1",
"created_by": "1",
"description": null,
"deleted": "0",
"cas_id": "3",
"cas_index": "3",
"pro_id": "6e172e2c-2842-11e6-a4bb-6c4008960436",
"cas_previous": "2",
"cas_reassign_level": "0",
"bpnmn_id": "7c62acc2-2842-11e6-9b9c-6c4008960436",
"bpnmn_type": "bpnmnActivity",
"cas_assignment_method": "static",
"cas_user_id": "1",
"cas_thread": "1",
"cas_flow_status": "FORM",
"cas_sugar_module": "Accounts",
"cas_sugar_object_id": "b2103fd0-28ef-11e6-8916-6c400896043
6",
"cas_sugar_action": "None",
"cas_adhoc_type": "",
"cas_adhoc_parent_id": "",
"cas_adhoc_actions": "[\u0022link_cancel\u0022,\u0022approve\u0022,\u0022reject\u0022,\u0022edit\u0022]",
"cas_task_start_date": null,
"cas_delegate_date": "2016-06-02 18:27:42",
"cas_start_date": null,
"cas_finish_date": null,
"cas_due_date": null,
"cas_queue_duration": "0",
"cas_duration": "0",
"cas_delay_duration": "0",
"cas_started": "0",
"cas_finished": "0",
"cas_delayed": "0",
"assigned_user_id": "1",
"au_first_name": null,
"au_last_name": "Administrator",
"cbu_first_name": null,
"cbu_last_name": "Administrator",
"mbu_first_name": null,
"mbu_last_name": "Administrator",
"my_favorite": null
},
"reclaim": false,
"buttons":
[
```

---

```

{
  "type": "button",
  "name": "cancel_button",
  "label": "Cancel",
  "css_class": "btn-invisible btn-link",
  "showOn": "edit",
  "events":
  {
    "click": "button:cancel_button:click"
  }
},
{
  "type": "rowaction",
  "event": "case:approve",
  "name": "approve_button",
  "label": "Approve",
  "css_class": "btn btn-success"
},
{
  "type": "rowaction",
  "event": "case:reject",
  "name": "reject_button",
  "label": "Reject",
  "css_class": "btn btn-danger"
},
{
  "type": "actiondropdown",
  "name": "main_dropdown",
  "primary": true,
  "showOn": "view",
  "buttons":
  [
    {
      "type": "rowaction",
      "event": "button:edit_button:click",
      "name": "edit_button",
      "label": "Edit",
      "acl_action": "edit"
    },
    {
      "type": "rowaction",
      "name": "history",
      "label": "History",
      "event": "case:history"
    }
  ]
}

```



---

```

        "type": "rowaction",
        "name": "status",
        "label": "Status",
        "event": "case:status"
    },
    {
        "type": "rowaction",
        "name": "add-notes",
        "label": "Show Notes",
        "event": "case:add:notes"
    }
]
}
],
"readonly": [],
"required": [],
"title":
{
    "time":
    {
        "expected_time_warning": false,
        "expected_time_message": false,
        "expected_time_view": false,
        "expected_time": ""
    },
    "process": "PD1",
    "rec_name": "ABC3",
    "activity": "Activity # 1"
},
"inboxId": "b2b6e20e-28ef-11e6-bba8-6c4008960436",
"flowId": "b2d418ba-28ef-11e6-8ae6-6c4008960436"
}
}

```

**Last Modified:** 2021-02-17 02:44:13

## **/pmse\_Inbox/casesList GET**

### **Overview**

---

Returns a list with the processes for Process Management

## Summary

This endpoint gets a list of Processes.

## Request Arguments

| Name        | Type    | Description   | Required |
|-------------|---------|---|----------|
| module_list | string  | Identifier used to determine which status to filter against   | false    |
| order_by    | string  | How to sort the returned records, in a comma delimited list with the direction appended to the column name after a colon. | false    |
| q           | string  | A search expression, will search on this module. Cannot be used at the same time as a filter expression or id.            | false    |
| filter      | string  | The filter expression   | false    |
| filter_id   | string  | Identifier for a preexisting filter. If filter is also set, the two filters are joined with an AND.                       | false    |
| max_num     | integer | A maximum number of records to return. Default is 20.   | false    |
| offset      | integer | The number of   | false    |

| Name    | Type    | Description   | Required |
|---------|---------|---|----------|
|         |         | records to skip over before records are returned. Default is 0. |          |
| fields  | string  | Comma delimited list of fields to return                        | false    |
| deleted | boolean | Boolean to show deleted records in the result set.              | false    |

## Response Arguments

| Name        | Type            | Description                |
|-------------|-----------------|----------------------------|
| next_offset | Integer         | Next offset                |
| records     | <field>/<value> | List of process attributes |

## Response

```
{
  {
    "next_offset":-1,
    "records":
    [
      {
        "id":"3922976c-284f-11e6-9f40-6c4008960436",
        "name":"ABC2",
        "date_entered":"2016-06-01T16:18:59-07:00",
        "date_modified":"2016-06-01T16:18:59-07:00",
        "modified_user_id":"1",
        "created_by":"1",
        "deleted":"0",
        "cas_id":"2",
        "cas_parent":"0",
        "cas_status":"IN PROGRESS",
        "pro_id":"6e172e2c-2842-11e6-a4bb-6c4008960436",
        "cas_title":"ABC2",
        "cas_custom_status":""
      }
    ]
  }
}
```

---

```
"cas_init_user": "1",
"cas_create_date": "2016-06-01T16:18:59-07:00",
"cas_update_date": "2016-06-01 23:18:59",
"cas_finish_date": null,
"cas_assigned_status": "UNASSIGNED",
"cas_module": "Accounts",
"team_id": "1",
"team_set_id": "1",
"assigned_user_id": "1",
"assigned_user_name": "Administrator",
"prj_id": "6e025038-2842-11e6-b4f7-6c4008960436",
"prj_created_by": "1",
"prj_module": "Accounts",
"cas_sugar_module": "Accounts",
"cas_sugar_object_id": "38beb03a-284f-11e6-b059-6c4008960436",
"pro_title": "PD1",
"prj_deleted": "0",
"prj_user_id_full_name": "Administrator",
"cas_user_id_full_name": "Sarah Smith"
    },
  }
}
```

**Last Modified:** 2021-02-17 02:44:13

## **/pmse\_Inbox/changeCaseUser/:cas\_id GET**

### **Overview**

Deprecated endpoint.

### **Summary**

This endpoint is deprecated and will be removed in a future release.

**Last Modified:** 2021-02-17 02:44:13

---

## **/pmse\_Inbox/clearLog/:typelog PUT**

### **Overview**

Clear the PMSE.log file log

### **Summary**

This endpoint clears the contents of the PMSE.log file

### **Request Arguments**

There are no request arguments for this endpoint

### **Response Arguments**

| Name | Type    | Description                   |
|------|---------|-------------------------------|
| none | boolean | Result of the clear operation |

### **Response**

true

**Last Modified:** 2021-02-17 02:44:13

## **/pmse\_Inbox/delete\_notes/:id DELETE**

### **Overview**

Deletes a process note

---

## Summary

TBD

## Request Arguments

| Name | Type   | Description           | Required |
|------|--------|-----------------------|----------|
| id   | string | The note id to delete | true     |

## Response Arguments

| Name | Type   | Description            |
|------|--------|------------------------|
| id   | string | Id of the deleted note |

## Response

```
{  
  "id": "da13553a-298a-11e6-b125-6c4008960436"  
}
```

**Last Modified:** 2021-02-17 02:44:13

## /pmse\_Inbox/engine\_claim PUT

### Overview

Claims the processes to the current user

### Summary

This endpoint claims the processes to the current user.

---

## Request Arguments

| Name      | Type   | Description                            | Required |
|-----------|--------|--|----------|
| cas_id    | string | The id of the process trigger sequence | true     |
| cas_index | string | The step in the process                | true     |

## Response

There is no Response to this endpoint

**Last Modified:** 2021-02-17 02:44:13

## /pmse\_Inbox/engine\_route PUT

### Overview

Evaluates the response of the user form Show Process [Approve, Reject, Route]

### Summary

This endpoint handles Approve, Reject and Route actions for a process record.

### Request Arguments

| Name       | Type   | Description   | Required |
|------------|--------|---|----------|
| frm_action | string | The action to take when it comes to routing the record. | true     |

---

## Response Arguments

| Name    | Type    | Description                     |
|---------|---------|---------------------------------|
| success | boolean | Result of the routing operation |

## Response

```
{  
  "success":true,  
}
```

**Last Modified:** 2021-02-17 02:44:13

## /pmse\_Inbox/filter GET

### Overview

Returns a list of Processes by user

### Summary

This endpoint gets a list of processes by user

### Request Arguments

| Name     | Type   | Description  | Required |
|----------|--------|--|----------|
| order_by | string | How to sort the returned records, in a comma delimited list with the direction appended to the column name after | false    |



| Name      | Type    | Description  | Required |
|-----------|---------|--|----------|
|           |         | a colon.   |          |
| q         | string  | A search expression, will search on this module. Cannot be used at the same time as a filter expression or id. | false    |
| filter    | string  | The filter expression  | false    |
| filter_id | string  | Identifier for a preexisting filter. If filter is also set, the two filters are joined with an AND             | false    |
| max_num   | integer | A maximum number of records to return. Default is 20.  | false    |
| offset    | integer | The number of records to skip over before records are returned. Default is 0.                                  | false    |
| fields    | string  | Comma delimited list of fields to return   | false    |
| deleted   | boolean | Boolean to show deleted records in the result set.   | false    |

## Response Arguments

| Name        | Type            | Description             |
|-------------|-----------------|-------------------------|
| records     | <field>:<value> | Process records         |
| next_offset | integer         | Next offset for results |

---

## Response

```
{
  "next_offset":-1,
  "records":
  [
    {
      "id":"839ccd22-2925-11e6-83f3-6c4008960436",
      "date_modified":"2016-06-02T17:52:55-07:00",
      "created_by":"1",
      "cas_finish_date":"",
      "assigned_user_id":"1",
      "assigned_user_name":"Administrator",
      "assigned_user_link":
      {
        "full_name":"Administrator",
        "id":"1",
        "_acl":
        {
          "fields":
          {
            "pwd_last_changed":
            {
              "write":"no",
              "create":"no"
            },
            "last_login":
            {
              "write":"no",
              "create":"no"
            }
          },
          "delete":"no",
          "_hash":"08b99a97c2e8d792f7a44d8882b5af6d"
        }
      },
      "_acl":
      {
        "fields":{}
      },
      "_module":"pmse_Project/pmse_BpmFlow",
      "_locked_fields":[],
      "cas_id":"4",
      "act_assignment_method":"static",
      "cas_title":"PQR1",
      "pro_title":"PD1",
    }
  ]
}
```

---

```
"date_entered": "2016-06-02T17:52:55-07:00",
"name": "PQR1",
"cas_create_date": "2016-06-02T17:52:55-07:00",
"flow_id": "839ccd22-2925-11e6-83f3-6c4008960436",
"id2": "8380e512-2925-11e6-9600-6c4008960436",
"task_name": "Activity # 1",
"cas_assignment_method": "static",
"cas_sugar_module": "Accounts",
"cas_sugar_object_id": "82d5c470-2925-11e6-a269-6c4008960436",
6",
    "prj_id": "6e025038-2842-11e6-b4f7-6c4008960436",
    "in_time": true,
    "cas_user_id": "1",
    "prj_created_by": "1",
    "cas_user_id_full_name": "Administrator",
    "prj_user_id_full_name": "Administrator"
  },
]
}
```

**Last Modified:** 2021-02-17 02:44:13

## **/pmse\_Inbox/getLog GET**

### **Overview**

Return the text of the PMSE.log file

### **Summary**

This endpoint gets the contents of the PMSE.log file

### **Request Arguments**

There are no request arguments for this endpoint

### **Response Arguments**

---

| Name | Type   | Description               |
|------|--------|---------------------------|
| none | string | Log Entries from PMSE.log |

## Response

"Test Log Entry1\nTest Log Entry2\n"

Last Modified: 2021-02-17 02:44:13

## /pmse\_inbox/historyLog/:filter GET

### Overview

Gets the history log for a process

### Summary

This endpoint gets the history log for a process

### Request Arguments

| Name   | Type   | Description                                     | Required |
|--------|--------|---|----------|
| filter | string | The id of the process trigger sequence (cas_id) | true     |

### Response Arguments

| Name    | Type    | Description             |
|---------|---------|-------------------------|
| success | boolean | Result of the operation |
|         |         |                         |

| Name   | Type            | Description     |
|--------|-----------------|-----------------|
| result | <field>:<value> | History records |

## Response

```
{
  "success":true,
  "result":
  [
    {
      "image":"index.php?entryPoint=download\u0026id=0b2dc2f0-23
77-11e6-9d2a-6c4008960436\u0026type=SugarFieldImage\u0026isTempFile=1"
,
      "user":"Administrator",
      "current_user":"Administrator",
      "due_date":"2016-06-03T16:18:59-07:00",
      "end_date":"2016-06-01T16:18:59-07:00",
      "current_date":"2016-06-02T10:53:14-07:00",
      "delegate_date":"2016-06-01T16:18:59-07:00",
      "start_date":"2016-06-01T16:18:59-07:00",
      "completed":true,
      "cas_user_id":"1",
      "data_info":"has created Process #2  on the Account record
with the event \u0027Start Event # 1\u0027."
    },
  ]
}
```

**Last Modified:** 2021-02-17 02:44:13

## /pmse\_Inbox/note\_list/:cas\_id GET

### Overview

Returns the notes list for a process

---

## Summary

This endpoint gets the notes for a process

## Request Arguments

| Name   | Type   | Description                            | Required |
|--------|--------|--|----------|
| cas_id | string | The id of the process trigger sequence | true     |

## Response Arguments

| Name          | Type    | Description    |
|---------------|---------|----------------|
| rowList       | object  | Note records   |
| totalRows     | integer | Total notes    |
| currentOffset | integer | Current offset |
| currentDate   | integer | Current date   |

## Response

```
{
  "rowList":
  [
    {
      "pmse_bpm_notes__date_entered": "2016-06-02 16:52:21",
      "id": "602d4cb0-28e2-11e6-88c9-6c4008960436",
      "date_entered": "2016-06-02T09:52:21-07:00",
      "date_modified": "2016-06-02T09:52:21-07:00",
      "cas_id": "2",
      "cas_index": "1",
      "not_user_id": "1",
      "not_user_recipient_id": "",
      "not_type": "GENERAL",
      "not_date": null,
      "not_status": "ACTIVE",
      "not_availability": "",
      "not_content": "Test Note1",
    }
  ]
}
```

---

```
        "not_recipients": "",
        "first_name": null,
        "last_name": "Administrator",
        "picture": "0b2dc2f0-2377-11e6-9d2a-6c4008960436"
    }
],
"totalRows": 1,
"currentOffset": 0,
"currentDate": "2016-06-02 16:52:39"
}
```

**Last Modified:** 2021-02-17 02:44:13

## **/pmse\_Inbox/reactivateFlows PUT**

### **Overview**

Deprecated endpoint.

### **Summary**

This endpoint is deprecated and will be removed in a future release.

**Last Modified:** 2021-02-17 02:44:13

## **/pmse\_Inbox/reassignFlows PUT**

### **Overview**

Call methods to reassign processes

### **Summary**

---

This endpoint reassigns a collection of processes

## Request Arguments

| Name      | Type  | Description  | Required |
|-----------|-------|--|----------|
| flow_data | array | Collection of flow data arrays, each containing a user_id property | true     |

## Response Arguments

| Name    | Type    | Description                      |
|---------|---------|----------------------------------|
| success | boolean | Result of the reassign operation |

## Response

```
{  
  "success": true,  
}
```

Last Modified: 2021-02-17 02:44:13

## /pmse\_Inbox/reassignFlows/:record GET

### Overview

Retrieve information to reassign processes

### Summary



---

This endpoint gets information necessary to reassign a process

## Request Arguments

| Name   | Type   | Description                            | Required |
|--------|--------|--|----------|
| record | string | The id of the process trigger sequence | true     |

## Response Arguments

| Name        | Type            | Description                     |
|-------------|-----------------|---------------------------------|
| success     | boolean         | Result of the routing operation |
| next_offset | integer         | Next offset for more results    |
| records     | <field>:<value> | List of process attributes      |

## Response

```
{
  "success":true,
  "next_offset":-1,
  "records":
  [
    {
      "cas_id":"2",
      "cas_index":"3",
      "cas_task_start_date":null,
      "cas_delegate_date":"2016-06-01T16:18:59-07:00",
      "cas_flow_status":"FORM",
      "cas_user_id":"seed_sarah_id",
      "cas_due_date":"",
      "cas_sugar_module":"Accounts",
      "bpmn_id":"7c62acc2-2842-11e6-9b9c-6c4008960436",
      "act_name":"Activity # 1",
      "act_assignment_method":"static",
      "act_expected_time":"eyJ0aW1lIjpuYWxsLCJlbml0IjoiaG91ciJ9"
```

---

```
'
    "cas_expected_time": "",
    "assigned_user": "Sarah Smith"
  }
]
```

**Last Modified:** 2021-02-17 02:44:13

## **/pmse\_Inbox/:record/file/:field GET**

### **Overview**

Returns the process status image file

### **Summary**

This endpoint returns the process status image file.

### **Request Arguments**

| Name     | Type   | Description  | Required |
|----------|--------|--|----------|
| record   | string | The id of the record or image to get                         | true     |
| field    | string | The image type field to get the image from                   | true     |
| _project | string | If set, will get an image for a project instead of a process | false    |

### **Response**

There is no Response to this endpoint

---

Last Modified: 2021-02-17 02:44:13

## /pmse\_Inbox/save\_notes POST

### Overview

Creates a new note for a process

### Summary

This endpoint creates a new note for a process

### Request Arguments

| Name             | Type   | Description   | Required |
|------------------|--------|---|----------|
| data             | array  | Collection of data for a note containing the following: | true     |
| data.cas_id      | string | The id of the process trigger sequence                  | true     |
| data.cas_index   | string | The step in the process                                 | true     |
| data.not_content | string | The content of the note                                 | true     |
| data.not_type    | string | The type of note, defaults to 'GENERAL'                 | false    |

### Response Arguments

---

| Name         | Type    | Description          |
|--------------|---------|----------------------|
| success      | boolean | Result of the update |
| id           | string  | Id of new note       |
| date_entered | date    | Date of creation     |

## Response

```
{
  "success":true,
  "id":"06c075d0-28e7-11e6-8bb1-6c4008960436",
  "date_entered":"2016-06-02T10:25:39-07:00"
}
```

**Last Modified:** 2021-02-17 02:44:13

## /pmse\_Inbox/settings GET

### Overview

Retrieve settings for the PA engine

### Summary

This endpoint gets settings for the SugarBPM™ engine

### Request Arguments

| Name   | Type   | Description   | Required |
|--------|--------|---|----------|
| fields | string | Comma separated list of SugarBPM™ config keys to return. If not sent, all config settings will be returned. | false    |

---

## Response Arguments

| Name                   | Type    | Description            |
|------------------------|---------|------------------------|
| logger_level           | string  | Level of logging       |
| error_number_of_cycles | integer | Error number of cycles |
| error_timeout          | integer | Timeout for errors     |

## Response

```
{  
  "logger_level": "critical",  
  "error_number_of_cycles": "10",  
  "error_timeout": "40"  
}
```

**Last Modified:** 2021-02-17 02:44:13

## /pmse\_Inbox/settings PUT

### Overview

Update settings for the SugarBPM™ engine

### Summary

This endpoint updates settings for the SugarBPM™ engine

### Request Arguments

| Name | Type  | Description   | Required |
|------|-------|---|----------|
| data | array | Key/value map of config keys and their associated values for the SugarBPM™ engine to update | false    |

## Response Arguments

| Name    | Type    | Description                                       |
|---------|---------|---|
| success | boolean | Result of update                                  |
| data    | object  | Key/Value map of config keys and their new values |

## Response

```
{
  "success":true,
  "data":
  {
    "logger_level":"critical",
    "error_number_of_cycles":"10",
    "error_timeout":"40"
  }
}
```

**Last Modified:** 2021-02-17 02:44:13

## /pmse\_Inbox/unattendedCases GET

### Overview

Retrieves the processes to show on Unattended Process view

---

## Summary

This endpoint gets the list of unattended processes

## Request Arguments

| Name        | Type   | Description  | Required |
|-------------|--------|--|----------|
| module_list | string | Identifier used to determine which field to filter against       | true     |
| q           | string | Filter applied to a field to determine which processes to return | false    |
| order_by    | string | Sort definition to apply to the result                           | false    |

## Response Arguments

| Name        | Type            | Description                           |
|-------------|-----------------|---------------------------------------|
| next_offset | integer         | Next offset for more results          |
| records     | <field>:<value> | List of unattended process attributes |

## Response

```
{
  "next_offset": "-1",
  "records":
  [
    {
      "id": "3922976c-284f-11e6-9f40-6c4008960436",
      "assigned_user_id": "1",
      "date_modified": "2016-06-01 23:18:59",
      "date_entered": "2016-06-01T16:18:59-07:00",
      "name": "ABC2",
    }
  ]
}
```

---

```
        "cas_id": "2",
        "cas_title": "ABC2",
        "cas_status": "IN PROGRESS",
        "pro_title": "PD1",
        "pro_id": "6e172e2c-2842-11e6-a4bb-6c4008960436",
        "cas_init_user": "1",
        "cas_user_full_name": "Sarah Smith",
        "prj_id": "6e025038-2842-11e6-b4f7-6c4008960436",
        "prj_user_id_full_name": "Administrator",
        "cas_sugar_object_id": "38beb03a-284f-11e6-b059-6c4008960436",
        "cas_sugar_module": "Accounts",
        "assigned_user_name": "Administrator"
    }
]
}
```

**Last Modified:** 2021-02-17 02:44:13

## **/pmse\_Inbox/userListByTeam/:id GET**

### **Overview**

Deprecated endpoint.

### **Summary**

This endpoint is deprecated and will be removed in a future release.

**Last Modified:** 2021-02-17 02:44:13

## **/pmse\_Project/ActivityDefinition/:record GET**



---

## Overview

Retrieves the definition data for an activity

## Summary

This endpoint will retrieve the JSON encoded definition data for the Process Definition activity identified by the record input parameter.

## Request Arguments

| Name   | Type   | Description  | Required |
|--------|--------|--|----------|
| record | String | The value for the act_uid field in the pmse_bpmn_activity record | True     |

## Response Arguments

| Name    | Type    | Description                                  |
|---------|---------|--|
| success | Boolean | The status of the response                   |
| <field> | <value> | Field value in the pmse_bpmn_activity record |

## Response

```
{
  "success":true,
  "id":"566f0156-0ce3-75b4-da56-573cb73984aa",
  "name":"Action # 1",
  "date_entered":"2016-05-18 18:41:29",
  "date_modified":"2016-05-18 18:42:00",
  "modified_user_id":"1",
  "created_by":"1",
  "description":null,
  "deleted":"0",
```

---

```
"pro_id": "9f8c4fcd-8d4c-949d-50b8-573caddf8c0c",
"act_type": "TASK",
"act_duration": "0",
"act_duration_unit": "DAYS",
"act_send_notification": "0",
"act_assignment_method": "balanced",
"act_assign_team": "",
"act_assign_user": "",
"act_value_based_assignment": "",
"act_reassign": "0",
"act_reassign_team": "",
"act_adhoc": "0",
"act_adhoc_behavior": "",
"act_adhoc_team": "",
"act_response_buttons": "",
"act_last_user_assigned": "",
"act_field_module": "Accounts",
"act_fields": "[{\u0022name\u0022:\u0022Assigned to\u0022,\u0022field\u0022:\u0022assigned_user_id\u0022,\u0022value\u0022:\u0022currentuser\u0022,\u0022type\u0022:\u0022user\u0022,\u0022label\u0022:\u0022Current user\u0022}]",
"act_readonly_fields":
[
  {
    "name": "phone_alternate",
    "label": "Alternate Phone",
    "readonly": false
  },
  {
    "name": "annual_revenue",
    "label": "Annual Revenue",
    "readonly": false
  },
  {
    "name": "billing_address_city",
    "label": "Billing City",
    "readonly": false
  },
  {
    "name": "billing_address_country",
    "label": "Billing Country",
    "readonly": false
  },
  {
    "name": "billing_address_postalcode",
    "label": "Billing Postal Code",
```

---

```
    "readonly":false
  },
  {
    "name":"billing_address_state",
    "label":"Billing State",
    "readonly":false
  },
  {
    "name":"billing_address_street",
    "label":"Billing Street",
    "readonly":false
  },
  {
    "name":"created_by",
    "label":"Created By",
    "readonly":false
  },
  {
    "name":"description",
    "label":"Description",
    "readonly":false
  },
  {
    "name":"duns_num",
    "label":"DUNS",
    "readonly":false
  },
  {
    "name":"employees",
    "label":"Employees",
    "readonly":false
  },
  {
    "name":"facebook",
    "label":"Facebook Account",
    "readonly":false
  },
  {
    "name":"phone_fax",
    "label":"Fax",
    "readonly":false
  },
  {
    "name":"googleplus",
    "label":"Google Plus ID",
    "readonly":false
```

---

```
    },
    {
      "name": "industry",
      "label": "Industry",
      "readonly": false
    },
    {
      "name": "modified_user_id",
      "label": "Modified By",
      "readonly": false
    },
    {
      "name": "name",
      "label": "Name",
      "readonly": false
    },
    {
      "name": "phone_office",
      "label": "Office Phone",
      "readonly": false
    },
    {
      "name": "ownership",
      "label": "Ownership",
      "readonly": false
    },
    {
      "name": "rating",
      "label": "Rating",
      "readonly": false
    },
    {
      "name": "shipping_address_city",
      "label": "Shipping City",
      "readonly": false
    },
    {
      "name": "shipping_address_country",
      "label": "Shipping Country",
      "readonly": false
    },
    {
      "name": "shipping_address_postalcode",
      "label": "Shipping Postal Code",
      "readonly": false
    },
  },
```

---

```
{
  "name": "shipping_address_state",
  "label": "Shipping State",
  "readonly": false
},
{
  "name": "shipping_address_street",
  "label": "Shipping Street",
  "readonly": false
},
{
  "name": "sic_code",
  "label": "SIC Code",
  "readonly": false
},
{
  "name": "ticker_symbol",
  "label": "Ticker Symbol",
  "readonly": false
},
{
  "name": "twitter",
  "label": "Twitter Account",
  "readonly": false
},
{
  "name": "account_type",
  "label": "Type",
  "readonly": false
},
{
  "name": "website",
  "label": "Website",
  "readonly": false
}
],
"act_expected_time":
{
  "time": "",
  "unit": "hour"
},
"act_required_fields":
[
  {
    "name": "phone_alternate",
    "label": "Alternate Phone",
```

---

```
    "required":false
  },
  {
    "name":"annual_revenue",
    "label":"Annual Revenue",
    "required":false
  },
  {
    "name":"billing_address_city",
    "label":"Billing City",
    "required":false
  },
  {
    "name":"billing_address_country",
    "label":"Billing Country",
    "required":false
  },
  {
    "name":"billing_address_postalcode",
    "label":"Billing Postal Code",
    "required":false
  },
  {
    "name":"billing_address_state",
    "label":"Billing State",
    "required":false
  },
  {
    "name":"billing_address_street",
    "label":"Billing Street",
    "required":false
  },
  {
    "name":"created_by",
    "label":"Created By",
    "required":false
  },
  {
    "name":"description",
    "label":"Description",
    "required":false
  },
  {
    "name":"duns_num",
    "label":"DUNS",
    "required":false
```

---

```
    },
    {
      "name": "employees",
      "label": "Employees",
      "required": false
    },
    {
      "name": "facebook",
      "label": "Facebook Account",
      "required": false
    },
    {
      "name": "phone_fax",
      "label": "Fax",
      "required": false
    },
    {
      "name": "googleplus",
      "label": "Google Plus ID",
      "required": false
    },
    {
      "name": "industry",
      "label": "Industry",
      "required": false
    },
    {
      "name": "modified_user_id",
      "label": "Modified By",
      "required": false
    },
    {
      "name": "phone_office",
      "label": "Office Phone",
      "required": false
    },
    {
      "name": "ownership",
      "label": "Ownership",
      "required": false
    },
    {
      "name": "rating",
      "label": "Rating",
      "required": false
    },
  },
```

---

```
{
  "name": "shipping_address_city",
  "label": "Shipping City",
  "required": false
},
{
  "name": "shipping_address_country",
  "label": "Shipping Country",
  "required": false
},
{
  "name": "shipping_address_postalcode",
  "label": "Shipping Postal Code",
  "required": false
},
{
  "name": "shipping_address_state",
  "label": "Shipping State",
  "required": false
},
{
  "name": "shipping_address_street",
  "label": "Shipping Street",
  "required": false
},
{
  "name": "sic_code",
  "label": "SIC Code",
  "required": false
},
{
  "name": "ticker_symbol",
  "label": "Ticker Symbol",
  "required": false
},
{
  "name": "twitter",
  "label": "Twitter Account",
  "required": false
},
{
  "name": "account_type",
  "label": "Type",
  "required": false
},
{
```



---

```
        "name": "website",
        "label": "Website",
        "required": false
    }
],
"act_related_modules": [],
"act_service_url": null,
"act_service_params": null,
"act_service_method": null,
"act_update_record_owner": null,
"execution_mode": "DEFAULT",
"assigned_user_id": "",
"au_first_name": null,
"au_last_name": null,
"cbu_first_name": null,
"cbu_last_name": "Administrator",
"mbu_first_name": null,
"mbu_last_name": "Administrator",
"my_favorite": null
}
```

**Last Modified:** 2021-02-17 02:44:13

## **/pmse\_Project/ActivityDefinition/:record PUT**

### **Overview**

Updates the definition data for an activity

### **Summary**

This endpoint will update the Process Definition activity identified by the record input parameter with the data provided in the request payload.

### **Request Arguments**

| Name   | Type   | Description  | Required |
|--------|--------|--|----------|
| record | String | The value for the act_uid field in the pmse_bpmn_activity record | True     |

## Request Payload

```
{
  "data":
  {
    "act_field_module": "Accounts",
    "act_fields": "[{\\"name\\":\\"Assigned to\\",\\"field\\":\\"assigned_user_id\\",\\"value\\":\\"owner\\",\\"type\\":\\"user\\",\\"label\\":\\"Record owner\\"}]"
  }
}
```

## Response Arguments

| Name    | Type    | Description                        |
|---------|---------|------------------------------------|
| success | Boolean | The status of the update operation |

## Response

```
{
  "success": true
}
```

Last Modified: 2021-02-17 02:44:13

## /pmse\_Project/CrmData/:data/:filter GET

---

## Overview

Retrieves information about Fields, Modules, Users, Roles, etc.

## Summary

This endpoint will retrieve various data related to the Process Definition.

## Request Arguments

| Name   | Type   | Description  | Required |
|--------|--------|--|----------|
| data   | String | The type of data to be retrieved                   | True     |
| filter | String | Filtering criteria to be applied to data retrieved | False    |

## Request

**Note:** Additional input parameters can be provided in the form of a URL query string.

```
/rest/v11/pmse_Project/CrmData/related/Accounts?cardinality=one
```

## Response Arguments

| Name    | Type    | Description                             |
|---------|---------|---|
| success | Boolean | The status of the response              |
| search  | String  | The value of the filter input parameter |
| result  | Array   | The data requested                      |

## Response

---

```
{
  "search": "Accounts",
  "success": true,
  "result":
  [
    {
      "value": "Accounts",
      "text": "\u003CAccounts\u003E",
      "module": "Accounts",
      "module_label": "Accounts",
      "module_name": "Accounts",
      "relationship": "Accounts"
    },
    {
      "value": "member_of",
      "text": "Accounts (Member of: member_of)",
      "module": "Accounts",
      "module_label": "Accounts",
      "module_name": "Accounts",
      "relationship": "member_accounts"
    },
    {
      "value": "campaign_accounts",
      "text": "Campaigns (Campaigns: campaign_accounts)",
      "module": "Campaigns",
      "module_label": "Campaigns",
      "module_name": "Campaigns",
      "relationship": "campaign_accounts"
    },
    {
      "value": "assigned_user_link",
      "text": "Users (Assigned to User: assigned_user_link)",
      "module": "Users",
      "module_label": "Users",
      "module_name": "Users",
      "relationship": "accounts_assigned_user"
    },
    {
      "value": "created_by_link",
      "text": "Users (Created by User: created_by_link)",
      "module": "Users",
      "module_label": "Users",
      "module_name": "Users",
      "relationship": "accounts_created_by"
    }
  ],
}
```

---

```
{
  "value": "modified_user_link",
  "text": "Users (Modified by User: modified_user_link)",
  "module": "Users",
  "module_label": "Users",
  "module_name": "Users",
  "relationship": "accounts_modified_user"
}
```

**Last Modified:** 2021-02-17 02:44:13

## **/pmse\_Project/CrmData/:record/:filter PUT**

### **Overview**

Updates information about Fields, Modules, Users, Roles, etc.

### **Summary**

This endpoint will update various data related to the Process Definition with the data provided in the request payload.

### **Request Arguments**

| Name   | Type   | Description                                      | Required |
|--------|--------|--|----------|
| record | String | The type of data to be updated                   | True     |
| filter | String | Filtering criteria to be applied to data updated | False    |

### **Request**

---

/rest/v11/pmse\_Project/CrmData/clearEventCriteria/383414365573cf64b8ea  
a65039872849

## Request Payload

```
{  
  "data":null  
}
```

## Response Arguments

| Name    | Type    | Description                        |
|---------|---------|------------------------------------|
| success | Boolean | The status of the update operation |

## Response

```
{  
  "success":true  
}
```

Last Modified: 2021-02-17 02:44:13

## /pmse\_Project/EventDefinition/:record GET

### Overview

Retrieves the definition data for an event

### Summary

This endpoint will retrieve the JSON encoded definition data for the Process

---

Definition event identified by the record input parameter.

## Request Arguments

| Name   | Type   | Description   | Required |
|--------|--------|---|----------|
| record | String | The value for the evn_uid field in the pmse_bpmn_event record | True     |

## Request

**Note:** Additional input parameters can be provided in the form of a URL query string.

```
/rest/v11/pmse_Project/EventDefinition/632263607573cb74a582507093735454?related=modules
```

## Response Arguments

| Name    | Type    | Description                                  |
|---------|---------|--|
| <field> | <value> | Field value in the pmse_bpmn_activity record |

## Response

```
{  
  "id": "80a37c82-8be8-c668-a547-573cb791b905",  
  "name": "",  
  "date_entered": "2016-05-18 18:41:29",  
  "date_modified": "2016-05-18 18:41:42",  
  "created_by": "1",  
  "description": null,  
  "deleted": "0",  
  "evn_status": "ACTIVE",  
  "evn_type": "START",
```

---

```
"evn_module": "Accounts",
"evn_criteria": "",
"evn_params": "new",
"evn_script": "",
"execution_mode": "DEFAULT",
"au_first_name": null,
"au_last_name": null,
"cbu_first_name": null,
"cbu_last_name": "Administrator",
"mbu_first_name": null,
"mbu_last_name": "Administrator",
"my_favorite": null,
"evn_uid": "632263607573cb74a582507093735454",
"related":
{
  "modules":
  [
    {
      "value": "Accounts",
      "text": "Accounts"
    },
    {
      "value": "Bugs",
      "text": "Bugs"
    },
    {
      "value": "Calls",
      "text": "Calls"
    },
    {
      "value": "Campaigns",
      "text": "Campaigns"
    },
    {
      "value": "Cases",
      "text": "Cases"
    },
    {
      "value": "Contacts",
      "text": "Contacts"
    },
    {
      "value": "Contracts",
      "text": "Contracts"
    }
  ]
}
```



---

```
    "value": "Documents",
    "text": "Documents"
  },
  {
    "value": "KBContents",
    "text": "Knowledge Base"
  },
  {
    "value": "Leads",
    "text": "Leads"
  },
  {
    "value": "Meetings",
    "text": "Meetings"
  },
  {
    "value": "Notes",
    "text": "Notes"
  },
  {
    "value": "Opportunities",
    "text": "Opportunities"
  },
  {
    "value": "ProductTemplates",
    "text": "Product Catalog"
  },
  {
    "value": "ProjectTask",
    "text": "Project Tasks"
  },
  {
    "value": "Project",
    "text": "Projects"
  },
  {
    "value": "Products",
    "text": "Quoted Line Items"
  },
  {
    "value": "Quotes",
    "text": "Quotes"
  },
  {
    "value": "RevenueLineItems",
    "text": "Revenue Line Items"
```

---

```
    },
    {
      "value": "Prospects",
      "text": "Targets"
    },
    {
      "value": "Tasks",
      "text": "Tasks"
    }
  ]
}
```

**Last Modified:** 2021-02-17 02:44:13

## **/pmse\_Project/EventDefinition/:record PUT**

### **Overview**

Updates the definition data for an event

### **Summary**

This endpoint will update the Process Definition event identified by the record input parameter with the data provided in the request payload.

### **Request Arguments**

| Name   | Type   | Description   | Required |
|--------|--------|---|----------|
| record | String | The value for the evn_uid field in the pmse_bpmn_event record | True     |

### **Request Payload**

---

There are 5 event types in SugarBPM™.

### **Start Event**

```
{
  "data":
  {
    "evn_module": "Accounts",
    "evn_params": "updated",
    "evn_criteria": null
  }
}
```

### **Timer Event**

```
{
  "data":
  {
    "evn_timer_type": "duration",
    "evn_duration_criteria": "10",
    "evn_duration_params": "minute",
    "evn_criteria": null
  }
}
```

### **Receive Message Event**

```
{
  "data":
  {
    "evn_criteria": [
      {
        "expType": "MODULE",
        "expSubtype": "DropDown",
        "expLabel": "Accounts (Industry is equal to Banking)",
        "expValue": "Banking",
        "expOperator": "equals",
        "expModule": "Accounts",
        "expField": "industry"
      }
    ]
  }
}
```

---

```
}  
}
```

## Send Message Event

```
{  
  "data":  
  {  
    "evn_module": "Accounts",  
    "evn_criteria": "8444baae-c73f-11e8-afa5-6c400895ea84",  
    "evn_params":  
    {  
      "to": [  
        {  
          "type": "recipient",  
          "module": "calls",  
          "moduleLabel": "Calls",  
          "value": "email1",  
          "label": "%MODULE% : Email Address",  
          "filter": {  
            "expType": "MODULE",  
            "expSubtype": "DropDown",  
            "expLabel": "Calls (Status is equal to Scheduled)",  
            "expValue": "Planned",  
            "expOperator": "equals",  
            "expModule": "calls",  
            "expField": "status"  
          },  
          "chainedRelationship": {  
            "module": "contact_parent",  
            "moduleLabel": "Contacts",  
            "filter": {  
              "expType": "MODULE",  
              "expSubtype": "DropDown",  
              "expLabel": "Contacts (Lead Source is equal to  
Cold Call)",  
              "expValue": "Cold Call",  
              "expOperator": "equals",  
              "expModule": "contact_parent",  
              "expField": "lead_source"  
            }  
          }  
        }  
      ]  
    }  
  }  
}
```

```

    ],
    "cc": [],
    "bcc": []
  }
}

```

## End Event

```

{
  "data": {
    "activities": {
    },
    "events": {
      "4849630305bb7e68ae078d5012588603": {
        "evn_uid": "4849630305bb7e68ae078d5012588603",
        "evn_behavior": "THROW",
        "evn_marker": "EMPTY",
        "evn_message": "",
        "action": "UPDATE"
      }
    },
    "gateways": {
    },
    "flows": {
    },
    "artifacts": {
    },
    "prj_uid": "389d3d5a-c8ee-11e8-bc27-6c400895ea84"
  },
  "id": "389d3d5a-c8ee-11e8-bc27-6c400895ea84",
  "operation": "update",
  "wrapper": "Project"
}

```

## Response Arguments

| Name | Type | Description |
|------|------|-------------|
| N/A  |      |             |

---

## Response

null

**Last Modified:** 2021-02-17 02:44:13

## /pmse\_Project/GatewayDefinition/:record GET

### Overview

Retrieves the definition data for a gateway

### Summary

This endpoint will retrieve the JSON encoded definition data for the Process Definition gateway identified by the record input parameter.

### Request Arguments

| Name   | Type   | Description   | Required |
|--------|--------|---|----------|
| record | String | The value for the gat_uid field in the pmse_bpmn_gateway record | True     |

### Response Arguments

| Name    | Type    | Description                         |
|---------|---------|-------------------------------------|
| success | Boolean | The status of the response          |
| data    | Array   | The definition data for the gateway |

---

## Response

```
{
  "success":true,
  "data":
  [
    {
      "flo_uid":"985528634573cab8901d04029355451",
      "flo_condition":"[{\u0022expType\u0022:\u0022BUSINESS_RULE
S\u0022,\u0022expLabel\u0022:\u0022Action # 1 is equal to \\\u0022TRUE
\\\u0022\u0022,\u0022expValue\u0022:\u0022TRUE\u0022,\u0022expOperator
\u0022:\u0022equals\u0022,\u0022expField\u0022:\u0022b6d250c-
bf29-2ad7-67a2-569d5debc7d9\u0022}]"
```

**Last Modified:** 2021-02-17 02:44:13

## /pmse\_Project/GatewayDefinition/:record PUT

### Overview

Updates the definition data for a gateway

### Summary

This endpoint will update the Process Definition gateway identified by the record input parameter with the data provided by the request payload.

### Request Arguments

| Name   | Type   | Description   | Required |
|--------|--------|---|----------|
| record | String | The value for the gat_uid field in the pmse_bpmn_gateway record | True     |

---

## Request Payload

```
{
  "data":
  [
    {
      "flo_uid": "985528634573cab8901d04029355451",
      "flo_condition": ""
    }
  ]
}
```

## Response Arguments

| Name    | Type    | Description                        |
|---------|---------|------------------------------------|
| success | Boolean | The status of the update operation |

## Response

```
{
  "success": true
}
```

**Last Modified:** 2021-02-17 02:44:13

## /pmse\_Project GET

### Overview

Lists filtered records.



---

## Summary

This endpoint will return a set of records filtered by an expression. The filter can be applied to multiple fields and have multiple and/or conditions in it. Alternatively, you may use an existing filter by specifying its id. If both a filter definition and a filter id are passed, the two filters will be joined with an AND. Care will need to be taken to make sure that any filters used have appropriate indexes on the server side otherwise the runtime of the endpoint will be very long. Related fields can be searched by specifying the field name as: "link\_name.remote\_field", so if you wished to search the Accounts module by a related member account you would use "members.sic\_code".

## Request Arguments

| Name   | Type   | Description  | Required |
|--------|--------|--|----------|
| filter | String | <p>The filter expression. Filter expressions are explained below. Note that JSON-encoded filters can be specified as query parameters in one of two ways for GET requests:</p> <ol style="list-style-type: none"><li>1. By specifying individual filter arguments as distinct parameters. Example: filter[0][id]=1</li><li>2. By specifying the whole filter as a single JSON-encoded string. Note that this</li></ol> | False    |

| Name      | Type    | Description  | Required |
|-----------|---------|--|----------|
|           |         | <p>syntax is currently not supported on certain modules.</p> <p>Example: filter=[{"id": "1"}].</p>   |          |
| filter_id | String  | Identifier for a preexisting filter. If filter is also set, the two filters are joined with an AND.  | False    |
| max_num   | Integer | A maximum number of records to return. Default is 20.  | False    |
| offset    | Integer | The number of records to skip over before records are returned. Default is 0.  | False    |
| fields    | String  | <p>Comma delimited list of fields to return. Each field may be represented either by string, or by map containing field name and additional field parameters (applicable to link and collection fields). The fields id and date_modified will always be returned.</p> <p>Example: name,account_type,description,{"name": "opportunities", "fields": ["id</p> | False    |

| Name     | Type   | Description  | Required |
|----------|--------|--|----------|
|          |        | <p>","name","sales_status"],"order_by":"date_closed:desc"}<br/>           For more details on additional field parameters, see <a href="#">Relate API</a> and <a href="#">Collection API</a>.</p>  |          |
| view     | String | <p>Instead of defining the fields argument, the view argument can be used instead. The field list is constructed at the server side based on the view definition which is requested. This argument can be used in combination with the fields argument. Common views are "record" and "list".<br/>           Example: record</p> | False    |
| order_by | String | <p>How to sort the returned records, in a comma delimited list with the direction appended to the column name after a colon.<br/>           Example: name:DESC,account_type:DESC,date_modified:ASC</p>   | False    |
| q        | String | <p>A search expression, will search on this module. Cannot be</p>  | False    |

---

| Name       | Type    | Description   | Required |
|------------|---------|---|----------|
|            |         | used at the same time as a filter expression or id.                                   |          |
| deleted    | Boolean | Boolean to show deleted records in the result set.                                    | False    |
| nulls_last | Boolean | Boolean to return records with null values in order_by fields last in the result set. | False    |

## Filter Expressions

There are four types of filters:

### Basic

This will filter the results by checking the field "name" for value "Nelson Inc". This will only find exact matches.

### Example

```
{
  "filter": [
    {
      "name": "Nelson Inc"
    }
  ]
}
```

### Full

This expression allows you to specify what operation you want to use for filtering on the field. In the example you would match any record where the field "name" starts with the value "Nelson".

---

## Example

```
{
  "filter": [
    {
      "name": {
        "$starts": "Nelson"
      }
    }
  ]
}
```

Below is a list of operation types:

| Operation    | Description   |
|--------------|---|
| \$equals     | Performs an exact match on that field.  |
| \$not_equals | Performs an exact match on that field.  |
| \$not_equals | Matches on non-matching values.   |
| \$starts     | Matches on anything that starts with the value.   |
| \$ends       | Matches anything that ends with the value.  |
| \$contains   | Matches anything that contains the value  |
| \$in         | Finds anything where field matches one of the values as specified as an array.          |
| \$not_in     | Finds anything where field does not matches any of the values as specified as an array. |
| \$is_null    | Checks if the field is null. This operation does not need a value specified.            |
| \$not_null   | Checks if the field is not null. This operation does not need a value specified.        |
| \$lt         | Matches when the field is less than the value.  |
| \$lte        | Matches when the field is less than or equal to the value.                              |
| \$gt         | Matches when the field is greater than the value.                                       |

---

| Operation | Description   |
|-----------|---|
| \$gte     | Matches when the field is greater than or equal to the value. |

## Sub-expressions

This allows you to group filter expressions into or/and groupings. By default all expressions are and'ed together. The example expression would match if the field "name" was either "Nelson Inc" or "Nelson LLC". The only currently accepted sub-expression types are "\$and" and "\$or".

### Example

```
{
  "filter": [
    {
      "$or": [
        {
          "name": "Nelson Inc"
        },
        {
          "name": "Nelson LLC"
        }
      ]
    }
  ]
}
```

## Modules

There are two module expressions, they operate on modules instead of fields. The current module can be specified by either using the module name "\_this" or by leaving the module name as a blank string. The example expression would filter the records in the current module to only your favorites. The only currently accepted module expressions are "\$favorite" and "\$owner".

### Example

---

```

{
  "filter": [
    {
      "$favorite": "_this"
    }
  ]
}

```

## Response Arguments

| Name        | Type    | Description   |
|-------------|---------|---|
| next_offset | Integer | Displays the next offset for retrieval of additional results. -1 will be returned when there are no more records. |
| records     | Array   | An array of results containing matched records.   |

## Response

```

{
  "next_offset": -1,
  "records": [
    {
      "id": "fa300a0e-0ad1-b322-9601-512d0983c19a",
      "name": "Dale Spivey",
      "date_modified": "2013-02-28T05:03:00+00:00",
      "description": "",
      "opportunities": [
        {
          _module: "Opportunities",
          "id": "b0701501-1fab-8ae7-3942-540da93f5017",
          "name": "360 Vacations - 228 Units",
          "date_modified": "2014-09-08T16:05:00+03:00",
          "sales_status": "New"
        }
      ],
    }
  ],
}

```

```

    "_acl": {
      "fields": {
      }
    }
  },
  {
    "id": "95e17367-9b3d-0e26-22dc-512d0961fedf",
    "name": "Florence Haddock",
    "date_modified": "2013-02-26T19:12:00+00:00",
    "description": "",
    "opportunities": [
      {
        _module: "Opportunities"
        date_modified: "2014-09-08T16:05:00+03:00"
        id: "9ce7c088-8ee4-7cd3-18f1-540da944d4c0"
        name: "360 Vacations - 312 Units"
        sales_status: "New"
      },
    ],
    "_acl": {
      "fields": {
      }
    }
  }
]
}

```

## Change Log

| Version | Change                               |
|---------|--------------------------------------|
| v10     | Added /<module>/filter GET endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /pmse\_Project/file/project\_import POST



---

## Overview

Imports a Process Definition from a .bpm file

## Summary

This endpoint will import a Process Definition from the uploaded .bpm file containing JSON encoded data.

## Request Arguments

| Name        | Type  | Description                                     | Required |
|-------------|-------|---|----------|
| selectedIds | array | A list of IDs for dependent elements to import. | False    |

## Request

**Note:** A JSON encoded .bpm file attachment should be included with the request as part of the form-data. An optional array of IDs can be included to indicate which dependent Business Rules and Email Templates to import and link with the Process Definition. The file must contain the metadata for the dependent elements as well for the selectedIds to be used. **Important:** The request format must be multipart/form-data.

## Response Arguments

| Name           | Type   | Description                    |
|----------------|--------|--------------------------------|
| project_import | Object | Result of the import operation |

## Response

```
{
  "project_import":
  {
    "success": true,
```

---

```
    "id": "459f05de-3c3a-c0e7-ce1e-573cabe79e7c",
    "br_warning": true,
    "et_warning": true
  }
}
```

## Compatibility

SugarBPM™ files exported from Sugar version 7.6.1.0 or earlier cannot be imported to Sugar instances running 7.6.2.0 or later.

## Change Log

| Version | Change   |
|---------|--|
| v11_2   | Added support for selectedIds to specify which dependent elements to import. |
| v10     | Added /pmse_Project/file/project_import POST endpoint.                       |

Last Modified: 2021-02-17 02:44:13

## /pmse\_Project/project/:record GET

### Overview

Retrieves the schema data to be used by the Process Definition designer

### Summary

This endpoint will retrieve the JSON encoded schema data for the Process Definition identified by the record input parameter.

---

## Request Arguments

| Name   | Type   | Description                      | Required |
|--------|--------|----------------------------------|----------|
| record | String | The Process Definition record ID | True     |

## Response Arguments

| Name    | Type    | Description                                |
|---------|---------|--|
| success | Boolean | The status of the response                 |
| project | Object  | The schema data for the Process Definition |

## Response

```
{
  "success":true,
  "project":
  {
    "id":"2119da13-f748-4741-3858-573caddda034",
    "name":"PD_AC",
    "date_entered":"2016-05-18 17:58:07",
    "date_modified":"2016-05-18 18:41:45",
    "modified_user_id":"1",
    "created_by":"1",
    "description":null,
    "deleted":"0",
    "prj_uid":"2119da13-f748-4741-3858-573caddda034",
    "prj_target_namespace":null,
    "prj_expression_language":null,
    "prj_type_language":null,
    "prj_exporter":null,
    "prj_exporter_version":null,
    "prj_author":null,
    "prj_author_version":null,
    "prj_original_source":null,
    "prj_status":"INACTIVE",
    "prj_module":"Accounts",
    "team_id":"1",
```

---

```
"team_set_id":"1",
"team_set_selected_id":"","
"assigned_user_id":"1",
"au_first_name":null,
"au_last_name":"Administrator",
"cbu_first_name":null,
"cbu_last_name":"Administrator",
"mbu_first_name":null,
"mbu_last_name":"Administrator",
"tn_name":"Global",
"tn_name_2":"","
"my_favorite":null,
"following":"0",
"pro_id":"9f8c4fcd-8d4c-949d-50b8-573caddf8c0c",
"diagram":
[
  {
    "id":"9ce21d87-f81a-5be2-86e8-573cad955d06",
    "name":"PD_AC",
    "date_entered":"2016-05-18 17:58:07",
    "date_modified":"2016-05-18 17:58:07",
    "modified_user_id":"1",
    "created_by":"1",
    "description":null,
    "deleted":"0",
    "dia_uid":"343198086573cad309cc1d6078585899",
    "prj_id":"2119da13-f748-4741-3858-573cadda034",
    "dia_is_closable":"0",
    "assigned_user_id":"1",
    "activities":
    [
      {
        "id":"9ce21d87-f81a-5be2-86e8-573cad955d06",
        "name":"PD_AC",
        "date_entered":"2016-05-18 17:58:07",
        "date_modified":"2016-05-18 17:58:07",
        "modified_user_id":"1",
        "created_by":"1",
        "description":null,
        "deleted":"0",
        "dia_uid":"343198086573cad309cc1d6078585899",
        "prj_id":"2119da13-f748-4741-3858-573cadda034",
        "dia_is_closable":"0",
        "assigned_user_id":"1",
        "activities":
```

---

```
[
  {
    "id": "566f0156-0ce3-75b4-da56-573cb739
84aa",
    "name": "Action # 1",
    "date_entered": "2016-05-18 18:41:29",
    "date_modified": "2016-05-18 18:41:45",
    "created_by": "1",
    "description": "",
    "deleted": "0",
    "act_uid": "552527013573cb7565825f20504
63919",
    "act_type": "TASK",
    "act_is_for_compensation": "0",
    "act_start_quantity": "1",
    "act_completion_quantity": "0",
    "act_task_type": "SCRIPTTASK",
    "act_implementation": "",
    "act_instantiate": "0",
    "act_script_type": "CHANGE_FIELD",
    "act_script": "",
    "act_loop_type": "NONE",
    "act_test_before": "0",
    "act_loop_maximum": "0",
    "act_loop_condition": "",
    "act_loop_cardinality": "0",
    "act_loop_behavior": "",
    "act_is_adhoc": "0",
    "act_is_collapsed": "0",
    "act_completion_condition": "",
    "act_ordering": "PARALLEL",
    "act_cancel_remaining_instances": "1",
    "act_protocol": "",
    "act_method": "",
    "act_is_global": "0",
    "act_referer": "",
    "act_default_flow": "0",
    "act_master_diagram": "",
    "bou_x": "245",
    "bou_y": "106",
    "bou_width": "35",
    "bou_height": "35",
    "bou_container": "bpmnDiagram",
    "act_name": "Action # 1"
  }
],
```

---

```
"id": "566f0156-0ce3-75b4-da56-573cb73984aa",
"name": "Action # 1",
"date_entered": "2016-05-18 18:41:29",
"date_modified": "2016-05-18 18:41:45",
"created_by": "1",
"description": "",
"deleted": "0",
"act_uid": "552527013573cb7565825f2050463919",
"act_type": "TASK",
"act_is_for_compensation": "0",
"act_start_quantity": "1",
"act_completion_quantity": "0",
"act_task_type": "SCRIPTTASK",
"act_implementation": "",
"act_instantiate": "0",
"act_script_type": "CHANGE_FIELD",
"act_script": "",
"act_loop_type": "NONE",
"act_test_before": "0",
"act_loop_maximum": "0",
"act_loop_condition": "",
"act_loop_cardinality": "0",
"act_loop_behavior": "",
"act_is_adhoc": "0",
"act_is_collapsed": "0",
"act_completion_condition": "",
"act_ordering": "PARALLEL",
"act_cancel_remaining_instances": "1",
"act_protocol": "",
"act_method": "",
"act_is_global": "0",
"act_referer": "",
"act_default_flow": "0",
"act_master_diagram": "",
"bou_x": "245",
"bou_y": "106",
"bou_width": "35",
"bou_height": "35",
"bou_container": "bpmnDiagram",
"act_name": "Action # 1"
}
],
"events":
[
{
"act_name": "Action # 1",
"act_uid": "80a37c82-8be8-c668-a547-573cb791b905",
```

---

```
"name":"Start Event # 1",
"date_entered":"2016-05-18 18:41:29",
"date_modified":"2016-05-18 18:41:29",
"created_by":"1",
"description":"",
"deleted":"0",
"evn_uid":"632263607573cb74a582507093735454",
"evn_type":"START",
"evn_marker":"MESSAGE",
"evn_is_interrupting":"1",
"evn_attached_to":"",
"evn_cancel_activity":"0",
"evn_activity_ref":"",
"evn_wait_for_completion":"1",
"evn_error_name":"",
"evn_error_code":"",
"evn_escalation_name":"",
"evn_escalation_code":"",
"evn_condition":"",
"evn_message":"",
"evn_operation_name":"",
"evn_operation_implementation":"",
"evn_time_date":"",
"evn_time_cycle":"",
"evn_time_duration":"",
"evn_behavior":"CATCH",
"bou_x":"132",
"bou_y":"108",
"bou_width":"33",
"bou_height":"33",
"bou_container":"bpmnDiagram",
"evn_name":"Start Event # 1"
},
{
" id":"82894d13-1af8-f039-2cd3-573cb755559e",
" name":"End Event # 1",
" date_entered":"2016-05-18 18:41:29",
" date_modified":"2016-05-18 18:41:29",
" created_by":"1",
" description":"",
" deleted":"0",
" evn_uid":"282428179573cb7585826d6045140545",
" evn_type":"END",
" evn_marker":"EMPTY",
" evn_is_interrupting":"1",
" evn_attached_to":""
}
```

---

```

        "evn_cancel_activity":"0",
        "evn_activity_ref":"","
        "evn_wait_for_completion":"1",
        "evn_error_name":"","
        "evn_error_code":"","
        "evn_escalation_name":"","
        "evn_escalation_code":"","
        "evn_condition":"","
        "evn_message":"","
        "evn_operation_name":"","
        "evn_operation_implementation":"","
        "evn_time_date":"","
        "evn_time_cycle":"","
        "evn_time_duration":"","
        "evn_behavior":"THROW",
        "bou_x":"349",
        "bou_y":"107",
        "bou_width":"33",
        "bou_height":"33",
        "bou_container":"bpmnDiagram",
        "evn_name":"End Event # 1"
    }
],
"gateways":[],
"artifacts":[],
"flows":
[
    {
        "id":"974e5216-9d76-5e30-7241-573cb73b7761",
        "name":"","
        "date_entered":"2016-05-18 18:41:36",
        "date_modified":"2016-05-18 18:41:36",
        "created_by":"1",
        "description":"","
        "deleted":"0",
        "flo_uid":"287649205573cb75b582a78086279138",
        "flo_type":"SEQUENCE",
        "flo_element_origin":"632263607573cb74a5825070
93735454",
        "flo_element_origin_type":"bpmnEvent",
        "flo_element_origin_port":"0",
        "flo_element_dest":"552527013573cb7565825f2050
463919",
        "flo_element_dest_type":"bpmnActivity",
        "flo_element_dest_port":"0",
        "flo_is_inmediate":"","

```



---

```
"flo_condition":"","  
"flo_eval_priority":"0",  
"flo_x1":"165",  
"flo_y1":"125",  
"flo_x2":"243",  
"flo_y2":"122",  
"flo_state":  
[  
  {  
    "x":165,  
    "y":125  
  },  
  {  
    "x":204,  
    "y":125  
  },  
  {  
    "x":204,  
    "y":122  
  },  
  {  
    "x":243,  
    "y":122  
  }  
],  
"prj_id":"2119da13-f748-4741-3858-573cadda034"  
"  
  },  
  {  
    "id":"9fc25911-3e2d-89f1-8d37-573cb73639bd",  
    "name":"","  
    "date_entered":"2016-05-18 18:41:36",  
    "date_modified":"2016-05-18 18:41:36",  
    "created_by":"1",  
    "description":"","  
    "deleted":"0",  
    "flo_uid":"121706749573cb75d582c86016080199",  
    "flo_type":"SEQUENCE",  
    "flo_element_origin":"552527013573cb7565825f20  
50463919",  
    "flo_element_origin_type":"bpmnActivity",  
    "flo_element_origin_port":"0",  
    "flo_element_dest":"282428179573cb7585826d6045  
140545",  
    "flo_element_dest_type":"bpmnEvent",  
    "flo_element_dest_port":"0",
```

```

        "flo_is_inmediate": "",
        "flo_condition": "",
        "flo_eval_priority": "0",
        "flo_x1": "282",
        "flo_y1": "122",
        "flo_x2": "349",
        "flo_y2": "124",
        "flo_state":
        [
            {
                "x": 282,
                "y": 122
            },
            {
                "x": 315,
                "y": 122
            },
            {
                "x": 315,
                "y": 124
            },
            {
                "x": 349,
                "y": 124
            }
        ],
        "prj_id": "2119da13-f748-4741-3858-573cadda034
"
    }
]
}
],
"process_definition":
{
    "id": "9f8c4fcd-8d4c-949d-50b8-573caddf8c0c",
    "name": "",
    "date_entered": "2016-05-18 17:58:07",
    "date_modified": "2016-05-18 17:58:07",
    "created_by": "1",
    "description": null,
    "deleted": "0",
    "pro_module": "Accounts",
    "pro_status": "INACTIVE",
    "pro_locked_variables": [],
    "pro_terminate_variables": "",
    "execution_mode": "SYNC"

```

---

```
},
"prj_name":"PD_AC",
"prj_description":null,
"script_tasks":
{
  "add_related_record":
  {
    "1":
    {
      "value":"members",
      "text":"Accounts (Members: members)",
      "module":"Accounts",
      "module_label":"Accounts",
      "module_name":"Accounts",
      "relationship":"member_accounts"
    },
    "2":
    {
      "value":"bugs",
      "text":"Bugs (Bugs: bugs)",
      "module":"Bugs",
      "module_label":"Bugs",
      "module_name":"Bugs",
      "relationship":"accounts_bugs"
    },
    "3":
    {
      "value":"calls",
      "text":"Calls (Calls: calls)",
      "module":"Calls",
      "module_label":"Calls",
      "module_name":"Calls",
      "relationship":"account_calls"
    },
    "4":
    {
      "value":"cases",
      "text":"Cases (Cases: cases)",
      "module":"Cases",
      "module_label":"Cases",
      "module_name":"Cases",
      "relationship":"account_cases"
    },
    "5":
    {
      "value":"contacts",
```

---

```
    "text": "Contacts (Contacts: contacts)",
    "module": "Contacts",
    "module_label": "Contacts",
    "module_name": "Contacts",
    "relationship": "accounts_contacts"
  },
  "6":
  {
    "value": "contracts",
    "text": "Contracts (Contracts: contracts)",
    "module": "Contracts",
    "module_label": "Contracts",
    "module_name": "Contracts",
    "relationship": "account_contracts"
  },
  "7":
  {
    "value": "documents",
    "text": "Documents (Documents: documents)",
    "module": "Documents",
    "module_label": "Documents",
    "module_name": "Documents",
    "relationship": "documents_accounts"
  },
  "8":
  {
    "value": "leads",
    "text": "Leads (Leads: leads)",
    "module": "Leads",
    "module_label": "Leads",
    "module_name": "Leads",
    "relationship": "account_leads"
  },
  "9":
  {
    "value": "meetings",
    "text": "Meetings (Meetings: meetings)",
    "module": "Meetings",
    "module_label": "Meetings",
    "module_name": "Meetings",
    "relationship": "account_meetings"
  },
  "10":
  {
    "value": "notes",
    "text": "Notes (Notes: notes)",
```

---

```

        "module": "Notes",
        "module_label": "Notes",
        "module_name": "Notes",
        "relationship": "account_notes"
    },
    "11":
    {
        "value": "opportunities",
        "text": "Opportunities (Opportunity: opportunities)
",
        "module": "Opportunities",
        "module_label": "Opportunities",
        "module_name": "Opportunities",
        "relationship": "accounts_opportunities"
    },
    "12":
    {
        "value": "project",
        "text": "Projects (Projects: project)",
        "module": "Projects",
        "module_label": "Projects",
        "module_name": "Project",
        "relationship": "projects_accounts"
    },
    "13":
    {
        "value": "products",
        "text": "Quoted Line Items (Products: products)",
        "module": "Quoted Line Items",
        "module_label": "Quoted Line Items",
        "module_name": "Products",
        "relationship": "products_accounts"
    },
    "14":
    {
        "value": "quotes_shipto",
        "text": "Quotes (Quotes Ship to: quotes_shipto)",
        "module": "Quotes",
        "module_label": "Quotes",
        "module_name": "Quotes",
        "relationship": "quotes_shipto_accounts"
    },
    "15":
    {
        "value": "quotes",
        "text": "Quotes (Quotes: quotes)",

```

```
        "module": "Quotes",
        "module_label": "Quotes",
        "module_name": "Quotes",
        "relationship": "quotes_billto_accounts"
    },
    "16":
    {
        "value": "tasks",
        "text": "Tasks (Tasks: tasks)",
        "module": "Tasks",
        "module_label": "Tasks",
        "module_name": "Tasks",
        "relationship": "account_tasks"
    }
}
}
```

Last Modified: 2021-02-17 02:44:13

## /pmse\_Project/project/:record PUT

### Overview

Updates the schema data from the Process Definition designer

### Summary

This endpoint will update the Process Definition identified by the record input parameter with data provided in the request payload.

### Request Arguments

| Name   | Type   | Description                   | Required |
|--------|--------|-------------------------------|----------|
| record | String | The Process Definition record | True     |

| Name | Type | Description | Required |
|------|------|-------------|----------|
|      |      | ID          |          |

## Request Payload

```
{
  "data":
  {
    "activities": {},
    "gateways":
    {
      "407410601573ce3125db315056173234":
      {
        "action": "REMOVE",
        "gat_uid": "407410601573ce3125db315056173234"
      }
    },
    "events": {},
    "artifacts": {},
    "flows": {},
    "prj_uid": "2119da13-f748-4741-3858-573caddda034"
  },
  "id": "2119da13-f748-4741-3858-573caddda034",
  "operation": "update",
  "wrapper": "Project"
}
```

## Response Arguments

| Name    | Type    | Description                        |
|---------|---------|------------------------------------|
| success | Boolean | The status of the update operation |

## Response

```
{
  "success": true
}
```

---

Last Modified: 2021-02-17 02:44:13

## /pmse\_Project/:record/dproject GET

### Overview

Exports a .bpm file with a Process Definition

### Summary

This endpoint will retrieve a .bpm file containing JSON encoded data of a Process Definition identified by the record input parameter.

### Request Arguments

| Name   | Type   | Description                      | Required |
|--------|--------|----------------------------------|----------|
| record | String | The Process Definition record ID | True     |

### Response Arguments

| Name | Type | Description |
|------|------|-------------|
| N/A  |      |             |

### Response

**Note:** The response is a MIME type application/bpm file attachment without any response parameters.



---

Last Modified: 2021-02-17 02:44:13

## /pmse\_Project/:record/verify GET

### Overview

Verifies whether the Process Definition has any pending processes

### Summary

This endpoint will verify whether the Process Definition identified by the record input parameter has any currently pending processes based on it.

### Request Arguments

| Name   | Type   | Description                      | Required |
|--------|--------|----------------------------------|----------|
| record | String | The Process Definition record ID | True     |

### Response Arguments

| Name | Type | Description |
|------|------|-------------|
| N/A  |      |             |

### Response

**Note:** The response is a string of either "true" or "false" indicating whether any pending processes exist.

Last Modified: 2021-02-17 02:44:13

---

# /pmse\_Project/validateCrmData/:data/:filter GET

## Overview

Validates information about Fields, Modules, Users, Roles, etc.

## Summary

This endpoint will validate the existence of various data related to the Process Definition.

## Request Arguments

| Name   | Type   | Description   | Required |
|--------|--------|---|----------|
| data   | String | The type of data to be retrieved                                | True     |
| filter | String | Filtering criteria to be applied to data retrieved              | False    |
| key    | String | Key of the entry to search for within the given data and filter | True     |

## Request

**Note:** "key" should be provided in the form of a URL query string.

Example Request:

```
/rest/v11_10/pmse_Project/validateCrmData/field/Accounts?key=data_entered
```

## Response Arguments

| Name   | Type    | Description       |
|--------|---------|-------------------|
| result | Boolean | The result of the |

| Name | Type | Description   |
|------|------|---|
|      |      | validation. True if the key exists in the specified data set; false otherwise |

## Response

```
{
  result: true
}
```

## Change Log

| Version | Change  |
|---------|---|
| v11_10  | Added /pmse_Project/validateCrmData/:data/:filter GET endpoint. |

Last Modified: 2021-02-17 02:44:13

# /recent GET

## Overview

Returns all of the current users recently viewed records.

## Request Arguments

| Name        | Type   | Description   | Required |
|-------------|--------|---|----------|
| module_list | String | Comma delimited list of modules to return recently viewed records.<br>Example:<br>Accounts,Contacts | True     |

| Name   | Type    | Description   | Required |
|--------|---------|---|----------|
| fields | String  | Comma delimited list of fields to return. The field date_modified will always be returned. Example: id,name | False    |
| date   | String  | The date expression. Filter recently viewed records from this date.   | False    |
| limit  | Integer | A maximum number of records to return. Default is 20.   | False    |
| offset | Integer | The number of records to skip over before records are returned. Default is 0.                               | False    |

## Request

`http://{site_url}/rest/v10/recent?module_list=Accounts%2CContacts`

**Note:** GET endpoint parameters are passed in the form of a query string.

## Response Arguments

| Name        | Type   | Description   |
|-------------|--------|---|
| next_offset | String | The next offset to start fetching additional records. |
| records     | Array  | An array of recently viewed records.                  |

---

## Response

```
{
  "next_offset":-1,
  "records":[
    {
      "my_favorite":false,
      "following":false,
      "id":"e4213959-35cd-119b-5cd6-5342e8be16f6",
      "name":"Leila Purifoy",
      "date_entered":"2014-04-07T13:58:50-04:00",
      "date_modified":"2014-04-07T13:58:50-04:00",
      "modified_user_id":"1",
      "modified_by_name":"Administrator",
      "created_by":"1",
      "created_by_name":"Administrator",
      "doc_owner":"",
      "description":"",
      "deleted":false,
      "assigned_user_id":"seed_will_id",
      "assigned_user_name":"Will Westin",
      "team_count":"",
      "team_name":[
        {
          "id":"East",
          "name":"East",
          "name_2":"",
          "primary":true
        },
        {
          "id":"West",
          "name":"West",
          "name_2":"",
          "primary":false
        }
      ],
      "email":[
        {
          "email_address":"support62@example.biz",
          "invalid_email":false,
          "opt_out":true,
          "primary_address":false,
          "reply_to_address":false
        },
        {
          "email_address":"sales39@example.com",
```

---

```
        "invalid_email":false,
        "opt_out":false,
        "primary_address":true,
        "reply_to_address":true
    }
],
"email1":"sales39@example.com",
"email2":"support62@example.biz",
"invalid_email":false,
"email_opt_out":false,
"email_addresses_non_primary":"","
"salutation":"","
"first_name":"Leila",
"last_name":"Purifoy",
"full_name":"Leila Purifoy",
"title":"President",
"facebook":"","
"twitter":"","
"googleplus":"","
"department":"","
"do_not_call":false,
"phone_home":"(841) 469-8223",
"phone_mobile":"(286) 010-9553",
"phone_work":"(369) 075-2809",
"phone_other":"","
"phone_fax":"","
"primary_address_street":"345 Sugar Blvd.",
"primary_address_street_2":"","
"primary_address_street_3":"","
"primary_address_city":"Santa Monica",
"primary_address_state":"NY",
"primary_address_postalcode":"52255",
"primary_address_country":"USA",
"alt_address_street":"","
"alt_address_street_2":"","
"alt_address_street_3":"","
"alt_address_city":"","
"alt_address_state":"","
"alt_address_postalcode":"","
"alt_address_country":"","
"assistant":"","
"assistant_phone":"","
"picture":"","
"email_and_name1":"","
"lead_source":"Trade Show",
"account_name":"Sea Region Inc",
```

---

```
"account_id":"b1cd3a55-7e84-e53b-954e-5342e85b63f1",
"dnb_principal_id":"",
"opportunity_role_fields":"",
"opportunity_role_id":"",
"opportunity_role":"",
"reports_to_id":"",
"report_to_name":"",
"birthdate":"",
"portal_name":"LeilaPurifoy5",
"portal_active":true,
"portal_password":true,
"portal_password1":null,
"portal_app":"",
"preferred_language":"",
"campaign_id":"",
"campaign_name":"",
"c_accept_status_fields":"",
"m_accept_status_fields":"",
"accept_status_id":"",
"accept_status_name":"",
"accept_status_calls":"",
"accept_status_meetings":"",
"sync_contact":false,
"mkto_sync":false,
"mkto_id":null,
"mkto_lead_score":null,
"_acl":{
  "fields":{

  }
},
"_module":"Contacts",
"_last_viewed_date":"2014-04-07T14:43:46-04:00"
},
{
  "my_favorite":false,
  "following":false,
  "id":"e8f7eb6d-2647-7e57-df30-5342e83c622d",
  "name":"Draft Diversified Energy Inc",
  "date_entered":"2014-04-07T13:58:50-04:00",
  "date_modified":"2014-04-07T13:58:50-04:00",
  "modified_user_id":"1",
  "modified_by_name":"Administrator",
  "created_by":"1",
  "created_by_name":"Administrator",
  "doc_owner":"","
```

---

```
"description":"","  
"deleted":false,  
"assigned_user_id":"seed_max_id",  
"assigned_user_name":"Max Jensen",  
"team_count":"","  
"team_name":[  
  {  
    "id":"West",  
    "name":"West",  
    "name_2":"","  
    "primary":true  
  }  
],  
"email":[  
  {  
    "email_address":"dev.kid.kid@example.de",  
    "invalid_email":false,  
    "opt_out":false,  
    "primary_address":true,  
    "reply_to_address":false  
  },  
  {  
    "email_address":"info.sales@example.co.uk",  
    "invalid_email":false,  
    "opt_out":false,  
    "primary_address":false,  
    "reply_to_address":false  
  }  
],  
"email1":"dev.kid.kid@example.de",  
"email2":"info.sales@example.co.uk",  
"invalid_email":false,  
"email_opt_out":false,  
"email_addresses_non_primary":"","  
"facebook":"","  
"twitter":"","  
"googleplus":"","  
"account_type":"Customer",  
"industry":"Education",  
"annual_revenue":"","  
"phone_fax":"","  
"billing_address_street":"111 Silicon Valley Road",  
"billing_address_street_2":"","  
"billing_address_street_3":"","  
"billing_address_street_4":"","  
"billing_address_city":"Los Angeles",
```



```

"billing_address_state":"CA",
"billing_address_postalcode":"26022",
"billing_address_country":"USA",
"rating":"",
"phone_office":"(790) 406-0049",
"phone_alternate":"",
"website":"www.phonesugar.de",
"ownership":"",
"employees":"",
"ticker_symbol":"",
"shipping_address_street":"111 Silicon Valley Road",
"shipping_address_street_2":"",
"shipping_address_street_3":"",
"shipping_address_street_4":"",
"shipping_address_city":"Los Angeles",
"shipping_address_state":"CA",
"shipping_address_postalcode":"26022",
"shipping_address_country":"USA",
"parent_id":"",
"sic_code":"",
"duns_num":"",
"parent_name":"",
"campaign_id":"",
"campaign_name":"",
"_acl":{
  "fields":{

  }
},
"_module":"Accounts",
"_last_viewed_date":"2014-04-07T14:43:36-04:00"
}
]
}

```

## Change Log

| Version | API | Change                      |
|---------|-----|-----------------------------|
| 7.2.0   | v10 | Added /recent GET endpoint. |

## /rssfeed GET

### Overview

Consumes an RSS feed as a proxy and returns the feed up to a certain number of entries.

### Request Arguments

| Name     | Type    | Description  | Required |
|----------|---------|--|----------|
| feed_url | String  | A fully qualified URL to an RSS feed.  | True     |
| limit    | Integer | Maximum number of entries to fetch. If not provided, the API will return up to <code>\$sugar_config['rss_feed_max_entries']</code> or 20 if no config option is set. | False    |

### Request

```
http://{site_url}/rest/v10/rssfeed?feed_url=http%3A%2F%2Ffqd.rssfeed.url%2F&limit=10
```

**Note:** GET endpoint parameters are passed in the form of a query string.

### Response Arguments

| Name  | Type   | Description                |
|-------|--------|----------------------------|
| title | String | The title of the RSS Feed. |

| Name             | Type      | Description   |
|------------------|-----------|---|
|                  |           | This can be blank.  |
| link             | String    | The URL to the source of the RSS Feed. This can be blank.   |
| description      | String    | A description of the feed. This can be blank.   |
| publication_date | Timestamp | A timestamp of when the feed was published.   |
| entries          | Array     | <p>An array of entries, each of which will contain the following values:</p> <ul style="list-style-type: none"> <li>• title</li> <li>• description</li> <li>• link</li> <li>• publication_date</li> <li>• source</li> <li>• author</li> </ul> |

## Response

```
{
  "feed":{
    "title":"Sample Feed Title",
    "link":"http://www.samplefeed.com/feed-link-url.htm",
    "description":"A sample of a feed description",
    "publication_date":"Tue, 10 Aug 2014 13:38:55 -0800",
    "entries":[
      {
        "title":"First entry title",
        "description":"A blurb about the first entry. This will be HTML encoded on return.",
        "link":"http://www.samplefeed.com/feed-entry-1.htm",
        "publication_date":"Tue, 10 Aug 2014 13:38:55 -0800",
        "source":"Reuters",
        "author":"John Doe"
      },
      {
        "title":"Second entry title",
        "description":"A blurb about the Second entry. This wi
```

---

```
ll be HTML encoded on return.",
    "link": "http://www.samplefeed.com/feed-
entry-2.htm",
    "publication_date": "Tue, 10 Aug 2014 13:38:55 -0800",
    "source": "BBC",
    "author": ""
  }
]
}
}
```

## Change Log

| Version | Change                         |
|---------|--------------------------------|
| v10     | Added /<rssfeed> GET endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /search GET

### Overview

List records in a module. Searching, filtering and ordering can be applied to only fetch the records you are interested in. Additionally the set of returned fields can be restricted to speed up processing and reduce download times.

### Request Arguments

| Name | Type   | Description  | Required |
|------|--------|--|----------|
| q    | String | The search text to match records on. This will search through any fields on the module that has unified_search | False    |

| Name      | Type    | Description  | Required |
|-----------|---------|--|----------|
|           |         | set to true.   |          |
| max_num   | Integer | A maximum number of records to return.   | False    |
| offset    | Integer | The number of records to skip over before records are returned.  | False    |
| fields    | String  | Comma delimited list of fields to return. The field date_modified will always be returned. Example: name,account_type,description  | False    |
| order_by  | String  | How to sort the returned records, in a comma delimited list with the direction appended to the column name after a colon. Example: name:DESC,account_type:DESC,date_modified:ASC | False    |
| favorites | Boolean | Only fetch the current users favorited records.  | False    |
| my_items  | Boolean | Only fetch items assigned to the current user.   | False    |

## Response Arguments

| Name        | Type    | Description              |
|-------------|---------|--------------------------|
| next_offset | Integer | Displays the next offset |

| Name    | Type  | Description  |
|---------|-------|--|
|         |       | for retrieval of additional results. -1 will be returned when there are no more records. |
| records | Array | An array of results containing matched records.  |

## Response

```
{
  "next_offset":2,
  "records":[
    {
      "id":"ecbf2a6c-261e-5fca-fbb6-512d093554b8",
      "name":"Avery Software Co",
      "date_modified":"2013-02-26T19:12:56+00:00",
      "description":"",
      "my_favorite":false,
      "_acl":{
        "fields":{

        }
      },
      "_module":"Accounts",
      "_search":{
        "score":1
      }
    },
    {
      "id":"af5f8dae-7169-b497-1d77-512d0937ed81",
      "name":"Avery Software Co",
      "date_modified":"2013-02-26T19:12:56+00:00",
      "description":"",
      "my_favorite":false,
      "_acl":{
        "fields":{

        }
      },
      "_module":"Accounts",
      "_search":{
```

```
}
  ]
}
  "score":1
}
```

## Change Log

| Version | Change                        |
|---------|-------------------------------|
| v10     | Added /<module> GET endpoint. |

Last Modified: 2021-02-17 02:44:13

## /theme GET

### Overview

Fetches the customizable variables of a theme.

### Request Arguments

| Name      | Type   | Description   | Required |
|-----------|--------|---|----------|
| platform  | String | The theme platform - /themes/clients/** *PLATFORM***/themeName/. Accepted values are 'base' and 'portal'. | False    |
| themeName | String | The theme name - /themes/clients/platform/***/THEME NAME***/.   | False    |

---

## Request

`http://{site_url}/rest/v10/theme?platform=base&themeName=default`

**Note:** GET endpoint parameters are passed in the form of a query string.

## Response Arguments

| Name   | Type  | Description   |
|--------|-------|---|
| mixins | Array | An array of name value pairs detailing mixin colors     |
| hex    | Array | A array of name value pairs detailing css colors        |
| rgba   | Array | An array of name value pairs detailing colors           |
| rel    | Array | An array of name value pairs detailing relationships    |
| bg     | Array | An array of name value pairs detailing backgroup colors |

## Response

```
{
  "colors": [
    {
      "name": "BorderColor",
      "value": "#E61718"
    },
    {
      "name": "NavigationBar",
      "value": "#000000"
    },
    {
      "name": "PrimaryButton",
      "value": "#177EE5"
    }
  ]
}
```



```
]
}
```

## Change Log

| Version | Change                       |
|---------|------------------------------|
| v10     | Added /<theme> GET endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## /theme POST

### Overview

Updates the variables.less (less file containing customizable vars in the theme folder) with the set of variables passed as arguments.

### Request Arguments

| Name             | Type   | Description   | Required |
|------------------|--------|---|----------|
| platform         | String | The theme platform - /themes/clients/** *PLATFORM***/themeName/. Accepted values are 'base' and 'portal'. | True     |
| themeName        | String | The theme name - /themes/clients/platform/***/THEMENAME***/.  | True     |
| <theme variable> | String | The variables of the theme  | False    |

---

## Request

```
{
  platform: 'portal',
  themeName: 'default',
  primary: 'default',
  secondary: '#aaaaaa',
  primaryBtn: '#bbbbbb',
}
```

## Response Arguments

| Name       | Type   | Description                                     |
|------------|--------|---|
| <css path> | String | Returns the path of the new bootstrap.css file. |

## Response

```
"http://sugarcrm/cache/themes/clients/base/default/6a031485bf5239b9462e4aaba72a4646.css"
```

## Change Log

| Version | Change                        |
|---------|-------------------------------|
| v10     | Added /<theme> POST endpoint. |

**Last Modified:** 2021-02-17 02:44:13

## Extending Endpoints

### Overview

---

How to add your own custom endpoints to the REST API.

## Custom Endpoints

With the REST architecture, you can easily define your own endpoint. All custom global endpoints will be located in `./custom/clients/<client>/api/`. All custom endpoints specific to a module will be located in `./custom/modules/<module>/clients/<client>/api/`.

**Note:** The Sugar application client type is "base". More information on the various client types can be found in the [Clients](#) section.

## Defining New Endpoints

The endpoint class will be created in `./custom/clients/<client>/api/` and will extend `SugarApi`. Within this class, you will need to implement a `registerApiRest()` function that will define your endpoint paths. When creating a new endpoint, please note that the file name must match the class name for the endpoint definitions. The example below demonstrates creating a GET endpoint.

```
./custom/clients/base/api/MyEndpointsApi.php
```

```
<?php

if(!defined('sugarEntry') || !sugarEntry) die('Not A Valid Entry Point
');

class MyEndpointsApi extends SugarApi
{
    public function registerApiRest()
    {
        return array(
            //GET
            'MyGetEndpoint' => array(
                //request type
                'reqType' => 'GET',

                //set authentication
                'noLoginRequired' => false,

                //endpoint path
                'path' => array('MyEndpoint', 'GetExample', '?'),
```

---

```

        //endpoint variables
        'pathVars' => array('', '', 'data'),

        //method to call
        'method' => 'MyGetMethod',

        //short help string to be displayed in the help docume
ntation
        'shortHelp' => 'An example of a GET endpoint',

        //long help to be displayed in the help documentation
        'longHelp' => 'custom/clients/base/api/help/MyEndPoint
_MyGetEndPoint_help.html',
    ),
    );
}

/**
 * Method to be used for my MyEndpoint/GetExample endpoint
 */
public function MyGetMethod($api, $args)
{
    //custom logic
    return $args;
}
}

?>

```

**Note:** The file name must match the class name for the endpoint definitions. Given the example above, a class name of MyEndpointsApi must be created as MyEndpointsApi.php.

## registerApiRest() Method

Your extended class will contain two methods. The first method is registerApiRest() which will return an array that defines your REST endpoints. Each endpoint will need the following properties:

| Name    | Type           | Description  |
|---------|----------------|--|
| reqType | Array   String | An array of one or many request types of the endpoint. Possible values |

|                 |         |  |
|-----------------|---------|--|
|                 |         | are: GET, PUT, POST and DELETE.  |
| noLoginRequired | Boolean | Determines whether the endpoint is authenticated. Setting this value to true will remove the authentication requirement.   |
| path            | Array   | <p>The endpoint path. An endpoint path of:</p> <pre>'path' =&gt; array('MyEndpoint', 'GetExample'),</pre> <p>Will equate to the URL path of <code>http://{site url}/rest/{REST VERSION}/MyEndpoint/GetExample</code>.</p> <p>To pass in a variable string to your endpoint, you will add a path of '?'. This will allow you to pass URL data to your selected method given that it is specified in the pathVars.</p> |
| pathVars        | Array   | <p>The path variables. For each path on your endpoint, you can opt to pass its value in as a parameter to your selected method. An empty path variable will ignore the path.</p> <p>Example:</p> <pre>'path' =&gt; array('MyEndpoint', 'GetExample', '?'), 'pathVars' =&gt; array('', '', 'data'),</pre> <p>The above will pass information to your</p>  |

|            |         |  |
|------------|---------|--|
|            |         | selected method as the \$args parameter when calling http://{site url}/rest/{REST VERSION}/MyEndpoint/GetExample/MyData              |
| method     | String  | The method to pass the pathVars to. This can be named anything you choose and will be located in your SugarApi extended class.       |
| shortHelp  | String  | A short help string for developers when looking at the help documentation.   |
| longHelp   | String  | Path to a long help file. This file will be loaded when a user clicks an endpoint from the help documentation.                       |
| minVersion | Integer | The minimum API Version this endpoint can be used with. See <a href="#">Scoring</a> Section below.                                   |
| maxVersion | Integer | The maximum API Version this endpoint can be used with. See <a href="#">Scoring</a> Section below.                                   |
| extraScore | Integer | Add an extra score value to the Scoring of this endpoint, to place priority on its usage. See <a href="#">Scoring</a> Section below. |

## Endpoint Method

The second method can be named anything you choose but it is important to note that it will need to match the name of the method you specified for your endpoint. This method will require the parameters \$api and \$args. The MyGetMethod() in the example above will be used when the endpoint MyEndpoint/GetExample is called. Any path variables, query string parameters or posted data will be available

---

in the \$args parameter for you to work with.

```
public function MyEndpointMethod($api, $args)
{
    //logic
    return $returnData;
}
```

## Help Documentation

The final step once you have your endpoint working is to document it. This file can reside anywhere in the system and will be referenced in your endpoints longHelp property. An example of the help documentation can be found below:

custom/clients/base/api/help/MyEndPoint\_MyGetEndPoint\_help.html

```
<h2>Overview</h2>
<span class="lead">
    A custom GET endpoint. Returns the $args parameter that is passed
    to the endpoint method.
</span>
```

```
<h2>Path Variables</h2>
<table class="table table-hover">
    <thead>
        <tr>
            <th>Name</th>
            <th>Description</th>
        </tr>
    </thead>
    <tbody>
        <tr>
            <td>
                :data
            </td>
            <td>
                Data string to pass to the endpoint.
            </td>
        </tr>
    </tbody>
</table>
```

```
<h2>Input Parameters</h2>
<span class="lead">
    This endpoint does not accept any input parameters.
```

---

</span>

<h2>Result</h2>

```
<table class="table table-hover">
  <thead>
    <tr>
      <th>Name</th>
      <th>Type</th>
      <th>Description</th>
    </tr>
  </thead>
  <tbody>
    <tr>
      <td>
        __sugar_url
      </td>
      <td>
        String
      </td>
      <td>
        The endpoint path.
      </td>
    </tr>
    <tr>
      <td>
        data
      </td>
      <td>
        String
      </td>
      <td>
        The data from path variable.
      </td>
    </tr>
  </tbody>
</table>
```

<h3>Output Example</h3>

```
<pre class="pre-scrollable">
{
  "__sugar_url": "v10\\MyEndpoint\\GetExample\\MyData",
  "data": "MyData"
}
</pre>
```

<h2>Change Log</h2>



---

```
<table class="table table-hover">
  <thead>
    <tr>
      <th>Version</th>
      <th>Change</th>
    </tr>
  </thead>
  <tbody>
    <tr>
      <td>
        v10
      </td>
      <td>
        Added <code>/MyEndpoint/GetExample/:data</code> GET endpoint.
      </td>
    </tr>
  </tbody>
</table>
```

## Quick Repair and Rebuild

Once all of the files are in place, you will need to navigate to Admin > Repair > Quick Repair and Rebuild. This will rebuild the `./cache/file_map.php` and `./cache/include/api/ServiceDictionary.rest.php` files to make your endpoint available.

## Example

```
./custom/clients/base/api/MyEndpointsApi.php
```

```
<?php

if(!defined('sugarEntry') || !sugarEntry) die('Not A Valid Entry Point
');

class MyEndpointsApi extends SugarApi
{
    public function registerApiRest()
    {
        return array(
            //GET & POST
            'MyGetEndpoint' => array(
```

---

```

        //request type
        'reqType' => array('GET','POST'),

        //set authentication
        'noLoginRequired' => false,

        //endpoint path
        'path' => array('MyEndpoint', 'GetExample', '?'),

        //endpoint variables
        'pathVars' => array('', '', 'data'),

        //method to call
        'method' => 'MyGetMethod',

        //short help string to be displayed in the help docume
ntation
        'shortHelp' => 'An example of a GET endpoint',

        //long help to be displayed in the help documentation
        'longHelp' => 'custom/clients/base/api/help/MyEndPoint
_MyGetEndPoint_help.html',
    ),
    );
}

/**
 * Method to be used for my MyEndpoint/GetExample endpoint
 */
public function MyGetMethod($api, $args)
{
    //custom logic
    return $args;
}
}

?>

```

## Redefining Existing Endpoints

With endpoints, you may have a need to extend an existing endpoint to meet your needs. When doing this it is important that you do not remove anything from the return array of the endpoint. Doing so could result in unexpected behavior due to

---

other functionality using the same endpoint.

For this example, we will extend the ping endpoint to return "Pong <timestamp>". To do this, we will need to extend the existing PingApi class and define our method overrides. When creating a new endpoint, please note that the file name must match the class name for the endpoint definitions. For our example, we will prefix the original class name with "custom" to create our overriding endpoint.

```
./custom/clients/base/api/CustomPingApi.php
```

```
<?php

if(!defined('sugarEntry') || !sugarEntry) die('Not A Valid Entry Point
');

require_once("clients/base/api/PingApi.php");

class CustomPingApi extends PingApi
{
    public function registerApiRest()
    {
        //in case we want to add additional endpoints
        return parent::registerApiRest();
    }

    //override to modify the ping function of the ping endpoint
    public function ping($api, $args)
    {
        $result = parent::ping($api, $args);

        //append the current timestamp
        return $result . ' ' . time();
    }
}
```

**Note:** The file name must match the class name for the endpoint definitions. Given the example above, a class name of CustomPingApi must be created as CustomPingApi.php.

As you can see, we extended registerApiRest to fetch existing endpoint definitions in case we want to add our own. We then added an override for the ping method to return our new value. Once the file is in place you will need to navigate to Admin > Repair > Quick Repair and Rebuild. Once completed, any call made to <url>/rest/{REST VERSION}/ping will result in a response of "ping <timestamp>".

---

## Endpoint Scoring

When generating custom endpoints or overriding existing endpoints, the system can determine which endpoint to use based on the score placed on the registered endpoints. The scoring calculation works in the following manner for registered endpoints.

Route Path	Score
?	0.75
<module>	1.0
Exact Match	1.75
Custom	0.5
Endpoint 'extraScore' property	Defined Extra Score

The defined Path and extraScore properties in the registerApiRest() method, help determine the score for any given Endpoint. The higher the score allows the API to determine which Endpoint is being used for a given request. For example, if you had extended the /Accounts/:record GET API Endpoint as follows:

```
/custom/modules/Accounts/clients/base/api/CustomAccountsApi.php
```

```
<?php
```

```
if(!defined('sugarEntry') || !sugarEntry) die('Not A Valid Entry Point');
```

```
require_once("clients/base/api/ModuleApi.php");
```

```
class CustomAccountsApi extends ModuleApi  
{
```

```
    public function registerApiRest()  
    {
```

```
        return array(  
            //GET & POST  
            'getAccount' => array(  
                //request type  
                'reqType' => array('GET'),  
  
                //set authentication  
                'noLoginRequired' => false,  
  
                //endpoint path
```

---

```

        'path' => array('Accounts', '?'),

        //endpoint variables
        'pathVars' => array('module', 'record'),

        //method to call
        'method' => 'retrieveRecord',

        //short help string to be displayed in the help docume
ntation
        'shortHelp' => 'An example of a GET endpoint',

        //long help to be displayed in the help documentation
        'longHelp' => 'custom/clients/base/api/help/MyEndPoint
_MyGetEndPoint_help.html',
    ),
);
}

/**
 * Method to be used for my Accounts/:record endpoint
 */
public function retrieveRecord($api, $args)
{
    //custom logic
    return parent::retrieveRecord($api, $args);
}
}

?>

```

This Endpoint will be used when accessing `/Accounts/<record_id>` since the Exact Match of Accounts in the path property gives a greater score than the `<module>` match that comes with the standard `/<module>/:record` Endpoint defined in `ModuleApi`.

## Endpoint Versioning

Part of the scoring calculation allows for versioning of the API Endpoints to accommodate the same endpoint path in the Rest API, for other versions of the API. If you have a custom Endpoint at `/rest/v10/CustomEndpoint`, and would like to alter the logic slightly for another use without deprecating or removing the old Endpoint, you can use the versioning techniques to have the new logic reside at `/rest/v11/CustomEndpoint`. The following table describes how the Versioning

---

properties on the Endpoint definition affect the score of the Endpoint to allow the API to determine which Endpoint should be used for a given request.

Property	Score
minVersion	0.02 + minVersion/1000
maxVersion	0.02
minVersion === maxVersion (i.e. Both minVersion and maxVersion properties are defined on Endpoint to the same value)	0.06 + minVersion/1000

To allow for additional Versions in the API, you will first need to customize the 'maxVersion' property in the \$apiSettings array. To do this, create ./custom/include/api/metadata.php. Inside the file you can set the \$apiSettings['maxVersion'] property as follows:

```
<?php  
  
$apiSettings['maxVersion'] = 11;
```

Once you have configured the Max Version property, you can then set the minVersion and maxVersion properties on the Endpoint definition in the custom registerApiRest() method. For example, the following Endpoint definitions:

```
<?php  
...  
return array(  
    'foo1' => array(  
        'reqType' => 'GET',  
        'path' => array('Accounts','config',  
        'pathVars' => array('module', 'record'),  
        'method' => 'foo1',  
    ),  
    'foo2' => array(  
        'reqType' => 'GET',  
        'minVersion' => 11,  
        'path' => array('Accounts','config',  
        'pathVars' => array('module', 'record'),  
        'method' => 'foo2',  
    ),  
    'foo3' => array(  
        'reqType' => 'GET',
```

```

        'minVersion' => 11,
        'maxVersion' => 11,
        'path' => array('Accounts','config',
        'pathVars' => array('module', 'record'),
        'method' => 'foo3',
    ),
    'foo4' => array(
        'reqType' => 'GET',
        'minVersion' => 11,
        'maxVersion' => 12,
        'path' => array('Accounts','config',
        'pathVars' => array('module', 'record'),
        'method' => 'foo3',
    ),
    'foo5' => array(
        'reqType' => 'GET',
        'minVersion' => 14,
        'path' => array('Accounts','config',
        'pathVars' => array('module', 'record'),
        'method' => 'foo5',
    ),
);
...

```

With the above definitions, the following table provides the Expected Request for each Endpoint.

Request URI	Best Route
/rest/v10/Accounts/config	foo1
/rest/v11/Accounts/config	foo3
/rest/v12/Accounts/config	foo4
/rest/v13/Accounts/config	foo2
/rest/v14/Accounts/config	foo5

Last Modified: 2021-02-17 02:44:13

## API Exceptions

---

## Overview

Sugar comes with some predefined API Exceptions, located in `./include/api/`, that can be called from API endpoints. These exceptions return a specific HTTP code and a message.

## Stock Exceptions

Exception Class	HTTP Code	Error Label	Language Label Key	Language Label Value
SugarApiExceptionError	500	fatal_error	EXCEPTION_FATAL_ERROR	Your request failed to complete. A fatal error occurred. Check logs for more details.
SugarApiExceptionIncorrectVersion	301	incorrect_version	EXCEPTION_INCORRECT_VERSION	The version of the API you are using is not correct for the current request.
SugarApiExceptionNeedLogin	401	need_login	EXCEPTION_NEED_LOGIN	You need to be logged in to perform this action.
SugarApiExceptionInvalidGrant	401	invalid_grant	EXCEPTION_INVALID_TOKEN	Your authentication token is invalid.
SugarApiExceptionNotAuthorized	403	not_authorized	EXCEPTION_NOT_AUTHORIZED	You are not authorized to perform this action. Contact your administrator if you need access.
SugarApiExceptionPortalUserInactive	403	inactive_portal_user	EXCEPTION_INACTIVE_PORTAL_USER	You cannot access Portal because your portal account



				is inactive. Please contact customer support if you need access.
SugarApiExceptionPortalNotConfigured	403	portal_not_configured	EXCEPTION_PORTAL_NOT_CONFIGURED	Portal is not configured properly. Contact your Portal Administrator for assistance.
SugarApiExceptionNoMethod	404	no_method	EXCEPTION_NO_METHOD	Your request was not supported. Could not find the HTTP method of your request for this path.
SugarApiExceptionNotFound	404	not_found	EXCEPTION_NOT_FOUND	Your requested resource was not found. Could not find a handler for the path specified in the request.
SugarApiExceptionEditConflict	409	edit_conflict	EXCEPTION_EDIT_CONFLICT	Edit conflict, please reload the record data.
SugarApiExceptionInvalidHash	412	metadata_out_of_date	EXCEPTION_METADATA_OUT_OF_DATE	Your metadata or user hash did not match the server. Please resync your metadata.
SugarApiExceptionRequestTooLarge	413	request_too_large	EXCEPTION_REQUEST_TOO_LARGE	Your request is too large to process.
SugarApiExceptionMissingParameter	422	missing_parameter	EXCEPTION_MISSING_PARAMETER	A required parameter in

parameter			PARAMETER	Your request was missing.
SugarApiExceptionInvalidParameter	422	invalid_parameter	EXCEPTION_INVALID_PARAMETER	A parameter in your request was invalid.
SugarApiExceptionRequestMethodFailure	424	request_failure	EXCEPTION_REQUEST_FAILURE	Your request failed to complete.
SugarApiExceptionClientOutdated	433	client_outdated	EXCEPTION_CLIENT_OUTDATED	Your software is out of date, please update your client before attempting to connect again.
SugarApiExceptionConnectorResponse	502	bad_gateway	EXCEPTION_CONNECTOR_RESPONSE	A connector or an integration request resulted in a failed response.
SugarApiExceptionMaintenance	503	maintenance	EXCEPTION_MAINTENANCE	SugarCRM is in maintenance mode. Only admins can login. Please contact your administrator for details.
SugarApiExceptionServiceUnavailable	503	service_unavailable	EXCEPTION_SERVICE_UNAVAILABLE	The server cannot process your request because it is busy or unavailable at this time.
SugarApiExceptionSearchUnavailable	400	search_unavailable	EXCEPTION_SEARCH_UNAVAILABLE	Search engine is temporarily unavailable.
SugarApiExceptionSearchRuntime	400	search_runtime	EXCEPTION_SEARCH_RUNTIME	A search engine runtime error occurred. Please contact

## Using Exceptions

When [extending endpoints](#) in Sugar, the stock API exceptions can be used to return errors and messages. The exception classes accept a single parameter on creation for the message value to return. This parameter can accept [language label keys](#) or plain text. If no parameter is passed exception, the error will default to the exception's default language label key. To call a stock API exception from custom code add the following snippet :

```
//throwing an api exception using the stock message
throw new SugarApiExceptionError();

//throwing an api exception using a custom language label key
throw new SugarApiExceptionError('EXCEPTION_CSTM_LABEL_KEY');

//throwing an api exception with text
throw new SugarApiExceptionError('There has been an error.');
```

This will return an http response code of 500 with the following response data:

```
{
  "error": "fatal_error",
  "error_message": "There has been an error."
}
```

## Custom Exceptions

Sugar gives you the ability to create custom API exceptions by creating a new class in `./custom/include/api/` that extends the stock `SugarApiException` class. When extending the class you can provide the following properties in your custom code:

<code>\$httpCode</code>	The http response code to send back in the header. Defaults to 400 if not specified.
<code>\$errorLabel</code>	The string value returned in the 'error' key response.
<code>\$messageLabel</code>	The label to return as a default response if a message is not provided.

---

## Example

The following example will demonstrate how to create a custom exception.

`./custom/include/api/<name>.php`

```
<?php

require_once 'include/api/SugarApiException.php';

/**
 * Custom error.
 */
class cstmSugarApiExceptionError extends SugarApiException
{
    public $httpCode = 404;
    public $errorLabel = 'my_error';
    public $messageLabel = 'EXCEPTION_CSTM_LABEL_KEY';
}
```

Create a custom language label using the [extension framework](#):

`./custom/Extension/application/Ext/Language/<name>.php`

```
<?php

$app_strings['EXCEPTION_CSTM_LABEL_KEY'] = 'My Exception Message.';
```

You can call your new exception by using the following code :

```
require_once 'custom/include/api/<name>.php';

//throwing custom api exception using the default message
throw new cstmSugarApiExceptionError();

//throwing custom api exception using a custom language label key
throw new cstmSugarApiExceptionError('EXCEPTION_CSTM_LABEL_KEY');

//throwing custom api exception with text
throw new cstmSugarApiExceptionError('There has been an error.');
```

You will then need to navigate to Admin > Repair > Quick Repair and Rebuild before using your exception.

---

The exception error will return a response of:

```
{
  "error": "my_error",
  "error_message": "There has been an error."
}
```

**Last Modified:** 2021-02-17 02:44:13

## Legacy API

### Overview

v1 - v4.1 API documentation.

### SOAP VS REST

There are significant differences between how the legacy REST and SOAP protocols function on an implementation level (e.g. Performance, response size, etc). Deciding which protocol to use is up to the individual developer and is beyond the scope of this guide. Starting in SugarCRM version 6.2.0, there are some deviations between the protocols with the v4 API. There are additional core calls that are only made available through the REST protocol. They are listed below:

- `get_module_layout`
- `get_module_layout_md5`
- `get_quotes_pdf` method
- `get_report_pdf` method
- `snip_import_emails`
- `snip_update_contacts`
- `job_queue_cycle`
- `job_queue_next`
- `job_queue_run`
- `oauth_access` method
- `oauth_access_token`
- `oauth_request_token`

### REST

---

REST stands for 'Representational State Transfer'. This protocol is used by Sugar to exchange information both internally and externally.

## How do I access the REST service?

The legacy REST services in SugarCRM can be found by navigating to:

```
http://{site url}/service/{version}/rest.php
```

Where 'site url' is the URL of your Sugar instance and 'version' is the latest version of the API specific to your release of Sugar. You can find out more about versioning in the [Web Services](#) documentation.

## Input / Output Datatypes

The default input / output datatype for REST is JSON / PHP serialize.

These datatype files, SugarRestJSON.php and SugarRestSerialize.php, are in:

```
./service/core/REST/
```

## Defining your own Datatypes

You can also define your own datatype. To do this, you need to create a new file such as:

```
./service/core/REST/SugarRest<CustomDataType>.php
```

Next, you will need to override generateResponse() and serve() functions. The serve function decodes or unserializes the appropriate datatype based on the input type; the generateResponse function encodes or serializes it based on the output type.

See service/test.html for more examples on usage. In this file, the getRequestData function, which generates URL with json, is both the input\_type and the response\_type. That is, the request data from the JavaScript to the server is JSON and response data from server is also JSON. You can mix and match any datatype as input and output. For example, you can have JSON as the input\_type and serialize as the response\_type based on your application's requirements.

## REST Failure Response

---

If a call failure should occur, the result will be as shown below:

Name	Type	Description
name	String	Error message.
number	Integer	Error number.
description	String	Description of error.

## SOAP

SOAP stands for 'Simple Object Access Protocol'. SOAP is a simple XML-based protocol that is used to allow applications to exchange information.

### How do I access the SOAP service?

The legacy SOAP service in SugarCRM can be found by navigating to:

```
http://{sugar_url}/service/{version}/soap.php
```

Where 'sugar\_url' is the url of your Sugar instance and 'version' is the latest version of the API specific to your release of Sugar. You can find out more about versioning in the section titled 'API: Versioning'. The default WSDL is formatted as rpc/encoded.

### WS-I 1.0 Compliancy

Sugar supports generating a URL that is WS-I compliant. When accessing the soap entry point, you can access the WSDL at:

```
http://{sugar_url}/service/{version}/soap.php?wsdl
```

By default, the WSDL is formatted as rpc/encoded, however, this can be changed by specifying a 'style' and 'use' url-parameter. An example of this is:

```
http://{sugar_url}/service/{version}/soap.php?wsdl&style=rpc&use=literal
```

### URL Parameters

**style**

- 
- rpc
  - document

**use**

- encoded
- literal

## Validation

This WSDL (rpc/literal) was successfully verified against Apache CXF 2.2.

## SOAP Failure Response

If a call failure should occur, the result will be as shown below:

Name	Type	Description
faultcode	Integer	Fault ID.
faultactor	String	Provides information about what caused the fault to happen.
faultstring	String	Fault Message.
detail	String	Description of fault.

**Last Modified:** 2021-02-17 02:44:13

## What is NuSOAP?

### Overview

NuSOAP is a SOAP Toolkit for PHP that doesn't require PHP extensions.

### Where Can I Get It?



---

NuSOAP can be downloaded from <http://nusoap.sourceforge.net>

## How Do I Use It?

After you have downloaded NuSOAP, you will need to extract the zip file contents to a storage directory. Once extracted, you will reference "lib/nusoap.php" in your PHP SOAP application.

## Example

```
<?php

//require NuSOAP
require_once("../lib/nusoap.php");

//retrieve WSDL
$client = new nusoap_client("http://{site_url}/service/v4/soap.php?wsdl", 'wsdl');
```

**Last Modified:** 2021-02-17 02:44:13

## Methods

Web Service Method Calls.
---------------------------

**Last Modified:** 2021-02-17 02:44:13

## get\_available\_modules

## Overview

---

Retrieves a list of available modules in the system.

## Available APIs

- SOAP
- REST

## Definition

`get_available_modules(session, filter)`

## Parameters

Name	Type	Description
session	String	Session ID returned by a previous login call.
filter	String	String to filter the modules with. Possible values are 'default', 'mobile', 'all'.

## Result

Name	Type	Description
result	<code>new_module_fields</code>   Array	The call result.
result.modules	Array	The list of available modules.
result.modules[].module_key	String	The modules key.
result.modules[].module_label	String	The display label for the module.
result.modules[].favorite_enabled	String	Whether favorites are enabled for the module.
result.modules[].acls	Array	The ACL list for the module

---

## Change Log

Version	Change
v3	Added <b>filter</b> parameter. Accepts the values 'default', 'mobile', 'all'.

## PHP

```
$get_available_modules_parameters = array(  
    //Session id  
    "session" => $session_id,  
  
    //Module filter. Possible values are 'default', 'mobile', 'all'.  
    "filter" => 'all',  
);
```

**Last Modified:** 2021-02-17 02:44:13

## get\_document\_revision

### Overview

Retrieves a specific document revision.

### Available APIs

- SOAP
- REST

### Definition

get\_document\_revision(session, i)

### Parameters

Name	Type	Description
session	String	Session ID returned by a previous login call.
i	String	The ID of the document revision.

## Result

Name	Type	Description
result	new_return_document_revision  Array	The call result.
result.document_revision	Array	The details of the document revision.
result.document_revision.id	String	The document ID.
result.document_revision.document_name	String	The document name.
result.document_revision.revision	String	The document revision number
result.document_revision.filename	String	The filename of the file.
result.document_revision.file	String	The binary contents of the file.

## Change Log

Version	Change
v2	Return type was changed from return_document_revision to <b>new_return_document_revision</b> .

## PHP

```
$get_document_revision_parameters = array(
    //Session id
```

---

```
"session" => $session_id,  
  
//The attachment details  
"i" => '723b7dcb-27b3-e53d-b348-50bd283f8e48',  
);
```

**Last Modified:** 2021-02-17 02:44:13

## get\_entries

### Overview

Retrieves a list of beans based on specified record IDs.

### Available APIs

- SOAP
- REST

### Definition

get\_entries(session, module\_name, ids, select\_fields, link\_name\_to\_fields\_array, track\_view)

### Parameters

Name	Type	Description
session	String	Session ID returned by a previous login call.
module_name	String	The name of the module from which to retrieve records. Note: This is the modules key which may not be the same as the modules display name.
ids	String	The list of record IDs to

Name	Type	Description
		retrieve.
select_fields	select_fields   Array	The list of fields to be returned in the results. Specifying an empty array will return all fields.
link_name_to_fields_array	link_names_to_fields_array   Array	A list of link names and the fields to be returned for each link.
track_view	Boolean	Flag the record as a recently viewed item.

## Result

Name	Type	Description
result	get_entry_result_version2   Array	The call result.
result.entry_list	Array	The record's name-value pair for the simple datatypes excluding the link field data. If you do not have access to the object, entry_list[].name_value_list will notify you.
result.relationship_list	Array	The records link field data.

## Change Log

Version	Change
v3_1	Added <b>track_view</b> parameter.
v2	Added <b>link_name_to_fields_array</b> parameter.
v2	Return type was changed from get_entry_result to <b>get_entry_result_version2</b> .

---

## PHP

```
$get_entries_parameters = array(
    //session id
    'session' => $session_id,

    //The name of the module from which to retrieve records
    'module_name' => 'Accounts',

    //An array of record IDs
    'ids' => array(
        '14b0c0ca-3ea2-0ee8-f3be-50aa57c11ee7',
    ),

    //The list of fields to be returned in the results
    'select_fields' => array(
        'name',
        'billing_address_state',
        'billing_address_country'
    ),

    //A list of link names and the fields to be returned for each link
    name
    'link_name_to_fields_array' => array(
        array(
            'name' => 'email_addresses',
            'value' => array(
                'email_address',
                'opt_out',
                'primary_address'
            ),
        ),
    ),

    //Flag the record as a recently viewed item
    'track_view' => true,
);
```

**Last Modified:** 2021-02-17 02:44:13

## get\_entries\_count

---

## Overview

Retrieves a list of beans based on query specifications.

## Available APIs

- SOAP
- REST

## Definition

`get_entries_count(session, module_name, query, deleted)`

## Parameters

Name	Type	Description
session	String	Session ID returned by a previous login call.
module_name	String	The name of the module from which to retrieve records. Note: This is the modules key which may not be the same as the modules display name.
query	String	The SQL WHERE clause without the word "where".
deleted	Integer	If deleted records should be included in the results.

## Result

Name	Type	Description
result	<code>get_entries_count_result</code>   Array	The call result.
result.result_count	Integer	The count of total records.



---

## Change Log

Version	Change

## PHP

```
$get_entries_count_parameters = array(  
    //Session id  
    'session' => $session_id,  
  
    //The name of the module from which to retrieve records  
    'module_name' => 'Accounts',  
  
    //The SQL WHERE clause without the word "where".  
    'query' => " accounts.name like '%example text%' ",  
  
    //If deleted records should be included in results.  
    'deleted' => false  
);
```

**Last Modified:** 2021-02-17 02:44:13

## get\_entry

### Overview

Retrieves a single bean based on record ID.

### Available APIs

- SOAP
- REST

### Definition

---

`get_entry(session, module_name, id, select_fields, link_name_to_fields_array, track_view)`

## Parameters

Name	Type	Description
<code>session</code>	String	Session ID returned by a previous login call.
<code>module_name</code>	String	The name of the module from which to retrieve records. Note: This is the modules key which may not be the same as the modules display name.
<code>id</code>	String	The ID of the record to retrieve.
<code>select_fields</code>	<code>select_fields</code>   Array	The list of fields to be returned in the results. Specifying an empty array will return all fields.
<code>link_name_to_fields_array</code>	<code>link_names_to_fields_array</code>   Array	A list of link names and the fields to be returned for each link.
<code>track_view</code>	Boolean	Flag the record as a recently viewed item.

## Result

Name	Type	Description
<code>result</code>	<code>get_entry_result_version2</code>   Array	The call result.
<code>result.entry_list</code>	Array	The record's name-value pair for the simple datatypes excluding the link field data. If you do not have access to the object, <code>entry_list[].name_value_list</code> will notify you.

---

Name	Type	Description
result.relationship_list	Array	The records link field data.

## Change Log

Version	Change
v3_1	Added <b><i>track_view</i></b> parameter.
v2	Added <b><i>link_name_to_fields_array</i></b> parameter.
v2	Return type was changed from <code>get_entry_result</code> to <b><i>get_entry_result_version2</i></b> .

## PHP

```
$get_entry_parameters = array(
    //session id
    'session' => $session_id,

    //The name of the module from which to retrieve records
    'module_name' => "Contacts",

    //The ID of the record to retrieve.
    'id' => "18df70e4-1422-8bff-6f5f-50aa571fe4e5",

    //The list of fields to be returned in the results
    'select_fields' => array(
        'id',
        'first_name',
        'last_name',
    ),

    //A list of link names and the fields to be returned for each link
    name
    'link_name_to_fields_array' => array(
        array(
            'name' => 'email_addresses',
            'value' => array(
                'email_address',
                'opt_out',
```

---

```
        'primary_address'
    ),
),
),

//Flag the record as a recently viewed item
'track_view' => true,
);
```

**Last Modified:** 2021-02-17 02:44:13

## get\_entry\_list

### Overview

Retrieves a list of beans based on query specifications.

### Available APIs

- SOAP
- REST

### Definition

get\_entry\_list(session, module\_name, query, order\_by, offset, select\_fields, link\_name\_to\_fields\_array, max\_results, deleted, favorites)

### Parameters

Name	Type	Description
session	String	Session ID returned by a previous login call.
module_name	String	The name of the module from which to retrieve records. Note: This is the modules key which may

Name	Type	Description
		not be the same as the modules display name.
query	String	The SQL WHERE clause without the word "where". You should remember to specify the table name for the fields to avoid any ambiguous column errors.
order_by	String	The SQL ORDER BY clause without the phrase "order by".
offset	Integer	The record offset from which to start.
select_fields	select_fields   Array	The list of fields to be returned in the results. Specifying an empty array will return all fields.
link_name_to_fields_array	link_names_to_fields_array   Array	A list of link names and the fields to be returned for each link.
max_results	Integer	The maximum number of results to return.
deleted	Integer	If deleted records should be included in the results.
favorites	Boolean	If only records marked as favorites should be returned.

## Result

Name	Type	Description
result	get_entry_result_version2   Array	The call result.
result.result_count	Integer	The total number of records returned in the call.
result.total_count	Integer	The total number of records.

Name	Type	Description
resultnext_offset	Integer	The next offset to retrieve records.
result.entry_list	Array	The record's name-value pair for the simple datatypes excluding the link field data. If you do not have access to the object, entry_list[].name_value_list will notify you.
result.relationship_list	Array	The records link field data.

## Change Log

Version	Change
v3_1	Added <i>favorites</i> parameter.
v2	Added <i>link_name_to_fields_array</i> parameter.
v2	Return type was changed from get_entry_list_result to <i>get_entry_list_result_version2</i> .

## PHP

```

$get_entry_list_parameters = array(
    //session id
    'session' => $session_id,

    //The name of the module from which to retrieve records
    'module_name' => 'Leads',

    //The SQL WHERE clause without the word "where".
    'query' => "",

    //The SQL ORDER BY clause without the phrase "order by".
    'order_by' => "",

    //The record offset from which to start.
    'offset' => 0,

```

---

```
//A list of fields to include in the results.
'select_fields' => array(
    'id',
    'name',
    'title',
),

//A list of link names and the fields to be returned for each link
name.
'link_name_to_fields_array' => array(
    array(
        'name' => 'email_addresses',
        'value' => array(
            'email_address',
            'opt_out',
            'primary_address'
        ),
    ),
),

//The maximum number of results to return.
'max_results' => 2,

//If deleted records should be included in results.
'deleted' => 0,

//If only records marked as favorites should be returned.
'favorites' => false,
);
```

**Last Modified:** 2021-02-17 02:44:13

## get\_language\_definition

### Overview

Retrieves the language label strings for the specified modules.

### Available APIs

- 
- REST

## Definition

`get_available_modules(session, modules, md5)`

## Parameters

Name	Type	Description
session	String	Session ID returned by a previous login call.
modules	Array	The list of modules to retrieve language definitions for.
md5	Boolean	Setting this to true will return an MD5 hash of the modules labels strings instead of the label strings themselves.

## Result

Name	Type	Description
result	Array	The call result. Contains a list of modules.
result[]	Array or String	The list of language definitions or MD5 hashes. This is dependent on the 'md5' parameter.

## Change Log

Version	Change
v3_1	Added <b><i>get_language_definition</i></b> method.



---

## PHP

```
$get_language_definition_parameters = array(
    //Session id
    'session' => $session_id,

    //The list of modules
    'modules' => array(
        'Accounts'
    ),

    //Whether to return the results as an MD5 hash
    'md5' => false,
);
```

**Last Modified:** 2021-02-17 02:44:13

## get\_last\_viewed

### Overview

Retrieves a list of recently viewed records by module for the current user.

### Available APIs

- SOAP
- REST

### Definition

get\_last\_viewed(session, module\_names)

### Parameters

Name	Type	Description
session	String	Session ID returned by a previous login call.

Name	Type	Description
module_names	module_names   Array	The list of modules to retrieve last viewed records for.

## Result

Name	Type	Description
result	last_viewed_list   Array	The call result. Contains a list of recently viewed records.
result[].id	Integer	The result ID.
result[].item_id	String	The recently viewed record ID.
result[].item_summary	String	The name of the recently viewed record.
result[].module_name	String	The name of the module.
result[].monitor_id	String	The monitor ID from the tracker table.
result[].date_modified	String	The date the record was viewed.

## Change Log

Version	Change

## PHP

```
$get_last_viewed_parameters = array(
    //Session id
    "session" => $session_id,

    //The name of the modules to retrieve last viewed for
    'module_names' => array(
```

---

```
        'Contacts',  
        'Accounts'  
    ),  
);
```

**Last Modified:** 2021-02-17 02:44:13

## get\_modified\_relationships

### Overview

Retrieves a list of modified relationships between a specific date range. Helps facilitate sync operations for users.

### Available APIs

- SOAP
- REST

### Definition

`get_modified_relationships(session, module_name, related_module, from_date, to_date, offset, max_results, deleted, module_user_id, select_fields, relationship_name, deletion_date)`

### Parameters

Name	Type	Description
session	String	Session ID returned by a previous login call.
module_name	String	The module key to retrieve relationships against.
related_module	String	The related module key to retrieve records off of. This parameter should always be 'Users'.

Name	Type	Description
from_date	String	Start date in YYYY-MM-DD HH:MM:SS format for the date range.
to_date	String	End date in YYYY-MM-DD HH:MM:SS format for the date range.
offset	Integer	The offset to begin returning records from.
max_results	Integer	The max_results to return.
deleted	Integer	Whether or not to include deleted records. Set to 1 to find deleted records.
module_user_id	String	*This parameter is no longer used and is only present for backward compatibility purposes.
select_fields	select_fields	List of fields to select and return as name/value pairs.
relationship_name	String	The name of the relationship name to search on.
deletion_date	String	Date value in YYYY-MM-DD HH:MM:SS format for filtering on deleted records whose date_modified falls within range.

## Result

Name	Type	Description
result	modified_relationship_result   Array	The call result.
result.result_count	Integer	The result count.
result.next_offset	Integer	The next offset to retrieve from.
result.entry_list	Array	List of found records.

---

Name	Type	Description
result.error	Array	Error Message.
result.error.number	Integer	The error number.
result.error.name	String	The name of the error.
result.error.description	String	The description of the error.

## Change Log

Version	Change
v4_1	Added <i>get_modified_relationships</i> method.

## Considerations

- The **module\_name** parameter should **always** be 'Users'.

## PHP

```
$get_modified_relationships_parameters = array(  
    //Session id  
    'session' => $session_id,  
  
    //The module key to retrieve relationships against.  
    //This parameter should always be 'Users'.  
    'module_name' => 'Users',  
  
    //The related module key to retrieve records off of.  
    'related_module' => 'Meetings',  
  
    //Start date in YYYY-MM-DD HH:MM:SS format for the date range.  
    'from_date' => '2000-01-01 01:01:01',  
  
    //End date in YYYY-MM-DD HH:MM:SS format for the date range  
    'to_date' => '2013-01-01 01:01:01',  
  
    //The offset to begin returning records from.  
    'offset' => 0,
```

---

```
//The max_results to return.
'max_results' => 5,

//Whether or not to include deleted records. Set to 1 to find deleted records.
'deleted' => 0,

//This parameter is not used.
'module_user_id' => '',

//List of fields to select and return as name/value pairs.
'select_fields' => array(),

//The name of the relationship name to search on.
'relationship_name' => 'meetings_users',

//Date value in YYYY-MM-DD HH:MM:SS format for filtering on deleted records.
'deletion_date' => '2012-01-01 01:01:01'
);
```

**Last Modified:** 2021-02-17 02:44:13

## get\_module\_fields

### Overview

Retrieves the list of field vardefs for a specific module.

### Available APIs

- SOAP
- REST

### Definition

get\_module\_fields(session, module\_name, fields)

---

## Parameters

Name	Type	Description
session	String	Session ID returned by a previous login call.
module_name	String	The name of the module from which to retrieve records. Note: This is the modules key which may not be the same as the modules display name.
fields	select_fields   Array	The list of fields to retrieve. An empty parameter will return all.

## Result

Name	Type	Description
result	new_module_fields   Array	The call result.
result.module_name	String	The name of the module.
result.table_name	String	The name of the modules primary table.
result.module_fields	Array	The vardefs for each individual field.

## Change Log

Version	Change
v2	Added <b>fields</b> parameter.
v2	Return type was changed from module_fields to <b>new_module_fields</b> .

## PHP

---

```
$get_module_fields_parameters = array(
    //Session id
    "session" => $session_id,

    //The name of the module from which to retrieve fields
    'module_name' => "Contacts",

    //List of specific fields
    'fields' => array(),
);
```

**Last Modified:** 2021-02-17 02:44:13

## get\_module\_fields\_md5

### Overview

Retrieves the MD5 hash of the vardefs for the specified modules.

### Available APIs

- SOAP
- REST

### Definition

get\_module\_fields\_md5(session, module\_names)

### Parameters

Name	Type	Description
session	String	Session ID returned by a previous login call.
module_names	select_fields   Array	The list of modules to retrieve MD5 hashes for.



---

## Result

Name	Type	Description
result	md5_results   Array	The call result. Contains a list of module field hashes. Order is based on the module_names parameter.

## Change Log

Version	Change

## PHP

```
$get_module_fields_md5_parameters = array(  
    //Session id  
    "session" => $session_id,  
  
    //The name of the modules to retrieve field hashes for  
    'module_names' => array(  
        'Contacts',  
        'Accounts'  
    ),  
);
```

**Last Modified:** 2021-02-17 02:44:13

## get\_module\_layout

### Overview

Retrieves the layout metadata for a given module given a specific type and view.

---

## Available APIs

- REST

### Definition

`get_module_layout(session, modules, types, views, acl_check, md5)`

### Parameters

Name	Type	Description
session	String	Session ID returned by a previous login call.
modules	Array	The list of modules to retrieve layouts for.
types	Array	The types of views requested. Current supported types are 'default' (for application) and 'wireless'.
views	Array	The views requested. Current supported types are 'edit', 'detail', 'list', and 'subpanel'.
acl_check	Boolean	Whether or not to check for ACL access.
md5	Boolean	Setting this to true will return an MD5 hash of the modules layouts instead of the layouts themselves.

### Result

Name	Type	Description
result	Array	The call result. Contains a list of modules.
result[[[\$type]	Array	The list of types

Name	Type	Description
		requested.
result[[\$view]	Array or String	The list of layout views requested or MD5 hashes. This is dependent on the 'md5' parameter.

## Change Log

Version	Change
v3_1	Added <b><i>acl_check</i></b> parameter.
v3	Added <b><i>get_module_layout</i></b> method.

## PHP

```

$get_module_layout_parameters = array(
    //Session id
    'session' => $session_id,

    //The list of modules
    'modules' => array(
        'Accounts'
    ),

    //The types of views requested
    'types' => array(
        'default',
    ),

    //The views requested
    'views' => array(
        'edit'
    ),

    //Whether or not to check for ACL access
    'acl_check' => false,

    //Whether to return the results as an MD5 hash
    'md5' => true,

```

---

);

**Last Modified:** 2021-02-17 02:44:13

## get\_module\_layout\_md5

### Overview

Retrieves the MD5 hash value for a layout given a specific module, type and view.

### Available APIs

- REST

### Definition

get\_module\_layout\_md5(session, modules, types, views, acl\_check)

### Parameters

Name	Type	Description
session	String	Session ID returned by a previous login call.
modules	Array	The list of modules to retrieve layouts for.
types	Array	The types of views requested. Current supported types are 'default' (for application) and 'wireless'.
views	Array	The views requested. Current supported types are 'edit', 'detail', 'list', and 'subpanel'.
acl_check	Boolean	Whether or not to check

---

Name	Type	Description
		for ACL access.

## Result

Name	Type	Description
result	Array	The call result. Contains a list of modules.
result[][\$type]	Array	The list of types requested.
result[][\$view]	String	The list of MD5 layout view hashes requested.

## Change Log

Version	Change
v3_1	Added <b><i>acl_check</i></b> parameter.
v3	Added <b><i>get_module_layout_md5</i></b> method.

## PHP

```

$get_module_layout_md5_parameters = array(
    //Session id
    'session' => $session_id,

    //The list of modules
    'modules' => array(
        'Accounts'
    ),

    //The types of views requested
    'types' => array(
        'default',
    ),

    //The views requested

```

---

```
'views' => array(
    'edit'
),

//Whether or not to check for ACL access
'acl_check' => false,
);
```

**Last Modified:** 2021-02-17 02:44:13

## get\_note\_attachment

### Overview

Retrieves an attachment associated with a specific note record.

### Available APIs

- SOAP
- REST

### Definition

get\_note\_attachment(session, id)

### Parameters

Name	Type	Description
session	String	Session ID returned by a previous login call.
id	String	The ID of the note record to associate the attachment to.

---

## Result

Name	Type	Description
result	new_return_note_attachment   Array	The call result.
result.note_attachment	Array	The details of the file attachment.
result.note_attachment.id	String	The ID of the note record / attachment.
result.note_attachment.filename	String	The filename of the attachment.
result.note_attachment.file	String	The binary contents of the file.
result.note_attachment.related_module_id	String	The related parent ID.
result.note_attachment.related_module_name	String	The related parent module.

## Change Log

Version	Change
v2	Return type was changed from return_note_attachment to <b>new_return_note_attachment</b> .

## PHP

```
$get_note_attachment_parameters = array(  
    //Session id  
    "session" => $session_id,  
  
    //The ID of the note containing the attachment.  
    'id' => "9057784d-de17-4f28-c5f9-50bd0f260a43",  
);
```

**Last Modified:** 2021-02-17 02:44:13

---

# get\_quotes\_pdf

## Overview

Generates a quote PDF for a specific quote.

## Available APIs

- REST

## Definition

```
get_quotes_pdf(session, quote_id, pdf_format)
```

## Parameters

Name	Type	Description
session	String	Session ID returned by a previous login call.
quote_id	String	The ID of the quote record to generate the PDF for.
pdf_format	String	The pdf type requested. 'Standard' is an example.

## Result

Name	Type	Description
result	Array	The call result.
result.file_contents	String	The binary contents of the PDF file.

## Change Log



---

Version	Change
v3_1	Added <b><i>get_quotes_pdf</i></b> method.

## PHP

```
$get_quotes_pdf_parameters = array(  
    //Session id  
    'session' => $session_id,  
  
    //The quote to generate the pdf for  
    'quote_id' => '490cc844-f83a-9b74-9888-50aa575b517c',  
  
    //The pdf type  
    'pdf_format' => 'Standard',  
);
```

**Last Modified:** 2021-02-17 02:44:13

## get\_relationships

### Overview

Retrieves a specific relationship link for a specified record.

### Available APIs

- SOAP
- REST

### Definition

`get_relationships(session, module_name, module_id, link_field_name, related_module_query, related_fields, related_module_link_name_to_fields_array, deleted, order_by, offset, limit)`

---

## Parameters

Name	Type	Description
session	String	Session ID returned by a previous login call.
module_name	String	The name of the module from which to retrieve records. Note: This is the modules key which may not be the same as the modules display name.
module_id	String	The ID of the specified module record.
link_field_name	String	The name of the link field for the related module.
related_module_query	String	The list of related record IDs you are relating
related_fields	select_fields   Array	An array specifying relationship fields to populate. An example of this is contact_role between Opportunities and Contacts.
related_module_link_name_to_fields_array	link_names_to_fields_array   Array	For every related record returned, specify link field names to field information.
deleted	Integer	
order_by	String	The SQL ORDER BY clause without the phrase "order by".
offset	Integer	The record offset from which to start.
limit	Integer	The maximum number of results to return.

## Result

Name	Type	Description
result	get_entry_result_version2   Array	The call result.
result.entry_list	Array	The record's name-value pair for the simple datatypes excluding the link field data. If you do not have access to the object, entry_list[].name_value_list will notify you.
result.relationship_list	Array	The records link field data.

## Change Log

Version	Change
v3	Added <b>order_by</b> parameter.
v2	Removed <b>related_module</b> parameter.
v2	Added <b>link_field_name</b> parameter.
v2	Added <b>related_fields</b> parameter.
v2	Added <b>related_module_link_name_to_fields_array</b> parameter.
v2	Return type was changed from get_relationships_result to <b>get_entry_result_version2</b> .

## PHP

```
$get_relationships_parameters = array(
    //session id
    'session' => $session_id,

    //The name of the module from which to retrieve records.
    'module_name' => 'Accounts',

    //The ID of the specified module bean.
```

---

```
'module_id' => '9f0c0ceb-c512-7103-9456-50aa5787c3f6',

//The relationship name of the linked field from which to return records.
'link_field_name' => 'opportunities',

//The portion of the WHERE clause from the SQL statement used to find the related items.
'related_module_query' => " opportunities.name IS NOT NULL ",

//The related fields to be returned.
'related_fields' => array(
    'id',
    'name'
),

//For every related bean returned,
//specify link field names to field information.
'related_module_link_name_to_fields_array' => array(
    array(
        'name' => 'contacts',
        'value' => array(
            'id',
            'first_name',
            'last_name',
        ),
    ),
),

//To exclude deleted records
'deleted'=> 0,

//order by
'order_by' => ' opportunities.name ',

//offset
'offset' => 0,

//limit
'limit' => 200,
);
```

**Last Modified:** 2021-02-17 02:44:13

---

# get\_report\_entries

## Overview

Retrieves a list of report entries based on specified record IDs.

## Available APIs

- SOAP
- REST

## Definition

get\_report\_entries(session, ids, select\_fields)

## Parameters

Name	Type	Description
session	String	Session ID returned by a previous login call.
ids	select_fields   Array	An array of record IDs to retrieve.
select_fields	select_fields   Array	The list of fields to be included in the results.

## Result

Name	Type	Description
result	get_entry_result_for_reports   Array	The call result.
result.field_list	Array	The list of selected fields.
result.field_list[].name	String	The name of the report.
result.field_list[].type	String	The type of the report.
result.field_list[].label	String	The label of the report.

Name	Type	Description
result.field_list[].required	Boolean	
result.field_list[].options	Array	
result.entry_list	Array	The list of report results
result.entry_list[].id	String	The result ID. This is not the record ID.
result.entry_list[].module_name	String	The name of the module. Normally contains the value 'Reports'.
result.entry_list[].name_value_list	Array	The name value list of the report results.

## Change Log

Version	Change
v2	Method <b><i>get_report_entries</i></b> was added.

## Considerations

- This method is not available in CE.

## PHP

```
$get_report_entries_parameters = array(
    //Session id
    'session' => $session_id,

    //An array of record IDs to retrieve.
    'ids' => array(
        '63f1b905-d206-14cb-cb95-50aa5734815f'
    ),

    //The list of fields to be included in the results.
    'select_fields' => array()
);
```

# get\_report\_pdf

## Overview

Generates a PDF for a specific report.

## Available APIs

- REST

## Definition

get\_report\_pdf(session, report\_id)

## Parameters

Name	Type	Description
session	String	Session ID returned by a previous login call.
report_id	String	The ID of the report record to generate the PDF for.

## Result

Name	Type	Description
result	Array	The call result.
result.file_contents	String	The binary contents of the PDF file.

---

## Change Log

Version	Change
v3_1	Added <b><i>get_report_pdf</i></b> method.

## PHP

```
$get_report_pdf_parameters = array(  
    //Session id  
    'session' => $session_id,  
  
    //The report to generate the pdf for.  
    'report_id' => '68ca4de9-7486-72e1-1a56-50aa5757aaab',  
);
```

**Last Modified:** 2021-02-17 02:44:13

## get\_server\_info

### Overview

Retrieves info about the SugarCRM instance.

### Available APIs

- SOAP
- REST

### Definition

get\_server\_info()

### Parameters



---

Name	Type	Description
null	null	No parameters available.

## Result

Name	Type	Description
result	get_server_info_result   Array	The call result.
result.flavor	String	The flavor of the instance.
result.version	String	The version of the instance.
result.gmt_time	String	The GMT time of the server.

## Change Log

Version	Change
v2	Method <b><i>get_server_info</i></b> was added to replace <b><i>get_server_time</i></b> , <b><i>get_server_version</i></b> and <b><i>get_sugar_flavor</i></b> .
v2	Method <b><i>get_server_time</i></b> was removed.
v2	Method <b><i>get_server_version</i></b> was removed.
v2	Method <b><i>get_sugar_flavor</i></b> was removed.

## PHP

```
//this method does not have any parameters
$get_server_info_parameters = array();
```

**Last Modified:** 2021-02-17 02:44:13

---

# get\_upcoming\_activities

## Overview

Retrieves a list of upcoming activities for the current user.

## Available APIs

- SOAP
- REST

## Definition

get\_upcoming\_activities(session)

## Parameters

Name	Type	Description
session	String	Session ID returned by a previous login call.

## Result

Name	Type	Description
result	upcoming_activities_list   Array	The call result. Contains a list of upcoming activity records.
result[].id	Integer	The record ID.
result[].module	String	The activity module.
result[].date_due	String	The date the activity is due.
result[].summary	String	The summary of the activity.

---

## Change Log

Version	Change

## PHP

```
$get_upcoming_activities_parameters = array(  
    //Session id  
    "session" => $session_id,  
);
```

**Last Modified:** 2021-02-17 02:44:13

## get\_user\_id

### Overview

Retrieves the id of the user currently logged in.

### Available APIs

- SOAP
- REST

### Definition

get\_user\_id(session)

### Parameters

Name	Type	Description
session	String	Session ID returned by a previous login call.

---

## Result

Name	Type	Description
id	String	The users ID.

## Change Log

Version	Change

## PHP

```
$get_user_id_parameters = array(  
    //Session id  
    "session" => $session_id,  
);
```

**Last Modified:** 2021-02-17 02:44:13

## get\_user\_team\_id

### Overview

Retrieves the ID of the default team of the user who is logged into the current session.

### Available APIs

- SOAP
- REST

---

## Definition

`get_user_team_id(session)`

## Parameters

Name	Type	Description
session	String	Session ID returned by a previous login call.

## Result

Name	Type	Description
default_team_id	Integer	The ID of the current users default team

## Change Log

Version	Change
v2	Added <b>get_user_team_id</b> method.

## PHP

```
$get_user_team_id_parameters = array(  
    //Session id  
    "session" => $session_id,  
);
```

**Last Modified:** 2021-02-17 02:44:13

## job\_queue\_cycle

---

## Overview

Runs through the scheduler cleanup process and cycles the scheduler jobs.

## Available APIs

- REST

## Definition

`job_queue_cycle(session, clientid)`

## Parameters

Name	Type	Description
session	String	Session ID returned by a previous login call.
clientid	String	The client id calling the application. This parameter is of your choosing for the calling application.

## Result

Name	Type	Description
result	Array	The call result.
result.results	String	The cycle result. Returns 'ok' on success.

## Change Log

Version	Change
v4	Added <b><i>job_queue_cycle</i></b> method.

---

## PHP

```
$job_queue_cycle_parameters = array(  
    //Session id  
    'session' => $session_id,  
  
    //The ID of the calling application.  
    'clientid' => 'MyAppID',  
);
```

**Last Modified:** 2021-02-17 02:44:13

## job\_queue\_next

### Overview

Retrieves the next job from the job queue and marks it as 'In Progress'.

### Available APIs

- REST

### Definition

job\_queue\_next(session, clientid)

### Parameters

Name	Type	Description
session	String	Session ID returned by a previous login call.
clientid	String	The client id calling the application. This

---

Name	Type	Description
		parameter is of your choosing for the calling application.

## Result

Name	Type	Description
result	Array	The call result.
result.results	String	The next job ID.

## Change Log

Version	Change
v4	Added <b><i>job_queue_next</i></b> method.

## PHP

```
$job_queue_next_parameters = array(  
    //Session id  
    'session' => $session_id,  
  
    //The ID of the calling application.  
    'clientid' => 'MyAppID',  
);
```

**Last Modified:** 2021-02-17 02:44:13

## job\_queue\_run

### Overview



---

Runs the specified job.

## Available APIs

- REST

## Definition

`job_queue_run(session, jobid, clientid)`

## Parameters

Name	Type	Description
session	String	Session ID returned by a previous login call.
jobid	String	The ID of the job to run.
clientid	String	The client id calling the application. This parameter is of your choosing for the calling application.

## Result

Name	Type	Description
result	Array	The call result.
result.results	Boolean	The result of the job run.
result.message	String	This is only returned if a failure occurs.

## Change Log

Version	Change
v4	Added <b><i>job_queue_run</i></b> method.

---

## PHP

```
$job_queue_run_parameters = array(  
    //Session id  
    'session' => $session_id,  
  
    //The ID of the job to run.  
    'jobid' => 'd141efd3-d2c7-8a9c-9c02-50c11b491f16',  
  
    //The ID of the calling application.  
    'clientid' => 'MyAppID',  
);
```

**Last Modified:** 2021-02-17 02:44:13

## login

### Overview

Logs a user into the SugarCRM application.

### Available APIs

- SOAP
- REST

### Definition

login(user\_auth, application\_name, name\_value\_list)

### Parameters

Name	Type	Description
user_auth	user_auth   Array	Contains the parameters to authenticate a user.
user_auth.user_name	String	The user name of your user
user_auth.password	String	The MD5 hash of the users password.
application name	String	The name of the application logging in.
name_value_list	name_value_list   Array	Sets the name_value pair. The parameter is used to set values for the 'language' and 'notifyonsave' user settings.
name_value_list.language	String	The language for the user.
name_value_list.notifyonsave	Boolean	Alerts users on new record creations when set to true.

## Result

Name	Type	Description
result	entry_value   Array	The call result
result.id	String	This is the session id required to make other method calls.
result.module_name	String	Returns the 'Users' module.
result.name_value_list	Array	Authenticated user properties.
result.name_value_list.user_id	String	ID of the authenticated user.
result.name_value_list.user_name	String	Username of the authenticated user.
result.name_value_list.user_language	String	Default language of the authenticated user.
result.name_value_list.user_currency	String	Default currency ID of the

Name	Type	Description
r_currency_id		authenticated user.
result.name_value_list.user_is_admin	String	Admin status of the authenticated user.
result.name_value_list.user_default_team_id	String	Default team of the authenticated user.
result.name_value_list.user_default_dateformat	String	Default date format for the authenticated user.
result.name_value_list.user_default_timeformat	String	Default time format for the authenticated user.
result.name_value_list.user_number_seperator	String	Number seperator for the authenticated user.
result.name_value_list.user_decimal_seperator	String	Decimal sperator for the authenticated user.
result.name_value_list.mobile_max_list_entries	String	Max list entires for the authenticated user.
result.name_value_list.mobile_max_subpanel_entries	String	Max subpanel entries for the authenticated user.
result.name_value_list.user_currency_name	String	Default currency name for the authenticated user.

## Change Log

Version	Change
v3_1	Added additional return values to <b><i>name_value_list</i></b> . The list now also includes <b><i>user_number_seperator</i></b> , <b><i>user_decimal_seperator</i></b> , <b><i>mobile_max_list_entries</i></b> , <b><i>mobile_max_subpanel_entries</i></b> .
v3	Added additional return values to <b><i>name_value_list</i></b> . The list now also includes <b><i>user_is_admin</i></b> , <b><i>user_default_team_id</i></b> , <b><i>user_default_dateformat</i></b> , <b><i>user_default_timeformat</i></b> .
v2	Added <b><i>name_value_list</i></b> to response. Returns <b><i>user_id</i></b> , <b><i>user_name</i></b> , <b><i>user_language</i></b> , <b><i>user_currency_id</i></b> , <b><i>user_currency_name</i></b> .
v2	Added <b><i>module_name</i></b> to response.
v2	Removed <b><i>error</i></b> from response.

---

v2	Added <i><b>name_value_list</b></i> parameter
v2	Return type was changed from set_entry_result to <i><b>entry_value</b></i> .

## PHP

```
$login_parameters = array(
    //user authentication
    "user_auth" => array(
        "user_name" => $username,
        "password" => md5($password),
    ),

    //application name
    "application_name" => "My Application",

    //name value list for 'language' and 'notifyonsave'
    "name_value_list" => array(
        array(
            'name' => 'language',
            'value' => 'en_us',
        ),
        array(
            'name' => 'notifyonsave',
            'value' => true
        ),
    ),
);
```

**Last Modified:** 2021-02-17 02:44:13

## logout

### Overview

Logs a user out of the SugarCRM application.

---

## Available APIs

- SOAP
- REST

## Definition

logout(session)

## Parameters

Name	Type	Description
session	String	Session ID returned by a previous call to login.

## Result

Name	Type	Description
null	void	No return value.

## Change Log

Version	Change
v2	Return type was changed from error_value to <b>void</b> .

## PHP

```
$logout_parameters = array(  
    //session id to expire  
    "session" => $session_id,  
);
```

**Last Modified:** 2021-02-17 02:44:13

---

# oauth\_access

## Overview

Retrieves the OAuth access token.

## Available APIs

- REST

## Definition

oauth\_access()

## Parameters

Name	Type	Description
session	String	Session ID returned by a previous login call.

## Result

Name	Type	Description
result	Array	The call result.
result.id	String	The OAuth access token.

## Change Log

Version	Change
v4	Added <i>oauth_access</i> method.

---

## PHP

```
$oauth_access_parameters = array(  
    //Session id  
    'session' => $session_id,  
);
```

**Last Modified:** 2021-02-17 02:44:13

## seamless\_login

### Overview

Verifies that a session is authenticated.

### Available APIs

- SOAP
- REST

### Definition

seamless\_login(session)

### Parameters

Name	Type	Description
session	String	Session ID returned by a previous login call.

### Result



---

Name	Type	Description
result	Integer	Returns 1 if the session is authenticated. Otherwise 0 will be returned.

## Change Log

Version	Change

## Considerations

If you are attempting to log a user into SugarCRM seamlessly, you can do this by passing the validated `session_id` in the url.

An example is shown below:

```
http://{site_url}/index.php?module=Home&action=index&MSID={session_id}
```

## PHP

```
$seamless_login_parameters = array(  
    //Session id  
    "session" => $session_id,  
);
```

**Last Modified:** 2021-02-17 02:44:13

## search\_by\_module

### Overview

Searches modules for a string and returns matched records.

---

## Available APIs

- SOAP
- REST

## Definition

search\_by\_module(session, search\_string, modules, offset, max\_results, assigned\_user\_id, select\_fields, unified\_search\_only, favorites)

## Parameters

Name	Type	Description
session	String	Session ID returned by a previous login call.
search_string	String	The string to search for.
modules	Integer	The list of modules to query.
offset	Integer	The record offset from which to start.
max_results	Integer	The maximum number of records to return.
assigned_user_id	String	Filters records by the assigned user ID. Leave this empty if no filter should be applied.
select_fields	select_fields   Array	An array of fields to return. If empty the default return fields will be from the active listviewdefs.
unified_search_only	Boolean	If the search is only against modules participating in the unified search.
favorites	Boolean	If only records marked as favorites should be returned.

---

## Result

Name	Type	Description
result	return_search_result   Array	Call result.
result.entry_list	Array	The count of records in paged result.
result.entry_list[].name	String	The .name of the module
result.entry_list[].records	Array	A list of name_value lists for each record matched.

## Change Log

Version	Change
v3_1	Added <b><i>unified_search_only</i></b> parameter.

## PHP

```
$search_by_module_parameters = array(  
    //Session id  
    "session" => $session_id,  
  
    //The string to search for.  
    'search_string' => 'example text',  
  
    //The list of modules to query.  
    'modules' => array(  
        'Accounts',  
    ),  
  
    //The record offset from which to start.  
    'offset' => 0,  
  
    //The maximum number of records to return.  
    'max_results' => 100,  
  
    //Filters records by the assigned user ID.  
    //Leave this empty if no filter should be applied.  
    'assigned_user_id' => '',
```

---

```
//An array of fields to return.
//If empty the default return fields will be from the active listview
//If the search is only search modules participating in the unified search.
//If only records marked as favorites should be returned.
);
```

**Last Modified:** 2021-02-17 02:44:13

## set\_campaign\_merge

### Overview

Handles campaign log entry creation for mail-merge activity given a specified campaign.

### Available APIs

- SOAP
- REST

### Definition

set\_campaign\_merge(session, targets, campaign\_id)

### Parameters

Name	Type	Description
session	String	Session ID returned by a previous call to login.
targets	select_fields   Array	A string array of IDs identifying the targets used in the merge. The IDs used in this parameter come from the column 'prospect_lists_prospects.id'.
campaign_id	String	The campaign ID used for the mail merge.

## Result

Name	Type	Description
null	void	No return value.

## Change Log

Version	Change
v2	Return type was changed from error_value to <b>void</b> .

## PHP

```

$set_campaign_merge_parameters = array(
    //Session id
    "session" => $session_id,

    //A string array of IDs identifying the targets used in the merge.
    //The IDs used in this parameter come from the column 'prospect_lists_prospects.id'.
    "targets" => array(
        '403787cc-ab19-bec8-3ef4-50bd4896c9b3',
        'c5341c8d-4b0a-2b56-7108-50bd48b91213'
    ),

```

---

```
//The campaign ID used for the mail merge.  
"campaign_id" => '781d4471-fb48-8dd2-ae62-50bd475950b2'  
);
```

**Last Modified:** 2021-02-17 02:44:13

## set\_document\_revision

### Overview

Creates a new document revision for a specific document record.

### Available APIs

- SOAP
- REST

### Definition

set\_document\_revision(session, note)

### Parameters

Name	Type	Description
session	String	Session ID returned by a previous login call.
note	document_revision   Array	The file attachment details
note.id	String	The ID of the note record to associate the attachment to.
note.file	String	The binary contents of the file.
note.filename	String	The file name of the file attachment.
note.revision	String	The revision number

---

## Result

Name	Type	Description
result	new_set_entry_result   array	The results from the call.
result.id	String	The ID of the document revision.

## Change Log

Version	Change
v2	Return type was changed from set_entry_result to <b><i>new_set_entry_result</i></b> .

## PHP

```
$file_contents = file_get_contents("/path/to/example_document.txt");
$set_document_revision_parameters = array(
    //Session id
    "session" => $session_id,

    //The attachment details
    "note" => array(
        //The ID of the parent document.
        'id' => $document_id,

        //The binary contents of the file.
        'file' => base64_encode($file_contents),

        //The name of the file
        'filename' => 'example_document.txt',

        //The revision number
        'revision' => '1',
    ),
);
```

## set\_entries

### Overview

Create or update a list of records.

### Available APIs

- SOAP
- REST

### Definition

set\_entries(session, module\_name, name\_value\_lists)

### Parameters

Name	Type	Description
session	String	Session ID returned by a previous login call.
module_name	String	The name of the module from which to retrieve records. Note: This is the modules key which may not be the same as the modules display name.
name_value_lists	name_value_lists   Array	The an array of name/value lists containing the record attributes.

### Result



Name	Type	Description
result	new_set_entries_result   Array	The call result.
result.ids	Array	The list of record IDs that were created or updated

## Change Log

Version	Change
v2	Return type was changed from set_entry_result to <b><i>new_set_entries_result</i></b> .

## Considerations

- To update an existing record, you will need to specify 'id' for the name\_value\_list item in the name\_value\_lists parameter.
- To create a new record with a specific ID, you will need to set 'new\_with\_id' in the name\_value\_list item in the name\_value\_lists parameter.

## PHP

```
$set_entries_parameters = array(
    //Session id
    "session" => $session_id,

    //The name of the module from which to retrieve records.
    "module_name" => "Accounts",

    //Record attributes
    "name_value_lists" => array(
        array(
            //to update a record
            /*
            array(
                "name" => "id",
                "value" => "da0b107d-cfbc-cb08-4f90-50b7b9cb9ad7"
            ),
            */
        )
    )
);
```

---

```

//to create a new record with a specific ID
/*
array(
    "name" => "new_with_id",
    "value" => 1
),
*/
array(
    "name" => "name",
    "value" => "Example Account 1"
),
),
array(
//to update a record
/*
array(
    "name" => "id",
    "value" => "da0b107d-cfbc-cb08-4f90-50b7b9cb9ad7"
),
*/

//to create a new record with a specific ID
/*
array(
    "name" => "new_with_id",
    "value" => 1
),
*/

array(
    "name" => "name",
    "value" => "Example Account 2"
),
),
),
);

```

**Last Modified:** 2021-02-17 02:44:13

## set\_entry

---

## Overview

Creates or updates a specific record.

## Available APIs

- SOAP
- REST

## Definition

`set_entry(session, module_name, name_value_list)`

## Parameters

Name	Type	Description
session	String	Session ID returned by a previous login call.
module_name	String	The name of the module from which to retrieve records. Note: This is the modules key which may not be the same as the modules display name.
name_value_list	name_value_list   Array	The name/value list of the record attributes.

## Result

Name	Type	Description
result	new_set_entry_result   Array	The call result.
result.id	String	The ID of the record that was created/updated.

---

## Change Log

Version	Change
v2	Return type was changed from <code>set_entry_result</code> to <b><i>new_set_entry_result</i></b> .

## Considerations

- To update an existing record, you will need to specify 'id' in the `name_value_list` parameter.
- To create a new record with a specific ID, you will need to set 'new\_with\_id' in the `name_value_list` parameter.

## PHP

```
$set_entry_parameters = array(
    //session id
    "session" => $session_id,

    //The name of the module from which to retrieve records.
    "module_name" => "Accounts",

    //Record attributes
    "name_value_list" => array(
        //to update a record
        /*
        array(
            "name" => "id",
            "value" => "da0b107d-cfbc-cb08-4f90-50b7b9cb9ad7"
        ),
        */

        //to create a new record with a specific ID
        /*
        array(
            "name" => "new_with_id",
            "value" => true
        ),
        */

        array(
```

---

```
        "name" => "name",
        "value" => "Example Account "
    ),
),
);
```

**Last Modified:** 2021-02-17 02:44:13

## set\_note\_attachment

### Overview

Creates an attachment and associated it to a specific note record.

### Available APIs

- SOAP
- REST

### Definition

set\_note\_attachment(session, note)

### Parameters

Name	Type	Description
session	String	Session ID returned by a previous login call.
note	new_note_attachment   Array	The file attachment details
note.id	String	The ID of the note record to associate the attachment to.
note.filename	String	The file name of the file attachment.

---

Name	Type	Description
note.file	String	The binary contents of the file.

## Result

Name	Type	Description
result	new_set_entry_result   Array	The call result.
result.id	String	The ID of the note record / attachment

## Change Log

Version	Change
v2	Return type was changed from set_entry_result to <b><i>new_set_entry_result</i></b> .
v2	Parameter note type change from note_attachment to <b><i>new_note_attachment</i></b> .

## PHP

```

$file_contents = file_get_contents("/path/to/example_file.php");
$set_note_attachment_parameters = array(
    //Session id
    "session" => $session_id,

    //The attachment details
    "note" => array(
        //The ID of the note containing the attachment.
        'id' => $note_id,

        //The file name of the attachment.
        'filename' => 'example_file.php',

        //The binary contents of the file.
        'file' => base64_encode($file_contents),
    )

```

---

```
    ),  
);
```

**Last Modified:** 2021-02-17 02:44:13

## set\_relationship

### Overview

Sets relationships between two records. You can relate multiple records to a single record using this.

### Available APIs

- SOAP
- REST

### Definition

set\_relationship(session, module\_name, module\_id, link\_field\_name, related\_ids, name\_value\_list, delete)

### Parameters

Name	Type	Description
session	String	Session ID returned by a previous login call.
module_name	String	The name of the module from which to retrieve records. Note: This is the modules key which may not be the same as the modules display name.
module_id	String	The ID of the specified module record.
link_field_name	String	The name of the link field

Name	Type	Description
		for the related module.
related_ids	select_fields   Array	The list of related record IDs you are relating
name_value_list	name_value_list   Array	An array specifying relationship fields to populate. An example of this is contact_role between Opportunities and Contacts.
delete	Integer	Determines whether the relationship is being created or deleted. 0:create, 1:delete

## Result

Name	Type	Description
result	new_set_relationship_list_result   Array	The call result
result.created	Integer	The number of relationships created.
result.failed	Integer	Determines whether or not the relationship failed. This is normally thrown when the parameters module_name or link_field_name are incorrect.
result.deleted	Integer	The number of relationships deleted.

## Change Log

Version	Change
v2	Removed <b>set_relationship_value</b> parameter.
v2	Added <b>module_name</b> parameter.



v2	Added <b><i>module_id</i></b> parameter.
v2	Added <b><i>link_field_name</i></b> parameter.
v2	Added <b><i>related_ids</i></b> parameter.
v2	Added <b><i>name_value_list</i></b> parameter.
v2	Added <b><i>delete</i></b> parameter.
v2	Return type was changed from <code>error_value</code> to <b><i>new_set_relationship_list_result</i></b> .

## PHP

```

$set_relationship_parameters = array(
    //session id
    'session' => $session_id,

    //The name of the module.
    'module_name' => 'Opportunities',

    //The ID of the specified module bean.
    'module_id' => '15e79b92-5025-827f-0784-50aa578270d8',

    //The relationship name of the linked field from which to relate records.
    'link_field_name' => 'contacts',

    //The list of record ids to relate
    'related_ids' => array(
        '19b8799e-64ae-9502-588c-50aa575454c9',
    ),

    //Sets the value for relationship based fields
    'name_value_list' => array(
        array(
            'name' => 'contact_role',
            'value' => 'Other'
        )
    ),

    //Whether or not to delete the relationship. 0:create, 1:delete
    'delete'=> 0,
);

```

# set\_relationships

## Overview

Sets multiple relationships between multiple record sets.

## Available APIs

- SOAP
- REST

## Definition

set\_relationships(session, module\_names, module\_ids, link\_field\_names, related\_ids, name\_value\_lists, delete\_array)

## Parameters

Name	Type	Description
session	String	Session ID returned by a previous login call.
module_names	select_fields   Array	The list of modules from which to retrieve records. Note: This is the modules key which may not be the same as the modules display name.
module_ids	select_fields   Array	The list of IDs for the specified module records.
link_field_names	select_fields   Array	The list of link names for the related modules.
related_ids	new_set_relationship_ids   Array	The list of related record IDs you are relating.

Name	Type	Description
name_value_lists	name_value_lists   Array	An array of arrays specifying relationship fields to populate. An example of this is contact_role between Opportunities and Contacts.
delete_array	deleted_array   Array	An array determining whether the relationships are being created or deleted. 0:create, 1:delete

## Result

Name	Type	Description
result	new_set_relationship_list_result   Array	The call result.
result.created	Integer	The number of relationships created.
result.failed	Integer	Determines whether or not the relationship failed. This is normally thrown when the parameters module_name or link_field_name are incorrect.
result.deleted	Integer	The number of relationships deleted.

## Change Log

Version	Change
v2	Removed <b>set_relationship_value</b> parameter.
v2	Added <b>module_names</b> parameter.
v2	Added <b>module_ids</b> parameter.
v2	Added <b>link_field_names</b> parameter.

v2	Added <i>related_ids</i> parameter.
v2	Added <i>name_value_lists</i> parameter.
v2	Added <i>delete_array</i> parameter.
v2	Return type was changed from <i>set_relationship_list_result</i> to <i>new_set_relationship_list_result</i> .

## PHP

```

$set_relationships_parameters = array(
    //session id
    'session' => $session_id,

    //The name of the modules from which to relate records.
    'module_names' => array(
        'Opportunities',
        'Accounts',
    ),

    //The IDs of the specified module beans.
    'module_ids' => array(
        '15e79b92-5025-827f-0784-50aa578270d8', //Opportunity ID
        '27035f04-f6ec-492d-b89e-50aa57f5247f' //Account ID
    ),

    //The relationship names of the linked fields from which to relate
    records.
    'link_field_names' => array(
        'contacts', //Contacts link field to Opportunities
        'leads' //Leads link field to Accounts
    ),

    //The lists of record ids to relate
    'related_ids' => array(
        //Contact IDs
        array(
            '19b8799e-64ae-9502-588c-50aa575454c9'
        ),

        //Lead IDs
        array(
            '16d8d519-5f56-0984-2092-50aa576a7333',

```

---

```
        '15ae07eb-63f0-dbac-6e4c-50aa57c5a609'
    ),
),

//Sets the value for relationship based fields
'name_value_lists' => array(
    //Opportunity-Contact relationship fields
    array(
        array(
            'name' => 'contact_role',
            'value' => 'Other'
        ),
    ),

    //Account-Lead relationship fields
    array(),
),

//Whether or not to delete the relationships. 0:create, 1:delete
'delete_array'=> array(
    0, //Opportunity-Contact
    0 //Account-Lead
),
);
```

**Last Modified:** 2021-02-17 02:44:13

## snip\_import\_emails

### Overview

Used to imports an email record from the SNIP archiving service.

### Available APIs

- REST

### Definition

---

snip\_import\_emails(session, email)

## Parameters

Name	Type	Description
session	String	Session ID returned by a previous login call.
email	Array	The contents of the email being imported.
email.message	Array	Contains the email attributes.
email.message.message_id	String	The ID of the email message.
email.message.subject	String	Email subject.
email.message.attachments	Array	The list of attachments to be imported
email.message.from_name	String	From sender name.
email.message.description	String	Plain text content body.
email.message.description_html	String	HTML email content body.
email.message.to_addrs	String	Email addresses the email was sent to.
email.message.cc_addrs	String	Email addresses the email was CCed to.
email.message.bcc_addrs	String	Email addresses the email was BCCed to.
email.message.date_sent	String	Date the email was sent.

## Result

Name	Type	Description
result	Array	The call result.
result.results	Boolean	The success of the import.
result.count	Integer	The count of records imported.
result.message	String	The return message.

---

## Change Log

Version	Change
v4	Added <i>snip_import_emails</i> method.

Last Modified: 2021-02-17 02:44:13

## snip\_update\_contacts

### Overview

Retrieves new contact emails since a timestamp for the current user.

### Available APIs

- REST

### Definition

snip\_update\_contacts(session, report\_id)

### Parameters

Name	Type	Description
session	String	Session ID returned by a previous login call.
report_id	String	The ID of the report record to generate the PDF for.

---

## Result

Name	Type	Description
result	Array	The call result.
result.results	Boolean	The new emails.
result.count	Integer	The count of results.
result.message	String	The return message.

## Change Log

Version	Change
v4	Added <b><i>snip_update_contacts</i></b> method.

Last Modified: 2021-02-17 02:44:13

## Extending v1 - v4.1 Web Services

### Overview

The guide will demonstrate how to add your own custom methods to the REST and SOAP API or extend existing ones. It is important to note that this customization is not supported on Sugar's cloud service and it is recommended to [extend the latest endpoints](#) instead.

### Extending the API

The following example will demonstrate how to extend the v4\_1 API.

### Defining the Entry Point Location

This is where you define the directory that will contain your new REST and SOAP entry points. We recommend a path formatted as follows:



---

```
./custom/service/{version}_custom/
```

The actual location of the entry points does not matter, however, using a path such as this will allow you to call your entry points as follows:

- [http://{sugar\\_url}/custom/service/{version}\\_custom/rest.php](http://{sugar_url}/custom/service/{version}_custom/rest.php)
- [http://{sugar\\_url}/custom/service/{version}\\_custom/soap.php](http://{sugar_url}/custom/service/{version}_custom/soap.php)

## Define the SugarWebServiceImpl Class

The next step is to define a new SugarWebServiceImpl class. Since we are using v4\_1, we need to extend ./service/v4\_1/SugarWebServiceImplv4\_1.php and add our new method. To do this, we will create the file:

```
./custom/service/v4_1_custom/SugarWebServiceImplv4_1_custom.php
```

```
<?php
```

```
    if(!defined('sugarEntry'))define('sugarEntry', true);

    require_once('service/v4_1/SugarWebServiceImplv4_1.php');

    class SugarWebServiceImplv4_1_custom extends SugarWebServiceImplv4
_1
    {
        /*
        * Returns the session id if authenticated
        *
        * @param string $session
        * @return string $session - false if invalid.
        *
        */
        function example_method($session)
        {
            $GLOBALS['log']->info('Begin: SugarWebServiceImplv4_1_cust
om->example_method');
            $error = new SoapError();

            //authenticate
            if (!self::$helperObject->checkSessionAndModuleAccess($ses
sion, 'invalid_session', '', '', '', $error))
            {
                $GLOBALS['log']->info('End: SugarWebServiceImplv4_1_cu
stom->example_method.');
```

---

```
        }
        return $session;
    }
}
?>
```

## Define the Registry Class

Next, we will define the registry class that will register our new function. This file will be located at:

`./custom/service/v4_1_custom/registry.php`

```
<?php

require_once('service/v4_1/registry.php');

class registry_v4_1_custom extends registry_v4_1
{
    protected function registerFunction()
    {
        parent::registerFunction();
        $this->serviceClass->registerFunction('example_method', array('session'=>'xsd:string'), array('return'=>'xsd:string'));
    }
}

?>
```

## Define the REST Entry Point

This REST entry point will be located at:

`./custom/service/v4_1_custom/rest.php`

```
<?php
if(!defined('sugarEntry'))define('sugarEntry', true);

chdir('.../.../...');
require 'include/entryPoint.php';
require_once('SugarWebServiceImplv4_1_custom.php');
```

---

```
$webservice_path = 'service/core/SugarRestService.php';
$webservice_class = 'SugarRestService';
$webservice_impl_class = 'SugarWebServiceImplv4_1_custom';

$registry_path = 'custom/service/v4_1_custom/registry.php';
$registry_class = 'registry_v4_1_custom';

$location = 'custom/service/v4_1_custom/rest.php';

require_once('service/core/webservice.php');
```

?>

## Define the SOAP Entry Point

This SOAP entry point will be located at:

`./custom/service/v4_1_custom/soap.php`

```
<?php
    if(!defined('sugarEntry'))define('sugarEntry', true);

    chdir('../..');
    require 'include/entryPoint.php';
    require_once('SugarWebServiceImplv4_1_custom.php');

    $webservice_class = 'SugarSoapService2';
    $webservice_path = 'service/v2/SugarSoapService2.php';
    $webservice_impl_class = 'SugarWebServiceImplv4_1_custom';

    $registry_class = 'registry_v4_1_custom';
    $registry_path = 'custom/service/v4_1_custom/registry.php';

    $location = 'custom/service/v4_1_custom/soap.php';

    require_once('service/core/webservice.php');
```

?>

**Last Modified:** 2021-02-17 02:44:13

---

# REST Release Notes

## Overview

Lists changes between the different versions of the REST API.

## Release Notes

### v4\_1

- `get_modified_relationships` method was added.
- `get_relationships` had the parameter `$limit` added.
- `get_relationships` had the parameter `$offset` added.

### v4

- `get_entries` had the parameter `$track_view` removed.
- `job_queue_cycle` method was added.
- `job_queue_next` method was added.
- `job_queue_run` method was added.
- `oauth_access` method was added.
- `oauth_access_token` method was added.
- `oauth_request_token` method was added.
- `search_by_module` had the parameter `$favorites` added.
- `snip_import_emails` method was added.
- `snip_update_contacts` method was added.

### v3\_1

- `get_entries` had the parameter `$track_view` added.
- `get_entry` had the parameter `$track_view` added.
- `get_entry_list` had the parameter `$favorites` added.
- `get_language_definition` method was added.
- `get_module_layout` had the parameter `$acl_check` added.
- `get_module_layout_md5` had the parameter `$acl_check` added.
- `get_quotes_pdf` method was added.
- `get_report_pdf` method was added.
- `search_by_module` had the parameter `$unified_search_only` added.
- `set_entry` had the parameter `$track_view` added.

---

## v3

- `get_available_modules` had the parameter `$filter` added.
- `get_last_viewed` method was added.
- `get_module_fields_md5` method was added.
- `get_module_layout` method was added.
- `get_module_layout_md5` method was added.
- `get_relationships` had the parameter `$order_by` added.
- `get_upcoming_activities` method was added.
- `search_by_module` had the parameter `$assigned_user_id` added.
- `search_by_module` had the parameter `$select_fields` added.

## v2\_1

- `get_entry_list` method logic was modified.
- `get_report_entries` method logic was modified.
- `md5` method was removed.

## v2 (REST API was introduced into SugarCRM)

- `get_available_modules` method was added.
- `get_document_revision` method was added.
- `get_entries` method was added.
- `get_entries_count` method was added.
- `get_entry` method was added.
- `get_entry_list` method was added.
- `get_module_fields` method was added.
- `get_note_attachment` method was added.
- `get_relationships` method was added.
- `get_report_entries` method was added.
- `get_server_info` method was added.
- `get_user_id` method was added.
- `get_user_team_id` method was added.
- `login` method was added.
- `logout` method was added.
- `md5` method was added.
- `seamless_login` method was added.
- `search_by_module` method was added.
- `set_campaign_merge` method was added.
- `set_document_revision` method was added.
- `set_entries` method was added.
- `set_entry` method was added.
- `set_note_attachment` method was added.

- 
- set\_relationship method was added.
  - set\_relationships method was added. SOAP Release Notes

Last Modified: 2021-02-17 02:44:13

## SOAP Release Notes

### Overview

Lists changes between the different versions of the SOAP API.

### Release Notes

#### v4\_1

- get\_modified\_relationships method was added.
- get\_relationships had the parameter \$limit added.
- get\_relationships had the parameter \$offset added.

#### v4

- search\_by\_module had the parameter \$favorites added.

#### v3\_1

- get\_entries had the parameter \$track\_view added.
- get\_entry had the parameter \$track\_view added.
- get\_entry\_list had the parameter \$favorites added.
- search\_by\_module had the parameter \$unified\_search\_only added.

#### v3

- get\_available\_modules had the parameter \$filter added.
- get\_last\_viewed method was added.
- get\_module\_fields\_md5 method was added.
- get\_relationships had the parameter \$order\_by added.

- 
- `get_upcoming_activities` method was added.
  - `search_by_module` had the parameter `$assigned_user_id` added.
  - `search_by_module` had the parameter `$select_fields` added.

## v2\_1

- `get_entry_list` method logic was modified.
- `get_report_entries` method logic was modified.

## v2

- `contact_by_email` method was removed.
- `create_account` method was removed.
- `create_case` method was removed.
- `create_contact` method was removed.
- `create_lead` method was removed.
- `create_opportunity` method was removed.
- `create_session` method was removed.
- `end_session` method was removed.
- `get_attendee_list` method was removed.
- `get_contact_relationships` method was removed.
- `get_disc_client_file_list` method was removed.
- `get_document_revision` return type was changed from `return_document_revision` to `new_return_document_revision`.
- `get_encoded_file` method was removed.
- `get_encoded_portal_zip_file` method was removed.
- `get_encoded_zip_file` method was removed.
- `get_entries` had the parameter `$link_name_to_fields_array` added.
- `get_entries` return type was changed from `get_entry_result` to `get_entry_result_version2`.
- `get_entry` had the parameter `$link_name_to_fields_array` added.
- `get_entry` return type was changed from `get_entry_result` to `get_entry_result_version2`.
- `get_entry_list` had the parameter `$link_name_to_fields_array` added.
- `get_entry_list` return type was changed from `get_entry_list_result` to `get_entry_list_result_version2`.
- `get_gmt_time` method was removed.
- `get_mailmerge_document` method was removed.
- `get_mailmerge_document2` method was removed.
- `get_modified_entries` method was removed.
- `get_module_fields` had the parameter `$fields` added.
- `get_module_fields` return type was changed from `module_fields` to `new_module_fields`.

- 
- `get_note_attachment` return type was changed from `return_note_attachment` to `new_return_note_attachment`.
  - `get_quick_sync_data` method was removed.
  - `get_related_notes` method was removed.
  - `get_relationships` had the parameter `$link_field_name` added.
  - `get_relationships` had the parameter `$related_fields` added.
  - `get_relationships` had the parameter `$related_module` removed.
  - `get_relationships` had the parameter `$related_module_link_name_to_fields_array` added.
  - `get_relationships` return type was changed from `get_relationships_result` to `get_entry_result_version2`.
  - `get_report_entries` method was added.
  - `get_required_upgrades` method was removed.
  - `get_server_info` method was added.
  - `get_server_time` method was removed.
  - `get_server_version` method was removed.
  - `get_sugar_flavor` method was removed.
  - `get_system_status` method was removed.
  - `get_unique_system_id` method was removed.
  - `is_loopback` method was removed.
  - `is_user_admin` method was removed.
  - `login` had the parameter `$name_value_list` added.
  - `login` return type was changed from `set_entry_result` to `entry_value`.
  - `logout` return type was changed from `error_value` to `void`.
  - `offline_client_available` method was removed.
  - `relate_note_to_module` method was removed.
  - `search` method was removed.
  - `search_by_module` had the parameter `$password` removed.
  - `search_by_module` had the parameter `$session` added.
  - `search_by_module` had the parameter `$user_name` removed.
  - `search_by_module` return type was changed from `get_entry_list_result` to `return_search_result`.
  - `set_campaign_merge` return type was changed from `error_value` to `void`.
  - `set_document_revision` return type was changed from `set_entry_result` to `new_set_entry_result`.
  - `set_entries` return type was changed from `set_entries_result` to `new_set_entries_result`.
  - `set_entries_details` method was removed.
  - `set_entry` return type was changed from `set_entry_result` to `new_set_entry_result`.
  - `set_note_attachment` had the parameter `$note` type change from `note_attachment` to `new_note_attachment`.
  - `set_note_attachment` return type was changed from `set_entry_result` to `new_set_entry_result`.
  - `set_relationship` had the parameter `$delete` added.
  - `set_relationship` had the parameter `$link_field_name` added.



- 
- `set_relationship` had the parameter `$module_id` added.
  - `set_relationship` had the parameter `$module_name` added.
  - `set_relationship` had the parameter `$name_value_list` added.
  - `set_relationship` had the parameter `$related_ids` added.
  - `set_relationship` had the parameter `$set_relationship_value` removed.
  - `set_relationship` return type was changed from `error_value` to `new_set_relationship_list_result`.
  - `set_relationships` had the parameter `$delete_array` added.
  - `set_relationships` had the parameter `$link_field_names` added.
  - `set_relationships` had the parameter `$module_ids` added.
  - `set_relationships` had the parameter `$module_names` added.
  - `set_relationships` had the parameter `$name_value_lists` added.
  - `set_relationships` had the parameter `$related_ids` added.
  - `set_relationships` had the parameter `$set_relationship_list` removed.
  - `set_relationships` return type was changed from `set_relationship_list_result` to `new_set_relationship_list_result`.
  - `sudo_user` method was removed.
  - `sync_get_entries` method was removed.
  - `sync_get_modified_relationships` method was removed.
  - `sync_get_relationships` method was removed.
  - `sync_set_entries` method was removed.
  - `sync_set_relationships` method was removed.
  - `track_email` method was removed.
  - `update_portal_user` method was removed.
  - `user_list` method was removed.

**Last Modified:** 2021-02-17 02:44:13

## SugarHttpClient

### Overview

The `SugarHttpClient` class is used to make REST calls.

### The `SugarHttpClient` Class

The `SugarHttpClient` class is located in `'include/SugarHttpClient.php'`. It contains a `callRest()` method that will allow you to post a request to a REST service via cURL without having to worry about the overhead or the restrictions on the `file_get_contents()` method when doing outbound webservice calls.

---

## Making a Request

```
<?php

// specify the REST web service to interact with
$url = 'http://{sugar_url}/service/v4_1/rest.php';

// Open a SugarHttpClient session for making the call
require_once('include/SugarHttpClient.php');
$client = new SugarHttpClient;

// Set the POST arguments to pass to the Sugar server
$parameters = array(
    'user_auth' => array(
        'user_name' => 'username',
        'password' => md5('password'),
    ),
);

$json = json_encode($parameters);

$postArgs = array(
    'method' => 'login',
    'input_type' => 'JSON',
    'response_type' => 'JSON',
    'rest_data' => $json,
);

$postArgs = http_build_query($postArgs);

// Make the REST call, returning the result
$response = $client->callRest($url, $postArgs);

if ( $response === false )
{
    die("Request failed.\n");
}

// Convert the result from JSON format to a PHP array
$result = json_decode($response);

if ( !is_object($result) )
{
    die("Error handling result.\n");
}
```

---

```
if ( !isset($result->id) )
{
    die("Error: {$result->name} - {$result->description}\n.");
}

// Get the session id
$sessionId = $result->id;

?>
```

**Last Modified:** 2021-02-17 02:44:13

## ExternalResourceClient

### Overview

In Sugar 12.1, ExternalResourceClient was introduced to replace cURL. This has also been backported to all supported versions of Sugar. Therefore any apps or integrations for Sugar that use a Module Loadable Package (MLP) that includes any of the PHP `curl_*`, `socket_*`, or `stream_*` functions will need to change to use the ExternalResourceClient lib.

### Self-Signed Certificates

ExternalResourceClient is designed to be as secure as possible. We will not support disabling the check for authenticity of the peer's certificate as you could in cURL with using the `CURLOPT_SSL_VERIFYPEER` option. This is not a security best practice and is therefore not allowed in the new client.

If your target URL has an invalid or [self-signed certificate](#), you can benefit from using [Let's Encrypt](#). Let's Encrypt is a free, automated, and open Certificate Authority (CA) that makes it possible to set up an HTTPS server and have it automatically obtain a browser-trusted certificate without any human intervention. You can get started [here](#).

### IP vs Domain/Hostnames via DNS

---

ExternalResourceClient does not support using an IP address in your URL. Editing /etc/hosts on your server is a very easy and fast way of accomplishing this, but if that is not an option and you have a proper DNS server configured, you can use one of the following articles to help you understand what DNS is and how you can configure them in different OSs and infrastructures.

- [Build your own DNS server on Linux](#)
- [DNS Configuration: Everything You Need to Know](#)
- [How to Setup DNS Server on Windows Server 2012](#)

## Local Endpoints

If you do not know what server-side request forgery (SSRF) is, please refer to [this detailed explanation and examples](#) of how an attacker can reach your local network using malicious HTTP requests.

ExternalResourceClient prevents this type of attack by taking the resolved IP from your URL and checking against a Sugar Config `$sugar_config['security']['private_ips']` array list.

This list contains a wide range of internal IPs blocked by default [ '10.0.0.0|10.255.255.255', '172.16.0.0|172.31.255.255', '192.168.0.0|192.168.255.255', '169.254.0.0|169.254.255.255', '127.0.0.0|127.255.255.255' ] .

For example, if your URL is `http://an-internal-url/api/get` and "an-internal-url" resolves to an IP 10.0.0.87, it will throw an exception because it is within the range of your config.

Add your critical IP ranges to this config so no attacker will get to sensitive IPs through ExternalResourceClient's HTTP Request.

## Sugar Proxy

To get proxy settings, ExternalResourceClient relies on `Administration::getSettings('proxy')`. This utility queries Sugar's infrastructure (cache or DB) to retrieve those settings, therefore it needs to be bootstrapped into SugarCRM.

In the case of MLPs that use standard modules via the web, you don't need to manually bootstrap SugarCRM, so you may use ExternalResourceClient in your methods without requiring `entryPoint.php`

---

If you are writing a CLI script, you must include SugarCRM `entryPoint.php`:

```
<?php
if (!defined('sugarEntry')) {
    define('sugarEntry', true);
}

define('ENTRY_POINT_TYPE', 'api');
require_once 'include/entryPoint.php';

?>
```

## Test your customization

You can easily test your package by enabling PackageScanner checks in the supported versions for now (`$sugar_config['moduleInstaller']['enableEnhancedModuleChecks'] = true`), remember, it comes disabled by default in 12.1.

If your code doesn't go through PackageScanner, it will not be enforced, that's the premise we're working with.

## Examples of Replacing cURL

The below examples can be used as a guideline for replacing your current cURL code with `ExternalResourceClient`.

You must import this client and its exceptions (if needed) from:

```
<?php

use Sugarcrm\Sugarcrm\Security\HttpClient\ExternalResourceClient;
use Sugarcrm\Sugarcrm\Security\HttpClient\RequestException;
```

### HTTP GET

The following code snippet provides you with a code replacement from cURL GET to `ExternalResourceClient`.

Before:

```
// cURL GET
```

---

```

$ch = curl_init();

$url = 'https://httpbin.org/get';
curl_setopt_array($ch, array(
    CURLOPT_URL => $url,
    CURLOPT_RETURNTRANSFER => true,
    CURLOPT_ENCODING => "",
    CURLOPT_MAXREDIRS => 10,
    CURLOPT_TIMEOUT => 60,
    CURLOPT_FOLLOWLOCATION => true,
    CURLOPT_HTTP_VERSION => CURL_HTTP_VERSION_2TLS,
));

$response = curl_exec($ch);

$httpCode = curl_getinfo($ch, CURLINFO_HTTP_CODE);
$errorNo = curl_errno($ch);
$error = curl_error($ch);

if ($errorNo !== 0) {
    $GLOBALS['log']->log("fatal", "curl error ($errorNo): $error");
    throw new \SugarApiExceptionError("curl error ($errorNo): $error")
;
}

curl_close($ch);

if ($httpCode === 0 || $httpCode >= 400) {
    $GLOBALS['log']->log("fatal", "Error message: $error");
    throw new \SugarApiException($error, null, null, $httpCode ? $http
Code : 500);
}

echo $response;

```

**After:**

```

// ExternalResourceClient GET
try {
    // Set timeout to 60 seconds and 10 max redirects
    $response = (new ExternalResourceClient(60, 10))->get($url);
} catch (RequestException $e) {
    $GLOBALS['log']->log('fatal', 'Error: ' . $e->getMessage());
    throw new \SugarApiExceptionError($e->getMessage());
}
$httpCode = $response->getStatusCode();

```

---

```
if ($statusCode >= 400) {
    $GLOBALS['log']->log("fatal", "Request failed with status: " . $statusCode);
    throw new \SugarApiException("Request failed with status: " . $statusCode, null, null, $statusCode);
}
echo $response->getBody()->getContents();
```

## HTTP POST

The following code snippet provides you with a code replacement from cURL POST to ExternalResourceClient.

Before:

```
// cURL POST JSON
$url = 'https://httpbin.org/post';

$ch = curl_init($url);
curl_setopt($ch, CURLOPT_POST, 1);
curl_setopt($ch, CURLOPT_RETURNTRANSFER, 1);
curl_setopt($ch, CURLOPT_SSL_VERIFYHOST, 2);
curl_setopt($ch, CURLOPT_SSL_VERIFYPEER, 1);
curl_setopt($ch, CURLOPT_HTTPHEADER, array("Content-Type: application/json"));
curl_setopt($ch, CURLOPT_POSTFIELDS, json_encode(['foo' => 'bar']));

$response = curl_exec($ch);
curl_close($ch);
$parsed = !empty($response) ? json_decode($response, true) : null;
var_dump($parsed);
```

After:

```
// ExternalResourceClient POST JSON
try {
    $response = (new ExternalResourceClient())->post($url, json_encode(['foo' => 'bar']), ['Content-Type' => "application/json"]);
} catch (RequestException $e) {
    throw new \SugarApiExceptionError($e->getMessage());
}

$parsed = !empty($response) ? json_decode($response->getBody()->getContents(), true) : null;
var_dump($parsed);
```

---

## Authenticated Endpoints (CURLOPT\_USERPWD)

The following code snippet provides you with a code replacement from cURL to ExternalResourceClient passing authentication params.

Before:

```
$username = 'foo';
$password = 'bar';
$url = 'https://httpbin.org/basic-auth/{$username}/{$password}';

$ch = curl_init($url);
curl_setopt($ch, CURLOPT_USERPWD, $username . $password);
curl_setopt($ch, CURLOPT_RETURNTRANSFER, 1);
curl_setopt($ch, CURLOPT_SSL_VERIFYHOST, 2);
curl_setopt($ch, CURLOPT_SSL_VERIFYPEER, 1);
curl_setopt($ch, CURLOPT_POSTFIELDS, json_encode(['foo' => 'bar']));

$response = curl_exec($ch);
curl_close($ch);
$parsed = !empty($response) ? json_decode($response, true) : null;
var_dump($parsed);
```

After:

```
$username = 'foo';
$password = 'bar';
$auth     = base64_encode( "{$username}:{$password}" );
//Passing custom 'Authorization' header
// try + catch is omitted for brevity
$response = (new ExternalResourceClient())->get("https://httpbin.org/basic-auth/{$username}/{$password}", [
    'Authorization' => 'Basic ' . $auth,
]);
echo $response->getBody()->getContents();

// OR the same by using user:password@hostname.tld URL format
// try + catch is omitted for brevity
$response = (new ExternalResourceClient())->get("https://{username}:{password}@httpbin.org/basic-auth/{username}/{password}");
echo $response->getBody()->getContents();
```

## Stream



---

The following code snippet provides you with a code replacement from stream to ExternalResourceClient.

**Before:**

```
<?php
// Sending GET
if ($stream = fopen('https://httpbin.org/get', 'r')) {
    echo stream_get_contents($stream);
}

// Sending POST
$options = [
    'http' => [
        'method' => 'POST',
        'header' => ["Content-Type: application/x-www-form-
urlencoded"],
        'content' => http_build_query(['fieldName' => 'value', 'fieldN
ame2' => 'another value']),
        'ignore_errors' => true,
    ],
];
$context = stream_context_create($options);
if ($stream = fopen('https://httpbin.org/post', 'r', false, $context))
{
    echo stream_get_contents($stream);
}
```

**After:**

```
// Using ExternalResourceClient
// GET
echo (new ExternalResourceClient())
->get('https://httpbin.org/get')
->getBody()
->getContents();
// POST
echo (new ExternalResourceClient())
->post(
'https://httpbin.org/post',
['fieldName' => 'value', 'fieldName2' => 'another value']
)
->getBody()
->getContents();
```

---

## Socket

The following code snippet provides you with a code replacement from socket to ExternalResourceClient.

Before:

```
<?php

// Sending GET
$fp = fsockopen("httpbin.org", 80, $errno, $errstr, 30);
if (!$fp) {
    echo "$errstr ($errno)\n";
} else {
    $out = "GET /get HTTP/1.1\r\n";
    $out .= "Host: httpbin.org\r\n";
    $out .= "Connection: Close\r\n\r\n";
    fwrite($fp, $out);
    while (!feof($fp)) {
        echo fgets($fp, 128);
    }
    fclose($fp);
}

// Sending POST

$fp = fsockopen("httpbin.org", 80, $errno, $errstr, 30);
if (!$fp) {
    echo "$errstr ($errno)\n";
} else {
    $postData = http_build_query(['fieldName' => 'value', 'fieldName2'
=> 'another value']);
    $out = "POST /post HTTP/1.1\r\n";
    $out .= "Host: httpbin.org\r\n";
    $out .= "Content-type: application/x-www-form-urlencoded\r\n";
    $out .= "Content-length: " . strlen($postData) . "\r\n";
    $out .= "Connection: Close\r\n\r\n";
    $out .= "{$postData}\r\n\r\n";
    fwrite($fp, $out);
    while (!feof($fp)) {
        echo fgets($fp, 128);
    }
    fclose($fp);
}
```

After:

---

```
// Using ExternalResourceClient
// GET
echo (new ExternalResourceClient())
->get('http://httpbin.org/get')
->getBody()
->getContents();
// POST
echo (new ExternalResourceClient())
->post(
'http://httpbin.org/post',
['fieldName' => 'value', 'fieldName2' => 'another value']
)
->getBody()
->getContents();
```

## Upload a file

The following code snippet provides you with a code example using ExternalResourceClient to upload files from Sugar.

```
// Uploading files from `upload` directory
// File data will be accessible on the target server as $_FILES['file_
field_name']
echo 'File upload', PHP_EOL, PHP_EOL;
$file = new UploadFile('file_field_name');
// relative to `upload` directory
$filename = 'f68/2cad6f68-e016-11ec-9c9c-0242ac140007';
$file->temp_file_location = $file->get_upload_path($filename);
// try + catch is omitted for brevity
echo (new ExternalResourceClient())->upload(
    $file,
    'https://httpbin.org/post',
    'POST',
    ['foo' => 'bar'], // Optional, additional form data
    ['custom-header-name' => 'custom-header-
value'] // Optional, additional headers
)->getBody()->getContents();
```

**Last Modified:** 2022-08-18 12:51:57

## Migration

---

Migrating Sugar instances and external data.

**Last Modified:** 2021-02-17 02:44:13

## Migrating From On-Site to SugarCloud

### Overview

The following article describes the process of migrating an on-site deployment to the SugarCloud environment.

### Prerequisites

A few requirements must be met before an instance can be migrated to the SugarCloud environment:

- The on-site deployment must be running MySQL. If you are using SQL Server or Oracle, you will need to speak with your Sugar Customer Advocate about data migration options.
- The instance must be updated to a supported version of Sugar. Refer to the [Managing Your Sugar Subscription](#) article for information on determining your Sugar version. Once identified, you can check your version against our [Supported Versions](#).

### Migration

Once the above requirements have been met you are ready to migrate.

### Case Portal

Inform Sugar Support of your intention to migrate by [opening a support case](#). They will provide you with an FTP site and a set of credentials so you can transfer your instance. Sugar Support will expect you to provide two files. One file will be an archive (zip, tar, etc.) containing all the files and folders of your Sugar instance. The second file will be an export of your SQL database; it is a good idea to archive the resulting SQL export as well.

---

## Files and Folders

You should be aware of the location of your Sugar instance on your on-site server. If you do not, you can locate the path to your instance by navigating to Admin > Schedulers.

Once there, you should see something similar to this:

### To Set Up Crontab

Note: In order to run Sugar Schedulers, add the following line to the crontab file:

```
***** cd <path to sugar instance>; php -f cron.php > /dev/null 2>&1
```

Now that you have located the path to your Sugar instance, archive the entire contents of the Sugar root directory using the archive utility of your choice (zip, tar, WinZip, WinRar, 7zip, etc.). The Sugar root directory is the directory that contains the files config.php, cron.php, sugarcrm.log, and the folders custom, cache, and modules among others.

## Database

The following describes how to export a MySQL database using the command line utility "mysqldump". If you prefer, you may choose to use a tool such as phpMyAdmin to export your database. The command to export a MySQL database is:

```
mysqldump -h localhost -u [MySQL user, e.g. root] -p[database password] [name of the database] > backup.sql
```

If you do not know the host, username, password, or database name you may refer to the "config.php" file of your Sugar instance. The "dbconfig" array in the "config.php" file contains all the required information. The example above showed the following "dbconfig" array:

```
'dbconfig' => array (
    'db_host_name' => 'localhost',
    'db_host_instance' => 'SQLEXPRESS',
    'db_user_name' => 'sugarcrm',
    'db_password' => 'MyP@ssword',
    'db_name' => 'sugarcrm',
    'db_type' => 'mysql',
),
```

Using this information we can rewrite the command:

---

```
mysqldump -h localhost -u sugarcrm -pMyP@ssword sugarcrm > backup.sql
```

## Upload

Finally, upload the two files to the FTP site provided by the Sugar Support team. The instance will be deployed to the SugarCloud environment and a URL to the instance will be provided to you.

**Last Modified:** 2021-02-17 02:44:13

# Migrating From SugarCloud to On-Site

## Overview

Occasionally, system administrators will have the need to deploy versions of their instance hosted on Sugar's cloud service to an on-site system. Reasons for this type of deployment are:

- Testing locally-developed modules
- Migrating from SugarCloud to on-site

## Prerequisites

- Before migrating Sugar to an on-site environment, you will need to request a backup of your SugarCloud system by [filing a case](#) with the Sugar Support team. Once the backup request is received, SugarCRM will provide an FTP account where the following files can be downloaded:
  - instance\_name-YYYYMMDDHHmm.sql.gz (backup of database)
  - instance\_name-YYYYMMDDHHmm-triggers.sql.gz (backup of database triggers)
  - instance\_name-YYYYMMDDHHmm.files.tgz (backup of file system)
- The local system must be running MySQL. Converting the database to another system, such as SQL Server or Oracle, requires special handling. For more information regarding this type of conversion, please contact your Account Manager.
- On-site system administrators must be familiar with their stack and the tools (gunzip, tar, mysqladmin, mysql, etc.) referenced in this guide.

---

**Note:** It is the system administrator's responsibility to diagnose and troubleshoot issues specific to the stack (permissions, environment variables, etc.).

## Steps to Complete

Deploy the backup files to a local system using the following steps:

1. Extract and import the SQL data as follows:

- Extract the SQL file via an archive utility (e.g. 7-Zip) or via command line such as:

```
gunzip instance_name-YYYYMMDDHHmm.sql.gz
```

- Create a database on your MySQL server via command line:

```
mysqladmin -u mysql_username -p create instance_name
```

Or, if already logged into MySQL, with a command such as:

```
CREATE DATABASE instance_name;
```

- Import the SQL data to your MySQL server via the command line:

```
mysql -u mysql_username database_name -p < instance_name-YYYYMMDDHHmm.sql
```

- Extract the Triggers file via an archive utility (e.g. 7-Zip) or via command line such as:

```
gunzip instance_name-YYYYMMDDHHmm.triggers.sql.gz
```

- Import the Triggers data to your MySQL server via the command line:

```
mysql -u mysql_username database_name -p < instance_name-YYYYMMDDHHmm.triggers.sql
```

2. Extract the tar file to your web server's web root directory (e.g.

---

/var/www/html) with the following command:

```
tar -C /var/www/html -xzf instance_name-YYYYMMDDHHmm.files.tgz
```

This will create a directory named "instance\_name-YYYYMMDDHHmm" in your web root directory.

3. Rename the newly created directory:

```
mv /var/www/html/instance_name-  
YYYYMMDDHHmm /var/www/html/instance_name
```

4. For Linux-based servers, perform the following actions:

- Change the ownership of the directory to be accessible by the Apache user and group. Please note that the user and group (e.g. apache, www-data, etc.) values can vary depending on your web server configuration.

```
chown -R apache:apache /var/www/html/instance_name
```

- Change the permissions of the directory to ensure files can be accessed by the application. The actual permission values may differ depending on server security settings.

```
chmod -R 770 /var/www/html/instance_name
```

5. Edit the ./config.php file to point to your database.

- Open the ./config.php file:

```
vi /var/www/html/instance_name/config.php
```

- Locate and update the dbconfig array with the information appropriate for your MySQL server as follows:

```
'dbconfig' => array (  
  'db_host_name' => 'localhost',  
  'db_host_instance' => 'SQLEXPRESS',  
  'db_user_name' => 'mysql_username',  
  'db_password' => 'mysql_password',  
  'db_name' => 'instance_name',  
  'db_type' => 'mysql',  
  'db_port' => '',
```



---

```
'db_manager' => 'MysqliManager',  
) ,
```

6. Edit the config.php file and modify the following parameters:
  - site\_url should be the URL of the instance on your server (e.g. https://www.mysugarinstance.com)
  - host\_name should be the URL of the instance without the https protocol (e.g. www.mysugarinstance.com)
7. Modify the .htaccess file in the root directory of the instance.
  - Remove the following lines if they exist in the file:

```
#Added by operations to force SSL  
RewriteEngine On  
RewriteCond %{QUERY_STRING} !^entryPoint=WebToLeadCapture  
RewriteCond %{HTTP:X-SSL-CLUSTER} !^od2$  
RewriteRule ^(.*)$ https://%{HTTP_HOST}%{REQUEST_URI} [R=3  
01,L]
```

- If your on-site deployment does not reside in the root of your domain (e.g. https://www.example.com/mysugar/), change the following line from:

```
RewriteBase /  
  
to:  
  
RewriteBase /mysugar/
```

8. If you are migrating permanently to an on-site deployment, there are additional modifications that should be made to ensure full functionality for your instance of Sugar.

- To restore the ability to perform upgrades, open the ./config.php file and remove the following line:

```
'disable_uw_upload' => true,
```

- To display the full-text search configuration options under Admin > Search, open the ./config.php file and remove the following line:

```
'hide_full_text_engine_config' => true,
```

- To display the Sugar log settings under Admin > System Settings, open the ./config.php file and remove the following line:

---

```
'logger_visible' => false,
```

- To bypass security checks when installing packages via Admin > Module Loader, open the `./config.php` file and change the following line from:

```
'packageScan' => true,
```

to:

```
'packageScan' => false,
```

- To ensure full-text search functions properly, open the `./config.php` file and modify the following lines to point to your [ElasticSearch](#) configuration:

```
'full_text_engine' => array (  
    'Elastic' => array (  
        'host' => '<your_elastic_search_host>',  
        'port' => '<your_elastic_search_port>',  
    ),  
)
```

9. Disable the [SugarCloud Insights](#) service as this is only available for SugarCloud instances. Open the `./config.php` file and change `'enabled' => true`, to `'enabled' => false`, in the following array:

```
'cloud_insight' =>  
    array (  
        'enabled' => true,  
        'url' => 'https://sugarcloud-insights.service.sugarcrm.com',  
        'key' => '<insights key>',  
    ),
```

10. Finally, please navigate to Admin > Repair and perform a "Quick Repair and Rebuild" to clear all cached elements from the SugarCloud instance.

You should now have a working version of your SugarCloud instance accessible from your local server.

# Migrating From SugarCloud to On-Site

## Overview

Occasionally, system administrators will have the need to deploy versions of their SugarCloud instance to an on-site system. Reasons for this type of deployment include:

- Testing locally developed modules
- Migrating from SugarCloud to on-site

## Prerequisites

- Before migrating Sugar to an on-site environment, you will need to request a backup of your SugarCloud system by [filing a case](#) with the Sugar Support team. Once the backup request is received, SugarCRM will provide an FTP account where the following files can be downloaded:
  - instance\_name-YYYYMMDDHHmm.sql.gz (backup of the database)
  - instance\_name-YYYYMMDDHHmm-triggers.sql.gz (backup of database triggers)
  - instance\_name-YYYYMMDDHHmm.files.tgz (backup of the file system)
- The local system must be running MySQL. Converting the database to another system, such as SQL Server or Oracle, requires special handling. For more information regarding this type of conversion, please contact your Account Manager.
- On-site system administrators must be familiar with their stack and the tools (gunzip, tar, mysqladmin, mysql, etc.) referenced in this guide.

**Note:** It is the system administrator's responsibility to diagnose and troubleshoot issues specific to the stack (permissions, environment variables, etc.).

## Steps to Complete

Deploy the backup files to a local system using the following steps:

---

1. Extract and import the SQL data as follows:

- Extract the SQL file via an archive utility (e.g. 7-Zip) or via command line such as:

```
gunzip instance_name-YYYYMMDDHHmm.sql.gz
```

- Create a database on your MySQL server via command line:

```
mysqladmin -u mysql_username -p create instance_name
```

Or, if already logged into MySQL, with a command such as:

```
CREATE DATABASE instance_name;
```

- Import the SQL data to your MySQL server via the command line:

```
mysql -u mysql_username database_name -p < instance_name-YYYYMMDDHHmm.sql
```

- Extract the Triggers file via an archive utility (e.g. 7-Zip) or via command line such as:

```
gunzip instance_name-YYYYMMDDHHmm.triggers.sql.gz
```

- Import the Triggers data to your MySQL server via the command line:

```
mysql -u mysql_username database_name -p < instance_name-YYYYMMDDHHmm.triggers.sql
```

2. Extract the tar file to your web server's web root directory (e.g. /var/www/html) with the following command:

```
tar -C /var/www/html -xzf instance_name-YYYYMMDDHHmm.files.tgz
```

This will create a directory named "instance\_name-YYYYMMDDHHmm" in your web root directory.

3. Rename the newly created directory:

---

```
mv /var/www/html/instance_name-  
YYYYMMDDHHmm /var/www/html/instance_name
```

4. For Linux-based servers, perform the following actions:

- Change the ownership of the directory to be accessible by the Apache user and group. Please note that the user and group (e.g. apache, www-data, etc.) values can vary depending on your web server configuration.

```
chown -R apache:apache /var/www/html/instance_name
```

- Change the permissions of the directory to ensure files can be accessed by the application. The actual permission values may differ depending on server security settings.

```
chmod -R 770 /var/www/html/instance_name
```

5. Edit the config.php file to point to your database.

- Open the config.php file:

```
vi /var/www/html/instance_name/config.php
```

- Locate and update the dbconfig array with the information appropriate for your MySQL server as follows:

```
'dbconfig' =>  
array (  
    'db_host_name' => 'localhost',  
    'db_host_instance' => 'SQLEXPRESS',  
    'db_user_name' => 'mysql_username',  
    'db_password' => 'mysql_password',  
    'db_name' => 'instance_name',  
    'db_type' => 'mysql',  
    'db_port' => '',  
    'db_manager' => 'MysqliManager',  
)
```

6. Edit the config.php file and modify the following parameters:

- site\_url should be the URL of the instance on your server (e.g. <https://www.mysugarinstance.com>)
- host\_name should be the URL of the instance without the https protocol (e.g. [www.mysugarinstance.com](http://www.mysugarinstance.com))

---

7. Modify the `.htaccess` file in the root directory of the instance.

- Remove the following lines if they exist in the file:

```
#Added by operations to force SSL
RewriteEngine On
RewriteCond %{QUERY_STRING} !^entryPoint=WebToLeadCapture
RewriteCond %{HTTP:X-SSL-CLUSTER} !^od2$
RewriteRule ^(.*)$ https://%{HTTP_HOST}%{REQUEST_URI} [R=301,L]
```

- If your on-site deployment does not reside in the root of your domain (e.g. `https://www.example.com/mysugar/`), change the following line from:

```
RewriteBase /
```

to:

```
RewriteBase /mysugar/
```

8. If you are migrating permanently to an on-site deployment, there are additional modifications that should be made to ensure full functionality for your instance of Sugar.

- To restore the ability to perform ad-hoc file backups, open the `./config.php` file and remove the following line:

```
'hide_admin_backup' => true,
```

- To restore the ability to perform upgrades, open the `./config.php` file and remove the following line:

```
'disable_uw_upload' => true,
```

- To display the full-text search configuration options under Admin > Search, open the `./config.php` file and remove the following line:

```
'hide_full_text_engine_config' => true,
```

- To display the Sugar log settings under Admin > System Settings, open the `./config.php` file and remove the following line:

---

```
'logger_visible' => false,
```

- To bypass security checks when installing packages via Admin > Module Loader, open the `./config.php` file and change the following line from:

```
'packageScan' => true,
```

to:

```
'packageScan' => false,
```

- To ensure full-text search functions properly, open the `./config.php` file and modify the following lines to point to your [ElasticSearch](#) configuration:

```
'full_text_engine' =>
array (
  'Elastic' =>
array (
  'host' => '<your_elastic_search_host>',
  'port' => '<your_elastic_search_port>',
),
),
```

9. Finally, please navigate to Admin > Repair and perform a "Quick Repair and Rebuild" to clear all cached elements from the cloud instance.

You should now have a working version of your SugarCloud instance accessible from your local server.

**Last Modified:** 2021-02-17 02:44:13

## **Migrating From a Broken Instance to a Clean Install**

---

## Overview

The following article describes the process of migrating a potentially broken instance to a clean install.

This is beneficial in the use case of corrupted core files. This will not correct issues caused by broken customizations.

## Requirements

To migrate your instance to a clean install you will need to do the following:

- Have full permissions to modify the system files.
- Identify your Sugar version. The version of your instance can be found by navigating to the About page in your SugarCRM instance from the global links menu.
- Once you have identified your Sugar version, you will need to download the full installer package of your Sugar version from your account's [Downloads page](#).
- If you are on 11.0.6 Pro, you must download the SugarPro-11.0.6.zip package or the migration will not work.

## Migrating to a New Instance

1. Make a complete backup of your broken instance. This includes both the filesystem and database.
2. Extract the contents of your downloaded Sugar package ( Sugar<Edition>-<Version>.zip ) to your web directory. This will be your clean Sugar directory that we will migrate your existing instance to.
3. You will then need to copy the following directories and files from your broken instance to the clean instance:
  - ./config.php
  - ./config\_override.php (if it exists)
  - ./custom/
  - ./upload/
  - ./cache/images/ - This is optional and contains the embedded emails displayed in the UI.
  - **Note:** If you are on a version prior to 6.4.0, you will also need to copy over the entire ./cache/ directory.
4. Next, you will need to identify if you have any custom modules. These folders will reside in your ./modules/ directory and have a naming format of <key>\_<module name>. You will need to copy these files to their corresponding directory in the clean instance you extracted in step 2.



- 
5. Once the files have been moved to the clean instance, you can remove your old instances files and move the clean instance in its place. If you choose to move the instance to a new location on the server, you will need to update the `$sugar_config['site_url']` parameter in your `./config.php` and/or `./config_override.php` files.
  6. Reset your filesystem permissions.
  7. Log into your instance as an administrator and navigate to Admin > Repair > Quick Repair and Rebuild.

**Last Modified:** 2021-02-17 02:44:13

## Importing Records

Covers the Sugar structure when migrating data into the application.

**Last Modified:** 2021-02-17 02:44:13

## Importing Email Addresses

### Overview

Recommended approaches when Importing email addresses.

### Importing via API

Sugar comes out of the box with an API that can be called from custom applications utilizing the REST interface. The API can be used to mass create and update records in Sugar with external data. For more information on the REST API in Sugar, please refer to the [Web Services](#) documentation.

### Importing New Records

When importing new records into Sugar through the API, modules with relationships to email addresses can utilize the `email1` field or the `email link` field to specify email addresses for a record.

---

## Email1 Field

When using the email1 field, the default functionality is to import the email address specified as the primary address. Assuming the email address does not already exist in the database, the email address is then flagged as being valid and is not opted out. Using the /<module> **POST** endpoint, you can send the following JSON payload to create a contact record with a primary email address using the email1 field:

POST URL: http://<site url>/rest/v10/Contacts

```
{
  "first_name": "Rob",
  "last_name": "Robertson",
  "email1": "rob.robertson@sugar.crm"
}
```

**Note:** For importing multiple email addresses, you will need to use the email link field described below.

## Email Link Field

When using the email link field, you can specify multiple email addresses to assign to the record. You may specify the following additional information regarding each email address being added:

- **invalid\_email** : Specify this email address as being invalid
- **opt\_out** : Specify this email address as being opted out
- **primary\_address** : Specify this email address as the primary

Using the /<module> **POST** endpoint, you can send the following JSON payload to create a contact record with multiple email addresses using the email link field:

POST URL: http://<site url>/rest/v10/Contacts

```
{
  "first_name": "Rob",
  "last_name": "Robertson",
  "email": [
    {
      "email_address": "rob.robertson@sugar.crm",
      "primary_address": "1",
      "invalid_email": "0",
      "opt_out": "0"
    },
    {

```

---

```
        "email_address": "rob@sugar.crm",
        "primary_address": "0",
        "invalid_email": "0",
        "opt_out": "1"
    }
]
}
```

For more information on the `/<module>:record POST` endpoint, you can refer to your instance's help documentation found at:

`http://<site url>/rest/v10/help`

Or you can reference the [<module> POST](#) PHP example.

## Updating Existing Records

When updating existing records in Sugar through the API, modules with relationships to email addresses can also utilize the `email1` field or the `email link` field to specify email addresses for a record.

### Email1 Field

When using the `email1` field, the default functionality is to replace the existing email primary address. Assuming the email does not already exist in the database, the new email address is flagged as being valid and is not opted out. Using the `/<module>:record PUT` endpoint, you can send the following JSON payload to update a contact records primary email address:

PUT URL: `http://<site url>/rest/v10/Contacts/<record id>`

```
{
  "email1": "rob.robertson@sugar.crm"
}
```

**Note:** This will replace the current email address on the record with the new data. The old email address will no longer be associated with the record.

### Email Link Field

When using the `email link` field, you can specify multiple email addresses to update the record with. You may specify the following additional information regarding each email address being added:

- 
- **invalid\_email** : Specify this email address as being invalid
  - **opt\_out** : Specify this email address as being opted out
  - **primary\_address** : Specify this email address as the primary

Using the **/<module>/:record PUT** endpoint, you can send the following JSON payload to update a contact record with multiple email addresses:

PUT URL: `http://<site url>/rest/v10/Contacts/<record id>`

```
{
  "email": [
    {
      "email_address": "rob.robertson@sugar.crm",
      "primary_address": "1",
      "invalid_email": "0",
      "opt_out": "0"
    },
    {
      "email_address": "rob@sugar.crm",
      "primary_address": "0",
      "invalid_email": "0",
      "opt_out": "1"
    }
  ]
}
```


For more information on the **/<module>/:record PUT** endpoint, you can refer to your instance's help documentation found at:

`http://<site url>/rest/v10/help`

Or you can reference the [<module>/:record PUT](#) PHP example.

## Importing via Database

When importing records into Sugar directly via the database, it is important that you understand the data structure involved before loading data. Email addresses are not stored directly on the table for the module being imported in, but are related via the `email_addr_bean_rel` table.

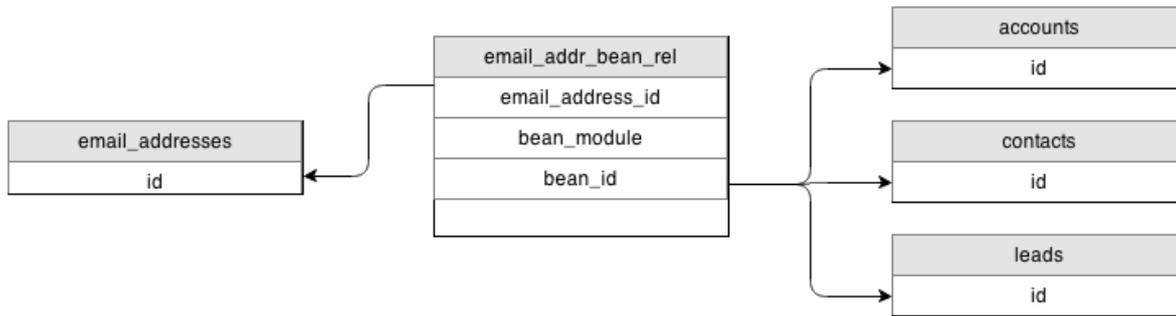

The table structure for email addresses can be seen from the database via the following SQL statement:

```
SELECT
  email_addr_bean_rel.bean_id,
  email_addr_bean_rel.bean_module,
  email_addresses.email_address
FROM email_addr_bean_rel
INNER JOIN email_addresses
  ON email_addresses.id = email_addr_bean_rel.email_address_id
  AND email_addr_bean_rel.deleted = 0
WHERE email_addresses.deleted = 0;
```

## Checking for Duplicates

Email addresses can become duplicated in Sugar from a variety of sources including API calls, imports, and from data entry. There are a few ways to have the system check for duplicate contact records, but not many of those methods work for checking email addresses for duplicates. The following section will demonstrate how to find and clean up duplicate email addresses using SQL.

The following SQL query can be used to locate if any email addresses are being used against more than one bean record within Sugar:

```
SELECT
  email_addresses.email_address,
  COUNT(*) AS email_address_count
FROM email_addr_bean_rel
INNER JOIN email_addresses
  ON email_addresses.id = email_addr_bean_rel.email_address_id
  AND email_addr_bean_rel.deleted = 0
WHERE email_addresses.deleted = 0
GROUP BY email_addresses.email_address
HAVING COUNT(*) > 1;
```

---

**Note:** If you convert a Lead record to a Contact record, both the Lead and the Contact will be related to the same Email Address and will return as having duplicates in this query. You can add the following line to the WHERE clause to filter the duplicate check down to only one bean type:

```
AND email_addr_bean_rel.bean_module = 'Contacts'
```

Email addresses can not only be duplicated in the system but can occasionally be missing critical data. Each bean record with an email address assigned to it should have an email address designated the primary. The following query will locate any bean records that have at least one email address, where there is not an email address designated as the primary:

```
SELECT
  email_addr_bean_rel.bean_module,
  email_addr_bean_rel.bean_id,
  COUNT(*) AS email_count,
  COUNT(primary_email_addr_bean_rel.id) AS primary_email_count
FROM email_addr_bean_rel
LEFT JOIN email_addr_bean_rel primary_email_addr_bean_rel
  ON primary_email_addr_bean_rel.bean_module = email_addr_bean_rel.bean_module
  AND primary_email_addr_bean_rel.bean_id = email_addr_bean_rel.bean_id
  AND primary_email_addr_bean_rel.primary_address = '1'
  AND primary_email_addr_bean_rel.deleted = '0'
WHERE email_addr_bean_rel.deleted = '0'
GROUP BY email_addr_bean_rel.bean_module,
  email_addr_bean_rel.bean_id
HAVING primary_email_count < 1;
```

## Removing Duplicates

If it is determined you have duplicate email addresses being used in your system, you can use the following query to clean up the records:

```
START TRANSACTION;
CREATE
  TABLE email_addr_bean_rel_tmp
SELECT
  *
FROM email_addr_bean_rel
WHERE deleted = '0'
GROUP BY email_address_id,
  bean_module,
  bean_id
```

---

```
ORDER BY primary_address DESC;
TRUNCATE TABLE email_addr_bean_rel;
INSERT INTO email_addr_bean_rel
  SELECT
    *
  FROM email_addr_bean_rel_tmp;
SELECT
  COUNT(*) AS repetitions,
  date_modified,
  bean_id,
  bean_module
FROM email_addr_bean_rel
WHERE deleted = '0'
GROUP BY bean_id,
  bean_module,
  email_address_id
HAVING repetitions > 1;
COMMIT;
```

**Last Modified:** 2021-02-17 02:44:13

## Security

Security documents for securing Sugars infrastructure.

**Last Modified:** 2021-02-17 02:44:13

## Endpoints and Entry Points

### Overview

This document describes how to disable out of the box REST API endpoints and legacy MVC entry points.

Advisory ID: sugarcrm-sr-2015-001

Revision: 1.1

Last updated: 2015-10-01

---

## Description

SugarCRM has both legacy entry points and REST API endpoints which are shipped out of the box. Not every customer uses all capabilities of the SugarCRM product. To harden the configuration both entry points can be disabled based on the customer's requirements.

## Legacy Entry Points

All stock entry points are defined in `include/MVC/Controller/entry_point_registry.php`. Using the SugarCRM Extension framework the configuration directives can be overridden in an upgrade safe manner. As an example consider the endpoint "removeme". To disable this endpoint use the following procedure.

Create a new php file `./custom/Extension/application/Ext/EntryPointRegistry/disable_removeme.php` and add the following content:

```
<?php

if (isset($entry_point_registry['removeme'])) {
    unset($entry_point_registry['removeme']);
}
```

Execute a quick repair and rebuild as SugarCRM administrator. The entry point is now fully disabled and no longer accessible to respond to any calls. Note that when trying to hit a non-existing (or disabled) entry point, the application will redirect you to the homepage (or login screen if the user has no session).

## REST API Endpoints

To disable the HelpAPI which is located at `clients/base/api/HelpApi.php` use the following procedure.

Create a new php file `custom/clients/base/api/CustomHelpApi.php` and add the following content:

```
<?php

require_once 'clients/base/api/HelpApi.php';

class CustomHelpApi extends HelpApi
```



---

```
{
  public function getHelp($api, $args)
  {
    throw new SugarApiExceptionNotFound();
  }
}
```

Execute a quick repair and rebuild as SugarCRM administrator. The entry point is now fully disabled. When making a REST API call to /rest/v10/help the following HTTP 404 Not Found error will be returned:

```
{
  "error": "not_found",
  "error_message": "Your requested resource was not found."
}
```

## Publication History

2015-10-01	Adding REST API endpoint example
2015-06-16	Initial publication

A stand-alone copy of this document that omits the distribution URL is an uncontrolled copy, and may lack important information or contain factual errors. SugarCRM reserves the right to change or update this document at any time.

**Last Modified:** 2021-02-17 02:44:13

## Web Server Configuration

### Overview

This document serves as a guideline to harden the web server configuration with regard to running SugarCRM. Note that this is a guideline and certain settings will depend on your specific environment and setup. This guideline focuses on Apache web server as this is SugarCRM's primary supported web server. However, the recommendations in this document apply to all web servers in general.

Advisory ID: sugarcrm-sr-2015-003

Revision: 1.1

---

Last updated: 2015-10-01

## SugarCRM .htaccess file

During installation, SugarCRM deploys an .htaccess file in SugarCRM's root folder. The content of this file may change during upgrades as well. The primary configuration directives managed by SugarCRM are focused around disabling direct access to certain directories and files. Secondly, the configuration contains specific URL rewrite rules which are required for SugarCRM.

Although this file can be used to ship most of the settings which are explained in this document to harden the web server, SugarCRM has chosen not to do so as most of them depend on the customer's setup which cannot be fully controlled by the SugarCRM application itself.

All directives which are managed by SugarCRM are placed between the following markers inside the .htaccess file:

```
# BEGIN SUGARCRM RESTRICTIONS
RedirectMatch 403 .*\.log$
...
# END SUGARCRM RESTRICTIONS
```

Customers can add additional directives if need. Make sure to put those directives outside of the above-mentioned markers. SugarCRM can rebuild during upgrades all directives enclosed in the above markers.

## Securing .htaccess

Apache allows admins to drop in .htaccess files in any given directory. When a request comes in, Apache will scan the directory recursively for any .htaccess file and apply its configuration directives. This ability is orchestrated by the AllowOverride directive which is enabled by default on most Apache configurations.

To disable this dynamic Apache configuration behavior, disable AllowOverride and make sure to copy paste the .htaccess file content as well.

```
<Directory "/var/www/html">
  AllowOverride None
  # BEGIN SUGARCRM RESTRICTIONS
  RedirectMatch 403 .*\.log$
  ...
```

---

```
# END SUGARCRM RESTRICTIONS
</Directory>
```

When choosing for this security measure, make sure to verify if any changes have happened in the .htaccess after an upgrade. Those changes need to be applied manually back in the Apache configuration to ensure SugarCRM functions properly. Disabling the .htaccess file support also has a positive impact on the performance as Apache will no longer need to scan for the presence of .htaccess files.

Although Apache does not allow to download .htaccess files, to tighten the security around .htaccess, even more, the following directives can be added:

```
<Files ".ht*">
    Order deny,allow
    Deny from all
</Files>
```

## Prevent version exposure

By default Apache web server exposes its version and OS details in most \*nix distributions in both the HTTP response headers as well as on the default error pages. To prevent this behavior use the following configuration directives:

```
ServerSignature Off
ServerTokens Prod
```

The exposure of the PHP version can be disabled in your php.ini file. When exposed an X-Powered-By response header will be added containing the PHP version information.

```
expose_php = Off
```

Another option is to unset the header explicitly in the Apache configuration:

```
<IfModule mod_headers.c>
    Header unset X-Powered-By
</IfModule>
```

Note that unsetting the Server header is not possible using this way. The web server will always respond with a Server header containing the string "Apache". If it is desired to remove this header as well, additional modules need to be used for this (i.e. mod\_security can do this).

---

## Directory listing and index page

Make sure to configure a default index page which should only be index.php for SugarCRM. This is mostly configured but worth checking. Additional SugarCRM does not require the directory browsing support and this is recommended to be disabled. This can be accomplished by removing Options Indexes and/or completely disable the mod\_autoindex module.

Optionally additional Allow/Deny directives can be used to apply access lists to certain directories. It is not recommended to add additional authentication through Apache as SugarCRM already fully manages user authentication. The Allow/Deny directives can still be used to apply any IP access list if required by the customer.

The following example secures the root directory (default configuration), disable directory browsing and an additional IP access list is applied.

```
DocumentRoot "/var/www/html"
```

```
<Directory />
    AllowOverride none
    Order allow,deny
    Deny from all
</Directory>
```

```
<Directory "/var/www/html">
    DirectoryIndex index.php
    Options -Indexes
    Order deny,allow
    Allow from 10.0.0.0/8
    Deny from all
</Directory>
```

## Additional Options directives

SugarCRM does not rely on both CGI and SSI and it is recommended to disable this functionality explicitly. Optionally the FollowSymLinks options can also be disabled depending on your directory setup.

```
<Directory "/var/www/html">
    Options -ExecCGI -Includes -FollowSymLinks
</Directory>
```

## Web server permissions

---

Ensure your web server is configured to run as a dedicated non-privileged user. Certain \*nix distributions use out of the box the user/group nobody. It is recommended to use a dedicated user/group instead.

User wwwrun

Group www

Ensure the configured user/group have the proper file and directory permissions for SugarCRM. See the installation/upgrade guide for more detailed instructions regarding the required permissions.

## Disable unnecessary loadable modules

Apache is pluggable by means of loadable modules. To minimize the chances of becoming a victim of an attack it is recommended to disable all loadable modules which are not needed. SugarCRM recommends the following base Apache modules:

- mod\_authz\_host
- mod\_dir
- mod\_expires
- mod\_rewrite
- mod\_headers
- mod\_mime
- mod\_alias

From an Apache perspective to disable a loadable module, it is sufficient to comment out the LoadModule directives. However certain \*nix distribution has additional configuration scripts to manage the loaded Apache modules. Please refer to your \*nix distribution for this.

Based on your setup additional Apache modules can be used. When using MPM prefork you will also need mod\_php5 and when terminating secure HTTP connection on the web server directly also mod\_ssl (see below).

## HTTP methods

HTTP uses different methods (verbs) in requests. As per RFC-7231 for HTTP/1.1 different request methods are defined which serve the primary source of the request semantics. The following methods are used by SugarCRM:

For new REST API:

- 
- GET
  - POST
  - PUT
  - DELETE
  - HEAD (\*)
  - OPTIONS (\*)

Bootstrap, BWC access, old SOAP/REST API:

- GET
- POST

(\*) Currently not in use, but may be implemented in the future.

The new REST API is accessed using the URL `"/rest/vxx/..."` where `xxx` represents the API version number. To harden the usage of the additional HTTP methods the following directives can be used for the new REST API endpoint while only allowing GET and POST on the legacy access.

```
<Directory "/var/www/html">
  <LimitExcept GET POST>
    Order deny,allow
    Deny from all
  </LimitExcept>
</Directory>

<Location "/rest">
  <LimitExcept GET POST PUT DELETE>
    Order deny,allow
    Deny from all
  </LimitExcept>
</Location>

<Location "/api/rest.php">
  <LimitExcept GET POST PUT DELETE>
    Order deny,allow
    Deny from all
  </LimitExcept>
</Location>
```

Instead of using the Limit directive, an alternative is using `mod_allowmethods` which is available since Apache 2.4. However this module is flagged as experimental.

---

## Secure HTTP traffic

SugarCRM requires the usage of HTTPS transport without any exception. Depending on your setup you can terminate the secure connection on a separate endpoint (load balancer, dedicated HTTPS termination point) or directly on the web server(s). You will also need a valid private key and X.509 certificate. In most cases, the customer needs to acquire an X.509 certificate through a public certification authority of their choice. For internal deployments, this may not be necessary when a local PKI environment is available.

When terminating the secure connection directly on the Apache web server, `mod_ssl` is required. A dedicated `VirtualHost` needs to be configured on port 443 (standard HTTPS port). The following is a basic SSL/TLS configuration as a reference. More details are covered in the next paragraphs.

```
<VirtualHost 1.2.3.4:443>
    SSLEngine on
    SSLCertificateFile /etc/pki/tls/certs/example.com.crt
    SSLCertificateKeyFile /etc/pki/tls/certs/example.com.key
    SSLCertificateChainFile /etc/pki/tls/certs/example_bundle.crt
    ServerName crm.example.com
</VirtualHost>
```

Make sure to have your server name properly configured as it should match the X.509 certificate's `CommonName` (or one of the SNA's, subject alternative names). More information regarding the certificate requests including the certificate chain can be obtained from your certification authority.

Ensure to redirect all non-secure HTTP (port 80) traffic to the secure virtual host.

```
<VirtualHost *:80>
    Redirect "/" "https://crm.example.com/"
</VirtualHost >
```

## Cipher suite hardening

One of the crucial points of HTTPS is to force only secure cryptographic algorithms. Based on new future weaknesses which may be discovered in the future the recommended cipher suite settings can change. As per publish date of this document the usage of SSLv2 and SSLv3 is recommended to be disabled. The current safe secure transport protocols are TLSv1.0, TLSv1.1, and TLSv1.2 with properly configured cipher suites.

For proper deployment of Diffie-Hellman (DH) key exchange algorithms the

---

following guidelines apply:

- No longer use out-dated export cipher suites
- Ensure the usage of Elliptic Curve Diffie-Hellman (ECDHE) based algorithms
- Use of non-common Diffie-Hellman groups

More detail around the DH configuration and a detailed list of recommended cipher suites including web server configuration examples can be found at <https://weakdh.org/sysadmin.html>. Additionally, an online SSL/TLS checker can be used to generate a full report of your current configuration in case your web server is publically reachable. A recommended tool is <https://www.ssllabs.com/ssltest/analyze.html>. The output of this SSL/TLS test suite will guide you into further (optional) details which can be tweaked regarding your configuration (i.e. OCSP stapling, certificate pinning, ...).

Please note that using the above instruction "perfect forward secrecy" will be enabled. This basically means that captured TLS traffic can only be decoded using the session key between a specific client and server. Nonperfect forwarding secrecy connections can always be decrypted by having access to only the server's private key. If the customer's setup has intermediate IDS/WAF systems to inspect traffic looking inside the secure traffic, having perfect forwarding secrecy configured may not be desirable.

## **Public trusted root CA's**

It is recommended that the \*nix system where Apache is running always has the latest public root CA (certification authority) files available to authenticate server certificates during the SSL/TLS handshake. Most \*nix distributions take care of this through their online update process. If this is not the case, the system administrator is responsible to ensure the latest trusted root CA's are up-to-date. Out of the box, the SugarCRM application contacts the SugarCRM heartbeat and licensing server using a secure connection.

## **HSTS header**

As all traffic requires HTTPS for SugarCRM, it is recommended to configure a global HSTS (HTTP Strict Transport Security) header. This is an additional opt-in security enhancement supported by most modern browsers. The HSTS will instruct the browser to always use HTTPS in the future for the given FQDN. More details regarding HSTS can be found here:

[https://www.owasp.org/index.php/HTTP\\_Strict\\_Transport\\_Security](https://www.owasp.org/index.php/HTTP_Strict_Transport_Security).



---

Before enabling the HSTS header, ensure that no other non-HTTPS website is running for the given FQDN and any subdomains.

```
Header always set Strict-Transport-Security \  
"max-age=10886400; includeSubdomains; preload"
```

Optionally when your SugarCRM application is publically reachable, you can submit your FQDN on the preload which is maintained by Chrome and included by Firefox, Safari, Internet Explorer 11 and Edge browser. Understand the consequences and requirements to end up on the preload list. Once registered, this cannot be undone easily. Submissions for the HSTS preload list can be found at <https://hstspreload.appspot.com>.

## CSP header

A Content Security Policy header can be added to offer additional protection against XSS (cross-site scripting). Most modern browsers support CSP and will apply the limitation as directed by the CSP header. The CSP header defines the allowed sources through different directives which are allowed regarding JScript, CSS, images, fonts, form actions, plugins, ... More information can be found at [https://www.owasp.org/index.php/Content\\_Security\\_Policy](https://www.owasp.org/index.php/Content_Security_Policy).

The management of CSP headers can become complex and may depend on different types of customizations which can be deployed on the SugarCRM platform.

For now, CSP headers can be configured directly on the web server. A basic configuration looks like this:

```
Header always set Content-Security-Policy \  
"default-src 'self'; script-src 'self'"
```

**Note:** This is a syntax example of a CSP header and not a recommended value.

Older browsers use the header X-Content-Security-Policy or X-WebKit-CSP instead of the standardized one. The CSP header can also safely be added first in "report only" mode before deploying it in production using Content-Security-Policy-Report-Only.

## Additional security headers

To prevent clickjacking an X-Frame-Options header can be added. This header can also be used to iframe the SugarCRM application inside another web site if

---

required. This can be better controlled with the above mentioned CSP header. Both can coexist together but it is encouraged to use the CSP approach.

```
Header always set X-Frame-Options "SAMEORIGIN"  
Header always set X-Frame-Options "ALLOW-  
FROM https://someothersite.com"
```

To protect against "drive-by download" attacks, it is encouraged to disable Content-Type sniffing. This is particularly targeted at Chrome and IE.

```
Header always set X-Content-Type-Options "nosniff"
```

Ensure XSS browser protection is enabled by adding the following header. By default, this feature should be enabled in every browser. In case it has been disabled, sending this header will re-enable it.

```
Header always set X-XSS-Protection "1; mode=block"
```

## Secure cookie settings

Ensure the following settings are applied in php.ini to ensure legacy cookies are properly protected against XSS attacks and are only transmitted over a secure HTTPS connection.

```
session.cookie_httponly = 1  
session.cookie_secure = 1
```

Additionally, the session.cookie\_path can be tweaked if other applications are running on the same web server.

## Security modules

Additional Apache loadable security modules exist which can optionally be installed to better protect your system from malicious requests and/or DDOS attacks. The following modules are available for Apache 2.4:

- mod\_security - This module adds WAF (web application firewall) capabilities to your Apache setup. In combination with the OWASP CRS (core rule set) gives you a solid starting point for a WAF implementation.
- mod\_evasive - This module helps to prevent (D)DOS attacks

Covering both modules in details is out of the scope of this Security Response. Refer to the module documentation for additional details. In the future, SugarCRM

---

may publish specific settings and fine-tuning for both modules.

## Additional resources

Generic Apache security tips

[http://httpd.apache.org/docs/2.4/misc/security\\_tips.html](http://httpd.apache.org/docs/2.4/misc/security_tips.html)

Online SSL/TLS tester

<https://www.ssllabs.com/ssltest/analyze.html>

Useful HTTP headers

[https://www.owasp.org/index.php/List\\_of\\_useful\\_HTTP\\_headers](https://www.owasp.org/index.php/List_of_useful_HTTP_headers)

## Publication History

2015-10-01	Adding HTTP method restrictions
2015-09-08	Initial publication

A stand-alone copy of this document that omits the distribution URL is an uncontrolled copy and may lack important information or contain factual errors. SugarCRM reserves the right to change or update this document at any time.

**Last Modified:** 2021-02-17 02:44:13

## XSS Prevention

### Overview

This document describes how to prevent cross-site scripting (XSS) attacks in Sugar customizations. XSS attacks occur when malicious entities are able to inject client-side scripts into web pages.

### Best Practices

When creating custom code for Sugar, be sure to respect the following best practices. These rules serve to protect the elements of your customizations that are most susceptible to XSS vulnerabilities:

- 
- Create safe variables when injecting HTML via Handlebars templates or JavaScript methods such as: `$(selector).html(variable)`, `$(selector).before(variable)`, or `$(selector).after(variable)`.
  - Avoid using triple-bracket (e.g. `{{{variable}}}`) syntax to allow unescaped HTML content in Handlebars templates.
  - Never use input from an unknown source as it may contain unsafe data.
  - Protect dynamic content, which may also contain unsafe data.

Please refer to the following sections for more information and examples that demonstrate these best practices.

## Creating Safe Variables

You must always encode a variable before you inject or display it on a webpage. The piece that is not encoded should be isolated and marked as a safe string very carefully. The the following sections outline protecting your system when using [JavaScript](#) and [Handlebars templates](#).

### JavaScript

To ensure displayed JavaScript variables are safe, respect these two rules:

- If you are displaying plain text without any HTML, use `.text()` instead of `.html()` with your selectors.
- If your text contains HTML formatting, you can use `.html()` as long as it does not contain any dynamic data coming from a variable.

### Vulnerable Setup

This is an example of bad code because it utilizes the `.html()` method to display a dynamic-value variable, leaving the JavaScript vulnerable to injection:

```
var inputData = $('#myInput').val(); // "<script>alert(0)</script>"
$(selector).html('This is the value: ' + inputData); // "This is the v
alue: <script>alert(0)</script>"
```

### Protected Setup

This is an example of good code, which uses the safe `.text()` method to protect the JavaScript from potential injection:

```
var status = 'safe';
```

---

```
$(selector).text('This is very ' + status); // "This is very safe"
```

This is also an acceptable approach, which uses the `Handlebars.Utils.escapeExpression` to safely escape the content:

```
var inputData = $('#myinput').val(); // "<script>alert(0)</script>"
var safeData = Handlebars.Utils.escapeExpression(inputData); // "&lt;s
cript&gt;alert(0)&lt;/script&gt;"
$(selector).html('This is the value: ' + safeData); // "This is the va
lue: &lt;script&gt;alert(0)&lt;/script&gt;"
```

## Handlebars Templates

Handlebars, by default, handles the encoding of data passed to the template in double brackets (e.g. `{{variable}}`), however, it also allows you to bypass this encoding by using triple brackets (e.g. `{{{variable}}}`). Text passed via triple brackets will not be encoded. As a rule, do not use triple brackets. If you don't want Handlebars to encode a piece of a string, use double brackets and execute `Handlebars.SafeString()` in your JavaScript controller.

As an example, we will apply best practices to a complex use case with dynamic values that need to be encoded. For this example, we want to display a message similar to:

```
Congrats! You just created the record <a href="/#Accounts/abcd">ABCD</a>
```

The values `ABCD` and `/#Accounts/abcd` are dynamic values and, therefore, must be encoded. But the message must also be displayed as HTML, so the overall element cannot be entirely encoded. To address this use case, we must properly script the JavaScript controller and the Handlebars template.

The following JavaScript encodes the message's dynamic values, marks the displayed hyperlink as a safe string, and then outputs the safe message:

```
var record = {
  id: 'abcd',
  name: 'ABCD'
};

// escape `ABCD`
var safeName = Handlebars.Utils.escapeExpression(record.name);

// escape `abcd`
var safeId = Handlebars.Utils.escapeExpression(record.id);
```

---

```
// Mark the link as a SafeString now that the unsafe pieces are encoded and the content has safe HTML.
var link = new Handlebars.SafeString('<a href="/#Accounts/' + safeId + '>' + safeName + '</a>');

// This can be displayed with double brackets in the template because html parts will not be encoded.
this.safeMessage = new Handlebars.SafeString('Congrats! You just created the record ' + link + '.');
```

To display the safe message in the application, use the following syntax in your Handlebars template:

```
<div class="success">{{safeMessage}}</div>
```

Please refer to the [HTML Escaping](#) documentation on the Handlebars website for more information.

**Last Modified:** 2021-02-17 02:44:13

## Cookbook

Welcome to the SugarCRM Developer Cookbook! This library is filled with real-world code examples for common Sugar customizations and best practices. Sugar's [DevClub](#) is always cooking up new ideas, so be sure to check in often and see what's new. Get started by browsing the categories below.

**Last Modified:** 2021-02-17 02:44:13

## Adding Buttons to the Application Footer

### Overview

This example explains how to add additional buttons to the application footer. We will create a custom view and then append the view component to the footer-buttons layout metadata. The additional button will merely show an alert, but can be expanded on to do much more.

---

## Steps To Complete

This tutorial requires the following steps, which are explained in the sections below:

1. Creating the Custom View
2. Appending the View to Layout Metadata

## Creating the Custom View

To add a button to the application footer, you will first need to create the custom view that will contain your button and logic. To create the custom view create a folder in `./custom/clients/base/views` with the name of your view, such as `./custom/clients/base/views/footer-greet-button/`. Once your folder is in place, you can create the three primary files that make up your view:

1. `footer-greet-button.hbs` - Contains the handlebar template for your view
2. `footer-greet-button.js` - Contains the JavaScript controller logic
3. `footer-greet-button.php` - Contains the metadata your view might use. For this example, we simply use the metadata to define whether the greeting will auto close or not.

`./custom/clients/base/views/footer-greet-button/footer-greet-button.hbs`

```
{{!  
  Define HTML for our new button.  We will mimic the style of other  
buttons  
  in the footer so we remain consistent.  
  Also we will only show the button if a User is logged into the sys  
tem  
}}  
  
{{#if isAuthenticated}}  
<button class="btn btn-invisible" type="button" data-action="greet">  
  <i class="fa fa-bell"></i>  
  <span class="action-label"> {{str "Greet!"}}</span>  
</button>  
{{/if}}
```

`./custom/clients/base/views/footer-greet-button/footer-greet-button.js`

```
({  
  // tagName attribute is inherited from Backbone.js.
```

---

```

    // We set it to "span" instead of default "div" so that our "button"
    // element is displayed inline.
    tagName: "span",
    events: {
        //On click of our "button" element
        'click [data-action=greet]': 'greet'
    },
    isAuthenticated: false,

    _renderHtml: function() {
        this.isAuthenticated = app.api.isAuthenticated();
        this._super('_renderHtml');
    },
    greet: function(){
        // Use Sugar 7 API to pop one of our standard alert message boxes.
        app.alert.show('greeting-alert', {
            level: 'info',
            messages: 'Hello '+app.user.get('full_name')+'!',
            autoClose: this.meta.autoClose || false
        });
    }
}

}))

```

```
./custom/clients/base/views/footer-greet-button/footer-greet-button.php
```

```
<?php
```

```

$viewdefs['base']['view']['footer-greet-button'] = array(
    'autoClose' => true
);

```

## Appending the View to Layout Metadata

Once the view is created, you simply need to add the view to the Footer-Buttons Layout metadata. The Footer-Buttons Layout is located in `./clients/base/layout/footer-buttons/`, so appending the view to this layout can be done via the Extension Framework. Create a file in `./custom/Extension/application/Ext/clients/base/layouts/footer-buttons/` and the Extension Framework will append the metadata to the Footer-Buttons Layout.

```
./custom/Extension/application/Ext/clients/base/layouts/footer-buttons/greetingButton.php
```



---

```
<?php

$viewdefs['base']['layout']['footer-
buttons']['components'][] = array (
    'view' => 'footer-greet-button',
);
```

Once all the files are in place, you can run a Quick Repair and Rebuild and the new button will show in the footer when logged into your system.

**Last Modified:** 2021-03-01 17:27:48

## Adding Buttons to the Record View

### Overview

This example explains how to create additional buttons on the record view and add events. We will extend and override the stock Accounts record view to add a custom button. The custom button will be called "Validate Postal Code" and ping the Zippopotamus REST service to validate the records billing state and postal code.

### Steps To Complete

This tutorial requires the following steps, which are explained in the sections below:

1. [Defining the Metadata](#)
2. [Adding Custom Buttons](#)
3. [Defining the Button Label](#)
4. [Extending and Overriding the Controller](#)

### Defining the Metadata

To add a button to the record view, you will first need to create the custom metadata for the view if it doesn't exist. You can easily do this by opening and saving your modules record layout in studio. Depending on your module, the path will then be `./custom/modules/<module>/clients/base/views/record/record.php`. Once your file is in place, you will need to copy the button array from

---

./clients/base/views/record/record.php and add it to the \$viewdefs['<module>']['base']['view']['record'] portion of your metadata array. An example of the button array is shown below:

```
'buttons' => array(
    array(
        'type' => 'button',
        'name' => 'cancel_button',
        'label' => 'LBL_CANCEL_BUTTON_LABEL',
        'css_class' => 'btn-invisible btn-link',
        'showOn' => 'edit',
    ),
    array(
        'type' => 'rowaction',
        'event' => 'button:save_button:click',
        'name' => 'save_button',
        'label' => 'LBL_SAVE_BUTTON_LABEL',
        'css_class' => 'btn btn-primary',
        'showOn' => 'edit',
        'acl_action' => 'edit',
    ),
    array(
        'type' => 'actiondropdown',
        'name' => 'main_dropdown',
        'primary' => true,
        'showOn' => 'view',
        'buttons' => array(
            array(
                'type' => 'rowaction',
                'event' => 'button:edit_button:click',
                'name' => 'edit_button',
                'label' => 'LBL_EDIT_BUTTON_LABEL',
                'acl_action' => 'edit',
            ),
            array(
                'type' => 'shareaction',
                'name' => 'share',
                'label' => 'LBL_RECORD_SHARE_BUTTON',
                'acl_action' => 'view',
            ),
            array(
                'type' => 'pdfaction',
                'name' => 'download-pdf',
                'label' => 'LBL_PDF_VIEW',
                'action' => 'download',
                'acl_action' => 'view',
            )
        )
    )
)
```

---

```

    ),
    array(
        'type' => 'pdfaction',
        'name' => 'email-pdf',
        'label' => 'LBL_PDF_EMAIL',
        'action' => 'email',
        'acl_action' => 'view',
    ),
    array(
        'type' => 'divider',
    ),
    array(
        'type' => 'rowaction',
        'event' => 'button:find_duplicates_button:click',
        'name' => 'find_duplicates_button',
        'label' => 'LBL_DUP_MERGE',
        'acl_action' => 'edit',
    ),
    array(
        'type' => 'rowaction',
        'event' => 'button:duplicate_button:click',
        'name' => 'duplicate_button',
        'label' => 'LBL_DUPLICATE_BUTTON_LABEL',
        'acl_module' => $module,
    ),
    array(
        'type' => 'rowaction',
        'event' => 'button:audit_button:click',
        'name' => 'audit_button',
        'label' => 'LNK_VIEW_CHANGE_LOG',
        'acl_action' => 'view',
    ),
    array(
        'type' => 'divider',
    ),
    array(
        'type' => 'rowaction',
        'event' => 'button:delete_button:click',
        'name' => 'delete_button',
        'label' => 'LBL_DELETE_BUTTON_LABEL',
        'acl_action' => 'delete',
    ),
),
),
array(
    'name' => 'sidebar_toggle',

```

```

        'type' => 'sidebartoggle',
    ),
),

```

**Note:** When copying this array into your metadata, you will need to replace \$module with the text string of your module's name.

For standard button types, the button definitions will contain the following properties:

Property	Potential Values	Description
type	button, rowaction, shareaction, actiondropdown	The widget type
name		The name of the button
label		The label string key for the display text of the button
css_class		The CSS class to append to the button
showOn	edit, view	The ACL action of the button

For this example, we will add the custom button to the main dropdown. For actiondropdown types, there is an additional buttons array for you to specify the dropdown list of buttons. The button definitions in this array will contain the following properties:

Property	Potential Values	Description
type	button, rowaction, shareaction, actiondropdown	The widget type; Most custom buttons are 'rowaction'
event	button:button_name:click	The event name of the button
name		The name of the button
label		The label string key for the display text of the button
acl_action	edit, view	The ACL action of the button

---

## Adding Custom Buttons

For this example, modify the accounts' metadata to add the button definition to main\_dropdown:

```
array(  
    'type' => 'rowaction',  
    'event' => 'button:validate_postal_code:click',  
    'name' => 'validate_postal_code',  
    'label' => 'LBL_VALIDATE_POSTAL_CODE',  
    'acl_action' => 'view',  
)
```

A full example is shown below:

`./custom/modules/Accounts/clients/base/views/record/record.php`

```
<?php
```

```
$viewdefs['Accounts'] =  
array (  
    'base' =>  
    array (  
        'view' =>  
        array (  
            'record' =>  
            array (  
                'buttons' =>  
                array (  
                    0 =>  
                    array (  
                        'type' => 'button',  
                        'name' => 'cancel_button',  
                        'label' => 'LBL_CANCEL_BUTTON_LABEL',  
                        'css_class' => 'btn-invisible btn-link',  
                        'showOn' => 'edit',  
                    ),  
                    1 =>  
                    array (  
                        'type' => 'rowaction',  
                        'event' => 'button:save_button:click',  
                        'name' => 'save_button',  
                        'label' => 'LBL_SAVE_BUTTON_LABEL',  
                        'css_class' => 'btn btn-primary',  
                        'showOn' => 'edit',  
                        'acl_action' => 'edit',
```

---

```
),
2 =>
array (
  'type' => 'actiondropdown',
  'name' => 'main_dropdown',
  'primary' => true,
  'showOn' => 'view',
  'buttons' =>
array (
  0 =>
array (
  'type' => 'rowaction',
  'event' => 'button:edit_button:click',
  'name' => 'edit_button',
  'label' => 'LBL_EDIT_BUTTON_LABEL',
  'acl_action' => 'edit',
),
  1 =>
array (
  'type' => 'shareaction',
  'name' => 'share',
  'label' => 'LBL_RECORD_SHARE_BUTTON',
  'acl_action' => 'view',
),
  2 =>
array (
  'type' => 'rowaction',
  'event' => 'button:validate_postal_code:click',
  'name' => 'validate_postal_code',
  'label' => 'LBL_VALIDATE_POSTAL_CODE',
  'acl_action' => 'view',
),
  3 =>
array (
  'type' => 'divider',
),
  4 =>
array (
  'type' => 'rowaction',
  'event' => 'button:duplicate_button:click',
  'name' => 'duplicate_button',
  'label' => 'LBL_DUPLICATE_BUTTON_LABEL',
  'acl_module' => 'Accounts',
),
  5 =>
array (
```

---

```

        'type' => 'rowaction',
        'event' => 'button:audit_button:click',
        'name' => 'audit_button',
        'label' => 'LNK_VIEW_CHANGE_LOG',
        'acl_action' => 'view',
    ),
    6 =>
    array (
        'type' => 'divider',
    ),
    7 =>
    array (
        'type' => 'rowaction',
        'event' => 'button:delete_button:click',
        'name' => 'delete_button',
        'label' => 'LBL_DELETE_BUTTON_LABEL',
        'acl_action' => 'delete',
    ),
),
),
3 =>
array (
    'name' => 'sidebar_toggle',
    'type' => 'sidebartoggle',
),
),
'panels' =>
array (
    0 =>
    array (
        'name' => 'panel_header',
        'header' => true,
        'fields' =>
        array (
            0 =>
            array (
                'name' => 'picture',
                'type' => 'avatar',
                'width' => 42,
                'height' => 42,
                'dismiss_label' => true,
                'readonly' => true,
            ),
            1 => 'name',
            2 =>
            array (

```

---

```

        'name' => 'favorite',
        'label' => 'LBL_FAVORITE',
        'type' => 'favorite',
        'dismiss_label' => true,
    ),
    3 =>
    array (
        'name' => 'follow',
        'label' => 'LBL_FOLLOW',
        'type' => 'follow',
        'readonly' => true,
        'dismiss_label' => true,
    ),
),
),
1 =>
array (
    'name' => 'panel_body',
    'columns' => 2,
    'labelsOnTop' => true,
    'placeholders' => true,
    'fields' =>
    array (
        0 => 'website',
        1 => 'industry',
        2 => 'parent_name',
        3 => 'account_type',
        4 => 'assigned_user_name',
        5 => 'phone_office',
    ),
),
),
2 =>
array (
    'name' => 'panel_hidden',
    'hide' => true,
    'columns' => 2,
    'labelsOnTop' => true,
    'placeholders' => true,
    'fields' =>
    array (
        0 =>
        array (
            'name' => 'fieldset_address',
            'type' => 'fieldset',
            'css_class' => 'address',
            'label' => 'LBL_BILLING_ADDRESS',

```



---

```
'fields' =>
array (
  0 =>
  array (
    'name' => 'billing_address_street',
    'css_class' => 'address_street',
    'placeholder' => 'LBL_BILLING_ADDRESS_STREET',
  ),
  1 =>
  array (
    'name' => 'billing_address_city',
    'css_class' => 'address_city',
    'placeholder' => 'LBL_BILLING_ADDRESS_CITY',
  ),
  2 =>
  array (
    'name' => 'billing_address_state',
    'css_class' => 'address_state',
    'placeholder' => 'LBL_BILLING_ADDRESS_STATE',
  ),
  3 =>
  array (
    'name' => 'billing_address_postalcode',
    'css_class' => 'address_zip',
    'placeholder' => 'LBL_BILLING_ADDRESS_POSTALCODE',
  ),
  4 =>
  array (
    'name' => 'billing_address_country',
    'css_class' => 'address_country',
    'placeholder' => 'LBL_BILLING_ADDRESS_COUNTRY',
  ),
),
1 =>
array (
  'name' => 'fieldset_shipping_address',
  'type' => 'fieldset',
  'css_class' => 'address',
  'label' => 'LBL_SHIPPING_ADDRESS',
  'fields' =>
  array (
    0 =>
    array (
      'name' => 'shipping_address_street',
      'css_class' => 'address_street',
```

---

```

        'placeholder' => 'LBL_SHIPPING_ADDRESS_STREET',
    ),
    1 =>
    array (
        'name' => 'shipping_address_city',
        'css_class' => 'address_city',
        'placeholder' => 'LBL_SHIPPING_ADDRESS_CITY',
    ),
    2 =>
    array (
        'name' => 'shipping_address_state',
        'css_class' => 'address_state',
        'placeholder' => 'LBL_SHIPPING_ADDRESS_STATE',
    ),
    3 =>
    array (
        'name' => 'shipping_address_postalcode',
        'css_class' => 'address_zip',
        'placeholder' => 'LBL_SHIPPING_ADDRESS_POSTALCODE'
    ),
    4 =>
    array (
        'name' => 'shipping_address_country',
        'css_class' => 'address_country',
        'placeholder' => 'LBL_SHIPPING_ADDRESS_COUNTRY',
    ),
    5 =>
    array (
        'name' => 'copy',
        'label' => 'NTC_COPY_BILLING_ADDRESS',
        'type' => 'copy',
        'mapping' =>
        array (
            'billing_address_street' => 'shipping_address_street',
            'billing_address_city' => 'shipping_address_city',
            'billing_address_state' => 'shipping_address_state',
            'billing_address_postalcode' => 'shipping_address_postalcode',
            'billing_address_country' => 'shipping_address_country',
        ),
    ),
),
),

```

---

```
    ),
  ),
  2 =>
array (
  'name' => 'phone_alternate',
  'label' => 'LBL_OTHER_PHONE',
),
  3 => 'email',
  4 => 'phone_fax',
  5 => 'campaign_name',
  6 =>
array (
  'name' => 'description',
  'span' => 12,
),
  7 => 'sic_code',
  8 => 'ticker_symbol',
  9 => 'annual_revenue',
  10 => 'employees',
  11 => 'ownership',
  12 => 'rating',
  13 =>
array (
  'name' => 'date_entered_by',
  'readonly' => true,
  'type' => 'fieldset',
  'label' => 'LBL_DATE_ENTERED',
  'fields' =>
array (
  0 =>
array (
  'name' => 'date_entered',
),
  1 =>
array (
  'type' => 'label',
  'default_value' => 'LBL_BY',
),
  2 =>
array (
  'name' => 'created_by_name',
),
),
),
  14 => 'team_name',
  15 =>
```



---

```
);
```

## Defining the Button Label

Next, define the label for the button:

```
./custom/Extension/modules/Accounts/Ext/Language/en_us.validatePostalCode.php
```

```
<?php
```

```
$mod_strings['LBL_VALIDATE_POSTAL_CODE'] = 'Validate Postal Code';
```

## Extending and Overriding the Controller

Once the button has been added to the metadata, extend and override the record view controller:

```
./custom/modules/Accounts/clients/base/views/record/record.js
```

```
({  
  
  extendsFrom: 'RecordView',  
  
  zipJSON: {},  
  
  initialize: function (options) {  
    this._super('initialize', [options]);  
  
    //add listener for custom button  
    this.context.on('button:validate_postal_code:click', this.validate_postal_code, this);  
  },  
  
  validate_postal_code: function() {  
    //example of getting field data from current record  
    var AcctID = this.model.get('id');  
    var currentCity = this.model.get('billing_address_city');  
    var currentZip = this.model.get('billing_address_postalcode');  
  
    //jQuery AJAX call to Zippopotamus REST API  
    $.ajax({  
      url: 'http://api.zippopotam.us/us/' + currentZip,  
      success: function(data) {
```

---

```

        this.zipJSON = data;
        var city = this.zipJSON.places[0]['place name'];

        if (city === currentCity)
        {
            app.alert.show('address-ok', {
                level: 'success',
                messages: 'City and Zipcode match.',
                autoClose: true
            });
        }
        else
        {
            app.alert.show('address-ok', {
                level: 'error',
                messages: 'City and Zipcode do not match.'
            },
            {
                autoClose: false
            });
        }
    });
}
})

```

Once the files are in place, navigate to Admin > Repair > Quick Repair and Rebuild.

## Adding Buttons without Overriding View Controllers

Sometimes your customization might need to add the same buttons to multiple views, but you don't want to overwrite other possible customizations already on the view. The following will walk through creating a custom button like the above example, add adding the buttons to views without overriding the module view controllers.

### Create a Custom Button

Buttons typically come in two forms, a standard button and a 'rowaction' in an Action Menu. We can create two buttons to handle both scenarios.

```
./clients/base/fields/zipcode-check-button/zipcode-check-button.js
```

---

```

/**
 * Zipcode Check button will check if zipcode matches city field
 *
 * @class View.Fields.Base.ZipcodeCheckButtonField
 * @alias SUGAR.App.view.fields.BaseZipcodeCheckButtonField
 * @extends View.Fields.Base.ButtonField
 */
({
  extendsFrom: 'ButtonField',

  defaultZipCodeField: 'billing_address_postalcode',

  defaultCityField: 'billing_address_city',

  /**
   * @inheritdoc
   */
  initialize: function(options) {
    options.def.events = _.extend({}, options.def.events, {
      'click .zip-check-btn': 'validatePostalCode'
    });

    this._super('initialize', [options]);

    this.def.zip_code_field = _.isEmpty(this.def.zip_code_field)?t
his.defaultZipCodeField:this.def.zip_code_field;
    this.def.city_field = _.isEmpty(this.def.city_field)?this.defa
ultCityField:this.def.city_field;
  },

  validatePostalCode: function(evt) {
    var currentCity = this.model.get(this.def.city_field);
    var currentZip = this.model.get(this.def.zip_code_field);

    //jQuery AJAX call to Zippopotamus REST API
    $.ajax({
      url: 'http://api.zippopotam.us/us/' + currentZip,
      success: function(data) {
        this.zipJSON = data;
        var city = this.zipJSON.places[0]['place name'];

        if (city === currentCity)
        {
          app.alert.show('address-ok', {
            level: 'success',
            messages: 'City and Zipcode match.',

```

---

```

        autoClose: true
    });
}
else
{
    app.alert.show('address-ok', {
        level: 'error',
        messages: 'City and Zipcode do not match.',
        autoClose: false
    });
}
}
});
}
})

```

`./clients/base/fields/zipcode-check-rowaction/zipcode-check-rowaction.js`

```

/**
 * Zipcode Check button will check if zipcode matches city field
 *
 * @class View.Fields.Base.ZipcodeCheckRowactionField
 * @alias SUGAR.App.view.fields.BaseZipcodeCheckRowactionField
 * @extends View.Fields.Base.RowactionField
 */
({
    extendsFrom: 'RowactionField',

    defaultZipCodeField: 'billing_address_postalcode',

    defaultCityField: 'billing_address_city',

    /**
     * @inheritdoc
     */
    initialize: function(options) {
        this._super('initialize', [options]);

        this.def.zip_code_field = _.isEmpty(this.def.zip_code_field)?t
his.defaultZipCodeField:this.def.zip_code_field;
        this.def.city_field = _.isEmpty(this.def.city_field)?this.defa
ultCityField:this.def.city_field;
    },

    /**
     * Rowaction fields have a default event which calls rowActionSele

```



---

```

ct
    */
    rowActionSelect: function(evt) {
        this.validatePostalCode(evt);
    },

    validatePostalCode: function(evt) {
        var currentCity = this.model.get(this.def.city_field);
        var currentZip = this.model.get(this.def.zip_code_field);

        //jQuery AJAX call to Zippopotamus REST API
        $.ajax({
            url: 'http://api.zippopotam.us/us/' + currentZip,
            success: function(data) {
                this.zipJSON = data;
                var city = this.zipJSON.places[0]['place name'];

                if (city === currentCity)
                {
                    app.alert.show('address-check-msg', {
                        level: 'success',
                        messages: 'City and Zipcode match.',
                        autoClose: true
                    });
                }
                else
                {
                    app.alert.show('address-check-msg', {
                        level: 'error',
                        messages: 'City and Zipcode do not match.',
                        autoClose: false
                    });
                }
            }
        });
    }
}
))

```

Along with the JavaScript controllers for the buttons, you can copy over the detail.hbs and edit.hbs from the base controllers that each button is extended from into each folder. The folder structure will look as follows:

```
./clients/base/fields/zipcode-check-button/
```

- zipcode-check-button.js
- detail.hbs

- edit.hbs

./clients/base/fields/zipcode-check-rowaction/

- zipcode-check-rowaction.js
- detail.hbs
- edit.hbs

In the Handlebar files, you should add a custom CSS class called zip-check-btn to each of the layouts, as a way to find the elements on the page. This is also used for the ZipcodeCheckButton to isolate the event trigger. Example below:

./clients/base/fields/zipcode-check-button/edit.hbs

```
<a href="{{#if fullRoute}}#{{fullRoute}}{{else}}{{#if def.route}}#{{buildRoute context=context model=model action=def.route.action}}{{else}}javascript:void(0);{/if}}{/if}}"
  class="btn{{#if def.primary}} btn-primary{/if}} zip-check-btn"
  {{#if def.tooltip}}
    rel="tooltip"
    data-placement="bottom"
    title="{{str def.tooltip module}}"
  {{/if}}
  {{#if ariaLabel}}aria-label="{{ariaLabel}}"{{/if}}
  role="button" tabindex="{{tabIndex}}" name="{{name}}">{{#if def.icon}}<i class="fa {{def.icon}}"></i> {{/if}} {{label}}</a>
```

Once we have the button controllers and the templates setup, we can add the buttons to the View metadata for particular modules.

## Appending Buttons to Metadata

After creating your buttons, you will need to append the buttons to the views metadata. For this, you can use the [Extension Framework](#). The following examples will add a button to the action menu on the Accounts record view and a button to the Contacts record view. Please note that this example assumes that you have created the [rowaction button](#) above.

./custom/Extension/modules/Accounts/Ext/clients/base/views/record/addZipCodeCheckRowaction.php

```
$buttons = isset($viewdefs['Accounts']['base']['view']['record']['buttons'])?
$viewdefs['Accounts']['base']['view']['record']['buttons']:array();
```

---

```

if (!empty($buttons)) {
    foreach ($buttons as $key => $button) {
        if ($button['type'] == 'actiondropdown' && $button['name'] ==
'main_dropdown') {
            $viewdefs['Accounts']['base']['view']['record']['buttons']
[$key]['buttons'][] = array(
                'type' => 'divider',
            );
            $viewdefs['Accounts']['base']['view']['record']['buttons']
[$key]['buttons'][] = array(
                'type' => 'zipcode-check-rowaction',
                'event' => 'button:zipcode_check:click',
                'name' => 'zipcode_check_button',
                'label' => 'LBL_ZIPCODE_CHECK_BUTTON_LABEL',
                'acl_action' => 'edit',
                'showOn' => 'view',
            );
            break;
        }
    }
}

```

**./custom/Extension/modules/Contacts/Ext/clients/base/views/record/addZipCodeCheckButton.php**

```

$buttons = isset($viewdefs['Contacts']['base']['view']['record']['but
tons'])? $viewdefs['Contacts']['base']['view']['record']['buttons']:arra
y();
$zipCodeButton = array (
    'type' => 'zipcode-check-button',
    'event' => 'button:zipcode_check:click',
    'name' => 'zipcode_check_button',
    'label' => 'LBL_ZIPCODE_CHECK_BUTTON_LABEL',
    'acl_action' => 'edit',
    'zip_code_field' => 'primary_address_postalcode',
    'city_field' => 'primary_address_city'
);

if (!empty($buttons)){
    foreach($buttons as $key => $button){
        if ($button['type'] == 'actiondropdown' && $button['name'] ==
'main_dropdown'){
            //Get everything from this point down
            $slicedBtns = array_slice($viewdefs['Contacts']['base']['v
iew']['record']['buttons'],$key);
            //Remove everything from this point down

```

---

```

        array_splice($viewdefs['Contacts']['base']['view']['record
']['buttons'],$key);
        //Add Zip Code Button
        $viewdefs['Contacts']['base']['view']['record']['buttons']
[] = $zipCodeButton;
        //Add back the buttons we removed
        foreach($slicedBtns as $oldButton){
            $viewdefs['Contacts']['base']['view']['record']['butto
ns'][] = $oldButton;
        }
        break;
    }
}
} else {
    $viewdefs['Contacts']['base']['view']['record']['buttons'] = array
(
        $zipCodeButton
    );
}
unset($zipCodeButton);

```

The last thing that is needed now, is to define the button's label.

## Defining the Button Labels

Since the button was made to work globally on multiple modules, we can define the label at the application level.

```
./custom/Extension/application/Ext/Language/en_us.ZipCodeCheckButton.php
```

```
$app_strings['LBL_ZIPCODE_CHECK_BUTTON_LABEL'] = 'Verify Zip Code';
```

Once all files are in place, you can run a Quick Repair and Rebuild and the buttons will display and check the Zipcode fields for both the Contacts and Accounts record views without having to extend either modules RecordView controllers.

**Last Modified:** 2021-02-17 02:44:13

## Adding Field Validation to the Record View

---

## Overview

This page explains how to add additional field validation to the record view. In the following examples, we will extend and override the stock Accounts record view to add custom validation. The custom validation will require the Office Phone field when the account type is set to "Customer" and also require the user to enter at least one email address.

## Error Messages

When throwing a validation error, Sugar has several stock messages you may choose to use. They are shown below:

<b>Error Key</b>	<b>Label</b>	<b>Description</b>
maxValue	ERROR_MAXVALUE	This maximum value of this field
minValue	ERROR_MINVALUE	This minimum value of this field
maxLength	ERROR_MAX_FIELD_LENGTH	The max length of this field
minLength	ERROR_MIN_FIELD_LENGTH	The min length of this field
datetime	ERROR_DATETIME	This field requires a valid date
required	ERROR_FIELD_REQUIRED	This field is required
email	ERROR_EMAIL	There is an invalid email address
primaryEmail	ERROR_PRIMARY_EMAIL	No primary email address is set
duplicateEmail	ERROR_DUPLICATE_EMAIL	There is a duplicate email address
number	ERROR_NUMBER	This field requires a valid number
isBefore	ERROR_IS_BEFORE	The date of this field can not be after another date
isAfter	ERROR_IS_AFTER	The date of this field can not be before another date

---

You also have the option of displaying multiple error messages at a time. The example below would throw an error message notifying the user that the selected field is required and that it is also not a number.

```
errors['<field name>'] = errors['<field name>'] || {};  
errors['<field name>'].required = true;  
errors['<field name>'].number = true;
```

## Custom Error Messages

Custom error message can be used by appending custom language keys to `app.error.errorName2Keys` when initializing an extended controller. To accomplish this, create a new language key in the `$app_strings`. An example of this is shown below:

```
./custom/Extension/application/Ext/Language/en_us.error_custom_message.php
```

```
<?php
```

```
$app_strings['ERROR_CUSTOM_MESSAGE'] = 'My custom error message.';
```

Next, you will need to update your controller to use the new language key. To accomplish this, add your custom language key to the `app.error.errorName2Keys` array in the `initialize` method:

```
initialize: function (options) {  
    this._super('initialize', [options]);  
  
    //add custom message key  
    app.error.errorName2Keys['custom_message'] = 'ERROR_CUSTOM_MESSAGE  
';  
  
    ....  
},
```

Once completed, you can call your custom message by setting the `app.error.errorName2Keys` entry to true as shown below:

```
errors['phone_office'] = errors['phone_office'] || {};  
errors['phone_office'].custom_message = true;
```

## Method 1: Extending the RecordView and CreateView Controllers

---

One way to validate fields on record view is by creating record and create view controllers. This method requires a duplication of code due to the hierarchy design, however, it does organize the code by module and extend the core functionality. To accomplish this, override and extend the create view controller. This handles the validation when a user is creating a new record. Once the controller has been properly extended, define the validation check and use the `model.addValidationTask` method to append your function to the save validation.

```
./custom/modules/Accounts/clients/base/views/create/create.js
```

```
({
  extendsFrom: 'CreateView',
  initialize: function (options) {

    this._super('initialize', [options]);

    //add validation tasks
    this.model.addValidationTask('check_account_type', _.bind(this
._doValidateCheckType, this));
    this.model.addValidationTask('check_email', _.bind(this._doVal
idateEmail, this));
  },

  _doValidateCheckType: function(fields, errors, callback) {
    //validate type requirements
    if (this.model.get('account_type') == 'Customer' && _.isEmpty(
this.model.get('phone_office')))
    {
      errors['phone_office'] = errors['phone_office'] || {};
      errors['phone_office'].required = true;
    }

    callback(null, fields, errors);
  },

  _doValidateEmail: function(fields, errors, callback) {
    //validate email requirements
    if (_.isEmpty(this.model.get('email')))
    {
      errors['email'] = errors['email'] || {};
      errors['email'].required = true;
    }

    callback(null, fields, errors);
  },
})
```

---

Next, duplicate the validation logic for the record view. This handles the validation when editing existing records.

```
./custom/modules/Accounts/clients/base/views/record/record.js
```

```
({
  /* because 'accounts' already has a record view, we need to extend
  it */
  extendsFrom: 'AccountsRecordView',

  initialize: function (options) {

    this._super('initialize', [options]);

    //add validation tasks
    this.model.addValidationTask('check_account_type', _.bind(this
    ._doValidateCheckType, this));
    this.model.addValidationTask('check_email', _.bind(this._doVal
    idateEmail, this));
  },

  _doValidateCheckType: function(fields, errors, callback) {

    //validate requirements
    if (this.model.get('account_type') == 'Customer' && _.isEmpty(
    this.model.get('phone_office')))
    {
      errors['phone_office'] = errors['phone_office'] || {};
      errors['phone_office'].required = true;
    }

    callback(null, fields, errors);
  },

  _doValidateEmail: function(fields, errors, callback) {

    //validate email requirements
    if (_.isEmpty(this.model.get('email')))
    {
      errors['email'] = errors['email'] || {};
      errors['email'].required = true;
    }

    callback(null, fields, errors);
  },
})
```



---

Once the files are in place, navigate to Admin > Repair > Quick Repair and Rebuild. More information on displaying custom error messages can be found in the [Error Messages](#) section.

## Method 2: Overriding the RecordView and CreateView Layouts

Another method for defining your own custom validation is to override a module's record and create layouts to append a new view with your logic. The benefits of this method are that you can use the single view to house the validation logic, however, this means that you will have to override the layout. When overriding a layout, verify that the layout has not changed when upgrading your instance. Once the layouts are overridden, define the validation check and use the `model.addValidationTask` method to append the function to the save validation.

First, create the custom view. For the accounts example, create the view `validate-account`:

```
./custom/modules/Accounts/clients/base/views/validate-account/validate-account.js
```

```
{
  className: "hidden",

  _render: function() {
    //No-op, Do nothing here
  },

  bindDataChange: function() {
    //add validation tasks
    this.model.addValidationTask('check_account_type', _.bind(this._doValidateCheckType, this));
    this.model.addValidationTask('check_email', _.bind(this._doValidateEmail, this));
  },

  _doValidateCheckType: function(fields, errors, callback) {
    //validate type requirements
    if (this.model.get('account_type') == 'Customer' && _.isEmpty(this.model.get('phone_office')))
    {
      errors['phone_office'] = errors['phone_office'] || {};
      errors['phone_office'].required = true;
    }
  }
}
```

---

```

        callback(null, fields, errors);
    },

    _doValidateEmail: function(fields, errors, callback) {
        //validate email requirements
        if (_.isEmpty(this.model.get('email')))
        {
            errors['email'] = errors['email'] || {};
            errors['email'].required = true;
        }

        callback(null, fields, errors);
    },
})

```

More information on displaying custom error messages can be found in the [Error Messages](#) section. Next, depending on the selected module, duplicate its create layout to the modules custom folder to handle record creation. In our Accounts example, we have an existing

`./modules/Accounts/clients/base/layouts/create/create.php` file so we need to duplicate this file to

`./custom/modules/Accounts/clients/base/layouts/create/create.php`. After this has been completed, append the new custom view to the components. append:

```

array(
    'view' => 'validate-account',
),

```

As shown below:

`./custom/modules/Accounts/clients/base/layouts/create/create.php`

```
<?php
```

```

$viewdefs['Accounts']['base']['layout']['create'] = array(
    'components' =>
        array(
            array(
                'layout' =>
                    array(
                        'components' =>
                            array(
                                array(
                                    'layout' =>
                                        array(
                                            'components' =>

```

```

                                array(
                                    array(
                                        'view' => 'cre
ate',
                                    ),
                                    array(
                                        'view' => 'val
idate-account',
                                    ),
                                ),
                                'type' => 'simple',
                                'name' => 'main-pane',
                                'span' => 8,
                            ),
                        ),
                    array(
                        'layout' =>
                            array(
                                'components' =>
                                    array(),
                                'type' => 'simple',
                                'name' => 'side-pane',
                                'span' => 4,
                            ),
                    ),
                    array(
                        'layout' =>
                            array(
                                'components' =>
                                    array(
                                        array(
                                            'view' =>
                                                array (
                                                    'name'
=> 'dnb-account-create',
                                                    'label
' => 'DNB Account Create',
                                                ),
                                            'width' => 12,
                                        ),
                                    ),
                                'type' => 'simple',
                                'name' => 'dashboard-
pane',
                                'span' => 4,
                            ),
                    ),

```

---

```

        ),
        array(
            'layout' =>
                array(
                    'components' =>
                        array(
                            array(
                                'layout' => 'p
review',
                                ),
                            ),
                        'type' => 'simple',
                        'name' => 'preview-pane',
                        'span' => 8,
                    ),
                ),
            ),
            'type' => 'default',
            'name' => 'sidebar',
            'span' => 12,
        ),
    ),
    'type' => 'simple',
    'name' => 'base',
    'span' => 12,
);

```

Lastly, depending on the selected module, duplicate its record layout to the modules custom folder to handle editing a record. In the accounts example, we do not have an existing `./modules/Accounts/clients/base/layouts/record/record.php` file so we duplicated the core `./clients/base/layouts/record/record.php` to `./custom/modules/Accounts/clients/base/layouts/record/record.php`. Since we are copying from the `./clients/` core directory, modify:

```

$viewdefs['base']['layout']['record'] = array(
    ...
);

```

To:

```

$viewdefs['Accounts']['base']['layout']['record'] = array(
    ...
);

```

After this has been completed, append the new custom view to the components:

---

```
array(
    'view' => 'validate-account',
),
```

The resulting file is shown below:

`./custom/modules/Accounts/clients/base/layouts/record/record.php`

```
<?php
```

```
$viewdefs['Accounts']['base']['layout']['record'] = array(
    'components' => array(
        array(
            'layout' => array(
                'components' => array(
                    array(
                        'layout' => array(
                            'components' => array(
                                array(
                                    'view' => 'record',
                                    'primary' => true,
                                ),
                                array(
                                    'view' => 'validate-account',
                                ),
                                array(
                                    'layout' => 'extra-info',
                                ),
                                array(
                                    'layout' => array(
                                        'name' => 'filterpanel',
                                        'span' => 12,
                                        'last_state' => array(
                                            'id' => 'record-
filterpanel',
                                            'defaults' => array(
                                                'toggle-
view' => 'subpanels',
                                            ),
                                        ),
                                        'availableToggles' => array(
                                            array(
                                                'name' => 'subpanels',
                                                'icon' => 'icon-
table',
                                                'label' => 'LBL_DATA_V
```

---

```

IEW',
                                ),
                                array(
                                    'name' => 'list',
                                    'icon' => 'icon-
table',
                                    'label' => 'LBL_LISTVI
EW',
                                ),
                                array(
                                    'name' => 'activitystr
eam',
                                    'icon' => 'icon-th-
list',
                                    'label' => 'LBL_ACTIVI
TY_STREAM',
                                ),
                                ),
                                'components' => array(
                                    array(
                                        'layout' => 'filter',
                                        'targetEl' => '.filter
',
                                        'position' => 'prepend
',
                                    ),
                                    array(
                                        'view' => 'filter-
rows',
                                        "targetEl" => '.filter-
options'
                                    ),
                                    array(
                                        'view' => 'filter-
actions',
                                        "targetEl" => '.filter-
options'
                                    ),
                                    array(
                                        'layout' => 'activitys
tream',
                                        'context' =>
                                        array(
                                            'module' => 'Activ
ities',
                                        ),
                                ),

```

---

---

```

        ),
        array(
            'layout' => 'subpanels
',
        ),
    ),
),
),
    'type' => 'simple',
    'name' => 'main-pane',
    'span' => 8,
),
),
array(
    'layout' => array(
        'components' => array(
            array(
                'layout' => 'sidebar',
            ),
        ),
        'type' => 'simple',
        'name' => 'side-pane',
        'span' => 4,
    ),
),
array(
    'layout' => array(
        'components' => array(
            array(
                'layout' => array(
                    'type' => 'dashboard',
                    'last_state' => array(
                        'id' => 'last-visit',
                    )
                ),
            ),
            'context' => array(
                'forceNew' => true,
                'module' => 'Home',
            ),
        ),
    ),
    'type' => 'simple',
    'name' => 'dashboard-pane',
    'span' => 4,
),

```





---

## Key Concepts

There are two key things to understand when implementing this functionality:

1. You **can not** relate an existing Note record to an Email record. This will throw an Exception in the API as intended. A note that is used as an attachment can only exist once and can not act as an attachment across multiple emails.
2. You **can** create a new Note record that uses an existing Note's attached file. Doing so essentially requires setting the `upload_id` field of the new Note record to the id of the existing Note you want to reuse the file from, and setting the `file_source` field of the new Note to 'Notes'. In addition to needing to set the `upload_id`, you must also set the `filename` and `name` field.

The following examples demonstrate how to do this in three different contexts: server-side (SugarBean/PHP), client-side (sidecar/Javascript), and purely through the API. But all three contexts follow the same essential steps:

1. Fetch the original Note record;
2. Create a new Note record, setting the necessary fields from the original Note record;
3. Link the new Note record to the Email record via the appropriate 'attachments' link.

## PHP

This example would be done server-side using the SugarBean object, similar to how you might interact with the records in a custom Logic Hook or Scheduler job.

```
$original_note_id = '4e226282-8158-11e8-a1b3-439fe19c087a';
$email_id = 'e3e058f4-7f11-11e8-ba11-fcdd97d61bbe';

// 1. Fetch Original Note:
$original_note = BeanFactory::retrieveBean('Notes', $original_note_id)
;

// 2. Create a new note based on original note, setting upload_id, name, and filename:
$new_note = BeanFactory::newBean('Notes');
$new_note->upload_id = $original_note->getUploadId();
$new_note->file_source = 'Notes';
$new_note->filename = $original_note->filename;
$new_note->name = $original_note->filename;
```

---

```
// 3. Relate the new note to Email record using 'attachments' link:
$email = BeanFactory::retrieveBean('Emails', $email_id);
$email->load_relationship('attachments');
$email->attachments->add($email, $new_note);
```

Note that in most contexts, such as a Logic Hook or a custom endpoint, you will not need to call `save()` on either the `$new_note` or `$email` for `$new_note` to be related as an attachment to `$email` and for `$new_note` to save. The `$new_note` record will save as part of being linked to `$email`.

## Javascript

The following example is totally standalone within Sidecar, demonstrating how to fetch the existing Note using `app.data.createBean` and `bean.fetch()`, create the new Note using `app.data.createBean` and setting the relevant fields, and then adding the new Note to the email records `attachments_collection`.

```
var original_note_id = '4e226282-8158-11e8-a1b3-439fe19c087a';
var email_id = 'e3e058f4-7f11-11e8-ba11-fcdd97d61bbe';

// 1. Fetch Original Note:
var original_note = app.data.createBean('Notes');
original_note.set('id', original_note_id);
original_note.fetch();

// 2. Create a new note based on original note, setting upload_id, name, and filename:

var new_note = app.data.createBean('Notes', {
  _link: 'attachments',
  upload_id: original_note.get('id'),
  file_source: 'Notes',
  filename: original_note.get('filename'),
  name: original_note.get('filename'),
  file_mime_type: original_note.get('file_mime_type'),
  file_size: original_note.get('file_size'),
  file_ext: original_note.get('file_ext'),
});

// 3. Relate the new note to Email record using 'attachments_collection' link:

var email = app.data.createBean('Emails');
email.set('id', email_id);
```

---

```
email.fetch();
```

```
email.get('attachments_collection').add(new_note, {merge:true});  
email.save();
```

**Note:** In the above example, the fields `file_mime_type`, `file_size`, and `file_ext` are also set. This is assuming a context where the customization is adding the attachments to the Compose Email view. Setting these fields makes the new attachments look correct to the user before saving the Email, but these fields are otherwise set automatically on save. If extending the actual compose view for emails, you also wouldn't fetch the email directly. This is added in this example purely for demonstration purposes.

## REST API

The following section will outline how to related the attachment using the REST API using the `/link/attachments/` endpoint for the Email record.

### Fetch Original Note

To fetch the original note, send a GET request to `rest/{REST VERSION}/Notes/{$original_note_id}`. An example of the response is shown below:

```
{  
  "id": "4e226282-8158-11e8-a1b3-439fe19c087a",  
  "name": "Note with Attachment",  
  "date_entered": "2018-07-01T12:00:00-00:00",  
  "description": "Send to special clients.",  
  "file_mime_type": "application/pdf",  
  "filename": "special_sales_doc.pdf",  
  "_module": "Notes"  
}
```

### Create and Relate a Note

Create a JSON object based on the response (which we will treat as a JSON object named `$original_note`) like:

```
{  
  "upload_id": "$original_note.id",  
  "file_source" : "Notes"
```

---

```
"name" : "$original_note.filename",  
"filename" : "$original_note.filename",  
}
```

Relate the Note to the Email record using the 'attachments' link. Next, send a POST request to `rest/{REST VERSION}/Emails/{$email_id}/link/attachments/` with the JSON shown above as the request body.

**Last Modified:** 2021-02-17 02:44:13

## Adding the Email Field to a Bean

### Overview

This example explains how to add an emails field for modules that don't extend the Person module template. We will create an email field and bring the email functionality module bean. The steps are applicable for stock and custom modules. In this example, we will add the email field into the Opportunities module.

### Steps to Complete

This tutorial requires the following steps, which are explained in the sections below:

1. Creating a Custom Vardef file for email Field and Relationships
2. Creating a Custom Bean and Modify the save function
3. Replacing the stock bean with the custom bean
4. Adding Emails Field into Record View

### Creating a Custom Vardef file for email Field and Relationships

You will create a file in the `custom/Extension/modules/Opportunities/` folder for the field and relationships definitions.

```
./custom/Extension/modules/Opportunities/Ext/Vardefs/custom_email_field.php
```

```
<?php
```

```
$module = 'Opportunity';
```

---

```

$stable_name = 'opportunities';

$dictionary[$module]['fields']['email'] = array(
    'name' => 'email',
    'type' => 'email',
    'query_type' => 'default',
    'source' => 'non-db',
    'operator' => 'subquery',
    'subquery' => 'SELECT eabr.bean_id FROM email_addr_bean_rel eabr J
OIN email_addresses ea ON (ea.id = eabr.email_address_id) WHERE eabr.d
eleted=0 AND ea.email_address LIKE',
    'db_field' => array(
        'id',
    ),
    'vname' => 'LBL_EMAIL_ADDRESS',
    'studio' => array(
        'visible' => true,
        'searchview' => true,
        'editview' => true,
        'editField' => true,
    ),
    'duplicate_on_record_copy' => 'always',
    'len' => 100,
    'link' => 'email_addresses_primary',
    'rname' => 'email_address',
    'module' => 'EmailAddresses',
    'full_text_search' => array(
        'enabled' => true,
        'searchable' => true,
        'boost' => 1.50,
    ),
    'audited' => true,
    'pii' => true,
);

$dictionary[$module]['fields']['email1'] = array(
    'name' => 'email1',
    'vname' => 'LBL_EMAIL_ADDRESS',
    'type' => 'varchar',
    'function' => array(
        'name' => 'getEmailAddressWidget',
        'returns' => 'html',
    ),
    'source' => 'non-db',
    'link' => 'email_addresses_primary',
    'rname' => 'email_address',
);

```

---

---

```

    'group' => 'email1',
    'merge_filter' => 'enabled',
    'module' => 'EmailAddresses',
    'studio' => false,
    'duplicate_on_record_copy' => 'always',
    'importable' => false,
);

$dictionary[$module]['fields']['email2'] = array(
    'name' => 'email2',
    'vname' => 'LBL_OTHER_EMAIL_ADDRESS',
    'type' => 'varchar',
    'function' => array(
        'name' => 'getEmailAddressWidget',
        'returns' => 'html',
    ),
    'source' => 'non-db',
    'group' => 'email2',
    'merge_filter' => 'enabled',
    'studio' => 'false',
    'duplicate_on_record_copy' => 'always',
    'importable' => false,
    'workflow' => false,
);

$dictionary[$module]['fields']['invalid_email'] = array(
    'name' => 'invalid_email',
    'vname' => 'LBL_INVALID_EMAIL',
    'source' => 'non-db',
    'type' => 'bool',
    'link' => 'email_addresses_primary',
    'rname' => 'invalid_email',
    'massupdate' => false,
    'studio' => 'false',
    'duplicate_on_record_copy' => 'always',
);

$dictionary[$module]['fields']['email_opt_out'] = array(
    'name' => 'email_opt_out',
    'vname' => 'LBL_EMAIL_OPT_OUT',
    'source' => 'non-db',
    'type' => 'bool',
    'link' => 'email_addresses_primary',
    'rname' => 'opt_out',
    'massupdate' => false,
    'studio' => 'false',
);

```

---

```

        'duplicate_on_record_copy' => 'always',
    );

$dictionary[$module]['fields']['email_addresses_primary'] = array(
    'name' => 'email_addresses_primary',
    'type' => 'link',
    'relationship' => strtolower($table_name) . '_email_addresses_prim
ary',
    'source' => 'non-db',
    'vname' => 'LBL_EMAIL_ADDRESS_PRIMARY',
    'duplicate_merge' => 'disabled',
    'primary_only' => true,
);

$dictionary[$module]['fields']['email_addresses'] = array(
    'name' => 'email_addresses',
    'type' => 'link',
    'relationship' => strtolower($table_name) . '_email_addresses',
    'source' => 'non-db',
    'vname' => 'LBL_EMAIL_ADDRESSES',
    'reportable' => false,
    'unified_search' => true,
    'rel_fields' => array('primary_address' => array('type' => 'bool'))
),
);

// Used for non-primary mail import
$dictionary[$module]['fields']['email_addresses_non_primary'] = array(
    'name' => 'email_addresses_non_primary',
    'type' => 'varchar',
    'source' => 'non-db',
    'vname' => 'LBL_EMAIL_NON_PRIMARY',
    'studio' => false,
    'reportable' => false,
    'massupdate' => false,
);

$dictionary[$module]['relationships'][strtolower($table_name) . '_emai
l_addresses'] = array(
    'lhs_module' => $table_name,
    'lhs_table' => strtolower($table_name),
    'lhs_key' => 'id',
    'rhs_module' => 'EmailAddresses',
    'rhs_table' => 'email_addresses',
    'rhs_key' => 'id',
    'relationship_type' => 'many-to-many',

```

---

```

    'join_table' => 'email_addr_bean_rel',
    'join_key_lhs' => 'bean_id',
    'join_key_rhs' => 'email_address_id',
    'relationship_role_column' => 'bean_module',
    'relationship_role_column_value' => $table_name,
);

$dictionary[$module]['relationships'][$strtolower($table_name) . '_email_addresses_primary'] = array(
    'lhs_module' => $table_name,
    'lhs_table' => strtolower($table_name),
    'lhs_key' => 'id',
    'rhs_module' => 'EmailAddresses',
    'rhs_table' => 'email_addresses',
    'rhs_key' => 'id',
    'relationship_type' => 'many-to-many',
    'join_table' => 'email_addr_bean_rel',
    'join_key_lhs' => 'bean_id',
    'join_key_rhs' => 'email_address_id',
    'relationship_role_column' => 'bean_module',
    'relationship_role_column_value' => $module,
    'primary_flag_column' => 'primary_address',
);

```

## Creating a Custom Bean and Modifying the Save Function

Next step, you will need to create a custom bean that extends from the stock bean. In our example, we choose the Opportunities.

`./custom/modules/Opportunities/CustomOpportunity.php`

```

<?php

class CustomOpportunity extends Opportunity
{
    /**
     * Constructor
     */
    public function __construct()
    {
        parent::__construct();
        $this->emailAddress = BeanFactory::newBean('EmailAddresses');
    }

    /**

```



---

```

    * Populate email address fields here instead of retrieve() so tha
t they are properly available for logic hooks
    *
    * @see parent::fill_in_relationship_fields()
    */
public function fill_in_relationship_fields()
{
    parent::fill_in_relationship_fields();
    $this->emailAddress->handleLegacyRetrieve($this);
}

/**
 * @see parent::get_list_view_data()
 */
public function get_list_view_data()
{
    global $current_user;

    $temp_array = $this->get_list_view_array();

    $temp_array['EMAIL'] = $this->emailAddress->getPrimaryAddress(
$this);

    // Fill in the email1 field only if the user has access to it
    // This is a special case, because getEmailLink() uses email1
field for making the link
    // Otherwise get_list_view_data() shouldn't set any fields exc
ept fill the template data
    if ($this->ACLFieldAccess('email1', 'read')) {
        $this->email1 = $temp_array['EMAIL'];
    }

    $temp_array['EMAIL_LINK'] = $current_user->getEmailLink('email
1', $this, '', '', 'ListView');

    return $temp_array;
}

/**
 *
 * @see parent::save()
 */
public function save($check_notify = false)
{
    if (static::inOperation('saving_related')) {
        parent::save($check_notify);
    }
}

```

---

```

        return $this;
    }

    $ori_in_workflow = empty($this->in_workflow) ? false : true;
    $this->emailAddress->handleLegacySave($this, $this->module_dir
);
    parent::save($check_notify);
    $override_email = array();
    if (!empty($this->email1_set_in_workflow)) {
        $override_email['emailAddress0'] = $this->email1_set_in_wor
rkflow;
    }

    if (!empty($this->email2_set_in_workflow)) {
        $override_email['emailAddress1'] = $this->email2_set_in_wor
rkflow;
    }

    if (!isset($this->in_workflow)) {
        $this->in_workflow = false;
    }

    if ($ori_in_workflow === false || !empty($override_email)) {
        $result = $this->emailAddress->save($this->id, $this->modu
le_dir, $override_email, '', '', '', '',
        $this->in_workflow);
    }

    return $this;
}
}

```

## Replacing the Stock Bean with a Custom Bean

Once you created the custom bean, you will need to show Sugar to use Custom bean. To do that you will create `./custom/modules/<modulename>/<modulename>.php` and update the class name and file path in the `$beanList` and `$beanFiles`. (See: [Modules \\$beanList](#) and [Customizing Core SugarBeans](#))

`custom/Extension/application/Ext/Include/customOpportunities.php`

`<?php`

---

```
$objectList['Opportunities'] = 'Opportunity';
$beanList['Opportunities'] = 'CustomOpportunity';
$beanFiles['CustomOpportunity'] = 'custom/modules/Opportunities/Custom
Opportunity.php';
```

Once you have created these files, you will need to navigate Admin > Repairs and perform Quick Repair and Rebuild.

## Adding the Emails Field to the Record View

At the stage, you have already created the field and updated the bean. The last step is placing the email field to record view. You can perform this step using Studio. Once you navigate to Studio you will find an Email field on the left column where available fields are listed. After adding the field the record views of Opportunities will look like this:

```
./custom/modules/Opportunities/clients/base/views/record/record.php
```

```
<?php
$viewdefs['Opportunities'] =
array (
  'base' =>
  array (
    'view' =>
    array (
      'record' =>
      array (
        'buttons' =>
        array (
          0 =>
          array (
            'type' => 'button',
            'name' => 'cancel_button',
            'label' => 'LBL_CANCEL_BUTTON_LABEL',
            'css_class' => 'btn-invisible btn-link',
            'showOn' => 'edit',
            'events' =>
            array (
              'click' => 'button:cancel_button:click',
            ),
          ),
          1 =>
          array (
            'type' => 'rowaction',
```

---

```
'event' => 'button:save_button:click',
'name' => 'save_button',
'label' => 'LBL_SAVE_BUTTON_LABEL',
'css_class' => 'btn btn-primary',
'showOn' => 'edit',
'acl_action' => 'edit',
),
2 =>
array (
  'type' => 'actiondropdown',
  'name' => 'main_dropdown',
  'primary' => true,
  'showOn' => 'view',
  'buttons' =>
  array (
    0 =>
    array (
      'type' => 'rowaction',
      'event' => 'button:edit_button:click',
      'name' => 'edit_button',
      'label' => 'LBL_EDIT_BUTTON_LABEL',
      'acl_action' => 'edit',
    ),
    1 =>
    array (
      'type' => 'shareaction',
      'name' => 'share',
      'label' => 'LBL_RECORD_SHARE_BUTTON',
      'acl_action' => 'view',
    ),
    2 =>
    array (
      'type' => 'pdfaction',
      'name' => 'download-pdf',
      'label' => 'LBL_PDF_VIEW',
      'action' => 'download',
      'acl_action' => 'view',
    ),
    3 =>
    array (
      'type' => 'pdfaction',
      'name' => 'email-pdf',
      'label' => 'LBL_PDF_EMAIL',
      'action' => 'email',
      'acl_action' => 'view',
    ),
  ),
```

---

```
4 =>
array (
  'type' => 'divider',
),
5 =>
array (
  'type' => 'rowaction',
  'event' => 'button:find_duplicates_button:click',
  'name' => 'find_duplicates_button',
  'label' => 'LBL_DUP_MERGE',
  'acl_action' => 'edit',
),
6 =>
array (
  'type' => 'rowaction',
  'event' => 'button:duplicate_button:click',
  'name' => 'duplicate_button',
  'label' => 'LBL_DUPLICATE_BUTTON_LABEL',
  'acl_module' => 'Opportunities',
  'acl_action' => 'create',
),
7 =>
array (
  'type' => 'rowaction',
  'event' => 'button:historical_summary_button:click',
  'name' => 'historical_summary_button',
  'label' => 'LBL_HISTORICAL_SUMMARY',
  'acl_action' => 'view',
),
8 =>
array (
  'type' => 'rowaction',
  'event' => 'button:audit_button:click',
  'name' => 'audit_button',
  'label' => 'LNK_VIEW_CHANGE_LOG',
  'acl_action' => 'view',
),
9 =>
array (
  'type' => 'divider',
),
10 =>
array (
  'type' => 'rowaction',
  'event' => 'button:delete_button:click',
  'name' => 'delete_button',
```

---

```

        'label' => 'LBL_DELETE_BUTTON_LABEL',
        'acl_action' => 'delete',
    ),
),
),
3 =>
array (
    'name' => 'sidebar_toggle',
    'type' => 'sidebartoggle',
),
),
'panels' =>
array (
    0 =>
array (
    'name' => 'panel_header',
    'header' => true,
    'fields' =>
array (
    0 =>
array (
        'name' => 'picture',
        'type' => 'avatar',
        'size' => 'large',
        'dismiss_label' => true,
        'readonly' => true,
    ),
    1 =>
array (
        'name' => 'name',
        'related_fields' =>
array (
            0 => 'total_revenue_line_items',
            1 => 'closed_revenue_line_items',
            2 => 'included_revenue_line_items',
        ),
    ),
    2 =>
array (
        'name' => 'favorite',
        'label' => 'LBL_FAVORITE',
        'type' => 'favorite',
        'dismiss_label' => true,
    ),
    3 =>
array (

```

---

```

        'name' => 'follow',
        'label' => 'LBL_FOLLOW',
        'type' => 'follow',
        'readonly' => true,
        'dismiss_label' => true,
    ),
),
),
1 =>
array (
    'name' => 'panel_body',
    'label' => 'LBL_RECORD_BODY',
    'columns' => 2,
    'labels' => true,
    'labelsOnTop' => true,
    'placeholders' => true,
    'newTab' => false,
    'panelDefault' => 'expanded',
    'fields' =>
    array (
        0 =>
        array (
            'name' => 'account_name',
            'related_fields' =>
            array (
                0 => 'account_id',
            ),
        ),
    ),
    1 =>
    array (
        'name' => 'date_closed',
        'related_fields' =>
        array (
            0 => 'date_closed_timestamp',
        ),
    ),
    2 =>
    array (
        'name' => 'amount',
        'type' => 'currency',
        'label' => 'LBL_LIKELY',
        'related_fields' =>
        array (
            0 => 'amount',
            1 => 'currency_id',
            2 => 'base_rate',

```

---

```

    ),
    'currency_field' => 'currency_id',
    'base_rate_field' => 'base_rate',
    'span' => 12,
  ),
  3 =>
  array (
    'name' => 'best_case',
    'type' => 'currency',
    'label' => 'LBL_BEST',
    'related_fields' =>
    array (
      0 => 'best_case',
      1 => 'currency_id',
      2 => 'base_rate',
    ),
    'currency_field' => 'currency_id',
    'base_rate_field' => 'base_rate',
  ),
  4 =>
  array (
    'name' => 'worst_case',
    'type' => 'currency',
    'label' => 'LBL_WORST',
    'related_fields' =>
    array (
      0 => 'worst_case',
      1 => 'currency_id',
      2 => 'base_rate',
    ),
    'currency_field' => 'currency_id',
    'base_rate_field' => 'base_rate',
  ),
  5 =>
  array (
    'name' => 'tag',
    'span' => 6,
  ),
  6 =>
  array (
    'name' => 'sales_status',
    'readonly' => true,
    'studio' => true,
    'label' => 'LBL_SALES_STATUS',
    'span' => 6,
  ),

```



---

```

7 =>
array (
  'name' => 'email',
  'studio' =>
array (
  'visible' => true,
  'searchview' => true,
  'editview' => true,
  'editField' => true,
),
  'label' => 'LBL_EMAIL_ADDRESS',
  'span' => 12,
),
),
),
2 =>
array (
  'name' => 'panel_hidden',
  'label' => 'LBL_RECORD_SHOWMORE',
  'hide' => true,
  'labelsOnTop' => true,
  'placeholders' => true,
  'columns' => 2,
  'newTab' => false,
  'panelDefault' => 'expanded',
  'fields' =>
array (
  0 => 'next_step',
  1 => 'opportunity_type',
  2 => 'lead_source',
  3 => 'campaign_name',
  4 =>
array (
  'name' => 'description',
  'span' => 12,
),
  5 => 'assigned_user_name',
  6 => 'team_name',
  7 =>
array (
  'name' => 'date_entered_by',
  'readonly' => true,
  'type' => 'fieldset',
  'label' => 'LBL_DATE_ENTERED',
  'fields' =>
array (

```



---

```
),  
,  
);
```

Once the files are in place, navigate to Admin > Repair > Quick Repair & Rebuild to regenerate the metadata.

**Last Modified:** 2021-02-17 02:44:13

## Converting Address' Country Field to a Dropdown

### Overview

Address fields in Sugar are normally text fields, which allow users to enter in the appropriate information (e.g. street, city, and country) for the record. However, with multiple users working in Sugar, it is possible for data (e.g. country) to be entered in a variety of different ways (e.g. USA, U.S.A, and United States) when creating or editing the record. This can cause some issues when creating a report grouped by the Billing Country field, for example, as records with the same country will be grouped separately based on the different ways the country was entered.

This article will cover how to change the address' Billing Country field to a dropdown list which will allow users to select a single value (e.g. USA) and maintain consistency in data throughout the system.

**Note:** This article pertains to Sugar versions 6.x and 7.x.

### Use Case

In this example, we will convert the Billing Country field in the Accounts module to a dropdown-type field to allow values to be selected from a dropdown list.

### Prerequisites

A part of making this change involves mapping the "countries\_dom" dropdown list to your existing Billing Country field's values. This dropdown list can be accessed

---

and modified via Admin > Dropdown Editor. For more information on editing dropdown lists, please refer to the [Developer Tools](#) documentation. It is very important that the existing values in the Billing Country field exactly match the Item Name values in the "countries\_dom" dropdown list in order for the values to convert properly. If the existing value (e.g. United States) does not match one of the country options (e.g. USA) in the dropdown list, then the new dropdown version of the Billing Country field will most likely default to a blank value for that record record.

To avoid such issues, please review and update all of your existing Billing Country text field values prior to making this change. For more information on updating many records at once via import, please refer to the [Updating Records Via Import](#) article.

## Steps to Complete

### Converting Field to Dropdown

Use the following steps to change the Billing Country field to a dropdown list:

1. First, we will associate the Billing Country field in the Accounts module with the "countries\_dom" dropdown. Locate the following directory in your Sugar file system: `./custom/Extension/modules/Accounts/Ext/Vardefs/`
2. Locate a file called `sugarfield_billing_address_country.php` which controls the `billing_address_country` field and add the following lines to the file. This will set the field type to 'enum' and define the dropdown (countries\_dom) to use for the field.

**Note:** If this file or location does not exist, then you will need to first create this path and file.

Your file should look like this:

3. `<?php`

```
$dictionary['Account']['fields']['billing_address_country']['type']='enum';
$dictionary['Account']['fields']['billing_address_country']['options']='countries_dom';
```

4. Now, since the address block is handled uniquely in Sugar, we will also need to modify the template file in order to display the field as a dropdown anywhere the layout is being used in backward compatibility mode. To do this in an upgrade safe way, you will need to copy the file located in `./include/SugarFields/Fields/Address/en_us.EditView.tpl` and place it in the

---

following directory: `./custom/include/SugarFields/Fields/Address/`.

If you are using multiple languages in Sugar, you will need to make this change for each language-type in your system. For our example, we will be focusing on the "en\_us" language.

**Note:** You will most likely need to create this directory as it likely does not already exist.

5. Once the `en_us.EditView.tpl` file is in the custom directory, locate the line for the input html element for the country field. The line of code should look similar to this:

```
<input type="text" name="{{ $country }}" id="{{ $country }}" size="{
$displayParams.size|default:30}" {{if !empty($vardef.len)}}max
length='{{ $vardef.len }}' {{/if}} value='{{ $fields.{{ $country }}.val
ue}' tabindex="{{ $tabindex }}">
```

6. Directly between the list shown above and the `<td>` appearing before it, add the following lines to display the field as a dropdown:

```
{if (!isset($config.enable_autocomplete) || $config.enable_autoc
omplete==false) && isset($fields.{{ $country }}.options)}
<select name="{{ $country }}" id="{{ $country }}" title=''>
{if isset($fields.{{ $country }}.value) && $fields.{{ $country }}.va
lue != ''}
{html_options options=$fields.{{ $country }}.options selected=$fie
lds.{{ $country }}.value}
{else}
{html_options options=$fields.{{ $country }}.options selected=$fie
lds.{{ $country }}.default}
{/if}
</select>
{else}
<input type="text" name="{{ $country }}" id="{{ $country }}" size="{
$displayParams.size|default:30}" {{if !empty($vardef.len)}}max
length='{{ $vardef.len }}' {{/if}} value='{{ $fields.{{ $country }}.val
ue}' tabindex="{{ $tabindex }}">
{/if}
```

7. Save the changes to the file.

Once the necessary change has been made, please navigate to Admin > Repair and perform a [Quick Repair and Rebuild](#) in order for the change to take effect. Your Billing Country field will now display as a dropdown field in the Accounts module.

Please note that only the Account module's Billing Country field will be converted

to a dropdown field once this change is applied. If you wish to have the Shipping Country field converted to a dropdown as well, please follow the [steps](#) above, but be sure to make the change specific to the "shipping\_address\_country" field. In addition, you can make this change for other modules (e.g. Contacts and Leads) as well by specifying the appropriate module name (e.g. Contacts) and field name (e.g. Primary Address Country) when going through the steps.

## Updating the Field Type for List View Filter

Once the appropriate changes have been made per the [section](#) above, use the following steps to get the list view filter to recognize the change:

1. Navigate to Admin > Studio > Accounts > Layouts > Search.
2. Drag the Billing Country field from the Default column to the Hidden column and click "Save & Deploy".

The screenshot shows the Salesforce Studio interface for the 'Search' layout. The left sidebar shows the 'Modules' tree with 'Accounts > Layouts > Search' selected. The main area is divided into two columns: 'Default' and 'Hidden'. The 'Default' column contains the following fields: Name ([name]), Type ([account\_type]), Industry ([industry]), Annual Revenue ([annual\_revenue]), Street ([address\_street]), City ([address\_city]), State ([address\_state]), Postal Code ([address\_postalcode]), and Billing Country ([billing\_address\_country]). The 'Hidden' column contains: Modified By ([modified\_by\_name]), Created By ([created\_by\_name]), Description ([description]), Facebook Account ([facebook]), Twitter Account ([twitter]), Google Plus ID ([googleplus]), Fax ([phone\_fax]), Billing Street 2 ([billing\_address\_street\_2]), and Billing Street 3 ([billing\_address\_street\_3]). A red box highlights the 'Billing Country' field in the Default column, and a red arrow points from it to the 'Billing Street 2' field in the Hidden column. Above the columns are buttons for 'Save & Deploy', 'View History', and 'Restore Default Layout'.

3. Now drag the Billing Country field back to the Default column and click "Save & Deploy" again.

This will retrieve the Billing Country field in its new state and add it to the account's list view filter.

---


## Application

Once the Billing Country field is converted successfully to a dropdown, all records that had an existing value in the field should have the matching country automatically selected. Going forward, users will simply need to select the appropriate country when entering address information in Sugar.

Please note that administrators can add additional country values as necessary to the "countries\_dom" dropdown via Admin > Dropdown Editor. For more information on editing dropdown lists, please refer to the [Developer Tools](#) documentation.

The Billing Country field will now appear as follows:

For Accounts record view:

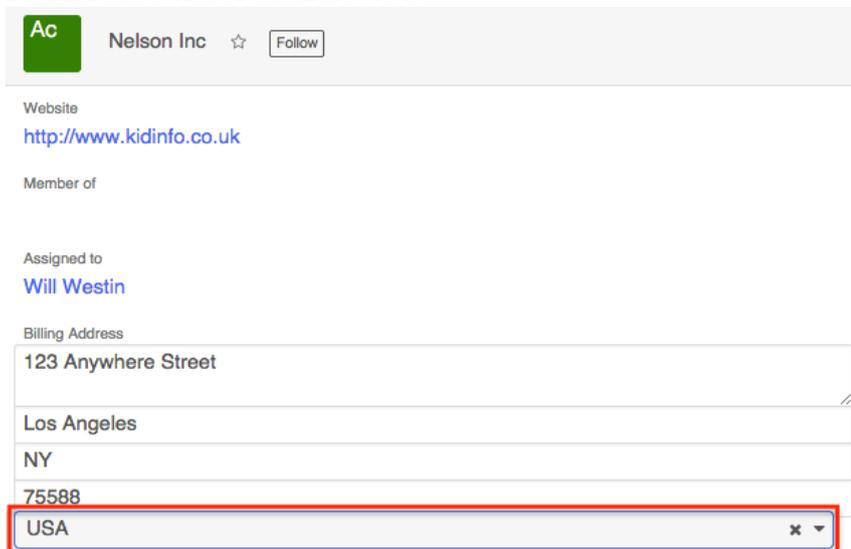

Ac Nelson Inc ☆ Follow

Website  
<http://www.kidinfo.co.uk>

Member of

Assigned to  
[Will Westin](#)

Billing Address

123 Anywhere Street


Los Angeles

NY

75588

USA

For Accounts list view filter:

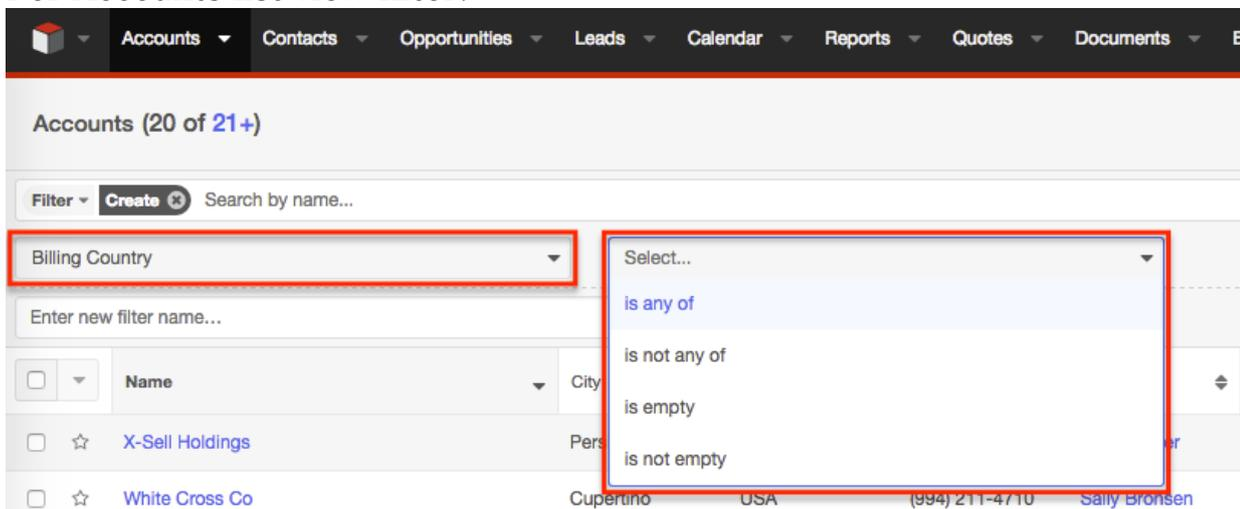

Accounts (20 of 21+)

Filter Create Search by name...

Billing Country

Select...


- is any of
- is not any of
- is empty
- is not empty

Name	City	State	Phone	Person
X-Sell Holdings	Per...			
White Cross Co	Cupertino	USA	(994) 211-4710	Sally Bronsen

# Changing the Default Module When Logging a New Call or Meeting

## Overview

When creating a call or meeting directly from the Calls or Meetings module in Sugar, the default module for the Related To field is Accounts. If your sales team frequently schedules calls and meetings related to records from a module other than Accounts, it may make sense to adjust the behavior so that the Related To field defaults to a more commonly used module. This article covers how to change the default related module for calls and meetings in Sugar.

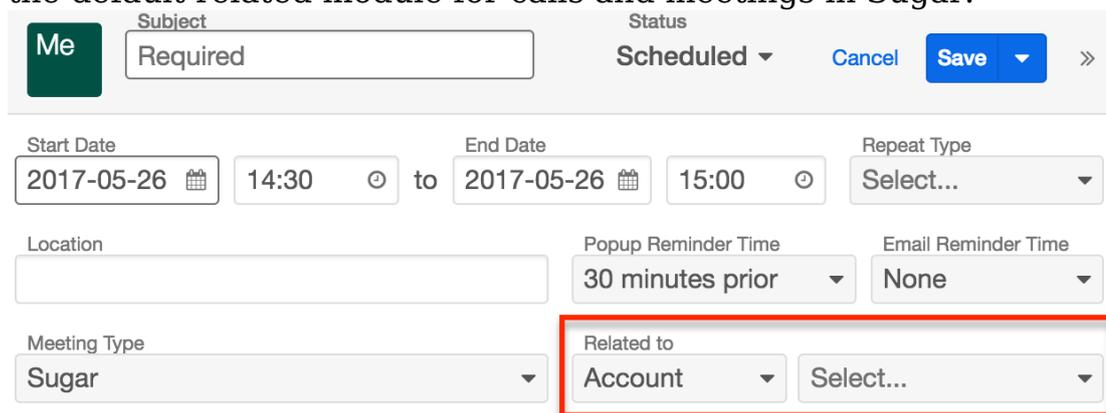

The screenshot displays the Sugar CRM interface for creating a call or meeting. The 'Subject' field is set to 'Required' and the 'Status' is 'Scheduled'. The 'Start Date' is '2017-05-26' at '14:30' and the 'End Date' is '2017-05-26' at '15:00'. The 'Repeat Type' is 'Select...'. The 'Location' field is empty. The 'Popup Reminder Time' is '30 minutes prior' and the 'Email Reminder Time' is 'None'. The 'Meeting Type' is 'Sugar'. The 'Related to' dropdown menu is highlighted with a red box, showing 'Account' as the selected option and a 'Select...' button next to it.

**Note:** This article pertains to Sugar versions 6.x and 7.x.

## Prerequisites

This change requires code-level customizations, which requires direct access to the server or familiarity with creating and installing [module loadable packages](#). If you need assistance making these changes and already have a relationship with a Sugar partner, you can work with them to make this customization. If not, please refer to the [Partner Page](#) to find a reselling partner to help with your development needs.



---

## Steps to Complete

For this example, we will change the default "Relates To" module to Contacts for records created in the [Calls](#) module and the [Meetings](#) module. Please note that, after completing these steps, the Related To field will still default to Accounts when creating a call or meeting from a contact that has an account relationship or to the current module from any other related module's record view.

## Calls

1. Create the following directory path if it does not already exist from the root of your Sugar instance directory:  
./custom/Extension/modules/Calls/Ext/Vardefs/
2. Create a file in the directory called sugarfield\_parent\_type.php with the following contents:

```
<?php
```

```
$dictionary['Call']['fields']['parent_type']['default'] = 'Contacts';
```

3. Save the file and ensure that the file has the correct permissions by referring to the [Required File System Permissions on Linux](#) and [Required File System Permissions on Windows With IIS](#) articles.
4. Log into Sugar as an administrator and navigate to Admin > Repair and perform a [Quick Repair and Rebuild](#).

Once the quick repair completes, navigate to the Calls module and "Contact" should now be selected by default for the Related To field when logging a new call.

The screenshot shows the 'Calls' module form in Sugar CRM. The form includes fields for Subject (Required), Status (Scheduled), Start Date (2017-05-26), End Date (2017-05-26), Repeat Type (Select...), Direction (Inbound), Popup Reminder Time (30 minutes prior), and Email Reminder Time (None). The 'Related to' field is highlighted with a red box and shows 'Contact' selected in the dropdown menu.

## Meetings


1. Create the following directory path if it does not already exist from the root of your Sugar instance directory:  
./custom/Extension/modules/Meetings/Ext/Vardefs/.
2. Create a file in the directory called sugarfield\_parent\_type.php with the following contents:

```
<?php
```

```
$dictionary['Meeting']['fields']['parent_type']['default'] = 'Contacts';
```

3. Save the file and ensure that the file has the correct permissions by referring to the [Required File System Permissions on Linux](#) and [Required File System Permissions on Windows With IIS](#) articles.
4. Log into Sugar as an administrator and navigate to Admin > Repair and perform a [Quick Repair and Rebuild](#).

Once the quick repair completes, navigate to the Meetings module and "Contact" should now be selected by default for the Related To field when scheduling a new meeting.

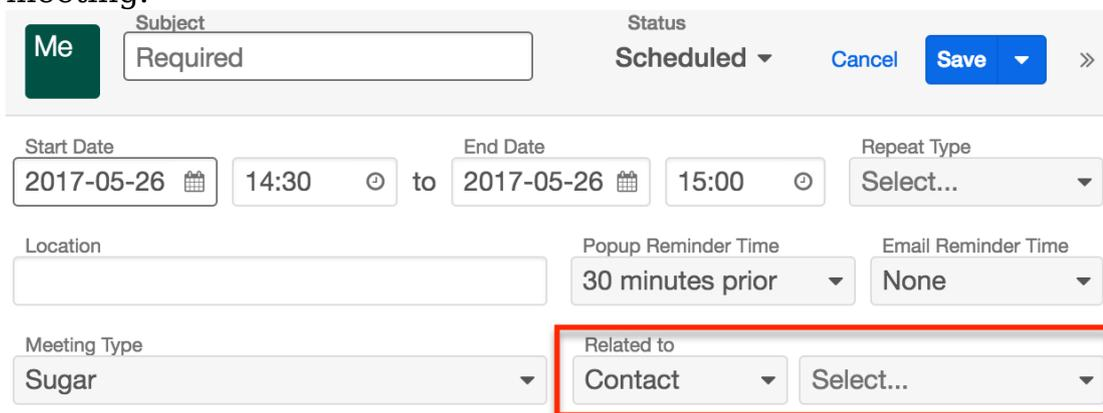

The screenshot shows the Sugar CRM meeting scheduling interface. At the top, there is a header with a user profile icon labeled 'Me', a 'Subject' field containing 'Required', and a 'Status' dropdown set to 'Scheduled'. Below this are fields for 'Start Date' (2017-05-26), 'End Date' (2017-05-26), and 'Repeat Type' (Select...). Further down are 'Location', 'Popup Reminder Time' (30 minutes prior), and 'Email Reminder Time' (None). At the bottom, there is a 'Meeting Type' dropdown set to 'Sugar' and a 'Related to' dropdown set to 'Contact'. The 'Related to' dropdown is highlighted with a red rectangular box.

**Last Modified:** 2021-02-17 02:44:13

## Creating Custom Field Types

### Overview

In this example, we create a custom field type called "Highlightfield", which will

---

mimic the base text field type with the added feature that the displayed text for the field will be highlighted in a color chosen when the field is created in Studio.

This example requires the following steps, which are covered in the sections and subsections below:

1. [Creating the JavaScript Controller](#)
2. [Defining the Handlebar Templates](#)
3. [Adding the Field Type to Studio](#)
4. [Enabling Search and Filtering](#)

**Note:** Custom field types are *not* currently functional for use in Reports and will break Report Wizard.

## Naming a Custom Field Type in Sugar

When choosing a name for a custom field type, keep in mind the following rules:

- The first letter of a custom field type's name must be capitalized.
- All subsequent letters in the field type's name must be lowercase.
- A field type's name cannot contain non-letter characters such as 0-9, hyphens, or dashes.

Therefore, in this example, the field type "Highlightfield" cannot be called HighLightField or highlightfield.

## Creating the JavaScript Controller

First, create a controller file. Since we are starting from scratch, we need to extend the base field template. To accomplish this, create `./custom/clients/base/fields/Highlightfield/Highlightfield.js`. This file will contain the JavaScript needed to render the field and format the values. By default, all fields extend the base template and do not require you to add the `extendsFrom` property. An example template is shown below:

```
./custom/clients/base/fields/Highlightfield/Highlightfield.js
```

```
( {  
  /**  
   * Called when initializing the field  
   * @param options  
   */  
  initialize: function(options) {
```

---

```

        this._super('initialize', [options]);
    },

    /**
     * Called when rendering the field
     * @private
     */
    _render: function() {
        this._super('_render');
    },

    /**
     * Called when formatting the value for display
     * @param value
     */
    format: function(value) {
        return this._super('format', [value]);
    },

    /**
     * Called when unformatting the value for storage
     * @param value
     */
    unformat: function(value) {
        return this._super('unformat', [value]);
    }
}
}))

```

**Note:** This controller file example contains methods for initialize, \_render, format, and unformat. These are shown for your ease of use but are not necessarily needed for this customization. For example, you could choose to create an empty controller consisting of nothing other than ({}), and the field would render as expected in this example.

## Defining the Handlebar Templates

Next, define the handlebar templates. The templates will nearly match the base template found in `./clients/base/fields/base/` with the minor difference of an additional attribute of `style="background:{{def.backcolor}}; color:{{def.textcolor}}"` for the detail and list templates.

### Detail View

---

The first template to define is the Sidecar detail view. This template handles the display of data on the record view.

```
./custom/clients/base/fields/Highlightfield/detail.hbs
```

```
{{!  
  The data for field colors are passed into the handlebars template  
  through the def array. For this example, the def.backcolor and def.tex  
  tcolor properties. These indexes are defined in:  
    ./custom/modules/DynamicFields/templates/Fields/TemplateHighlightf  
  ield.php  
  }}  
  
{{#if value}}  
  <div class="ellipsis_inline" data-placement="bottom" style="backgr  
  ound:{{def.backcolor}}; color:{{def.textcolor}}">  
    {{value}}  
  </div>  
{{/if}}
```

## Edit View

Now define the Sidecar edit view. This template handles the display of the field in the edit view.

```
./custom/clients/base/fields/Highlightfield/edit.hbs.
```

```
{{!  
  We have not made any edits to this file that differ from stock, ho  
  wever,  
  we could add styling here just as we did for the detail and list t  
  emplates.  
  }}  
  
<input type="text"  
  name="{{name}}"  
  value="{{value}}"  
  {{#if def.len}}maxlength="{{def.len}}"{{/if}}  
  {{#if def.placeholder}}placeholder="{{str def.placeholder this.mod  
  el.module}}"{{/if}}  
  class="inherit-width">  
<p class="help-block">
```

---

## List View

Finally, define the list view. This template handles the display of the custom field in list views.

```
./custom/clients/base/fields/Highlightfield/list.hbs
```

```
{{!  
    The data for field colors are passed into the handlebars template  
    through the def array. Our case  
    being the def.backcolor and def.textcolor properties. These index  
    es are defined in:  
    ./custom/modules/DynamicFields/templates/Fields/TemplateHighlightf  
    field.php  
    }}  
  
<div class="ellipsis_inline" data-placement="bottom" data-original-  
title="{{#unless value}}  
    {{#if def.placeholder}}{{str def.placeholder this.model.module}}  
/if}}  
{{/unless}}  
{{value}}"  
    style="background:{{def.backcolor}}; color:{{def.textcolor}}">  
  
    {{#if def.link}}  
        <a href="{{#if def.events}}javascript:void(0);{{else}}  
{{href}}  
/if}}">{{value}}</a>{{else}}  
{{value}}  
    {{/if}}  
</div>
```

## Adding the Field Type to Studio

To enable the new field type for use in Studio, define the Studio field template. This will also allow us to map any additional properties we need for the templates. For this example, map the ext1 and ext2 fields from the fields\_meta\_data table to the backcolor and textcolor definitions. Also, set the dbfield definition to varchar so that the correct database field type is created.

**Note:** We are setting "reportable" to false to avoid issues with Report Wizard.

```
./custom/modules/DynamicFields/templates/Fields/TemplateHighlightfield.php
```

```
<?php  
  
if (!defined('sugarEntry') || !sugarEntry) die('Not A Valid Entry Point');
```

---

```

require_once 'modules/DynamicFields/templates/Fields/TemplateField.php
';

class TemplateHighlightfield extends TemplateField
{
    var $type = 'varchar';
    var $supports_unified_search = true;

    /**
     * TemplateAutoincrement Constructor: Map the ext attribute fields
to the relevant color properties
     *
     * References:          get_field_def function below
     *
     * @returns field_type
     */
    function __construct()
    {
        $this->vardef_map['ext1'] = 'backcolor';
        $this->vardef_map['ext2'] = 'textcolor';
        $this->vardef_map['backcolor'] = 'ext1';
        $this->vardef_map['textcolor'] = 'ext2';
    }

    //BEGIN BACKWARD COMPATIBILITY
    // AS 7.x does not have EditViews and DetailViews anymore these ar
e here
    // for any modules in backwards compatibility mode.

    function get_xtpl_edit()
    {
        $name = $this->name;
        $returnXTPL = array();

        if (!empty($this->help)) {
            $returnXTPL[strtoupper($this->name . '_help')] = translate
($this->help, $this->bean->module_dir);
        }

        if (isset($this->bean->$name)) {
            $returnXTPL[$this->name] = $this->bean->$name;
        } else {
            if (empty($this->bean->id)) {
                $returnXTPL[$this->name] = $this->default_value;
            }
        }
    }
}

```

---

```

    }
    return $returnXTPL;
}

function get_xtpl_search()
{
    if (!empty($_REQUEST[$this->name])) {
        return $_REQUEST[$this->name];
    }
}

function get_xtpl_detail()
{
    $name = $this->name;
    if (isset($this->bean->$name)) {
        return $this->bean->$name;
    }
    return '';
}

//END BACKWARD COMPATIBILITY

/**
 * Function:         get_field_def
 * Description:      Get the field definition attributes that are
 *                   required for the Highlightfield Field
 *                   the primary reason this function is here is
 *                   to set the dbType to 'varchar',
 *                   otherwise 'Highlightfield' would be used by
 *                   default.
 * References:       __construct function above
 *
 * @return          Field Definition
 */
function get_field_def()
{
    $def = parent::get_field_def();

    //set our fields database type
    $def['dbType'] = 'varchar';

    //set our fields to false to avoid issues with Report Wizard.
    $def['reportable'] = false;

    //set our field as custom type
    $def['custom_type'] = 'varchar';
}

```



---

```

        //map our extension fields for colorizing the field
        $def['backcolor'] = !empty($this->backcolor) ? $this->backcolor : $this->ext1;
        $def['textcolor'] = !empty($this->textcolor) ? $this->textcolor : $this->ext2;

        return $def;
    }
}

```

**Note:** For the custom field type, the ext1, ext2, ext3, and ext4 database fields in the fields\_meta\_data table offer additional property storage.

## Creating the Form Controller

Next, set up the field's form controller. This controller will handle the field's form template in Admin > Studio > Fields and allow us to assign color values to the Smarty template.

`./custom/modules/DynamicFields/templates/Fields/Forms/Highlightfield.php`

```

<?php

if (!defined('sugarEntry') || !sugarEntry) die('Not A Valid Entry Point');

require_once 'custom/modules/DynamicFields/templates/Fields/TemplateHighlightfield.php';

/**
 * Implement get_body function to correctly populate the template for the ModuleBuilder/Studio
 * Add field page.
 *
 * @param Sugar_Smarty $ss
 * @param array $vardef
 *
 */
function get_body(&$ss, $vardef)
{
    global $app_list_strings, $mod_strings;
    $vars = $ss->get_template_vars();
    $fields = $vars['module']->mbvardefs->vardefs['fields'];
    $fieldOptions = array();

```

---

```

foreach ($fields as $id => $def) {
    $fieldOptions[$id] = $def['name'];
}
$ss->assign('fieldOpts', $fieldOptions);

//If there are no colors defined, use black text on
// a white background
if (isset($vardef['backcolor'])) {
    $backcolor = $vardef['backcolor'];
} else {
    $backcolor = '#ffffff';
}
if (isset($vardef['textcolor'])) {
    $textcolor = $vardef['textcolor'];
} else {
    $textcolor = '#000000';
}
$ss->assign('BACKCOLOR', $backcolor);
$ss->assign('TEXTCOLOR', $textcolor);

$colorArray = $app_list_strings['highlightColors'];
asort($colorArray);

$ss->assign('highlightColors', $colorArray);
$ss->assign('textColors', $colorArray);

$ss->assign('BACKCOLORNAME', $app_list_strings['highlightColors'][$backcolor]);
$ss->assign('TEXTCOLORNAME', $app_list_strings['highlightColors'][$textcolor]);

return $ss->fetch('custom/modules/DynamicFields/templates/Fields/Forms/Highlightfield.tpl');
}
?>

```

## Creating the Smarty Template

Once the form controller is in place, create the Smarty template. The .tpl below will define the center content of the field's Studio edit view. The template includes a coreTop.tpl and coreBottom.tpl file. These files add the base field properties such as "Name" and "Display Label" that are common across all field types. This allows us to focus on the fields that are specific to our new field type.

`./custom/modules/DynamicFields/templates/Fields/Forms/Highlightfield.tpl`

---

```

{include file="modules/DynamicFields/templates/Fields/Forms/coreTop.tpl"}
<tr>
  <td class='mbLBL'>{sugar_translate module="DynamicFields" label="COLUMN_TITLE_DEFAULT_VALUE"}:</td>
  <td>
    {if $hideLevel < 5}
      <input type='text' name='default' id='default' value='{$vardef.default}'
        maxlength='{$vardef.len|default:50}'>
    {else}
      <input type='hidden' id='default' name='default' value='{$vardef.default}'>{$vardef.default}
    {/if}
  </td>
</tr>
<tr>
  <td class='mbLBL'>{sugar_translate module="DynamicFields" label="COLUMN_TITLE_MAX_SIZE"}:</td>
  <td>
    {if $hideLevel < 5}
      <input type='text' name='len' id='field_len' value='{$vardef.len|default:25}'
        onchange="forceRange(this,1,255);changeMaxLength(document.getElementById('default'),this.value);">
      <input type='hidden' id="orig_len" name='orig_len' value='{$vardef.len}'>
      {if $action=="saveSugarField"}
        <input type='hidden' name='customTypeValidate' id='customTypeValidate' value='{$vardef.len|default:25}'
          onchange="if (parseInt(document.getElementById('field_len').value) < parseInt(document.getElementById('orig_len').value)) return confirm(SUGAR.language.get('ModuleBuilder', 'LBL_CONFIRM_LOWER_LENGTH')); return true;">
      {/if}
    {literal}
    <script>
      function forceRange(field, min, max) {
        field.value = parseInt(field.value);
        if (field.value == 'NaN')field.value = max;
        if (field.value > max) field.value = max;
        if (field.value < min) field.value = min;
      }
      function changeMaxLength(field, length) {
        field.maxLength = parseInt(length);
    </script>
  </td>
</tr>

```

```

        field.value = field.value.substr(0, field.maxLengt
h);
    }
    </script>
    {/literal}
    {else}
        <input type='hidden' name='len' value='{ $vardef.len}'>{ $va
rdef.len}
    {/if}
</td>
</tr>
<tr>
    <td class='mbLBL'>{sugar_translate module="DynamicFields" label="L
BL_HIGHLIGHTFIELD_BACKCOLOR"}:</td>
    <td>
        {if $hideLevel < 5}
            {html_options name="ext1" id="ext1" selected=$BACKCOLOR op
tions=$highlightColors}
        {else}
            <input type='hidden' id='ext1' name='ext1' value='{ $BACKCO
LOR}'>
                { $BACKCOLORNAME}
            {/if}
        </td>
</tr>
<tr>
    <td class='mbLBL'>{sugar_translate module="DynamicFields" label="L
BL_HIGHLIGHTFIELD_TEXTCOLOR"}:</td>
    <td>
        {if $hideLevel < 5}
            {html_options name="ext2" id="ext2" selected=$TEXTCOLOR op
tions=$highlightColors}
        {else}
            <input type='hidden' id='ext2' name='ext2' value='{ $TEXTCO
LOR}'>
                { $TEXTCOLORNAME}
            {/if}
        </td>
</tr>

{include file="modules/DynamicFields/templates/Fields/Forms/coreBottom
.tpl"}

```

## Registering the Field Type

---

Once you have defined the Studio template, register the field as a valid field type. For this example, the field will inherit the base field type as it is a text field. In doing this, we are able to override the core functions. The most used override is the save function shown below.

```
./custom/include/SugarFields/Fields/Highlightfield/SugarFieldHighlightfield.php
```

```
<?php

require_once 'include/SugarFields/Fields/Base/SugarFieldBase.php';
require_once 'data/SugarBean.php';

class SugarFieldHighlightfield extends SugarFieldBase
{
    //this function is called to format the field before saving. For
    //example we could put code in here
    // to check spelling or to change the case of all the letters
    public function save(&$bean, $params, $field, $properties, $prefix
= '')
    {
        $GLOBALS['log']->debug("SugarFieldHighlightfield::save() funct
ion called.");
        parent::save($bean, $params, $field, $properties, $prefix);
    }
}
?>
```

## Creating Language Definitions

For the new field, you must define several language extensions to ensure everything is displayed correctly. This section includes three steps:

- Adding the Custom Field to the Type List
- Creating Labels for Studio
- Defining Dropdown Controls

### Adding the Custom Field to the Type List

Define the new field type in the field types list. This will allow an Administrator to select the Highlightfield field type in Studio when creating a new field.

```
./custom/Extension/modules/ModuleBuilder/Ext/Language/en_us.Highlightfield.php
```

```
<?php
```

---

```
$mod_strings['fieldTypes']['Highlightfield'] = 'Highlighted Text';
```

## Creating Labels for Studio

Once the field type is defined, add the labels for the Studio template.

```
./custom/Extension/modules/DynamicFields/Ext/Language/en_us.Highlightfield.php
```

```
<?php
```

```
$mod_strings['LBL_HIGHLIGHTFIELD'] = 'Highlighted Text';  
$mod_strings['LBL_HIGHLIGHTFIELD_FORMAT_HELP'] = '';
```

```
$mod_strings['LBL_HIGHLIGHTFIELD_BACKCOLOR'] = 'Background Color';  
$mod_strings['LBL_HIGHLIGHTFIELD_TEXTCOLOR'] = 'Text Color';
```

## Defining Dropdown Controls

For this example, we must define dropdown lists, which will be available in Studio for an administrator to add or remove color options for the field type.

```
./custom/Extension/application/Ext/Language/en_us.Highlightfield.php
```

```
<?php
```

```
$app_strings['LBL_HIGHLIGHTFIELD_OPERATOR_CONTAINS'] = 'contains';  
$app_strings['LBL_HIGHLIGHTFIELD_OPERATOR_NOT_CONTAINS'] = 'does not contain';  
$app_strings['LBL_HIGHLIGHTFIELD_OPERATOR_STARTS_WITH'] = 'starts with';
```

```
$app_list_strings['highlightColors'] = array(  
    '#0000FF' => 'Blue',  
    '#00ffff' => 'Aqua',  
    '#FF00FF' => 'Fuchsia',  
    '#808080' => 'Gray',  
    '#ffff00' => 'Olive',  
    '#000000' => 'Black',  
    '#800000' => 'Maroon',  
    '#ff0000' => 'Red',  
    '#ffa500' => 'Orange',  
    '#ffff00' => 'Yellow',  
    '#800080' => 'Purple',
```

---

```
'#ffffff' => 'White',
'#00ff00' => 'Lime',
'#008000' => 'Green',
'#008080' => 'Teal',
'#c0c0c0' => 'Silver',
'#000080' => 'Navy'
);
```

## Enabling Search and Filtering

To enable Highlightfield for searching and filtering, define the filter operators and the Sugar widget.

### Defining the Filter Operators

The filter operators, defined in `./custom/clients/base/filters/operators/operators.php`, allow the custom field be used for searching in Sidecar listviews.

```
./custom/clients/base/filters/operators/operators.php
```

```
<?php
```

```
require 'clients/base/filters/operators/operators.php';
```

```
$viewdefs['base']['filter']['operators']['Highlightfield'] = array(
    '$contains' => 'LBL_HIGHLIGHTFIELD_OPERATOR_CONTAINS',
    '$not_contains' => 'LBL_HIGHLIGHTFIELD_OPERATOR_NOT_CONTAINS',
    '$starts' => 'LBL_HIGHLIGHTFIELD_OPERATOR_STARTS_WITH',
);
```

**Note:** The labels for the filters in this example are defined in `./custom/Extension/application/Ext/Language/en_us.Highlightfield.php`. For the full list of filters in the system, you can look at `./clients/base/filters/operators/operators.php`.

### Defining the Sugar Widget

Finally, define the Sugar widget. The widget will help our field for display on Reports and subpanels in backward compatibility. It also controls how search filters are applied to our field.

---

./custom/include/generic/SugarWidgets/SugarWidgetFieldHighlightfield.php

```
<?php
```

```
if (!defined('sugarEntry') || !sugarEntry) die('Not A Valid Entry Point');
```

```
require_once 'include/generic/SugarWidgets/SugarWidgetFieldvarchar.php';
```

```
class SugarWidgetFieldHighlightfield extends SugarWidgetFieldVarchar
{
    function SugarWidgetFieldText(&$layout_manager)
    {
        parent::SugarWidgetFieldVarchar($layout_manager);
    }

    function queryFilterEquals($layout_def)
    {
        return $this->reporter->db->convert($this->_get_column_select(
$layout_def), "text2char") .
            " = " . $this->reporter->db->quoted($layout_def['input_name0']
);
    }

    function queryFilterNot_Equals_Str($layout_def)
    {
        $column = $this->_get_column_select($layout_def);
        return "($column IS NULL OR " . $this->reporter->db->convert($
column, "text2char") . " != " .
            $this->reporter->db->quoted($layout_def['input_name0']) . ")";
    }

    function queryFilterNot_Empty($layout_def)
    {
        $column = $this->_get_column_select($layout_def);
        return "($column IS NOT NULL AND " . $this->reporter->db->conv
ert($column, "length") . " > 0)";
    }

    function queryFilterEmpty($layout_def)
    {
        $column = $this->_get_column_select($layout_def);
        return "($column IS NULL OR " . $this->reporter->db->convert($
column, "length") . " = 0)";
    }
}
```



---

```
function displayList($layout_def)
{
    return nl2br(parent::displayListPlain($layout_def));
}
?>
```

Once the files are in place, navigate to Admin > Repair > Quick Repair and Rebuild. It is also best practice to clear your browser cache before using the new field type in Studio.

**Last Modified:** 2023-03-08 19:50:21

## Creating an Auto-Incrementing Field

### Overview

This article will cover the two approaches to creating an auto-incrementing field in Sugar.

### Case 1: Auto-Incrementing a Field Using a Logic Hook

The benefits of having an auto-incrementing field populated from a logic hook are that it can be incremented based on additional logic. It also allows for multiple auto-incrementing fields, while a database-level auto-incrementing field is only allowed once per table. Auto-incremented fields handled in a logic hook can also be formatted as needed, such as adding leading zeros or alpha characters. You can also control the auto-increment value based on another field, for instance, if you wanted to increase a `version_number` based on other records related to the same parent. For this example, we will create a simple auto-incrementing field that goes up by 1 whenever the record is saved for the first time.

First, create an integer field `incrementing_number_c` in Studio.

Next, create a custom class and method that the logic hook will call:

```
./custom/modules/Accounts/Accounts_Save.php
```

---

```

<?php

class Accounts_Save
{
    function auto_increment($bean, $event, $arguments)
    {
        if (!$arguments['isUpdate']) {
            $sq = new \SugarQuery();
            $sq->from(BeanFactory::newBean('Accounts'), ['team_security' => false]);
            $sq->select->fieldRaw('MAX(' . $sq->getFromAlias() . '_current_max_id)', 'current_max_id');
            $current_max_id = $sq->getOne();
            $max_id = (empty($current_max_id)) ? 1 : $current_max_id + 1;

            $bean->incrementing_number_c = $max_id;
        }
    }
}

```

Next, register the custom logic hook via the LogicHooks Extension framework by creating a file at `./custom/Extension/modules/Accounts/Ext/LogicHooks`. An example is shown below:

`./custom/Extension/modules/Accounts/Ext/LogicHooks/autoIncrementOnSave.php`

```

<?php

$hook_array['before_save'][] = array(
    2,
    'Custom Logic to Auto-Increment integer_field_c',
    'custom/modules/Accounts/Accounts_Save.php',
    'Accounts_Save',
    'auto_increment'
);

```

After creating these files, run a Quick Repair and Rebuild.

## Case 2: Creating an Auto-Incrementing Field on the Database

Creating an auto-incrementing field at the database level has the benefit of being unique and easy to manage. One downside to having an auto-incrementing field at the database level is that it means only being allowed one such field per module, as

---

databases only allow one auto-incrementing field per table. A custom auto-incrementing field also relies on updating a module's core table, which is less upgrade safe. For this reason, a logic hook based auto-incrementing field is recommended over a database-driven auto-incrementing field.

To create an integer field in Sugar which auto-increments at the database level, we will create a custom field via the VarDefs extension as shown below:

```
./custom/Extension/modules/Accounts/Ext/Vardefs/autoIncrement.php
```

```
<?php
```

```
$dictionary['Account']['fields']['account_number_auto'] = array (
    'name' => 'account_number_auto',
    'vname' => 'LBL_NUMBER_AUTO',
    'type' => 'int',
    'readonly' => true,
    'len' => 11,
    'required' => true,
    'auto_increment' => true,
    'unified_search' => true,
    'full_text_search' => array(
        'enabled' => true,
        'searchable' => true,
        'boost' => 1.25
    ),
    'comment' => 'Visual unique identifier',
    'duplicate_merge' => 'disabled',
    'disable_num_format' => true,
    'studio' => array('quickcreate' => false),
    'duplicate_on_record_copy' => 'no',
);

$dictionary['Account']['indices']['account_number_auto'] = array(
    'name' =>'accountsnumk_cstm',
    'type' =>'unique',
    'fields'=>array('account_number_auto'),
);
```

Navigate to Admin > Studio > Repair > Quick Repair and Rebuild. After the repair, you will see a vardef comparison as shown below:

```
/*COLUMNS*/
/*MISSING IN DATABASE - account_number_auto - ROW*/
ALTER TABLE accounts add COLUMN account_number_auto int(11) NOT NULL a
uto_increment;
```

---

```
/* INDEXES */
/*MISSING INDEX IN DATABASE - accountsnumk_cstm - unique ROW */
ALTER TABLE accounts ADD CONSTRAINT UNIQUE accountsnumk_cstm (account_
number_auto);;
```

Alter this to be the following and execute the changes:

```
ALTER TABLE accounts add COLUMN account_number_auto int(11) UNIQUE NOT
NULL auto_increment;
```

**Note:** Since auto-incremented fields are populated at the database level, all existing records in the database will have this field populated as soon as the field is created on the database table. The value assigned will not be based on any logic (such as the record creation date) that can be controlled or predicted. Therefore when sorting by this field, records created after the field was added will be in order that they were created, but records created before will not.

**Last Modified:** 2021-02-17 02:44:13

## Customizing Prefill Fields When Copying Records

### Overview

The copy action on the record view allows for users to duplicate records. This article will cover the various ways to customize the prefill fields on the copy view.

### Modifying the Copy Prefill View Using the Vardefs

The following section will outline how to modify the fields that are prefilled when copying a Bug record from the record view using the beans Vardefs. This is helpful when the list of copied fields are static and have no dependencies. You can apply this to any module in the system.

```
./custom/Extension/modules/Bugs/Ext/Vardefs/copyPrefill.php
```

```
<?php
```

```
//remove a field from copy
$dictionary['Bug']['fields']['description']['duplicate_on_record_copy'
] = 'no';
```

---

```
//add a field to copy
$dictionary['Bug']['fields']['priority']['duplicate_on_record_copy'] =
  'always';
```

Once in place, navigate to Admin > Repair > Quick Repair & Rebuild.

Note: You can name the file 'copyPrefill.php' anything you like. We advise against making these changes in the ./custom/Extension/modules/<module>/Ext/Vardefs/sugarfield\_<field>.php files as these changes may be removed during studio edits.

## Modifying the Copy Prefill View Using JavaScript Controllers

The following section will outline how to modify the fields that are prefilled when copying a Bug record from the record view using the JavaScript Controller. This is helpful when you need to dependently determine the fields to copy by a field on the bean. You can apply this to any module in the system.

```
./custom/modules/Bugs/clients/base/views/record/record.js
```

```
({
  extendsFrom: 'RecordView',

  setupDuplicateFields: function (prefill) {

    this._super('setupDuplicateFields', prefill);

    var fields = [
      'name',
      'assigned_user_id',
      'priority',
      'type',
      'product_category',
      'description'
    ];

    //determines whether the field list above is a set of allowlis
    ted (allowed) or denylisted (denied) fields
    var denylist = false;

    if (denylist) {
      _.each(fields, function (field) {
```

---

```

        if (field && prefill.has(field)) {
            //set denylist field to the default value if exist
s
            if (!_.isUndefined(prefill.fields[field]) && !_.is
Undefined(prefill.fields[field].default)) {
                prefill.set(field, prefill.fields[field].defau
lt);
            } else {
                prefill.unset(field);
            }
        }
    });
} else {
    _.each(prefill.fields, function (value, field) {
        if (!_.contains(fields, field)) {
            if (!_.isUndefined(prefill.fields[field].default))
{
                prefill.set(field, prefill.fields[field].defau
lt);
            } else {
                prefill.unset(field);
            }
        }
    });
}
}
})

```

Once in place, navigate to Admin > Repair > Quick Repair & Rebuild. The denylist variable will determine whether the list of fields are allowlisted or denylisted from the copy feature.

**Last Modified:** 2022-10-17 23:56:15

## Customizing the Email Editor Buttons

### Overview

The Emails module in Sugar displays commonly-used buttons in the HTML editor. This article explains how to modify the buttons on the editor's toolbar.

---

## Modifying The View

The following sections outline how to customize the button toolbar presented within the TinyMCE editor. In the example below, we will be adding buttons for Cut, Copy, and Paste to the toolbar.

## Using Custom Module Metadata

To override the Emails module compose-email view, we will need to copy `./modules/Emails/clients/base/views/compose-email/compose-email.php` to `./custom/modules/Emails/clients/base/views/compose-email/compose-email.php`. Once completed, we will then edit the `['tinyConfig']['toolbar']` definition to include `| cut copy paste` . An example of this is shown below:

```
./custom/modules/Emails/clients/base/views/compose-email/compose-email.php

$viewdefs['Emails']['base']['view']['compose-email'] = array(
    ...
    'panels' => array(
        array(
            ...
            'fields' => array(
                ...
                array(
                    'name' => 'description_html',
                    'dismiss_label' => true,
                    'span' => 12,
                    'tinyConfig' => array(
                        'toolbar' => 'code | bold italic underline strikethrough | bullist numlist | ' .
                            'alignleft aligncenter alignright alignjustify | forecolor bgcolor | ' .
                            'fontsize select | formatselect | fontselect | sugarattachment sugarsignature sugartemplate | cut copy paste',
                    ),
                ),
            ),
        ),
        ...
    ),
);
```

**Note:** We recommend modifying the modules custom metadata for local

---

deployments when the customization is not part of a distributed package.

Once this file is in place, navigate to Admin > Repair > Quick Repair and Rebuild. Once completed, your changes will be reflected in the system.

## Using The Module Extension Framework

To extend the Emails module compose-email view using the extension framework, we will need to loop through the existing views array definition to find and modify the `description_html` field and update the relevant sub-array `['tinyConfig']['toolbar']` with the additional toolbar buttons we want to display. An example of this is shown below:

```
./custom/Extension/modules/Emails/Ext/clients/base/views/compose-email/add_toolbar_buttons.php
```

```
<?php

$target_view = 'compose-email';
$target_fieldname = 'description_html';

$default_toolbar = 'code | bold italic underline strikethrough | bullet
numlist | ' .
                    'alignleft aligncenter alignright alignjustify
| forecolor bgcolor | ' .
                    'fontselect | formatselect | fontselect | sugarattachment
sugarsignature sugartemplate';
$custom_toolbar = ' | cut copy paste';

if (!empty($viewdefs['Emails']['base']['view'][$target_view]['panels']
)) {
    $panels = $viewdefs['Emails']['base']['view'][$target_view]['panels']
;
    foreach ($panels as $i => $panel) {
        if (!empty($panel['fields'])) {
            foreach ($panel['fields'] as $j => $field) {
                if ($field['name'] == $target_fieldname) {
                    if(!isset($field['tinyConfig'])) {
                        $field['tinyConfig'] = array();
                    }
                    /* If toolbar already exists, add our custom buttons to the end,
otherwise set it to the default and append that. */
                    if(!isset($field['tinyConfig']['toolbar'])) {
                        $field['tinyConfig']['toolbar'] = $default_toolbar;
                    }
                }
            }
        }
    }
}
```



---

```
$viewdefs['Emails']['base']['view'][$target_view]['panels'][$i]['fields'][$j]['tinyConfig']['toolbar'] = $field['tinyConfig']['toolbar'] . $custom_toolbar;
    }
  }
}
}
```

**Note:** We recommend using the extension framework when the code will be installed as part of a distributed package.

Once this file is in place, navigate to Admin > Repair > Quick Repair and Rebuild. Once completed, your changes will be reflected in the system.

## Toolbar Format

As demonstrated in the examples above, the toolbar value is a string with the button keywords space-separated. The | indicates a divider should be shown in the editor. If the goal were to replace the toolbar buttons with only text-modifier buttons, the value for toolbar would be:

```
'bold italic | underline strikethrough'
```

The toolbar button keywords are documented at [TinyMCE Editor Control Identifiers](#). Note that at this time, only control keywords listed as "Core" are supported by Sugar .

**Last Modified:** 2021-02-17 02:44:13

## Customizing the Start Speed of List View Search

### Overview

When searching a Sidecar module's list view, Sugar begins returning results automatically once a predefined number of milliseconds have passed. This article covers how to customize the start speed of the list view search for Sidecar modules in Sugar.

---

## Prerequisites

This change requires code-level customizations, and you will need direct access to the server in order to make the necessary changes in the file system. If you already have a relationship with a Sugar partner, you can work with them to make this customization. If not, please refer to the [Partner Page](#) to find a reselling partner to help with your development needs.

**Note:** If your instance is hosted in Sugar's cloud environment, you can create a package that can be installed within Admin > Module Loader. For more information, please refer to the [Creating an Installable Package That Copies Files](#) article.

## Use Case

By default, the list view search process in Sugar begins to run 400 milliseconds after a user stops typing or pasting values into one of the search fields. For some users or situations, the system-defined start speed for list view search may be considered too fast. We will walk through increasing the length of time it takes before the search starts to run, using 750 milliseconds as an example.

## Steps to Complete

The function that controls the list view search speed in Sugar can be found in the following file: `./clients/base/views/filter-quicksearch/filter-quicksearch.js` In order to customize this function, please use the following steps to create an extension in the `./custom/` directory:

1. Navigate to the `./custom/` directory in the Sugar file system and create the following directory structure if it does not already exist:  
`./clients/base/views/filter-quicksearch/.`
2. In a text editor application, create a new file.
3. Copy the code provided below into this new file:

```
({
  extendsFrom: 'FilterQuicksearchView',

  /**
   * @override
   * @param {Object} opts
   */
  initialize: function(opts) {
```

---

```
        this._super('initialize', [opts]);
    },

    /**
     * Fire quick search
     * @param {Event} e
     */
    throttledSearch: _.debounce(function(e) {
        var newSearch = this.$el.val();
        if(this.currentSearch !== newSearch) {
            this.currentSearch = newSearch;
            this.layout.trigger('filter:apply', newSearch);
        }
    }, 750),
    })
```

4. For our example, the value of "750" at the end of the code represents the new start speed of list view search. Feel free to replace it with your desired value in milliseconds.
5. Save the new file as ./custom/clients/base/views/filter-quicksearch/filter-quicksearch.js.
6. Update the Ownership and Permissions of the directories and file that were created.
  - For more information on Linux based stacks, please refer to the article [Required File System Permissions on Linux](#).
  - For more information on Windows-based stacks, please refer to the article [Required File System Permissions on Windows With IIS](#).
7. Finally, log into Sugar and navigate to Admin > Repair then perform a "Quick Repair and Rebuild".

After completing the steps in this article, Sugar will wait 750 milliseconds before returning search results once the user has stopped entering search criteria.

**Last Modified:** 2021-02-17 02:44:13

## Disabling RLI Alerts on Opportunities

### Overview

How to disable Revenue Line Item (RLI) alerts on Opportunities using a custom JavaScript controller.

---

## Overriding the Record View

First, we must override the stock opportunities record view. This will handle the RLI alerts when navigating to an existing record. This can be done by creating:

`./custom/modules/Opportunities/clients/base/views/record/record.js`

```
({
  extendsFrom: 'OpportunitiesRecordView',
  initialize: function (options) {
    this._super('initialize', [options]);
  },
  /**
   * Hide the warning message about missing RLIs
   * @param string module      The module that we are currently on.
   */
  showRLIWarningMessage: function(module) {
    //here we create an empty override function
  },
  /**
   * @inheritdoc
   */
  _dispose: function() {
    this._super('_dispose', []);
  }
})
```

As you can see, this file extends from 'OpportunitiesRecordView' which points our code to extend the stock `./modules/Opportunities/clients/base/views/record/record.js` file.

**Last Modified:** 2021-02-17 02:44:13

## Disabling Tooltips

### Overview

This article will demonstrate how to disable the tooltips in Sugar.

---

## Steps to Complete

### Creating a Custom JavaScript File

First, we will need to create a custom JavaScript file. This file can technically exist anywhere within the root of your Sugar instance.

custom/JavaScript/disable\_tooltips.js

```
(function(app){
    app.events.on('app:init', function(){
        // Clear existing ones
        app.tooltip.clear();
        // Disable all
        app.tooltip._disable();
    });
})(SUGAR.App);
```

### Appending to JSGroupings

Second, we need to add our disable\_tooltips.js file to sugar\_grp7.min.js in our JSGroupings.

custom/Extension/application/Ext/JSGroupings/disable\_tooltips.php

```
<?php
foreach ($js_groupings as $key => $groupings) {
    foreach ($groupings as $file => $target) {
        if ($target == 'include/javascript/sugar_grp7.min.js') {
            $js_groupings[$key]['custom/JavaScript/disable_tooltips.js
'] = 'include/javascript/sugar_grp7.min.js';
        }
        break;
    }
}
```

**Note:** More information about JSGroupings can be found [here](#).

### Quick Repair and Rebuild

After creating the ./custom/JavaScript/disable\_tooltips.js and ./custom/Extension/application/Ext/JSGroupings/disable\_tooltips.php files, navigate to Admin > Repairs and perform a "Quick Repair and Rebuild". This will rebuild the cached files to fully implement the changes. Once "Quick Repair and Rebuild"

---

finishes, the tooltips will be disabled through Sugar.

**Last Modified:** 2021-02-17 02:44:13

## Dynamically Hiding Subpanels Based on Record Values

### Overview

This article will demonstrate how to dynamically hide subpanels that are dependent on record values by overriding the subpanels layout for a module. This example is for an account record where we will hide the Contacts subpanel when the account type is not 'Customer'.

### Example

To accomplish this, we will create a JavaScript controller that extends SubpanelsLayout. This controller will then monitor the model and control the display of the subpanels.

```
./custom/modules/Accounts/clients/base/layouts/subpanels/subpanels.js
```

```
({
  extendsFrom: 'SubpanelsLayout',

  _hiddenSubpanels: [],

  initialize: function(options) {
    this._super('initialize', [options]);
    this.registerModelEvents();
  },

  /**
   * Add the model change events for fields that determine when a subpanel should be hidden
   */
  registerModelEvents: function(){
    this.model.on('change:account_type',function(model) {
      var link = 'contacts';
```

---

```

        if (model.get('account_type') == "Customer"){
            this.unhideSubpanel(link);
        }else{
            this.hideSubpanel(link);
        }
    },this);
},

/**
 * Override showSubpanel to re-
hide subpanels when outside changes occur, like reordering subpanel
 * @inheritdoc
 */
showSubpanel: function(linkName) {
    this._super('showSubpanel', [linkName]);

    _.each(this._hiddenSubpanels, function(link) {
        this.hideSubpanel(link);
    },this);
},

/**
 * Helper for getting the Subpanel View for a specific link
 */
getSubpanelByLink: function(link){
    return this._components.find(function(component){
        return component.context.get('link') === link;
    });
},

/**
 * Add to the _hiddenSubpanels array, and hide the subpanel
 */
hideSubpanel: function(link){
    this._hiddenSubpanels.push(link);
    var component = this.getSubpanelByLink(link);
    if (!_isUndefined(component)){
        component.hide();
    }
    this._hiddenSubpanels = _.unique(this._hiddenSubpanels);
},

/**
 * Unhide the Subpanel and remove from _hiddenSubpanels array
 */
unhideSubpanel: function(link){

```

---

```
var index = this._hiddenSubpanels.findIndex(function(l){
    return l == link;
});
if (_.isUndefined(index)){
    delete this._hiddenSubpanels[index];
}
var component = this.getSubpanelByLink(link);
if (!_.isUndefined(component)){
    component.show();
}
}
})
```

Once the file is in place, run a Quick Repair and Rebuild. The changes will then be reflected in the Accounts record view.

**Last Modified:** 2021-02-17 02:44:13

## Enabling Importing for Custom Modules

### Overview

When designing a custom module in Module Builder, you have the option to enable importing for the module. If the custom module is deployed without enabling this option, it is not recommended that you redeploy the module since any changes made in Studio and potentially other areas of the application could be lost. This article will cover how to enable importing for custom modules via a code-level change to preserve any additional configurations made to the module since being deployed from Module Builder.

### Steps to Complete

To enable importing for your custom module, you must modify certain PHP files depending on the version of Sugar that you have. Please note that the instructions below apply to custom modules created via Admin > Module Builder and are not applicable to any stock modules which come out-of-the-box with Sugar. All of the directory paths are relative to the root directory of Sugar on the web server and require you to replace the <module\_key> and <module\_name> variables with appropriate values for your situation. For instance, if your module is installed in the directory of ./modules/abc\_custom\_module/ then the <module\_key> would be



---

abc and <module\_name> would be custom\_module.

1. Edit the ./modules/<module\_key>\_<module\_name>/<module\_key>\_<module\_name>\_sugar.php file in your Sugar file system.
2. Around line 24 of the file, locate and change public \$importable = false; to public \$importable = true;.
3. Save your changes to the file.
4. Next, edit the ./modules/<module\_key>\_<module\_name>/clients/base/menus/header/header.php file which should look similar to this:

```
$viewdefs[$moduleName]['base']['menu']['header'] = array(
    array(
        'route' => "#$moduleName/create",
        'label' => 'LNK_NEW_RECORD',
        'acl_action' => 'create',
        'acl_module' => $moduleName,
        'icon' => 'fa-plus',
    ),
    array(
        'route' => "#$moduleName",
        'label' => 'LNK_LIST',
        'acl_action' => 'list',
        'acl_module' => $moduleName,
        'icon' => 'fa-bars',
    ),
);
```

5. Add the following line to the end of the file after the last ), but before the ending );:

```
array(
    'route' => "#bwc/index.php?module=Import&action=Step1&import_module=$moduleName&return_module=$moduleName&return_action=index",
    'label' => 'LBL_IMPORT',
    'acl_action' => 'import',
    'acl_module' => $moduleName,
    'icon' => 'icon-upload',
),
```

6. Save your changes to the file. The updated file should then look similar to this:

```
$viewdefs[$moduleName]['base']['menu']['header'] = array(
```

```


array(
    'route' => "#$moduleName/create",
    'label' => 'LNK_NEW_RECORD',
    'acl_action' => 'create',
    'acl_module' => $moduleName,
    'icon' => 'fa-plus',
),
array(
    'route' => "#$moduleName",
    'label' => 'LNK_LIST',
    'acl_action' => 'list',
    'acl_module' => $moduleName,
    'icon' => 'fa-bars',
),
array(
    'route' => "#bwc/index.php?module=Import&action=Step1&import_module=$moduleName&return_module=$moduleName&return_action=index",
    'label' => 'LBL_IMPORT',
    'acl_action' => 'import',
    'acl_module' => $moduleName,
    'icon' => 'icon-upload',
),
);

```

Once the necessary changes have been made, log into Sugar and navigate to Admin > Repair and perform a "Quick Repair and Rebuild". This will rebuild the cached files to fully implement the changes.

## Application


After making these changes, the "Import {Module Name}" option will appear in the Actions menu of the custom module's module tab. Simply click the triangle in the module tab, then select the Import option to create or update records for your custom module. For instructions on using Sugar's Import tool, please refer to the [Import](#) documentation.

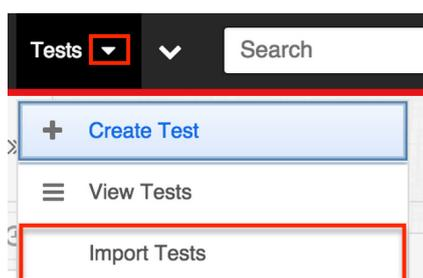

# Increasing the Number of Dashboards Displayed in the Home Menu

## Overview

By default, the "[Home Dashboard](#)" comes out-of-the-box with Sugar to display on the home page. In addition, Sugar users with a Sugar Serve and/or Sugar Sell [license type](#) will have access to specialized Home page dashboards called "[Service Console](#)" and "[Renewals Console](#)". Users have the ability to [create](#) new dashboards on their home page and build out its layout and dashlet set. Currently, Sugar imposes a limit of 50 dashboards that can be displayed under the Home module tab. So, when creating multiple dashboards, keep in mind that having more than 50 in the list of available dashboards will cause the ones in the beginning to be dropped off the list. This article covers how to increase the number of dashboards allowed in the Home menu via a code-level customization.

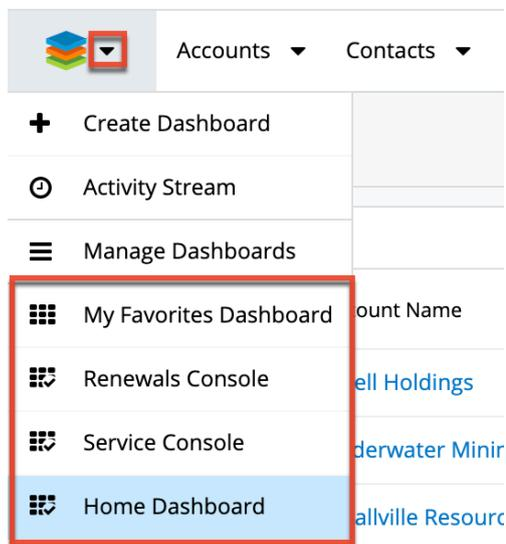

## Use Case

In this example, we will make a code-level change to set the number of dashboards allowed in the Home menu to "80".

---

## Prerequisites

This change requires code-level customizations. You will need direct access to the server as well as administrator access in Sugar in order to perform the necessary actions. If you need assistance making these changes and already have a relationship with a Sugar partner, you can work with them to make this change. If not, please refer to the [Partner Page](#) to find a reselling partner to help with your development needs.

You will also need the following capabilities prior to making this code-level customization:

- You should have a working knowledge of PHP development and arrays.
- You should have access to a text editor that can be used for programming.
- If your Sugar instance is hosted on Sugar's cloud service or hosted on a server to which you do not have direct file access, you will need to know how to create and deploy Module Loader packages. For more information, please refer to the [Module Loader](#) section of the Developer Guide.

## Steps to Complete

The following steps cover setting the number of dashboards allowed on the Home menu to "80" as an example:

1. Navigate to `./modules/Home/clients/base/views/module-menu/module-menu.php` and copy the file contents to a new file at `./custom/modules/Home/clients/base/views/module-menu/module-menu.php`. The contents of the file should look similar to this:

```
<?php

$viewdefs['Home']['base']['view']['module-menu'] = array(
    'settings' => array(
        'favorites' => 0,
        'recently_viewed' => 10,
        'recently_viewed_toggle' => 3,
    ),
);
?>
```

2. Modify the `./custom/modules/Home/clients/base/views/module-menu/module-menu.php` file and add the `dashboards => 80,` element to the array. The modified file should look similar to this:

---

```
<?php

$viewdefs['Home']['base']['view']['module-menu'] = array(
    'settings' => array(
        'dashboards' => 80,
        'favorites' => 0,
        'recently_viewed' => 10,
        'recently_viewed_toggle' => 3,
    ),
);
?>
```

3. Save the changes to the file and update the ownership and permissions of the files that were created.
  - For more information on Linux-based stacks, please refer to the [Required File System Permissions on Linux](#) article.
  - For more information on Windows-based stacks, please refer to the [Required File System Permissions on Windows With IIS](#) article.
4. Finally, log into Sugar as an administrator, navigate to Admin > Repair, and perform a "[Quick Repair and Rebuild](#)". This will rebuild the cached files to fully implement the changes to your Sugar instance.

## Application

Once the appropriate changes have been made, users should be able to create and view up to 80 dashboards on their home page and any previously missing dashboards should now display in the Home menu as well.



**Last Modified:** 2021-02-17 02:44:13

## Logic Hooks

These pages demonstrate some common examples of working with logic hooks in Sugar.

# Comparing Bean Properties Between Logic Hooks

## Overview

How to compare the properties of a bean between the `before_save` and `after_save` logic hooks

## Storing and Comparing Values

When working with a bean in the `after_save` logic hook, you may notice that the `after_save` fetched rows no longer match the `before_save` fetched rows. If your `after_save` logic needs to be able to compare values that were in the `before_save`, you can use the following example to help you store and use the values.

```
./custom/modules/<module>/logic_hooks.php
```

```
<?php
```

```
$hook_version = 1;
$hook_array = Array();

$hook_array['before_save'] = Array();
$hook_array['before_save'][] = Array(
    1,
    'Store values',
    'custom/modules/<module>/My_Logic_Hooks.php',
    'My_Logic_Hooks',
    'before_save_method'
);

$hook_array['after_save'] = Array();
$hook_array['after_save'][] = Array(
    1,
    'Retrieve and compare values',
    'custom/modules/<module>/My_Logic_Hooks.php',
    'My_Logic_Hooks',
    'after_save_method'
);
```

---

```
?>

./custom/modules/<module>/My_Logic_Hooks.php

<?php

if (!defined('sugarEntry') || !sugarEntry) die('Not A Valid Entry Point');

class My_Logic_Hooks
{
    function before_save_method($bean, $event, $arguments)
    {
        //store as a new bean property
        $bean->stored_fetched_row_c = $bean->fetched_row;
    }

    function after_save_method($bean, $event, $arguments)
    {
        //check if a fields value has changed
        if (
            isset($bean->stored_fetched_row_c)
            && $bean->stored_fetched_row_c['field'] != $bean->field
        )
        {
            //execute logic
        }
    }
}

?>
```

**Last Modified:** 2021-02-17 02:44:13

## Preventing Infinite Loops with Logic Hooks

### Overview

Infinite loops often happen when a logic hook calls save on a bean in a scenario that triggers the same hook again. This example shows how to add a check to a logic hook to eliminate perpetual looping.

---

## Saving in an After Save Hook

Infinite loops can sometimes happen when you have a need to update a record after it has been run through the workflow process in the `after_save` hook. Here is an example of a looping hook:

```
./custom/modules/Accounts/logic_hooks.php
```

```
<?php

$hook_version = 1;
$hook_array = Array();
$hook_array['after_save'] = Array();
$hook_array['after_save'][] = Array(
    1,
    'Update Account Record',
    'custom/modules/Accounts/Accounts_Hook.php',
    'Accounts_Hook',
    'update_self'
);
```

```
./custom/modules/Accounts/Accounts_Hook.php
```

```
<?php

if (!defined('sugarEntry') || !sugarEntry) die('Not A Valid Entry Point');

class Accounts_Hook
{
    function update_self($bean, $event, $arguments)
    {
        //generic condition
        if ($bean->account_type == 'Analyst')
        {
            //update
            $bean->industry = 'Banking';
            $bean->save();
        }
    }
}
```

In the example above, there is a condition that, when met, will trigger the update of a field on the record. This will cause an infinite loop because calling the `save()`



---

method will trigger once during the `before_save` hook and then again during the `after_save` hook. The solution to this problem is to add a new property on the bean to ignore any unneeded saves. For this example, we will name the property "ignore\_update\_c" and add a check to the logic hook to eliminate the perpetual loop. An example of this is shown below:

```
./custom/modules/Accounts/Accounts_Hook.php
```

```
<?php

if (!defined('sugarEntry') || !sugarEntry) die('Not A Valid Entry Point');

class Accounts_Hook
{
    function update_self($bean, $event, $arguments)
    {
        //loop prevention check
        if (!isset($bean->ignore_update_c) || $bean->ignore_update_c == false)
        {
            //generic condition
            if ($bean->account_type == 'Analyst')
            {
                //update
                $bean->ignore_update_c = true;
                $bean->industry = 'Banking';
                $bean->save();
            }
        }
    }
}
```

## Related Record Save Loops

Sometimes logic hooks on two separate but related modules can cause an infinite loop. The problem arises when the two modules have logic hooks that update one another. This is often done when wanting to keep a field in sync between two modules. The example below will demonstrate this behavior on the `accounts:contacts` relationship:

```
./custom/modules/Accounts/logic_hooks.php
```

```
<?php
```

---

```
$hook_version = 1;
$hook_array = Array();
$hook_array['before_save'] = Array();
$hook_array['before_save'][] = Array(
    1,
    'Handling associated Contacts records',
    'custom/modules/Accounts/Accounts_Hook.php',
    'Accounts_Hook',
    'update_contacts'
);
```

./custom/modules/Accounts/Accounts\_Hook.php

```
<?php

if (!defined('sugarEntry') || !sugarEntry) die('Not A Valid Entry Point');

class Accounts_Hook
{
    function update_contacts($bean, $event, $arguments)
    {
        //if relationship is loaded
        if ($bean->load_relationship('contacts'))
        {
            //fetch related beans
            $relatedContacts = $bean->contacts->getBeans();

            foreach ($relatedContacts as $relatedContact)
            {
                //perform any other contact logic
                $relatedContact->save();
            }
        }
    }
}
```

The above example will loop through all contacts related to the account and save them. At this point, the save will then trigger our contacts logic hook shown below:

./custom/modules/Contacts/logic\_hooks.php

```
<?php

$hook_version = 1;
```

---

```
$hook_array = Array();
$hook_array['before_save'] = Array();
$hook_array['before_save'][] = Array(
    1,
    'Handling associated Accounts records',
    'custom/modules/Contacts/Contacts_Hook.php',
    'Contacts_Hook',
    'update_account'
);
```

./custom/modules/Contacts/Contacts\_Hook.php

```
<?php
```

```
if (!defined('sugarEntry') || !sugarEntry) die('Not A Valid Entry Point');
```

```
class Contacts_Hook
```

```
{
    function update_account($bean, $event, $arguments)
    {
        //if relationship is loaded
        if ($bean->load_relationship('accounts'))
        {
            //fetch related beans
            $relatedAccounts = $bean->accounts->getBeans();

            $parentAccount = false;
            if (!empty($relatedAccounts))
            {
                //order the results
                reset($relatedAccounts);

                //first record in the list is the parent
                $parentAccount = current($relatedAccounts);
            }

            if ($parentAccount !== false && is_object($parentAccount))
            {
                //perform any other account logic
                $parentAccount->save();
            }
        }
    }
}
```

---

These two logic hooks will continuously trigger one another in this scenario until you run into a `max_execution` or `memory_limit` error. The solution to this problem is to add a new property on the bean to ignore any unneeded saves. In our example, we will name this property `"ignore_update_c"` and add a check to our logic hook to eliminate the perpetual loop. The following code snippets are copies of the two classes with the `ignore_update_c` property added.

`./custom/modules/Accounts/Accounts_Hook.php`

```
<?php

if (!defined('sugarEntry') || !sugarEntry) die('Not A Valid Entry Point');

class Accounts_Hook
{
    function update_contacts($bean, $event, $arguments)
    {
        //if relationship is loaded
        if ($bean->load_relationship('contacts'))
        {
            //fetch related beans
            $relatedContacts = $bean->contacts->getBeans();

            foreach ($relatedContacts as $relatedContact)
            {
                //check if the bean's ignore_update_c attribute is not
                set
                if (!isset($bean->ignore_update_c) || $bean->ignore_update_c === false)
                {
                    //set the ignore update attribute
                    $relatedContact->ignore_update_c = true;

                    //perform any other contact logic
                    $relatedContact->save();
                }
            }
        }
    }
}
```

`./custom/modules/Contacts/Contacts_Hook.php`

```
<?php
```

---

```

if (!defined('sugarEntry') || !sugarEntry) die('Not A Valid Entry Point');

class Contacts_Hook
{
    function update_account($bean, $event, $arguments)
    {
        //if relationship is loaded
        if ($bean->load_relationship('accounts'))
        {
            //fetch related beans
            $relatedAccounts = $bean->accounts->getBeans();

            $parentAccount = false;
            if (!empty($relatedAccounts))
            {
                //order the results
                reset($relatedAccounts);

                //first record in the list is the parent
                $parentAccount = current($relatedAccounts);
            }

            if ($parentAccount !== false && is_object($parentAccount))
            {
                //check if the bean's ignore_update_c element is set
                if (!isset($bean->ignore_update_c) || $bean->ignore_update_c === false)
                {
                    //set the ignore update attribute
                    $parentAccount->ignore_update_c = true;

                    //perform any other account logic
                    $parentAccount->save();
                }
            }
        }
    }
}

```

**Last Modified:** 2021-02-17 02:44:13

---

# Modifying Calendar Item Colors

## Overview

Each calendar event type (Meetings, Calls, and Tasks) has its own distinct color scheme. This article will review how to modify these colors, as well as demonstrate how to set the event color based on the event status.

The color scheme for each calendar activity type is defined in the stock file `./modules/Calendar/CalendarDisplay.php` in the `$activity_colors` array as shown below:

```
public $activity_colors = array(
    'Meetings' => array(
        'border' => '#1C5FBD',
        'body' => '#D2E5FC',
    ),
    'Calls' => array(
        'border' => '#DE4040',
        'body' => '#FCD CDC',
    ),
    'Tasks' => array(
        'border' => '#015900',
        'body' => '#B1F5AE',
    ),
);
```

This file can not be overridden or extended in an upgrade-safe way, but this array can still be overridden later in the rendering process allowing for an upgrade safe customization.

## Modifying the Calendar Activity Colors

The `CalendarDisplay` class passes the `$activity_colors` array to javascript by way of the `./modules/Calendar/tpls/main.tpl` Smarty template.

In this template file, you will see the following code where the `CAL.activity_colors` object is setup:

```
CAL.activity_colors = [];
{foreach name=colors from=$activity_colors key=module item=v}
    CAL.activity_colors['{$module}'] = [];
    CAL.activity_colors['{$module}']['border'] = '{$v.border}';
```

---

```
CAL.activity_colors['{$module}']['body'] = '{$v.body}'
{/foreach}
```

This is where we can update the `$activity_colors` array in an upgrade safe manner. To do this, copy the template file from `./modules/Calendar/tpls/main.tpl` to `./custom/modules/Calendar/tpls/main.tpl`.

If we wanted to change Meetings to have a purple color scheme, we might choose:

```
border: #580059
body : #F2AEF5
```

To implement this, we'll update the activity colors array in the custom template file as follows:

```
./custom/modules/Calendar/tpls/main.tpl
```

```
CAL.activity_colors = [];
{foreach name=colors from=$activity_colors key=module item=v}
  CAL.activity_colors['{$module}'] = [];
  CAL.activity_colors['{$module}']['border'] = '{$v.border}';
  CAL.activity_colors['{$module}']['body'] = '{$v.body}'
{/foreach}

{literal}

CAL.activity_colors["Meetings"] = {
  "border": "#580059",
  "body": "#F2AEF5"
};

{/literal}
```

In the above code, the `activity_colors` entry for "Meetings" has specifically been altered to set the custom colors just for Meetings, leaving the other activity types as they were. Alternatively, the entire `activity_colors` array could be updated, replacing the original coming from `CalendarDisplay`. For example:

```
./custom/modules/Calendar/tpls/main.tpl
```

```
CAL.activity_colors = [];
{foreach name=colors from=$activity_colors key=module item=v}
  CAL.activity_colors['{$module}'] = [];
  CAL.activity_colors['{$module}']['border'] = '{$v.border}';
  CAL.activity_colors['{$module}']['body'] = '{$v.body}'
{/foreach}
```

---

```
{literal}

CAL.activity_colors = {
  "Meetings": {
    "border": "#580059",
    "body": "#F2AEF5"
  },
  "Calls": {
    "border": "#DE4040",
    "body": "#FCDCDC"
  },
  "Tasks": {
    "border": "#015900",
    "body": "#B1F5AE"
  }
};

{/literal}
```

While Calls and Tasks have not been modified from their original colors, having the entire array defined here may make it easier to make further color customizations later on, since the modified `activity_colors` will be completely defined in the custom template file.

After making the above changes, run a Quick Repair and Rebuild and reload the Calendar module in your browser to see the changes take effect.

## Customizing colors based on event status

If you wanted to go a step further, you might want to customize the colors based on the status of the activity. For example, perhaps for Meetings, the color should reflect if the Meeting status is Scheduled, Held, or Canceled. To achieve this, we will need to customize the javascript that actually renders the activities onto the calendar view, so we will copy `./modules/Calendar/Cal.js` to `./custom/modules/Calendar/Cal.js`.

Additionally, in order for our custom template to load the custom `Cal.js`, it will need to be updated to point to the custom `Cal.js` by changing the line:

```
{sugar_getscript file="modules/Calendar/Cal.js"}
```

to

```
{sugar_getscript file="custom/modules/Calendar/Cal.js"}
```



---

The activity colors from the `CAL.activity_colors` object get applied in the `Cal.js` script at:

```
el.style.backgroundColor = CAL.activity_colors[item.module_name]['body'];
el.style.borderColor = CAL.activity_colors[item.module_name]['border'];
;
```

The activity type (Meetings, Calls, Tasks) comes from `item.module_name`, as shown above. The activity's status can be found in the `item.status` variable. Using these, we can modify the color-setting logic to apply a status-specific color scheme to the Meeting items in the calendar, for example:

```
if (item.module_name == "Meetings") {
    el.style.backgroundColor = CAL.activity_colors[item.module_name][item.status]['body'];
    el.style.borderColor = CAL.activity_colors[item.module_name][item.status]['border'];
}
else {
    el.style.backgroundColor = CAL.activity_colors[item.module_name]['body'];
    el.style.borderColor = CAL.activity_colors[item.module_name]['border'];
}
```

This assumes that the 'Meetings' part of `CAL.activity_colors` has status-specific colors set. Therefore we will need to update our custom template file so that this is the case:

```
./custom/modules/Calendar/tpls/main.tpl
```

```
{literal}
```

```
CAL.activity_colors = {
  "Meetings": {
    "Planned": {
      "border": "#FF6666",
      "body": "#FF6666"
    },
    "Held": {
      "border": "#FF9999",
      "body": "#FF9999"
    },
    "Not Held": {
      "border": "#6C8CD5",
```

---

```
        "body": "#6C8CD5"
    },
    "Calls": {
        "border": "#DE4040",
        "body": "#FCDCDC"
    },
    "Tasks": {
        "border": "#015900",
        "body": "#B1F5AE"
    },
    "Planned": {
        "border": "#ff6666",
        "body": "#ff6666"
    },
    "Held": {
        "border": "#FF9999",
        "body": "#FF9999"
    },
    "Not Held": {
        "border": "#6C8CD5",
        "body": "#6C8CD5"
    }
};

{/literal}
```

After making the above changes, run Rebuild JS Grouping Files followed by a Quick Repair and Rebuild, then reload the Calendar module in your browser to see the changes take effect.

**Last Modified:** 2021-02-17 02:44:13

## Modifying Layouts to Display Additional Columns

### Overview

By default, the record view layout for each module displays two columns of fields. The number of columns to display can be customized on a per-module basis with the following steps.

---

## Resolution

First, you will want to ensure your layouts are deployed in the custom directory. If you have not previously customized your layouts via Studio, go to Admin > Studio > {Module Name} > Layouts. From there, select each layout you wish to add additional columns to and click 'Save & Deploy'. This action will create a corresponding layout file under the `./custom/modules/{Module Name}/clients/base/views/record/` directory. The file will be named `record.php`.

In your custom `record.php` file, locate the `maxColumns` value under `templateMeta` array, and change it to the number of columns you would like to have on screen:

```
'maxColumns' => '3',
```


Once that is updated, locate the `widths` array to define the spacing for your each column(s). You should have a label and field entry for each column in your layout:

```
'widths' => array (
  0 => array (
    'label' => '10',
    'field' => '30',
  ),
  1 => array (
    'label' => '10',
    'field' => '30',
  ),
  2 => array (
    'label' => '10',
    'field' => '30',
  ),
),
```

Next, under the existing `panels` array, each entry will already have a `columns` property, with a value of 2. Update each of these to the number of columns you set for `maxColumns` :

```
'columns' => 3,
```

Once the file has been modified, you can navigate to Studio and add fields to your new column in the layout. For any rows that already contain two fields, the second field will automatically span the second and third column. Simply click the minus (-) icon to contract the field to one column and expose the new column space:

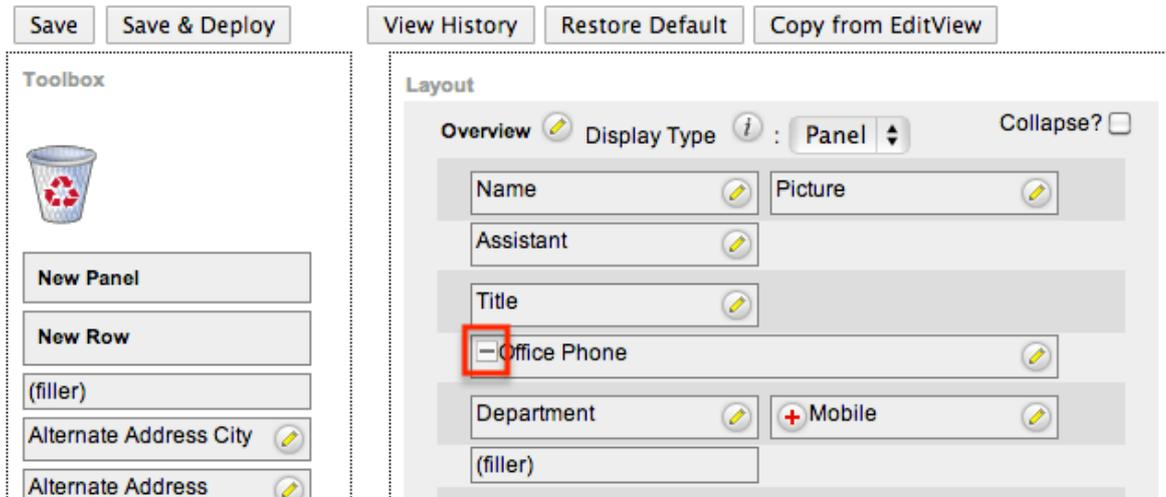

After you have added the desired fields in Studio, click 'Save & Deploy' to finalize your changes

## Column Widths

Studio does not support expanding a field beyond two column-widths. If you want a field to span the full layout (all three columns), you would need to manually update this in the custom record.php like so:

```
array (  
    'name' => 'description',  
    'span' => 12,  
)
```

Changing the span value from 8 to 12. After saving the changes on the file, you would then run a Quick Repair and Rebuild. However, any updates in Studio will revert the span back to 8.

**Last Modified:** 2021-02-17 02:44:13

## Modifying Subpanel Action Buttons

### Overview

---

Several action buttons exist on each subpanel by default such as "Create" (+ Plus symbol) and "Link Existing Record". These buttons are controlled by the panel-top view for each module. To make changes to the buttons included in a subpanel layout, you will need to create an override for the panel-top view in `./custom/Extension/modules/<module>/Ext/clients/base/views/panel-top/` and update the corresponding buttons property to include or exclude a button.

If you need to make changes to a specific relationships subpanel, then you will need to modify the subpanels layout definition for the relationship to point to a custom panel-top view that you define.

## Steps to Complete

### Editing Subpanel Action Buttons

In this example, we will remove the "Create" button from the Contacts subpanel for all modules. This code snippet uses the same button definition that the create button uses. It has been changed to trigger the "Link Existing Record" action by setting the button type to link-action. The blank array after the initial button is just to assure that the drop-down button displays next to it as disabled for placement purposes.

1. Create the file `custom/Extension/modules/Contacts/Ext/clients/base/views/panel-top/panel-top.php` as follows:

```
<?php

$viewdefs['Contacts']['base']['view']['panel-top']['buttons'] = array(
    array(
        'type' => 'actiondropdown',
        'name' => 'panel_dropdown',
        'css_class' => 'pull-right',
        'buttons' => array(
            array(
                'type' => 'link-action',
                'icon' => 'fa-link',
                'name' => 'select_button',
                'label' => ' ',
                'tooltip' => 'LBL_ASSOC_RELATED_RECORD',
            ),
            array(
            ),
        ),
    ),
);
```

```

    ),
),
);

```

2. Navigate to Admin > Repair and click "Quick Repair and Rebuild".

The subpanel will appear as shown below for all Contacts subpanels.

CONTACTS (4)							Link Existing Record
	Name	City	State	Email	Office P		
☆	Argentina Midgette	Sunnyvale	CA	dev93@example.co.uk	(637) 258-941		
☆	Demetra Hamby	St. Petersburg	CA	support76@example.biz	(433) 506-954		
☆	Sheba Doughtie	Salt Lake City	CA	the.im.kid@example.cn	(321) 764-397		
☆	Barton Chowdhury	Cupertino	CA	phone36@example.info	(250) 317-708		

## Using a Custom Panel-Top View for a Specific Relationship

In this example, we will only remove the "Create" action from a specific relationships subpanel. Specifically, the example will look at Contacts subpanel on the Accounts module and implement the above changes explicitly for that relationship.

1. Create the custom panel-top view in `./custom/modules/Contacts/clients/base/views/panel-top-for-accounts/panel-top-for-accounts.php` as follows:

```

<?php

$viewdefs['Contacts']['base']['view']['panel-top-for-accounts'] = array(
    'type' => 'panel-top',
    'template' => 'panel-top',
    'buttons' => array(
        array(
            'type' => 'actiondropdown',
            'name' => 'panel_dropdown',
            'css_class' => 'pull-right',
            'buttons' => array(
                array(
                    'type' => 'link-action',
                    'icon' => 'fa-link',
                    'name' => 'select_button',
                    'label' => ' ',
                )
            )
        )
    )
);

```

---

```

                'tooltip' => 'LBL_ASSOC_RELATED_RECORD',
            ),
            array(
            ),
        ),
    ),
);

```

2. Create the subpanel panel-top override definition for Accounts in `./custom/modules/Accounts/clients/base/layouts/subpanels/subpanels.php` as follows:

```

<?php

require 'modules/Accounts/clients/base/layouts/subpanels/subpanels.php';

foreach($viewdefs['Accounts']['base']['layout']['subpanels']['components'] as $key => $component){
    if ($component['context']['link'] == 'contacts'){
        $viewdefs['Accounts']['base']['layout']['subpanels']['components'][$key]['override_paneltop_view'] = 'panel-top-for-accounts';
        break;
    }
}

```

3. Navigate to Admin > Repair and click "Quick Repair and Rebuild".

Your changes will now be reflected in the system.

**Last Modified:** 2021-08-03 12:41:35

## Module Loadable Packages

Examples working with the module loadable packages.

**Last Modified:** 2021-02-17 02:44:13

---

# Creating an Installable Package for a Logic Hook

## Overview

These examples will demonstrate how to create module loadable packages for logic hooks based on different scenarios.

## Logic Hook File vs. Logic Hook Definition

No matter the deployment method, all logic hooks require being registered (meaning they are attached to the `$hook_array` array), defining the logic hook event, module, file to load, and class and function to run for that logic hook event. For all deployment options, the logic hook definition points to a file where the class and function to run is located, and this file must be copied to the instance via the copy `installdefs` of the manifest. The bulk of this article will focus on the various options for registering the logic hook definition via the package manifest. But all deployment strategies will assume the same logic hook definition, the same logic hook file, and will use the same copy array to move the logic hook file into the instance.

**Note:** More information on the `$manifest` or `$installdef` can be found in the [Introduction to the Manifest](#) .

## The Logic Hook

This logic hook will install a `before_save` hook to the accounts module that will default the account name to 'My New Account Name ({time stamp})'. This various ways of installing this hook will be shown in the following sections.

### Logic Hook Definition

```
<basepath>/Files/custom/Extension/Accounts/Ext/LogicHooks/account_name_hook.php
```

```
<?php
```

```
$hook_array['before_save'][] = Array(
    99,
    'Example Logic Hook - Updates account name',
    'custom/modules/Accounts/accounts_save.php',
    'Accounts_Save',
```



---

```
        'updateAccountName'  
    );
```

## Logic Hook File

```
<basepath>/Files/custom/modules/Accounts/accounts_save.php
```

```
<?php
```

```
if (!defined('sugarEntry') || !sugarEntry) die('Not A Valid Entry Point');
```

```
class Accounts_Save  
{  
    function updateAccountName($bean, $event, $arguments)  
    {  
        $bean->name = "My New Account Name (" . time() . ")";  
    }  
}
```

## Distributed Plugin

If the package being built is intended to be distributed to various Sugar instances as part of a distributed plugin, your logic hook definition should be created as part of the extension framework using the [LogicHooks Extension](#), which can be done using `$installdefs['logic_hooks']` in the package manifest. When using this extension, the logic hook will be installed and uninstalled along with the plugin.

**Note:** More information on the `$installdefs['logic_hooks']` can be found in [LogicHooks Extensions](#).

## Package Example

The following files are relative to the root of the .zip archive which is referred to at the basepath. This example package can be downloaded [here](#).

```
<basepath>/manifest.php
```

```
<?php
```

```
$manifest = array(  
    'acceptable_sugar_flavors' => array(  

```

---

```

        'PRO',
        'ENT',
        'ULT'
    ),
    'acceptable_sugar_versions' => array(
        'exact_matches' => array(),
        'regex_matches' => array(
            '11.0.*'
        ),
    ),
    'author' => 'SugarCRM',
    'description' => 'Installs a sample logic hook - using extension framework',
    'icon' => '',
    'is_uninstallable' => true,
    'name' => 'Example Logic Hook Installer - Using Extension Framework',
    'published_date' => '2018-01-01 00:00:00',
    'type' => 'module',
    'version' => '1.0.0',
);

```

```

$installdefs = array(
    'id' => 'package_123',
    'copy' => array(
        array(
            'from' => '<basepath>/Files/custom/modules/Accounts/accounts_save.php',
            'to' => 'custom/modules/Accounts/accounts_save.php',
        ),
    ),
    'hookdefs' => array(
        array(
            'from' => '<basepath>/Files/custom/Extension/Accounts/Ext/LogicHooks/account_name_hook.php',
            'to_module' => 'Accounts',
        ),
    ),
);

```

```

<basepath>/Files/custom/Extension/Accounts/Ext/LogicHooks/account_name_hook.php

```

```

<?php

```

```

$hook_array['before_save'][] = Array(

```

---

```
99,  
    'Example Logic Hook - Updates account name',  
    'custom/modules/Accounts/accounts_save.php',  
    'Accounts_Save',  
    'updateAccountName'  
);
```

<basepath>/Files/custom/modules/Accounts/accounts\_save.php

```
<?php
```

```
if (!defined('sugarEntry') || !sugarEntry) die('Not A Valid Entry Point');
```

```
class Accounts_Save  
{  
    function updateAccountName($bean, $event, $arguments)  
    {  
        $bean->name = "My New Account Name (" . time() . ")";  
    }  
}
```

## Promotion Process

If the package being built is intended to be part of a code promotion process, you are welcome to use the [LogicHooks Extension](#) as mentioned above or you may find it easier to update the `./custom/modules/<module>/logic_hooks.php` file, which can be done using the `$installdefs['logic_hooks']` in the package manifest.

## Package Example

The following files are relative to the root of the `.zip` archive which is referred to at the `basepath`. This example package can be downloaded [here](#).

<basepath>/manifest.php

```
<?php
```

```
$manifest = array(  
    'acceptable_sugar_flavors' => array(  
        'PRO',  
        'ENT',  
        'ULT'
```

---

```
    ),
    'acceptable_sugar_versions' => array(
        'exact_matches' => array(),
        'regex_matches' => array(
            '11.0.*'
        ),
    ),
),
'author' => 'SugarCRM',
'description' => 'Installs a sample logic hook - using logic_hooks in
stalldefs',
'icon' => '',
'is_uninstallable' => true,
'name' => 'Example Logic Hook Installer - Using logic_hooks installde
fs',
'published_date' => '2018-01-01 00:00:00',
'type' => 'module',
'version' => '1.0.0',
);
```

```
$installdefs = array(
    'id' => 'package_456',
    'copy' => array(
        array(
            'from' => '<basepath>/Files/custom/modules/Accounts/accounts_save.p
hp',
            'to' => 'custom/modules/Accounts/accounts_save.php',
        ),
    ),
    'logic_hooks' => array(
        array(
            'module' => 'Accounts',
            'hook' => 'before_save',
            'order' => 99,
            'description' => 'Example Logic Hook - Updates account name',
            'file' => 'custom/modules/Accounts/accounts_save.php',
            'class' => 'Accounts_Save',
            'function' => 'updateAccountName',
        ),
    ),
);
```

```
<basepath>/Files/custom/modules/Accounts/accounts_save.php
```

```
<?php
```

```
if (!defined('sugarEntry') || !sugarEntry) die('Not A Valid Entry Poin
```

---

```
t');

class Accounts_Save
{
    function updateAccountName($bean, $event, $arguments)
    {
        $bean->name = "My New Account Name (" . time() . ")";
    }
}
```

## Conditionally Add or Remove Logic Hook via post\_execute script

A developer may want to be able to trigger the addition or removal of logic hooks from a customization. This can be done using a post execute script with the `check_logic_hook_file` and `remove_logic_hook_file` functions.

It is recommended to be cautious when doing this and limit any updates to off-hours as not to affect system behavior for users.

**Note:** `remove_logic_hook_file` only removes hooks defined in the given module's `logic_hooks.php` file. `check_logic_hook_file` only checks hooks defined in the given module's `logic_hooks.php` file. Neither check or remove hooks defined via the Logic Hook Extension framework. Thus this deployment option should be considered a subset of the Promotion Process deployment option listed earlier.

## Package Example

**Note:** For demonstration purposes, in the `post_execute` script, the `Accounts_Save` logic hook from the earlier example package is unregistered (if it exists) and a second logic hook `Accounts_Save_Enterprise` is registered. The second logic hook points to a different logic hook file, which is moved to the instance using copy in the manifest.

The following files are relative to the root of the `.zip` archive which is referred to at the basepath. This example package can be downloaded [here](#).

```
<basepath>/manifest.php
```

```
<?php
```

```
$manifest = array(
    'acceptable_sugar_flavors' => array(
```

---

```

        'PRO',
        'ENT',
        'ULT'
    ),
    'acceptable_sugar_versions' => array(
        'exact_matches' => array(),
        'regex_matches' => array(
            '11.0.*'
        ),
    ),
    'author' => 'SugarCRM',
    'description' => 'Installs a sample logic hook - using post_execute c
heck_logic_hook_file',
    'icon' => '',
    'is_uninstallable' => true,
    'name' => 'Example Logic Hook Installer - Using post_execute check_lo
gic_hook_file',
    'published_date' => '2018-01-01 00:00:00',
    'type' => 'module',
    'version' => '1.0.0',
);

```

```

$installdefs = array(
    'id' => 'package_789',
    'copy' => array(
        array(
            'from' => '<basepath>/Files/custom/modules/Accounts/accounts_save_e
nterprise.php',
            'to' => 'custom/modules/Accounts/accounts_save_enterprise.php',
        ),
    ),
    'post_execute' => array(
        '<basepath>/change_hooks.php',
    ),
);

```

```
<basepath>/Files/custom/modules/Accounts/accounts_save_enterprise.php
```

```
<?php
```

```
if (!defined('sugarEntry') || !sugarEntry) die('Not A Valid Entry Poin
t');
```

```
class Accounts_Save_Enterprise
{
```

---

```
function updateAccountName($bean, $event, $arguments)
{
    $bean->name = "My New Account Name (" . time() . ") -- Enterprise";
}
}
```

<basepath>/change\_hooks.php

```
<?php
```

```
if(!defined('sugarEntry')) define('sugarEntry', true);
```

```
require_once 'include/entryPoint.php';
```

```
$accounts_hook_pro = array(
    99,
    'Example Logic Hook - Updates account name',
    'custom/modules/Accounts/accounts_save.php',
    'Accounts_Save',
    'updateAccountName'
);
```

```
$accounts_hook_ent = array(
    99,
    'Example Logic Hook - Updates account name - Enterprise',
    'custom/modules/Accounts/accounts_save_enterprise.php',
    'Accounts_Save_Enterprise',
    'updateAccountName'
);
```

```
if( $GLOBALS['sugar_flavor'] == 'ENT' ) {
```

```
    //unregister Accounts_Save logichook
    remove_logic_hook("Accounts", "before_save", $accounts_hook_pro);
```

```
    //register Accounts_Save_Enterprise logichook
    check_logic_hook_file("Accounts", "before_save", $accounts_hook_ent);
}
```

**Last Modified:** 2021-07-26 19:26:00

## Creating an Installable Package That Copies Files

---

## Overview

This is an overview of how to create a module loadable package that will copy files into your instance of Sugar. This is most helpful when your instance is hosted in Sugar's cloud environment or by a third party. For more details on the `$manifest` or `$installdefs` options, you can visit the [Introduction to the Manifest](#). This example package can be downloaded [here](#).

## Manifest Example

```
<?php

$manifest = array(
    'acceptable_sugar_flavors' => array('PRO', 'ENT', 'ULT'),
    'acceptable_sugar_versions' => array(
        'exact_matches' => array(),
        'regex_matches' => array('(.*?)\\.(.*?)\\.(.*?)$'),
    ),
    'author' => 'SugarCRM',
    'description' => 'Copies my files to custom/src/',
    'icon' => '',
    'is_uninstallable' => true,
    'name' => 'Example File Installer',
    'published_date' => '2018-06-29 00:00:00',
    'type' => 'module',
    'version' => '1.0.0',
);

$installdefs = array(
    'id' => 'package_1530305622',
    'copy' => array(
        0 => array(
            'from' => '<basepath>/Files/custom/src/MyLibrary/MyCustomC
lass.php',
            'to' => 'custom/src/MyLibrary/MyCustomClass.php',
        ),
    ),
);
```

## Copied File Example

This example copies a file to `./custom/src/MyLibrary/MyCustomClass.php`, which



---

adds the custom namespaced class  
Sugarcrm\Sugarcrm\custom\MyLibrary\MyCustomClass to the application.

```
<?php

namespace Sugarcrm\Sugarcrm\custom\MyLibrary;

use \Sugarcrm\Sugarcrm\Logger\Factory;

class MyCustomClass
{
    public function MyCustomMethod($message = 'relax')
    {
        $logger = Factory::getLogger('default');
        $logger->info('MyCustomClass says' . " '{$message}'");
    }
}
```

**Last Modified:** 2021-07-26 19:14:25

## Creating an Installable Package that Creates New Fields

### Overview

This is an overview of how to create a Module Loader package that will install custom fields to a module. This example will install a set of fields to the accounts module. The full package is downloadable [here](#) for your reference. For more details on the \$manifest or \$installdef options, you can visit the [Introduction to the Manifest File](#).

### Manifest Example

<basepath>/manifest.php

```
<?php

$manifest = array(
    'acceptable_sugar_flavors' => array('CE', 'PRO', 'CORP', 'ENT', 'U
```



---

```

    ),
    //DropDown
    array(
        'name' => 'dropdown_field_example_c',
        'label' => 'LBL_DROPDOWN_FIELD_EXAMPLE',
        'type' => 'enum',
        'module' => 'Accounts',
        'help' => 'Enum Field Help Text',
        'comment' => 'Enum Field Comment Text',
        'ext1' => 'account_type_dom', //maps to options - specify
list name
        'default_value' => 'Analyst', //key of entry in specified
list
        'mass_update' => false, // true or false
        'required' => false, // true or false
        'reportable' => true, // true or false
        'audited' => false, // true or false
        'importable' => 'true', // 'true', 'false' or 'required'
        'duplicate_merge' => false, // true or false
    ),
    //MultiSelect
    array(
        'name' => 'multiselect_field_example_c',
        'label' => 'LBL_MULTISELECT_FIELD_EXAMPLE',
        'type' => 'multienum',
        'module' => 'Accounts',
        'help' => 'Multi-Enum Field Help Text',
        'comment' => 'Multi-Enum Field Comment Text',
        'ext1' => 'account_type_dom', //maps to options - specify
list name
        'default_value' => 'Analyst', //key of entry in specified
list
        'mass_update' => false, // true or false
        'required' => false, // true or false
        'reportable' => true, // true or false
        'audited' => false, // true or false
        'importable' => 'true', // 'true', 'false' or 'required'
        'duplicate_merge' => false, // true or false
    ),
    //Checkbox
    array(
        'name' => 'checkbox_field_example_c',
        'label' => 'LBL_CHECKBOX_FIELD_EXAMPLE',
        'type' => 'bool',
        'module' => 'Accounts',
        'default_value' => true, // true or false

```

---

```

    'help' => 'Bool Field Help Text',
    'comment' => 'Bool Field Comment',
    'audited' => false, // true or false
    'mass_update' => false, // true or false
    'duplicate_merge' => false, // true or false
    'reportable' => true, // true or false
    'importable' => 'true', // 'true', 'false' or 'required'
),
//Date
array(
    'name' => 'date_field_example_c',
    'label' => 'LBL_DATE_FIELD_EXAMPLE',
    'type' => 'date',
    'module' => 'Accounts',
    'default_value' => '',
    'help' => 'Date Field Help Text',
    'comment' => 'Date Field Comment',
    'mass_update' => false, // true or false
    'required' => false, // true or false
    'reportable' => true, // true or false
    'audited' => false, // true or false
    'duplicate_merge' => false, // true or false
    'importable' => 'true', // 'true', 'false' or 'required'
),
//DateTime
array(
    'name' => 'datetime_field_example_c',
    'label' => 'LBL_DATETIME_FIELD_EXAMPLE',
    'type' => 'datetime',
    'module' => 'Accounts',
    'default_value' => '',
    'help' => 'DateTime Field Help Text',
    'comment' => 'DateTime Field Comment',
    'mass_update' => false, // true or false
    'enable_range_search' => false, // true or false
    'required' => false, // true or false
    'reportable' => true, // true or false
    'audited' => false, // true or false
    'duplicate_merge' => false, // true or false
    'importable' => 'true', // 'true', 'false' or 'required'
),
//Encrypt
array(
    'name' => 'encrypt_field_example_c',
    'label' => 'LBL_ENCRYPT_FIELD_EXAMPLE',
    'type' => 'encrypt',

```

---

```
'module' => 'Accounts',
'default_value' => '',
'help' => 'Encrypt Field Help Text',
'comment' => 'Encrypt Field Comment',
'reportable' => true, // true or false
'audited' => false, // true or false
'duplicate_merge' => false, // true or false
'importable' => 'true', // 'true', 'false' or 'required'
),
),
);

?>
```

## Language Example

<basepath>/Files/Language/Accounts/en\_us.lang.php

```
<?php
```

```
$mod_strings['LBL_TEXT_FIELD_EXAMPLE'] = 'Text Field Example';
$mod_strings['LBL_DROPDOWN_FIELD_EXAMPLE'] = 'DropDown Field Example';
$mod_strings['LBL_CHECKBOX_FIELD_EXAMPLE'] = 'Checkbox Field Example';
$mod_strings['LBL_MULTISELECT_FIELD_EXAMPLE'] = 'Multi-
Select Field Example';
$mod_strings['LBL_DATE_FIELD_EXAMPLE'] = 'Date Field Example';
$mod_strings['LBL_DATETIME_FIELD_EXAMPLE'] = 'DateTime Field Example';
$mod_strings['LBL_ENCRYPT_FIELD_EXAMPLE'] = 'Encrypt Field Example';
```

**Last Modified:** 2021-07-26 19:14:13

## Removing Files with an Installable Package

### Overview

This is an overview of how to create a module loadable package that will remove files from the custom directory that may have been left over from a previous package installation or legacy versions of your code customization.

**Note:** For SugarCloud customers, this method will not work because removing

---

files is prohibited by Package Scanner. To have files removed, you can [submit a case](#) to Sugar Support with a list of files to be removed or request a package approval and provide your module loadable package.

This example will install a custom file and use a pre-execute script to remove files from a previously installed customization. Typically, uninstalling a package would remove the files of the customization, however, in some scenarios, it is desired to install a new package on top of a previous version, and removing files with the new package might be necessary. The full package for this example is downloadable [here](#) for your reference.

For more details on the `$manifest` or `$installdefs` options, you can visit the [Introduction to the Manifest](#) documentation.

## Manifest Example

```
<basepath>/manifest.php
```

```
<?php
```

```
$manifest = array(
    'acceptable_sugar_flavors' => array(
        'PRO',
        'ENT',
        'ULT'
    ),
    'acceptable_sugar_versions' => array(
        'exact_matches' => array(),
        'regex_matches' => array(
            '11.0.*'
        ),
    ),
    'author' => 'SugarCRM',
    'description' => 'Installs a custom class file',
    'icon' => '',
    'is_uninstallable' => true,
    'name' => 'Example Removing File Installer',
    'published_date' => '2018-12-06 00:00:00',
    'type' => 'module',
    'version' => '1.2.0'
);

$installdefs = array(
    'id' => 'package_1341607504',
```

---

```
'copy' => array(
    array(
        'from' => '<basepath>/Files/custom/src/CustomClass.php'
    ),
    array(
        'to' => 'custom/src/CustomClass.php',
    ),
),
'pre_execute' => array(
    '<basepath>/removeLegacyFiles.php',
),
'remove_files' => array(
    'custom/include/CustomClass.php'
)
);
```

<basepath>/removeLegacyFiles.php

<?php

```
if (isset($this->installdefs['remove_files'])) {
    foreach($this->installdefs['remove_files'] as $relpath){
        if (SugarAutoloader::fileExists($relpath)) {
            SugarAutoloader::unlink($relpath);
        }
    }
}
```

The full package is downloadable [here](#) for your reference.

**Last Modified:** 2021-07-26 19:15:16

## Passing Data to Templates

### Overview

This page explains how to create a custom view component that passes data to the Handlebars template.

### Steps to Complete

---

The view component will render the actual content on the page. The view below will display data passed to it from the controller.

`./custom/clients/base/views/my-dataview/my-dataview.js`

```
({
  className: 'tcenter',
  loadData: function (options) {
    //populate your data
    myData=new Object();
    myData.myProperty = "My Value";
    this.myData = myData;

    /*
      //alternatively, you can pass in a JSON array to populate
your data
      myData = $.parseJSON( '{"myData":{"myProperty":"My Value"}
}' );
    */
    _.extend(this, myData);
  }

  this.render();

  //reset flags on reload
  if (options && _.isFunction(options.complete)) {
    options.complete();
  }

  // Another Alternative you can get the date from an end point
  let self = this;
  app.api.call("read", app.api.buildURL("Accounts/4bbd3b4e-755d-
11e9-9a7b-f45c89a8598f"), null, {
    success: function (accountResponse) {
      self.myData['account'] = accountResponse;
      self.render();
    },
  },
  })
},
})
```

Next, add the Handlebars template to render the data. An example is shown below:

`./custom/clients/base/views/my-dataview/my-dataview.hbs`

```
{{#with myData}}
```



---

```
{{account.name}} - {{account.assigned_user_name}} <br>
{{myProperty}}
{{/with}}
```

Once the files are in place, add the view to a [layout](#) and then navigate to Admin > Repair > Quick Repair and Rebuild.

**Last Modified:** 2021-02-17 02:44:13

## Prepopulating the Compose Email View

### Overview

When composing an email in Sugar, it may be useful to modify the compose view to better suit your common business practices. In this article, we will use JavaScript to create a code-level customization which causes the To, CC, and Subject fields of the email to prepopulate with data from a related Opportunity.

### Create a Custom Compose Email View

To modify the default compose email functionality, we will need to create our own compose-email view that extends from the base compose-email view. To accomplish this, we will need to create the following file:

```
./custom/modules/Emails/clients/base/views/compose-email/compose-email.js
```

```
({
  extendsFrom: 'EmailsComposeEmailView',

  initialize: function(options){
    this._super('initialize',[options]);
    this.configureDefaults();
  },

  /**
   * Configure the default data
   */
  configureDefaults: function(){
    var model = this.context.parent.get('model');
    var module = this.context.parent.get('module');
```

---

```

if (module == 'Opportunities'){
    var contacts;
    var oppName = model.get('name');
    if (this.model.get('to_collection').length === 0) {
        var email = this.model;
        //Get the related contacts to the Opportunity
        contacts = model.getRelatedCollection('contacts');
        contacts.fetch({
            relate: true,
            success: function (data) {
                var ccRecords = [],
                    toRecords = [];
                data.forEach(function (record) {
                    var parentName = app.utils.getRecordName(r
record);
                    if (record.attributes.opportunity_role ==
'Primary Decision Maker') {
                        //Primary decisions makers are added t
o the TO Recipients
                        toRecords.push(app.data.createBean('Em
ailParticipants', {
                            _link: 'to',
                            parent: _.extend({type: record.mod
ule}, record.attributes),
                            parent_type: record.module,
                            parent_id: record.get('id'),
                            parent_name: parentName
                        }));
                    } else {
                        //All other contacts are added to the
CC Recipients
                        ccRecords.push(app.data.createBean('Em
ailParticipants', {
                            _link: 'cc',
                            parent: _.extend({type: record.mod
ule}, record.attributes),
                            parent_type: record.module,
                            parent_id: record.get('id'),
                            parent_name: parentName
                        }));
                    }
                });
                email.get('to_collection').add(toRecords);
                email.get('cc_collection').add(ccRecords);
            },

```

---

```
        fields: ['id', 'full_name', 'email', 'opportunity_
role']
    });
}
//Default the Subject of Email to the Opportunity Name
email.set('name',oppName);
}
}
})
```

Some key things to note about this customization:

- The custom view should extend from `EmailsComposeEmailView`
- When adding recipients to an Email Bean Model, you should create an `EmailParticipants` Bean Model and specify the `_link` property that will be used.
- This view will be used when clicking on the "Create" button in the Emails subpanel, or when clicking on Email Address on a record when the user is configured to use the Sugar Email Client

Once you have added the custom code, execute a Quick Repair and rebuild via Admin > Repair > Quick Repair and Rebuild, and your changes should now be reflected in your instance.

**Last Modified:** 2021-02-17 02:44:13

## Refreshing Subpanels on the RecordView

### Overview

How to refresh specific subpanels on the Record View.

### Refreshing Subpanels

When Working with the Record View, it is sometimes necessary to force the refresh of a subpanel. The following example will demonstrate how to add buttons to force refresh a specific subpanel or all subpanels on the Accounts RecordView.

### Adding the Button Metadata

---

For our example, we will first create a metadata extension file to append our custom refresh buttons to the Accounts RecordView action menu.

`./custom/Extension/modules/Accounts/Ext/clients/base/views/record/refreshButtons.php`

```
<?php

//module name
$module = 'Accounts';

//buttons to append
$addButtons = array(
    array(
        'type' => 'divider',
    ),
    array (
        'type' => 'rowaction',
        'event' => 'button:refresh_specific_subpanel:click',
        'name' => 'refresh_specific_subpanel',
        'label' => 'LBL_REFRESH_SPECIFIC_SUBPANEL',
        'acl_action' => 'view',
    ),
    array (
        'type' => 'rowaction',
        'event' => 'button:refresh_all_subpanels:click',
        'name' => 'refresh_all_subpanels',
        'label' => 'LBL_REFRESH_ALL_SUBPANELS',
        'acl_action' => 'view',
    )
);

//if the buttons are missing in our base modules metadata, include core buttons
if (!isset($viewdefs[$module]['base']['view']['record']['buttons']))
{
    require('clients/base/views/record/record.php');
    $viewdefs[$module]['base']['view']['record']['buttons'] = $viewdefs['base']['view']['record']['buttons'];
    unset($viewdefs['base']);
}

foreach($viewdefs[$module]['base']['view']['record']['buttons'] as $outerKey => $outerButton)
{
```

---

```

if (
    isset($outerButton['type'])
    && $outerButton['type'] == 'actiondropdown'
    && isset($outerButton['name'])
    && $outerButton['name'] == 'main_dropdown'
    && isset($outerButton['buttons'])
)
{
    /*
    //removing buttons by name
    foreach($viewdefs[$module]['base']['view']['record']['buttons'
][[$outerKey]['buttons'] as $innerKey => $innerButton)
    {
        if (
            isset($innerButton['name'])
            && $innerButton['name'] == 'button_name'
        )
        {
            unset($viewdefs[$module]['base']['view']['record']['bu
ttons'][[$outerKey]['buttons']][$innerKey]);
        }
    }
    */

    //appending buttons
    foreach ($addButtons as $addButton)
    {
        $viewdefs[$module]['base']['view']['record']['buttons'][$o
uterKey]['buttons'][]=$addButton;
    }
}
}

```

Next, we will create our language labels for the buttons.

`./custom/Extension/modules/Accounts/Ext/Language/en_us.refreshButtons.php`

```
<?php
```

```

$mod_strings['LBL_REFRESH_SPECIFIC_SUBPANEL'] = 'Refresh Specific Subp
anel';
$mod_strings['LBL_REFRESH_ALL_SUBPANELS'] = 'Refresh All Subpanels';

```

Our next step is to extend the Accounts controller file. This is where we will add our code to refresh the subpanels when the buttons are clicked.

---

./custom/modules/Accounts/clients/base/views/record/record.js

```
({
  extendsFrom: 'RecordView',

  initialize: function (options) {
    this._super('initialize', [options]);

    //add listeners for custom buttons
    this.context.on('button:refresh_specific_subpanel:click', this
.refresh_specific_subpanel, this);
    this.context.on('button:refresh_all_subpanels:click', this.ref
resh_all_subpanels, this);
  },

  /**
   * Refreshes a specific subpanel given a link
   */
  refresh_specific_subpanel: function() {
    var linkName = 'contacts';
    var subpanelCollection = this.model.getRelatedCollection(linkN
ame);
    subpanelCollection.fetch({relate: true});
  },

  /**
   * Refreshes all subpanels
   */
  refresh_all_subpanels: function() {
    _.each(this.model._relatedCollections, function(collection){
      collection.fetch({relate: true});
    });
  }
})
```

**Note:** To refresh a specific subpanel, you will need to pass the linkname of the relationship to the `this.model.getRelatedCollection()` method.

Finally, we will then need to navigate to Admin > Repair > Quick Repair and Rebuild. This will rebuild our extensions and make the refresh buttons available on our RecordView.

**Last Modified:** 2021-02-17 02:44:13

---

# Removing the Account Requirement on Opportunities

## Overview

This article covers how to remove the Account field from being required on the Opportunities module.

## Removing the Requirement in Configuration

By default, Sugar requires the accounts field to be populated on several modules. These modules include

- Opportunities
- Cases
- Contracts

In order to remove this dependency, you will need to modify the `require_accounts` configuration in your `./config_override.php`.

```
$sugar_config['require_accounts'] = false;
```

The resulting file should look similar to:

```
$sugar_config['disable_count_query'] = true;  
$sugar_config['http_referer']['weak'] = true;  
$sugar_config['hide_full_text_engine_config'] = false;  
$sugar_config['fts_disable_notification'] = true;
```

```
$sugar_config['require_accounts'] = false;
```

```
/**CONFIGURATOR**/
```

## Removing the Requirement in Vardefs

Once you have updated your configuration, you may find the field is still required. This may be due to the module's vardefs array having the field's required attribute set to true. This will also need to be updated. Using the Opportunities vardefs as an example, we will need to do the following:

- Create a custom file in the Opportunities Extension directory like `./custom/Extension/modules/Opportunities/Ext/Vardefs/no_account_required.php`
- Set the content of this file so that the `account_name` field has required set

---

to false

```
<?php
```

```
$dictionary['Opportunity']['fields']['account_name']['required']  
= false;
```

Once completed, you will need to navigate to Admin > Repairs and run a Quick Repair & Rebuild

## Removing the Requirement in View Metadata

If the Account field is still required after making these changes, this may be due to the views metadata having the field's required attribute set to true. By default, `account_name` should not be set to required, but if you have created custom views, these may need to be updated. Using the Opportunities record view as an example, we will need to do the following:

- Edit `./custom/modules/Opportunities/clients/base/views/record/record.php` with a text editor application.
- Search for the `account_name` field in panel definitions of your record view.
- Remove `'required' => true`, from the `account_name` definition. If it doesn't already exist, you don't need to modify anything.

```
...  
'fields' =>  
  array (  
    0 =>  
      array (  
        'name' => 'account_name',  
        'required' => false,  
        ...  
      )  
    )  
  )
```

Your resulting file should be:

```
...  
'fields' =>  
  array (  
    0 =>  
      array (  
        'name' => 'account_name',  
        ...  
      )  
    )  
  )
```



- 
- These changes will only affect the record view for Opportunities. You may need to modify additional module layouts based on your use case. A list of other views you may need to modify for your module are shown below.
    - ./custom/modules/<module>/clients/base/views/list/list.php
    - ./custom/modules/<module>/clients/base/views/record/record.php
    - ./custom/modules/<module>/clients/base/views/dupecheck-list/dupecheck-list.php
    - ./custom/modules/<module>/clients/base/views/resolve-conflicts-list/resolve-conflicts-list.php
    - ./custom/modules/<module>/clients/base/views/selection-list/selection-list.php
    - ./custom/modules/<module>/clients/base/views/subpanel-list/subpanel-list.php

Once completed, you will need to navigate to Admin > Repairs and run a Quick Repair & Rebuild

## Application

Now that the appropriate changes have been made, navigate to the Opportunities module and create a new opportunity record. You will notice that the Account Name field no longer indicates "Required" in the field. In addition, the Account Name field will no longer be marked as required when importing records into the Opportunities module.

| Account Name      | Expected Close Date |
|-------------------|---------------------|
| Select account... |                     |
| Status            | Likely              |
| New               | No data             |
| Best              | Worst               |
| No data           | No data             |

**Last Modified:** 2021-10-21 20:20:06

## Web Services

---

Examples when working with Sugar's web service endpoints.

**Last Modified:** 2021-02-17 02:44:13

## REST API

Examples of integrating with Sugar REST APIs.

**Last Modified:** 2021-02-17 02:44:13

## Bash

Bash cURL examples of integrating with the REST v11 API.

**Last Modified:** 2021-02-17 02:44:13

## How to Export a List of Records

### Overview

An example in bash script demonstrating how to export a list of records using the v11 /<module>/export/:record\_list\_id REST GET endpoint.

### Exporting Records

#### Authenticating

First, you will need to authenticate to the Sugar API. An example is shown below:

```
curl -X POST -H Cache-Control:no-cache -H "Content-Type: application/json" -d '{
  "grant_type": "password",
  "client_id": "sugar",
```

---

```
"client_secret":"","  
"username":"admin",  
"password":"password",  
"platform":"custom_api"  
}' https://{site_url}/rest/v11/oauth2/token
```

More information on authenticating can be found in the [How to Authenticate and Log Out](#) example and [/oauth2/logout](#) endpoint documentation.

## Filtering Records

Next, we will need to identify the records we want to export using the `/<module>/filter` endpoint.

```
curl -s -X POST -H OAuth-Token:{access_token} -H "Content-  
Type: application/json" -H Cache-Control:no-cache -d '{  
  "filter":[  
    {  
      "$or":[  
        {  
          "name":{  
            "$starts":"A"  
          }  
        },  
        {  
          "name":{  
            "$starts":"b"  
          }  
        }  
      ]  
    }  
  ],  
  "max_num":2,  
  "offset":0,  
  "fields":"id",  
  "order_by":"date_entered",  
  "favorites":false,  
  "my_items":false  
}' https://{site_url}/rest/v11/Accounts/filter
```

More information on the filter API can be found in the [/<module>/filter](#) documentation.

## Response

---

The data received from the server is shown below:

```
{
  "next_offset":2,
  "records":[
    {
      "id":"f16760a4-3a52-f77d-1522-5703ca28925f",
      "date_modified":"2016-04-05T10:23:28-04:00",
      "_acl":{
        "fields":{

        }
      },
      "_module":"Accounts"
    },
    {
      "id":"ec409fbb-2b22-4f32-7fa1-5703caf78dc3",
      "date_modified":"2016-04-05T10:23:28-04:00",
      "_acl":{
        "fields":{

        }
      },
      "_module":"Accounts"
    }
  ]
}
```

## Creating a Record List

Once we have the list of ids, we then need to create a record list in Sugar that consists of those ids.

```
curl -s -X POST -H OAuth-Token:{access_token} -H "Content-Type: application/json" -H Cache-Control:no-cache -d '{
  "records":[
    "f16760a4-3a52-f77d-1522-5703ca28925f",
    "ec409fbb-2b22-4f32-7fa1-5703caf78dc3"
  ]
}' https://{site_url}/rest/v11/Accounts/record_list
```

## Response

---

The data received from the server is shown below:

```
{
  "id": "ef963176-4845-bc55-b03e-570430b4173c",
  "assigned_user_id": "1",
  "module_name": "Accounts",
  "records": [
    "f16760a4-3a52-f77d-1522-5703ca28925f",
    "ec409fbb-2b22-4f32-7fa1-5703caf78dc3"
  ],
  "date_modified": "2016-04-05 21:39:19"
}
```

## Exporting Records

Once we have the record list created, we can then export the CSV file.

```
curl -i -s -X GET -H OAuth-Token:{access_token} -H Cache-Control:no-cache https://{site_url}/rest/v11/Accounts/export/ef963176-4845-bc55-b03e-570430b4173c
```

More information on exporting records can be found in the [/export/:record\\_list\\_id](#) documentation.

## Response

The data received from the server is shown below:

```
HTTP/1.1 200 OK
Date: Tue, 05 Apr 2016 21:50:32
GMT Server: Apache/2.2.29 (Unix)
DAV/2 PHP/5.3.29 mod_ssl/2.2.29
OpenSSL/0.9.8zg X-Powered-By:
PHP/5.3.29 Expires:
Cache-Control: max-age=10,
private Pragma:
Content-Disposition: attachment; filename=Accounts.csv
Content-transfer-encoding: binary
Last-Modified: Tue, 05 Apr 2016 21:50:32
GMT ETag: 9b34f5d74e0298aaf7fd1f27d02e14f2
Content-Length: 1703
Connection: close
Content-Type: application/octet-stream; charset=ISO-8859-1
"Name", "ID", "Website", "Office Phone", "Alternate Phone", "Fax", "Billing"
```

---

```
Street","Billing City","Billing State","Billing Postal Code","Billing
Country","Shipping Street","Shipping City","Shipping State","Shipping
Postal Code","Shipping Country","Description","Type","Industry","Annu
al Revenue","Employees","SIC Code","Ticker Symbol","Parent Account ID",
"Ownership","Campaign ID","Rating","Assigned User Name","Assigned User
ID","Team ID","Teams","Team Set ID","Date Created","Date Modified","M
odified By Name","Modified By ID","Created By","Created By ID","Delete
d","test","Facebook Account","Twitter Account","Google Plus ID","DUNS"
,"Email","Invalid Email","Email Opt Out","Non-primary emails"
"Arts & Crafts Inc","ec409fbb-2b22-4f32-7fal-5703caf78dc3","www.hrinfo
.tw","(252) 456-8602","","","777 West Filmore Ln","Los Angeles","CA","
77076","USA","777 West Filmore Ln","Los Angeles","CA","77076","USA",""
,"Customer","Hospitality","","","","","","","","","Max Jensen","seed_m
ax_id","West","West, East, Global","dec43cb2-5273-8be2-968a-5703cadee7
5f","2016-04-05 10:23","2016-04-05 10:23","Administrator","1","Adminis
trator","1","0","","","","","","","sugar.sugar.section@example.org","0","
0","dev.phone@example.biz,0,0"
"B.H. Edwards Inc","f16760a4-3a52-f77d-1522-5703ca28925f","www.section
dev.edu","(361) 765-0216","","","111 Silicon Valley Road","Persistence
","CA","29709","USA","111 Silicon Valley Road","Persistence","CA","297
09","USA","","Customer","Apparel","","","","","","","","","Sally Brons
en","seed_sally_id","West","West","West","2016-04-05 10:23","2016-04-0
5 10:23","Administrator","1","Administrator","1","0","","","","","","","i
nfo.sugar@example.de","0","1","phone.sales.section@example.tv,0,0"
```

You can also output the results directly to a CSV file by omitting the header data and output the results directly to a new CSV file.

```
curl -s -X GET -H OAuth-Token:{access_token} -H -H Cache-Control:no-ca
che https://{site_url}/rest/v11/Accounts/export/ef963176-4845-bc55-b03
e-570430b4173c > Output.csv
```

**Last Modified:** 2021-02-17 02:44:13

## How to Filter a List of Records

### Overview

An example in bash script demonstrating how to filter records using the v11 /<module>/filter REST POST endpoints.

---

## Filtering Records

### Authenticating

First, you will need to authenticate to the Sugar API. An example is shown below:

```
curl -X POST -H Cache-Control:no-cache -H "Content-Type: application/json" -d '{
  "grant_type":"password",
  "client_id":"sugar",
  "client_secret":"",
  "username":"admin",
  "password":"password",
  "platform":"custom_api"
}' https://{site_url}/rest/v11/oauth2/token
```

More information on authenticating can be found in the [How to Authenticate and Log Out](#) example and [/oauth2/logout](#) endpoint documentation.

### Filtering Records

Next we can filter the records we want to return using the `/<module>/filter` endpoint with a POST request.

```
curl -s -X POST -H OAuth-Token:{access_token} -H "Content-Type: application/json" -H Cache-Control:no-cache -d '{
  "filter":[
    {
      "$or":[
        {
          "name":{
            "$starts":"A"
          }
        },
        {
          "name":{
            "$starts":"b"
          }
        }
      ]
    }
  ],
  "max_num":2,
  "offset":0,
```

---

```
"fields":"id",
"order_by":"date_entered",
"favorites":false,
"my_items":false
}' https://{site_url}/rest/v11/Accounts/filter
```

More information on the filter API can be found in the [/<module>/filter](#) documentation.

**Note :** The /<module>/filter endpoint can be called using a GET request as well, though long URL requests can have issues so the POST request is recommended.

## Response

The data received from the server is shown below:

```
{
  "next_offset":2,
  "records":[
    {
      "id":"f16760a4-3a52-f77d-1522-5703ca28925f",
      "date_modified":"2016-04-05T10:23:28-04:00",
      "_acl":{
        "fields":{

        }
      },
      "_module":"Accounts"
    },
    {
      "id":"ec409fbb-2b22-4f32-7fa1-5703caf78dc3",
      "date_modified":"2016-04-05T10:23:28-04:00",
      "_acl":{
        "fields":{

        }
      },
      "_module":"Accounts"
    }
  ]
}
```

**Last Modified:** 2021-02-17 02:44:13



---

# How to Favorite a Record

## Overview

An example in bash script demonstrating how to favorite a record using the v11 `<module>/:record/favorite` REST PUT API endpoint.

## Favoriting a Record

### Authenticating

First, you will need to authenticate to the Sugar API. An example is shown below:

```
curl -X POST -H Cache-Control:no-cache -H "Content-Type: application/json" -d '{
  "grant_type":"password",
  "client_id":"sugar",
  "client_secret":"",
  "username":"admin",
  "password":"password",
  "platform":"custom_api"
}' https://{site_url}/rest/v11/oauth2/token
```

More information on authenticating can be found in the [How to Authenticate and Log Out](#) example and [/oauth2/logout](#) endpoint documentation.

### Favoriting a Record

Next, we can favorite a specific record using the `/<module>/:record/favorite` endpoint.

```
curl -s -X PUT -H OAuth-Token:{access_token} -H Cache-Control:no-cache
https://{site_url}/rest/v11/Accounts/ae8b1783-404a-
fcb8-1e1e-56f1cc52cd1a/favorite
```

More information on the unfavorite API can be found in the [/<module>/:record/favorite PUT](#) documentation.

### Response

---

The data received from the server is shown below:

```
{
  "id": "ae8b1783-404a-fcb8-1e1e-56f1cc52cd1a",
  "name": "Union Bank",
  "date_entered": "2016-03-22T17:49:50-05:00",
  "date_modified": "2016-03-30T17:44:20-05:00",
  "modified_user_id": "1",
  "modified_by_name": "Administrator",
  "modified_user_link": {
    "full_name": "Administrator",
    "id": "1",
    "_acl": {
      "fields": [],
      "delete": "no",
      "_hash": "8e11bf9be8f04daddee9d08d44ea891e"
    }
  },
  "created_by": "1",
  "created_by_name": "Administrator",
  "created_by_link": {
    "full_name": "Administrator",
    "id": "1",
    "_acl": {
      "fields": [],
      "delete": "no",
      "_hash": "8e11bf9be8f04daddee9d08d44ea891e"
    }
  },
  "description": "",
  "deleted": false,
  "facebook": "",
  "twitter": "",
  "googleplus": "",
  "account_type": "Customer",
  "industry": "Banking",
  "annual_revenue": "",
  "phone_fax": "",
  "billing_address_street": "67321 West Siam St.",
  "billing_address_street_2": "",
  "billing_address_street_3": "",
  "billing_address_street_4": "",
  "billing_address_city": "Ohio",
  "billing_address_state": "CA",
  "billing_address_postalcode": "25159",
  "billing_address_country": "USA",
```

---

```
"rating": "",
"phone_office": "(065) 489-6104",
"phone_alternate": "",
"website": "www.qahr.edu",
"ownership": "",
"employees": "",
"ticker_symbol": "",
"shipping_address_street": "67321 West Siam St.",
"shipping_address_street_2": "",
"shipping_address_street_3": "",
"shipping_address_street_4": "",
"shipping_address_city": "Ohio",
"shipping_address_state": "CA",
"shipping_address_postalcode": "25159",
"shipping_address_country": "USA",
"parent_id": "",
"sic_code": "",
"duns_num": "",
"parent_name": "",
"member_of": {
  "name": "",
  "id": "",
  "_acl": {
    "fields": [],
    "_hash": "654d337e0e912edaa00dbb0fb3dc3c17"
  }
},
"campaign_id": "",
"campaign_name": "",
"campaign_accounts": {
  "name": "",
  "id": "",
  "_acl": {
    "fields": [],
    "_hash": "654d337e0e912edaa00dbb0fb3dc3c17"
  }
},
"following": true,
"my_favorite": true,
"tag": [],
"assigned_user_id": "seed_sarah_id",
"assigned_user_name": "Sarah Smith",
"assigned_user_link": {
  "full_name": "Sarah Smith",
  "id": "seed_sarah_id",
  "_acl": {
```

---

```
        "fields": [],
        "_hash": "654d337e0e912edaa00dbb0fb3dc3c17"
    }
},
"team_count": "",
"team_count_link": {
    "team_count": "",
    "id": "West",
    "_acl": {
        "fields": [],
        "_hash": "654d337e0e912edaa00dbb0fb3dc3c17"
    }
},
"team_name": [{
    "id": "East",
    "name": "East",
    "name_2": "",
    "primary": false
}, {
    "id": 1,
    "name": "Global",
    "name_2": "",
    "primary": false
}, {
    "id": "West",
    "name": "West",
    "name_2": "",
    "primary": true
}],
"email": [{
    "email_address": "hr.support.kid@example.info",
    "invalid_email": false,
    "opt_out": false,
    "primary_address": true,
    "reply_to_address": false
}, {
    "email_address": "info.support.the@example.com",
    "invalid_email": false,
    "opt_out": false,
    "primary_address": false,
    "reply_to_address": false
}],
"email1": "hr.support.kid@example.info",
"email2": "info.support.the@example.com",
"invalid_email": false,
"email_opt_out": false,
```

---

```
"email_addresses_non_primary": "",
"_acl": {
  "fields": {}
},
"_module": "Accounts"
}
```

**Last Modified:** 2021-02-17 02:44:13

## How to Manipulate File Attachments

### Overview

An example in bash script demonstrating how to attach a file to a record using the `v11 <module>/:record/file/:field` REST POST API endpoint, then retrieve it with the GET endpoint.

### Manipulating File Attachments

#### Authenticating

First, you will need to authenticate to the Sugar API. An example is shown below:

```
curl -X POST -H Cache-Control:no-cache -H "Content-Type: application/json" -d '{
  "grant_type":"password",
  "client_id":"sugar",
  "client_secret":"",
  "username":"admin",
  "password":"password",
  "platform":"custom_api"
}' https://{site_url}/rest/v11/oauth2/token
```

More information on authenticating can be found in the [How to Authenticate and Log Out](#) example and [/oauth2/logout](#) endpoint documentation.

#### Submitting a File Attachment

Next, we can create a Note record using the `/<module>` endpoint, and then submit a

---

File to the Note record using the /<module>/:record/file/:field endpoint.

## Create Note

```
curl -s -X POST -H OAuth-Token:{access_token}-H "Content-Type: application/json" -H Cache-Control:no-cache -d '{
  "name":"Test Note"
}' https://{site_url}/rest/v11/Notes
```

## Add An Attachment to the Note

```
curl -X POST -H OAuth-Token:{access_token} -H Cache-Control:no-cache -F "filename=@/path/to/file.txt" https://{site_url}/rest/v11/Notes/7b49aebd-8734-9773-8ef1-53553fa369c7/file/filename
```

## Response

```
{
  "filename":{
    "content-type":"text/plain",
    "content-length":13,
    "name":"file.txt",
    "uri":"http://<site url>/rest/v11/Notes/7b49aebd-8734-9773-8ef1-53553fa369c7/file/filename"
  },
  "record":{
    "my_favorite":false,
    "following":true,
    "id":"7b49aebd-8734-9773-8ef1-53553fa369c7",
    "name":"My Note",
    "date_modified":"2014-04-21T11:53:53-04:00",
    "modified_user_id":"1",
    "modified_by_name":"admin",
    "created_by":"1",
    "created_by_name":"Administrator",
    "doc_owner":"",
    "user_favorites":[

    ],
    "description":"",
    "deleted":false,
    "assigned_user_id":"",
    "assigned_user_name":""
  }
}
```

---

```
"team_count":"","  
"team_name":[  
  {  
    "id":1,  
    "name":"Global",  
    "name_2":"","  
    "primary":true  
  }  
],  
"file_mime_type":"text/plain",  
"file_url":"","  
"filename":"file.txt",  
"parent_type":"","  
"parent_id":"","  
"contact_id":"","  
"portal_flag":false,  
"embed_flag":false,  
"parent_name":"","  
"contact_name":"","  
"contact_phone":"","  
"contact_email":"","  
"account_id":"","  
"opportunity_id":"","  
"acase_id":"","  
"lead_id":"","  
"product_id":"","  
"quote_id":"","  
"_acl":{  
  "fields":{  
  
  }  
},  
"_module":"Notes"  
}  
}
```

## Getting a File Attachment

Next, we can retrieve the file attachment stored in Sugar by utilizing the `/<module>/:record/file/:fieldGET` endpoint.

```
curl -i -s -X GET -H OAuth-Token:{access_token} -H Cache-Control:no-cache https://{site_url}/rest/v11/Notes/7b49aebd-8734-9773-8ef1-53553fa369c7/file/filename
```

---

## Response

HTTP/1.1 200 OK

Date: Wed, 12 Mar 2014 15:15:03 GMT

Server: Apache/2.2.22 (Unix) PHP/5.3.14 mod\_ssl/2.2.22 OpenSSL/0.9.8o

X-Powered-By: PHP/5.3.14 ZendServer/5.0

Set-Cookie: ZDEDebuggerPresent=php,php3; path=/  
Expires:

Expires:

Cache-Control: max-age=0, private

Pragma:

Content-Disposition: attachment; filename="file.txt"

X-Content-Type-Options: nosniff

ETag: d41d8cd98f00b204e9800998ecf8427e

Content-Length: 16

Connection: close

Content-Type: application/octet-stream

This is the file contents.

You can also output the results directly to a file by omitting the header data and output the results directly to a new file.

```
curl -s -X GET -H OAuth-Token:{access_token} -H Cache-Control:no-cache  
https://{site_url}/rest/v11/Notes/7b49aebd-8734-9773-8ef1-53553fa369c  
7/file/filename > file.txt
```

**Last Modified:** 2021-02-17 02:44:13



---

# How to Fetch Related Records

## Overview

An example in bash script demonstrating how to fetch related records using the `v11 /<module>/:record/link/:link` REST GET endpoints.

## Fetching Related Records

### Authenticating

First, you will need to authenticate to the Sugar API. An example is shown below:

```
curl -X POST -H Cache-Control:no-cache -H "Content-Type: application/json" -d '{
  "grant_type": "password",
  "client_id": "sugar",
  "client_secret": "",
  "username": "admin",
  "password": "password",
  "platform": "custom_api"
}' https://{site_url}/rest/v11/oauth2/token
```

More information on authenticating can be found in the [How to Authenticate and Log Out](#) example and [/oauth2/logout](#) endpoint documentation.

### Fetching Related Records

Next, we can fetch the related records we want to return using the `/<module>/:record/link/:link` endpoint with a GET request where

| Element                     | Meaning                               |
|-----------------------------|---------------------------------------|
| <code>&lt;module&gt;</code> | The parent module name                |
| <code>:record</code>        | The parent records ID                 |
| <code>link</code>           | the actual word "link"                |
| <code>:link</code>          | The name of the relationship to fetch |

In this example we will fetch the related Contacts for an Account :

```
curl -s -X GET -H OAuth-Token:{access_token} -H Cache-Control:no-cache
```

---

https://{site\_url}/rest/v11/Accounts/e8c641ca-1b8c-74c1-d08d-56fedbdd  
3187/link/contacts

## Response

The data received from the server is shown below:

```
{
  "next_offset":-1,
  "records":[
    {
      "my_favorite":false,
      "following":false,
      "id":"819f4149-b007-a6da-a5fa-56fedbf2de77",
      "name":"Florine Marcus",
      "date_entered":"2016-04-01T15:34:00-05:00",
      "date_modified":"2016-04-01T15:34:00-05:00",
      "modified_user_id":"1",
      "modified_by_name":"Administrator",
      "created_by":"1",
      "created_by_name":"Administrator",
      "doc_owner":"","",
      "user_favorites":"","",
      "description":"","",
      "deleted":false,
      "assigned_user_id":"seed_will_id",
      "assigned_user_name":"Will Westin",
      "team_count":"","",
      "team_name":[
        {
          "id":"East",
          "name":"East",
          "name_2":"","",
          "primary":true
        },
        {
          "id":"West",
          "name":"West",
          "name_2":"","",
          "primary":false
        }
      ],
      "email":[
        {
          "email_address":"support27@example.tv",
```

---

```
        "primary_address":true,
        "reply_to_address":false,
        "invalid_email":false,
        "opt_out":false
    },
    {
        "email_address":"support.support.kid@example.net",
        "primary_address":false,
        "reply_to_address":false,
        "invalid_email":false,
        "opt_out":true
    }
],
"email1":"support27@example.tv",
"email2":"","
"invalid_email":false,
"email_opt_out":false,
"email_addresses_non_primary":"","
"salutation":"","
"first_name":"Florine",
"last_name":"Marcus",
"full_name":"Florine Marcus",
"title":"President",
"facebook":"","
"twitter":"","
"googleplus":"","
"department":"","
"do_not_call":false,
"phone_home":"(746) 162-2314",
"phone_mobile":"(941) 088-2874",
"phone_work":"(827) 541-9614",
"phone_other":"","
"phone_fax":"","
"primary_address_street":"1715 Scott Dr",
"primary_address_street_2":"","
"primary_address_street_3":"","
"primary_address_city":"Alabama",
"primary_address_state":"NY",
"primary_address_postalcode":"70187",
"primary_address_country":"USA",
"alt_address_street":"","
"alt_address_street_2":"","
"alt_address_street_3":"","
"alt_address_city":"","
"alt_address_state":"","
"alt_address_postalcode":"","
```

---

```
"alt_address_country": "",
"assistant": "",
"assistant_phone": "",
"picture": "",
"email_and_name1": "",
"lead_source": "Employee",
"account_name": "MTM Investment Bank F S B",
"account_id": "e8c641ca-1b8c-74c1-d08d-56fedbdd3187",
"dnb_principal_id": "",
"opportunity_role_fields": "",
"opportunity_role_id": "",
"opportunity_role": "",
"reports_to_id": "",
"report_to_name": "",
"birthdate": "",
"portal_name": "FlorineMarcus119",
"portal_active": true,
"portal_password": true,
"portal_password1": null,
"portal_app": "",
"preferred_language": "en_us",
"campaign_id": "",
"campaign_name": "",
"c_accept_status_fields": "",
"m_accept_status_fields": "",
"accept_status_id": "",
"accept_status_name": "",
"accept_status_calls": "",
"accept_status_meetings": "",
"sync_contact": false,
"mkto_sync": false,
"mkto_id": null,
"mkto_lead_score": null,
"_acl": {
  "fields": {
    }
  },
}_module": "Contacts"
},
{
"my_favorite": false,
"following": false,
"id": "527ccl1a9-7984-91fe-4148-56fedbc356aa",
"name": "Shaneka Aceto",
"date_entered": "2016-04-01T15:34:00-05:00",
```

---

```
"date_modified": "2016-04-01T15:34:00-05:00",
"modified_user_id": "1",
"modified_by_name": "Administrator",
"created_by": "1",
"created_by_name": "Administrator",
"doc_owner": "",
"user_favorites": "",
"description": "",
"deleted": false,
"assigned_user_id": "seed_will_id",
"assigned_user_name": "Will Westin",
"team_count": "",
"team_name": [
  {
    "id": "East",
    "name": "East",
    "name_2": "",
    "primary": true
  },
  {
    "id": "West",
    "name": "West",
    "name_2": "",
    "primary": false
  }
],
"email": [
  {
    "email_address": "support17@example.cn",
    "primary_address": true,
    "reply_to_address": false,
    "invalid_email": false,
    "opt_out": false
  },
  {
    "email_address": "section.sugar.the@example.tv",
    "primary_address": false,
    "reply_to_address": false,
    "invalid_email": false,
    "opt_out": true
  }
],
"email1": "support17@example.cn",
"email2": "",
"invalid_email": false,
"email_opt_out": false,
```

---

```
"email_addresses_non_primary": "",
"salutation": "",
"first_name": "Shaneka",
"last_name": "Aceto",
"full_name": "Shaneka Aceto",
"title": "IT Developer",
"facebook": "",
"twitter": "",
"googleplus": "",
"department": "",
"do_not_call": false,
"phone_home": "(502) 528-5151",
"phone_mobile": "(816) 719-3739",
"phone_work": "(994) 769-5855",
"phone_other": "",
"phone_fax": "",
"primary_address_street": "123 Anywhere Street",
"primary_address_street_2": "",
"primary_address_street_3": "",
"primary_address_city": "Denver",
"primary_address_state": "NY",
"primary_address_postalcode": "15128",
"primary_address_country": "USA",
"alt_address_street": "",
"alt_address_street_2": "",
"alt_address_street_3": "",
"alt_address_city": "",
"alt_address_state": "",
"alt_address_postalcode": "",
"alt_address_country": "",
"assistant": "",
"assistant_phone": "",
"picture": "",
"email_and_name1": "",
"lead_source": "Email",
"account_name": "MTM Investment Bank F S B",
"account_id": "e8c641ca-1b8c-74c1-d08d-56fedbdd3187",
"dnb_principal_id": "",
"opportunity_role_fields": "",
"opportunity_role_id": "",
"opportunity_role": "",
"reports_to_id": "",
"report_to_name": "",
"birthdate": "",
"portal_name": "ShanekaAceto151",
"portal_active": true,
```

---

```
"portal_password":true,
"portal_password1":null,
"portal_app":"","
"preferred_language":"en_us",
"campaign_id":"","
"campaign_name":"","
"c_accept_status_fields":"","
"m_accept_status_fields":"","
"accept_status_id":"","
"accept_status_name":"","
"accept_status_calls":"","
"accept_status_meetings":"","
"sync_contact":false,
"mkto_sync":false,
"mkto_id":null,
"mkto_lead_score":null,
"_acl":{
  "fields":{

  }
},
"_module":"Contacts"
},
{
  "my_favorite":false,
  "following":false,
  "id":"42d703ed-f834-f87c-967d-56fedb044051",
  "name":"Johnnie Pina",
  "date_entered":"2016-04-01T15:34:00-05:00",
  "date_modified":"2016-04-01T15:34:00-05:00",
  "modified_user_id":"1",
  "modified_by_name":"Administrator",
  "created_by":"1",
  "created_by_name":"Administrator",
  "doc_owner":"","
  "user_favorites":"","
  "description":"","
  "deleted":false,
  "assigned_user_id":"seed_will_id",
  "assigned_user_name":"Will Westin",
  "team_count":"","
  "team_name":[
    {
      "id":"East",
      "name":"East",
      "name_2":"","
```

---

```
        "primary":true
    },
    {
        "id":"West",
        "name":"West",
        "name_2":"",
        "primary":false
    }
],
"email":[
    {
        "email_address":"sugar.support.hr@example.co.uk",
        "primary_address":true,
        "reply_to_address":false,
        "invalid_email":false,
        "opt_out":false
    },
    {
        "email_address":"support.im@example.tw",
        "primary_address":false,
        "reply_to_address":false,
        "invalid_email":false,
        "opt_out":true
    }
],
"email1":"sugar.support.hr@example.co.uk",
"email2":"",
"invalid_email":false,
"email_opt_out":false,
"email_addresses_non_primary":"",
"salutation":"",
"first_name":"Johnnie",
"last_name":"Pina",
"full_name":"Johnnie Pina",
"title":"VP Operations",
"facebook":"",
"twitter":"",
"googleplus":"",
"department":"",
"do_not_call":false,
"phone_home":"(159) 335-1423",
"phone_mobile":"(580) 140-4050",
"phone_work":"(418) 792-9611",
"phone_other":"",
"phone_fax":"",
"primary_address_street":"345 Sugar Blvd.",
```



---

```
"primary_address_street_2":"","  
"primary_address_street_3":"","  
"primary_address_city":"Denver",  
"primary_address_state":"NY",  
"primary_address_postalcode":"70648",  
"primary_address_country":"USA",  
"alt_address_street":"","  
"alt_address_street_2":"","  
"alt_address_street_3":"","  
"alt_address_city":"","  
"alt_address_state":"","  
"alt_address_postalcode":"","  
"alt_address_country":"","  
"assistant":"","  
"assistant_phone":"","  
"picture":"","  
"email_and_name1":"","  
"lead_source":"Direct Mail",  
"account_name":"MTM Investment Bank F S B",  
"account_id":"e8c641ca-1b8c-74c1-d08d-56fedbdd3187",  
"dnb_principal_id":"","  
"opportunity_role_fields":"","  
"opportunity_role_id":"","  
"opportunity_role":"","  
"reports_to_id":"","  
"report_to_name":"","  
"birthdate":"","  
"portal_name":"JohnniePinal94",  
"portal_active":true,  
"portal_password":true,  
"portal_password1":null,  
"portal_app":"","  
"preferred_language":"en_us",  
"campaign_id":"","  
"campaign_name":"","  
"c_accept_status_fields":"","  
"m_accept_status_fields":"","  
"accept_status_id":"","  
"accept_status_name":"","  
"accept_status_calls":"","  
"accept_status_meetings":"","  
"sync_contact":false,  
"mkto_sync":false,  
"mkto_id":null,  
"mkto_lead_score":null,  
"_acl":{
```

---

```
        "fields":{
            }
        },
        "_module": "Contacts"
    }
]
}
```

**Last Modified:** 2021-02-17 02:44:13

## How to Manipulate Records (CRUD)

### Overview

The following page will provide examples in bash script demonstrating how to use the CRUD (Create, Read, Update, Delete) endpoints in the REST v11 API.

### CRUD Operations

#### Authenticating

First, you will need to authenticate to the Sugar API. An example is shown below:

```
curl -X POST -H Cache-Control:no-cache -H "Content-Type: application/json" -d '{
  "grant_type": "password",
  "client_id": "sugar",
  "client_secret": "",
  "username": "admin",
  "password": "password",
  "platform": "custom_api"
}' https://{site_url}/rest/v11/oauth2/token
```

More information on authenticating can be found in the [How to Authenticate and Log Out](#) example and [/oauth2/logout](#) endpoint documentation.

#### Creating a Record

---

Next, we need to submit the record to the Sugar instance using the `/<module>` endpoint. In this example, we are going to create an Account record with a Name of 'Test Record' and an email of 'test@sugar.com'.

```
curl -X POST -H OAuth-Token:<access_token> -H Cache-Control:no-cache -H "Content-Type: application/json" -d '{
  "name": "Test Record",
  "email1": "test@sugar.com"
}' http://<site_url>/rest/v11/Accounts
```

More information on this API endpoint can be found in the [/<module> - POST](#) documentation.

## Response

The data received from the server is shown below:

```
{
  "id": "ab2222df-73da-0e92-6887-5705428f4d68",
  "name": "Test Record",
  "date_entered": "2016-04-06T13:07:41-04:00",
  "date_modified": "2016-04-06T13:07:41-04:00",
  "modified_user_id": "1",
  "modified_by_name": "Administrator",
  "modified_user_link": {
    "full_name": "Administrator",
    "id": "1",
    "_acl": {
      "fields": [

    ],
    "delete": "no",
    "_hash": "8e11bf9be8f04daddee9d08d44ea891e"
  }
},
  "created_by": "1",
  "created_by_name": "Administrator",
  "created_by_link": {
    "full_name": "Administrator",
    "id": "1",
    "_acl": {
      "fields": [

    ],
    "delete": "no",
```

---

```
        "_hash": "8e11bf9be8f04daddee9d08d44ea891e"
    }
},
"description": "",
"deleted": false,
"facebook": "",
"twitter": "",
"googleplus": "",
"account_type": "",
"industry": "",
"annual_revenue": "",
"phone_fax": "",
"billing_address_street": "",
"billing_address_street_2": "",
"billing_address_street_3": "",
"billing_address_street_4": "",
"billing_address_city": "",
"billing_address_state": "",
"billing_address_postalcode": "",
"billing_address_country": "",
"rating": "",
"phone_office": "",
"phone_alternate": "",
"website": "",
"ownership": "",
"employees": "",
"ticker_symbol": "",
"shipping_address_street": "",
"shipping_address_street_2": "",
"shipping_address_street_3": "",
"shipping_address_street_4": "",
"shipping_address_city": "",
"shipping_address_state": "",
"shipping_address_postalcode": "",
"shipping_address_country": "",
"parent_id": "",
"sic_code": "",
"duns_num": "",
"parent_name": "",
"member_of": {
    "name": "",
    "id": "",
    "_acl": {
        "fields": [
            ],

```

---

```
        "_hash": "654d337e0e912edaa00dbb0fb3dc3c17"
    },
    "campaign_id": "",
    "campaign_name": "",
    "campaign_accounts": {
        "name": "",
        "id": "",
        "_acl": {
            "fields": [

                ],
                "_hash": "654d337e0e912edaa00dbb0fb3dc3c17"
            }
        },
        "following": true,
        "my_favorite": false,
        "tag": [

    ],
    "assigned_user_id": "",
    "assigned_user_name": "",
    "assigned_user_link": {
        "full_name": "",
        "id": "",
        "_acl": {
            "fields": [

                ],
                "_hash": "654d337e0e912edaa00dbb0fb3dc3c17"
            }
        },
        "team_count": "",
        "team_count_link": {
            "team_count": "",
            "id": "1",
            "_acl": {
                "fields": [

                    ],
                    "_hash": "654d337e0e912edaa00dbb0fb3dc3c17"
                }
            },
            "team_name": [
                {
                    "id": 1,
```

---

```
        "name": "Global",
        "name_2": "",
        "primary": true
    }
],
"email": [
    {
        "email_address": "test@sugar.com",
        "invalid_email": false,
        "opt_out": false,
        "primary_address": true,
        "reply_to_address": false
    }
],
"email1": "test@sugar.com",
"email2": "",
"invalid_email": false,
"email_opt_out": false,
"email_addresses_non_primary": "",
"_acl": {
    "fields": {

    }
},
"_module": "Accounts"
}
```

## Getting a Record

Next we can get the created record from the Sugar instance using the `/<module>/:record` endpoint. In this example, we are going to get an Account record by its ID, but only request the Name, Email, and Industry fields.

```
curl -H OAuth-Token:<access_token> -H Cache-Control:no-cache http://<site_url>/rest/v11/Accounts/<record_id>?fields=name,email1,industry
```

More information on this API endpoint can be found in the [/<module>/:record - GET](#) documentation.

## Response

The data received from the server is shown below:

```
{
```

---

```
"id": "ab2222df-73da-0e92-6887-5705428f4d68",
"name": "Test Record",
"date_modified": "2016-04-06T15:03:21-04:00",
"industry": "",
"email1": "test@sugar.com",
"_acl": {
  "fields": {

  }
},
"_module": "Accounts"
}
```

## Updating a Record

Next we can update the record in the Sugar instance using the `/<module>/:record` endpoint, and the PUT Http method. In this example we are going to update the Account record and change it's name to "Updated Test Record".

```
curl -X PUT -H OAuth-Token:<access_token> -H Cache-Control:no-cache -d '{
  "name": "Updated Record"
}' http://<site_url>/rest/v11/Accounts/<record_id>
```

More information on this API endpoint can be found in the [/<module>/:record - PUT](#) documentation.

## Response

The data received from the server is shown below:

```
{
  "id": "ab2222df-73da-0e92-6887-5705428f4d68",
  "name": "Updated Test Record",
  "date_entered": "2016-04-06T15:03:21-04:00",
  "date_modified": "2016-04-06T15:03:22-04:00",
  "modified_user_id": "1",
  "modified_by_name": "Administrator",
  "modified_user_link": {
    "full_name": "Administrator",
    "id": "1",
    "_acl": {
      "fields": [
```

---

```
    ],
    "delete": "no",
    "_hash": "8e11bf9be8f04daddee9d08d44ea891e"
  }
},
"created_by": "1",
"created_by_name": "Administrator",
"created_by_link": {
  "full_name": "Administrator",
  "id": "1",
  "_acl": {
    "fields": [

      ],
      "delete": "no",
      "_hash": "8e11bf9be8f04daddee9d08d44ea891e"
    }
  },
"description": "",
"deleted": false,
"facebook": "",
"twitter": "",
"googleplus": "",
"account_type": "",
"industry": "",
"annual_revenue": "",
"phone_fax": "",
"billing_address_street": "",
"billing_address_street_2": "",
"billing_address_street_3": "",
"billing_address_street_4": "",
"billing_address_city": "",
"billing_address_state": "",
"billing_address_postalcode": "",
"billing_address_country": "",
"rating": "",
"phone_office": "",
"phone_alternate": "",
"website": "",
"ownership": "",
"employees": "",
"ticker_symbol": "",
"shipping_address_street": "",
"shipping_address_street_2": "",
"shipping_address_street_3": "",
```



---

```
"shipping_address_street_4":"","  
"shipping_address_city":"","  
"shipping_address_state":"","  
"shipping_address_postalcode":"","  
"shipping_address_country":"","  
"parent_id":"","  
"sic_code":"","  
"duns_num":"","  
"parent_name":"","  
"member_of":{  
  "name":"","  
  "id":"","  
  "_acl":{  
    "fields":[  
  
    ],  
    "_hash":"654d337e0e912edaa00dbb0fb3dc3c17"  
  }  
},  
"campaign_id":"","  
"campaign_name":"","  
"campaign_accounts":{  
  "name":"","  
  "id":"","  
  "_acl":{  
    "fields":[  
  
    ],  
    "_hash":"654d337e0e912edaa00dbb0fb3dc3c17"  
  }  
},  
"following":true,  
"my_favorite":false,  
"tag":[  
  
],  
"assigned_user_id":"","  
"assigned_user_name":"","  
"assigned_user_link":{  
  "full_name":"","  
  "id":"","  
  "_acl":{  
    "fields":[  
  
    ],  
    "_hash":"654d337e0e912edaa00dbb0fb3dc3c17"
```

---

```

    }
  },
  "team_count": "",
  "team_count_link": {
    "team_count": "",
    "id": "1",
    "_acl": {
      "fields": [

        ],
        "_hash": "654d337e0e912edaa00dbb0fb3dc3c17"
      }
    },
  "team_name": [
    {
      "id": 1,
      "name": "Global",
      "name_2": "",
      "primary": true
    }
  ],
  "email": [
    {
      "email_address": "test@sugar.com",
      "invalid_email": false,
      "opt_out": false,
      "primary_address": true,
      "reply_to_address": false
    }
  ],
  "email1": "test@sugar.com",
  "email2": "",
  "invalid_email": false,
  "email_opt_out": false,
  "email_addresses_non_primary": "",
  "_acl": {
    "fields": {

    }
  },
  "_module": "Accounts"
}

```

## Deleting a Record

---

Next, we can delete the record from the Sugar instance using the `/<module>/:record` endpoint, by using the DELETE Http Method.

```
curl -X DELETE -H OAuth-Token:<access_token> -H Cache-Control:no-cache http://<site_url>/rest/v11/Accounts/<record_id>
```

More information on this API endpoint can be found in the [/<module>/:record - DELETE](#) documentation.

## Response

The data received from the server is shown below:

```
{
  "id": "ab2222df-73da-0e92-6887-5705428f4d68"
}
```

**Last Modified:** 2021-02-17 02:44:13

# How to Follow a Record

## Overview

An example in bash script demonstrating how to follow a record using the `v11 /<module>/:record/subscribe` REST POST endpoint.

## Following a Record

### Authenticating

First, you will need to authenticate to the Sugar API. An example is shown below:

```
curl -X POST -H Cache-Control:no-cache -H "Content-Type: application/json" -d '{
  "grant_type": "password",
  "client_id": "sugar",
  "client_secret": "",
  "username": "admin",
  "password": "password",
```

---

```
"platform": "custom_api"  
' https://{site_url}/rest/v11/oauth2/token
```

More information on authenticating can be found in the [How to Authenticate and Log Out](#) example and [/oauth2/logout](#) endpoint documentation.

## Following a Record

Next, we can follow a specific record using the `/<module>/:record/subscribe` endpoint.

```
curl -s -X POST -H OAuth-Token:{access_token} -H Cache-Control:no-cache  
e https://{site_url}/rest/v11/Accounts/e3a59dcd-  
ff5e-8a78-cd7f-570811366792/subscribe
```

More information on the subscribe API can be found in the [/<module>/:record/subscribe POST](#) documentation.

## Response

The data received from the server is shown below:

```
"58f96315-9e75-6562-42e9-5705917d2cdc"
```

**Last Modified:** 2021-02-17 02:44:13

# How to Unfavorite a Record

## Overview

An example in bash script demonstrating how to unfavorite a record using the `v11 /<module>/:record/unfavorite` REST PUT endpoint.

## Unfavoriting a Record

### Authenticating

First, you will need to authenticate to the Sugar API. An example is shown below:

---

```
curl -X POST -H Cache-Control:no-cache -H "Content-
Type: application/json" -d '{
  "grant_type":"password",
  "client_id":"sugar",
  "client_secret":"",
  "username":"admin",
  "password":"password",
  "platform":"custom_api"
}' https://{site_url}/rest/v11/oauth2/token
```

More information on authenticating can be found in the [How to Authenticate and Log Out](#) example and [/oauth2/logout](#) endpoint documentation.

## Unfavoriting a Record

Next, we can unfavorit a specific record using the `/<module>/:record/unfavorite` endpoint.

```
curl -s -X PUT -H OAuth-Token:{access_token} -H Cache-Control:no-cache
https://{site_url}/rest/v11/Accounts/ae8b1783-404a-
fcb8-1e1e-56f1cc52cd1a/unfavorite
```

More information on the unfavorite API can be found in the [/<module>/:record/unfavorite PUT](#) documentation.

## Response

The data received from the server is shown below:

```
{
  "id": "ae8b1783-404a-fcb8-1e1e-56f1cc52cd1a",
  "name": "Union Bank",
  "date_entered": "2016-03-22T17:49:50-05:00",
  "date_modified": "2016-03-30T17:44:20-05:00",
  "modified_user_id": "1",
  "modified_by_name": "Administrator",
  "modified_user_link": {
    "full_name": "Administrator",
    "id": "1",
    "_acl": {
      "fields": [],
      "delete": "no",
      "_hash": "8e11bf9be8f04daddee9d08d44ea891e"
    }
  }
}
```

---

```
},
"created_by": "1",
"created_by_name": "Administrator",
"created_by_link": {
  "full_name": "Administrator",
  "id": "1",
  "_acl": {
    "fields": [],
    "delete": "no",
    "_hash": "8e11bf9be8f04daddee9d08d44ea891e"
  }
},
"description": "",
"deleted": false,
"facebook": "",
"twitter": "",
"googleplus": "",
"account_type": "Customer",
"industry": "Banking",
"annual_revenue": "",
"phone_fax": "",
"billing_address_street": "67321 West Siam St.",
"billing_address_street_2": "",
"billing_address_street_3": "",
"billing_address_street_4": "",
"billing_address_city": "Ohio",
"billing_address_state": "CA",
"billing_address_postalcode": "25159",
"billing_address_country": "USA",
"rating": "",
"phone_office": "(065) 489-6104",
"phone_alternate": "",
"website": "www.qahr.edu",
"ownership": "",
"employees": "",
"ticker_symbol": "",
"shipping_address_street": "67321 West Siam St.",
"shipping_address_street_2": "",
"shipping_address_street_3": "",
"shipping_address_street_4": "",
"shipping_address_city": "Ohio",
"shipping_address_state": "CA",
"shipping_address_postalcode": "25159",
"shipping_address_country": "USA",
"parent_id": "",
"sic_code": "",
```

---

```
"duns_num": "",
"parent_name": "",
"member_of": {
  "name": "",
  "id": "",
  "_acl": {
    "fields": [],
    "_hash": "654d337e0e912edaa00dbb0fb3dc3c17"
  }
},
"campaign_id": "",
"campaign_name": "",
"campaign_accounts": {
  "name": "",
  "id": "",
  "_acl": {
    "fields": [],
    "_hash": "654d337e0e912edaa00dbb0fb3dc3c17"
  }
},
"following": true,
"my_favorite": false,
"tag": [],
"assigned_user_id": "seed_sarah_id",
"assigned_user_name": "Sarah Smith",
"assigned_user_link": {
  "full_name": "Sarah Smith",
  "id": "seed_sarah_id",
  "_acl": {
    "fields": [],
    "_hash": "654d337e0e912edaa00dbb0fb3dc3c17"
  }
},
"team_count": "",
"team_count_link": {
  "team_count": "",
  "id": "West",
  "_acl": {
    "fields": [],
    "_hash": "654d337e0e912edaa00dbb0fb3dc3c17"
  }
},
"team_name": [{
  "id": "East",
  "name": "East",
  "name_2": "",
```

---

```
    "primary": false
  }, {
    "id": 1,
    "name": "Global",
    "name_2": "",
    "primary": false
  }, {
    "id": "West",
    "name": "West",
    "name_2": "",
    "primary": true
  }],
  "email": [{
    "email_address": "hr.support.kid@example.info",
    "invalid_email": false,
    "opt_out": false,
    "primary_address": true,
    "reply_to_address": false
  }, {
    "email_address": "info.support.the@example.com",
    "invalid_email": false,
    "opt_out": false,
    "primary_address": false,
    "reply_to_address": false
  }],
  "email1": "hr.support.kid@example.info",
  "email2": "info.support.the@example.com",
  "invalid_email": false,
  "email_opt_out": false,
  "email_addresses_non_primary": "",
  "_acl": {
    "fields": {}
  },
  "_module": "Accounts"
}
```

**Last Modified:** 2021-02-17 02:44:13

## How to Unfollow a Record

### Overview



---

An example in bash script demonstrating how to unfollow a record using the v11 /<module>/:record/unsubscribe REST DELETE endpoint.

## Unfollowing a Record

### Authenticating

First, you will need to authenticate to the Sugar API. An example is shown below:

```
curl -X POST -H Cache-Control:no-cache -H "Content-Type: application/json" -d '{
  "grant_type":"password",
  "client_id":"sugar",
  "client_secret":"",
  "username":"admin",
  "password":"password",
  "platform":"custom_api"
}' https://{site_url}/rest/v11/oauth2/token
```

More information on authenticating can be found in the [How to Authenticate and Log Out](#) example and [/oauth2/logout](#) endpoint documentation.

### Unfollowing a Record

Next, we can unfollow a specific record using the /<module>/:record/unsubscribe endpoint.

```
curl -s -X DELETE -H OAuth-Token:{access_token} -H Cache-Control:no-cache https://{site_url}/rest/v11/Accounts/e7b0d745-0a3e-c896-5358-5708113786d7/unsubscribe
```

More information on the unsubscribe API can be found in the [/:record/unsubscribe DELETE](#) documentation.

### Response

The data received from the server is shown below:

```
true
```

**Last Modified:** 2021-02-17 02:44:13

---

# How to Get the Most Active Users

## Overview

An example in bash script demonstrating how to fetch the most active users for meetings, calls, inbound emails, and outbound emails using the v11 /mostactiveusers REST GET endpoint.

## Get Most Active Users

### Authenticating

First, you will need to authenticate to the Sugar API. An example is shown below:

```
curl -X POST -H Cache-Control:no-cache -H "Content-Type: application/json" -d '{
  "grant_type":"password",
  "client_id":"sugar",
  "client_secret":"",
  "username":"admin",
  "password":"password",
  "platform":"custom_api"
}' https://{site_url}/rest/v11/oauth2/token
```

More information on authenticating can be found in the [How to Authenticate and Log Out](#) example and [/oauth2/logout](#) endpoint documentation.

### Active Users

Next, we can retrieve the most active users using the /mostactiveusers endpoint.

```
curl -s -X GET -H OAuth-Token:{access_token} -H Cache-Control:no-cache https://{site_url}/rest/v11/mostactiveusers?days=30
```

More information on the mostactiveusers API can be found in the [/mostactiveusers](#) documentation.

### Response

---

The data received from the server is shown below:

```
{
  "meetings": {
    "user_id": "seed_max_id",
    "count": "21",
    "first_name": "Max",
    "last_name": "Jensen"
  },
  "calls": {
    "user_id": "seed_chris_id",
    "count": "4",
    "first_name": "Chris",
    "last_name": "Olliver"
  },
  "inbound_emails": {
    "user_id": "seed_chris_id",
    "count": "23",
    "first_name": "Chris",
    "last_name": "Olliver"
  },
  "outbound_emails": {
    "user_id": "seed_sarah_id",
    "count": "20",
    "first_name": "Sarah",
    "last_name": "Smith"
  }
}
```

**Last Modified:** 2021-02-17 02:44:13

## How to Authenticate and Log Out

### Overview

An example in bash script on how to authenticate and logout of the v11 REST API using the /oauth2/token and /oauth2/logout POST endpoints.

### Authenticating

---

The example below demonstrates how to authenticate to the REST v11 API. It is important to note that the oauth2 token arguments takes in several parameters that you should be aware of. The platform argument tends to cause confusion in that it is used to authenticate a user to a specific platform. Since Sugar only allows 1 user in the system at a time per platform, authenticating an integration script with a platform type of "base" will logout any current users in the system using those credentials. To work around this, your custom scripts should have a new platform type specified such as "custom\_api" or any other static text you prefer. The client\_id and client\_secret parameters can be used for additional security based on client types. You can create your own client type in Admin > OAuth Keys. More information can be found in the [/oauth2/token](#) documentation. An example script is shown below:

```
curl -X POST -H Cache-Control:no-cache -H "Content-Type: application/json" -d '{
  "grant_type":"password",
  "client_id":"sugar",
  "client_secret":"",
  "username":"admin",
  "password":"password",
  "platform":"custom_api"
}' https://{site_url}/rest/v11/oauth2/token
```

## Response

The data received from the server is shown below:

```
{
  "access_token":"c6d495c9-bb25-81d2-5f81-533ef6479f9b",
  "expires_in":3600,
  "token_type":"bearer",
  "scope":null,
  "refresh_token":"cbc40e67-12bc-4b56-a1d9-533ef62f2601",
  "refresh_expires_in":1209600,
  "download_token":"cc5d1a9f-6627-3349-96e5-533ef6b1a493"
}
```

## Logout

To log out of a session, a request can be made to the /oauth2/logout POST endpoint. More information can be found in the [/oauth2/logout](#) documentation. An example extending off of the above authentication example is shown below:

---

```
curl -s -X POST -H OAuth-Token:<access_token> -H Cache-Control:no-cache https://{site_url}/rest/v11/oauth2/logout
```

## Response

The data received from the server is shown below:

```
{
  "success":true
}
```

**Last Modified:** 2021-02-17 02:44:13

## How to Ping

### Overview

An example in bash script demonstrating how to ping using the REST v11 /ping GET endpoint.

### Pinging

#### Authenticating

First, you will need to authenticate to the Sugar API. An example is shown below:

```
curl -X POST -H Cache-Control:no-cache -H "Content-Type: application/json" -d '{
  "grant_type":"password",
  "client_id":"sugar",
  "client_secret":"",
  "username":"admin",
  "password":"password",
  "platform":"custom_api"
}' https://{site_url}/rest/v11/oauth2/token
```

More information on authenticating can be found in the [How to Authenticate and Log Out](#) example and [/oauth2/logout](#) endpoint documentation.

---

## Pinging

Once we have authenticated, we can now ping the system as shown below.

```
curl -s -X GET -H OAuth-Token:{access_token} -H Cache-Control:no-cache https://{site_url}/rest/v11/ping
```

More information on pinging can be found in the [/ping](#) documentation.

## Response

```
"pong"
```

**Last Modified:** 2021-02-17 02:44:13

# How to Fetch the Current Users Time

## Overview

An example in bash script demonstrating how to fetch the current users time with the v11 `/ping/whattimeisit` REST GET endpoint.

## Authenticating

First, you will need to authenticate to the Sugar API. An example is shown below:

```
curl -X POST -H Cache-Control:no-cache -H "Content-Type: application/json" -d '{
  "grant_type": "password",
  "client_id": "sugar",
  "client_secret": "",
  "username": "admin",
  "password": "password",
  "platform": "custom_api"
}' https://{site_url}/rest/v11/oauth2/token
```

More information on authenticating can be found in the [How to Authenticate and Log Out](#) example and [/oauth2/logout](#) endpoint documentation.

---

## Getting the Current Time and Date for the User

Next, we can get the current time and date using the `/ping/whattimeisit` endpoint.

```
curl -s -X GET -H OAuth-Token:{access_token} -H Cache-Control:no-cache https://{site_url}/rest/v11/ping/whattimeisit
```

### Response

```
"2017-11-03T06:45:59-07:00"
```

**Last Modified:** 2021-02-17 02:44:13

## How to Fetch Recently Viewed Records

### Overview

An example in bash script demonstrating how to retrieve recently viewed records using the `v11 /recent` REST GET endpoint.

### Authenticating

First, you will need to authenticate to the Sugar API. An example is shown below:

```
curl -X POST -H Cache-Control:no-cache -H "Content-Type: application/json" -d '{
  "grant_type":"password",
  "client_id":"sugar",
  "client_secret":"",
  "username":"admin",
  "password":"password",
  "platform":"custom_api"
}' https://{site_url}/rest/v11/oauth2/token
```

More information on authenticating can be found in the [How to Authenticate and Log Out](#) example and [/oauth2/logout](#) endpoint documentation.

---

## Recently Viewed Records

Next, we will need to identify the records we want to see using the /recent endpoint. In this case, we are going to request Accounts, Contacts and Leads.

```
curl -s -X GET -H OAuth-Token:{access_token} -H Cache-Control:no-cache
  https://{site_url}/rest/v11/recent?module_list=Accounts%2CContacts%2C
  Leads
```

More information on the search API can be found in the [/recent](#) documentation.

## Response

The data received from the server is shown below:

```
{
  "next_offset":-1,
  "records":[
    {
      "my_favorite":false,
      "following":false,
      "id":"f3951f4d-2d17-7939-c5ec-56fedbb9e92f",
      "name":"Talia Knupp",
      "date_entered":"2016-04-01T15:34:00-05:00",
      "date_modified":"2016-04-06T10:33:24-05:00",
      "modified_user_id":"1",
      "modified_by_name":"Administrator",
      "created_by":"1",
      "created_by_name":"Administrator",
      "doc_owner":"","",
      "user_favorites":"","",
      "description":"","",
      "deleted":false,
      "assigned_user_id":"seed_will_id",
      "assigned_user_name":"Will Westin",
      "team_count":"","",
      "team_name":[
        {
          "id":"East",
          "name":"East",
          "name_2":"","",
          "primary":true
        },
        {

```



---

```
        "id": "West",
        "name": "West",
        "name_2": "",
        "primary": false
    }
],
"email": [
    {
        "email_address": "jsmith@sugar.com",
        "invalid_email": false,
        "opt_out": false,
        "primary_address": true,
        "reply_to_address": false
    },
    {
        "email_address": "cjsmith@sugar.com",
        "invalid_email": false,
        "opt_out": false,
        "primary_address": false,
        "reply_to_address": false
    }
],
"email1": "jsmith@sugar.com",
"email2": "cjsmith@sugar.com",
"invalid_email": false,
"email_opt_out": false,
"email_addresses_non_primary": "",
"salutation": "",
"first_name": "Talia",
"last_name": "Knupp",
"full_name": "Talia Knupp",
"title": "Senior Product Manager",
"facebook": "",
"twitter": "",
"googleplus": "",
"department": "",
"do_not_call": false,
"phone_home": "(963) 741-3689",
"phone_mobile": "(600) 831-9872",
"phone_work": "(680) 991-2837",
"phone_other": "",
"phone_fax": "",
"primary_address_street": "111 Silicon Valley Road",
"primary_address_street_2": "",
"primary_address_street_3": "",
"primary_address_city": "Sunnyvale",
```

---

```
"primary_address_state":"NY",
"primary_address_postalcode":"99452",
"primary_address_country":"USA",
"alt_address_street":"","
"alt_address_street_2":"","
"alt_address_street_3":"","
"alt_address_city":"","
"alt_address_state":"","
"alt_address_postalcode":"","
"alt_address_country":"","
"assistant":"","
"assistant_phone":"","
"picture":"","
"converted":false,
"referred_by":"","
"lead_source":"Word of mouth",
"lead_source_description":"","
"status":"In Process",
"status_description":"","
"reports_to_id":"","
"report_to_name":"","
"dnb_principal_id":"","
"account_name":"First National S\B",
"account_description":"","
"contact_id":"","
"contact_name":"","
"account_id":"","
"opportunity_id":"","
"opportunity_name":"","
"opportunity_amount":"","
"campaign_id":"","
"campaign_name":"","
"c_accept_status_fields":"","
"m_accept_status_fields":"","
"accept_status_id":"","
"accept_status_name":"","
"accept_status_calls":"","
"accept_status_meetings":"","
"webtolead_email1":[
  {
    "email_address":"jsmith@sugar.com",
    "invalid_email":false,
    "opt_out":false,
    "primary_address":true,
    "reply_to_address":false
  },

```

---

```
    {
      "email_address": "cjsmith@sugar.com",
      "invalid_email": false,
      "opt_out": false,
      "primary_address": false,
      "reply_to_address": false
    }
  ],
  "webtolead_email2": [
    {
      "email_address": "jsmith@sugar.com",
      "invalid_email": false,
      "opt_out": false,
      "primary_address": true,
      "reply_to_address": false
    },
    {
      "email_address": "cjsmith@sugar.com",
      "invalid_email": false,
      "opt_out": false,
      "primary_address": false,
      "reply_to_address": false
    }
  ],
  "webtolead_email_opt_out": "",
  "webtolead_invalid_email": "",
  "birthdate": "",
  "portal_name": "",
  "portal_app": "",
  "website": "",
  "preferred_language": "",
  "mkto_sync": false,
  "mkto_id": null,
  "mkto_lead_score": null,
  "fruits_c": "Apples",
  "_acl": {
    "fields": {
      }
    },
  },
  "_module": "Leads",
  "_last_viewed_date": "2016-04-06T10:33:24-05:00"
},
{
  "my_favorite": false,
  "following": false,
```

---

```
"id": "e8c641ca-1b8c-74c1-d08d-56fedbdd3187",
"name": "MTM Investment Bank F S B",
"date_entered": "2016-04-01T15:34:00-05:00",
"date_modified": "2016-04-06T10:16:52-05:00",
"modified_user_id": "1",
"modified_by_name": "Administrator",
"created_by": "1",
"created_by_name": "Administrator",
"doc_owner": "",
"user_favorites": "",
"description": "",
"deleted": false,
"assigned_user_id": "seed_will_id",
"assigned_user_name": "Will Westin",
"team_count": "",
"team_name": [
  {
    "id": "East",
    "name": "East",
    "name_2": "",
    "primary": true
  },
  {
    "id": "West",
    "name": "West",
    "name_2": "",
    "primary": false
  }
],
"email": [
  {
    "email_address": "jsmith@sugar.com",
    "invalid_email": false,
    "opt_out": false,
    "primary_address": true,
    "reply_to_address": false
  },
  {
    "email_address": "the60@example.us",
    "invalid_email": false,
    "opt_out": false,
    "primary_address": false,
    "reply_to_address": false
  }
],
"email1": "jsmith@sugar.com",
```

---

```
"email2": "the60@example.us",
"invalid_email": false,
"email_opt_out": false,
"email_addresses_non_primary": "",
"facebook": "",
"twitter": "",
"googleplus": "",
"account_type": "Customer",
"industry": "a",
"annual_revenue": "",
"phone_fax": "",
"billing_address_street": "67321 West Siam St.",
"billing_address_street_2": "",
"billing_address_street_3": "",
"billing_address_street_4": "",
"billing_address_city": "Alabama",
"billing_address_state": "NY",
"billing_address_postalcode": "52272",
"billing_address_country": "USA",
"rating": "",
"phone_office": "(012) 704-8075",
"phone_alternate": "",
"website": "www.salesqa.it",
"ownership": "",
"employees": "",
"ticker_symbol": "",
"shipping_address_street": "67321 West Siam St.",
"shipping_address_street_2": "",
"shipping_address_street_3": "",
"shipping_address_street_4": "",
"shipping_address_city": "Alabama",
"shipping_address_state": "NY",
"shipping_address_postalcode": "52272",
"shipping_address_country": "USA",
"parent_id": "",
"sic_code": "",
"duns_num": "",
"parent_name": "",
"campaign_id": "",
"campaign_name": "",
"_acl": {
  "fields": {

  }
},
"_module": "Accounts",
```

---

```
"_last_viewed_date": "2016-04-06T10:16:52-05:00"
},
{
  "my_favorite": false,
  "following": false,
  "id": "f31b2f00-468c-3d35-1e88-56fedbd3921d",
  "name": "Kaycee Gibney",
  "date_entered": "2016-04-01T15:34:00-05:00",
  "date_modified": "2016-04-06T10:16:24-05:00",
  "modified_user_id": "1",
  "modified_by_name": "Administrator",
  "created_by": "1",
  "created_by_name": "Administrator",
  "doc_owner": "",
  "user_favorites": "",
  "description": "",
  "deleted": false,
  "assigned_user_id": "seed_jim_id",
  "assigned_user_name": "Jim Brennan",
  "team_count": "",
  "team_name": [
    {
      "id": "East",
      "name": "East",
      "name_2": "",
      "primary": true
    }
  ],
  "email": [
    {
      "email_address": "jsmith@sugar.com",
      "invalid_email": false,
      "opt_out": false,
      "primary_address": true,
      "reply_to_address": false
    },
    {
      "email_address": "sales.kid.dev@example.info",
      "invalid_email": false,
      "opt_out": true,
      "primary_address": false,
      "reply_to_address": false
    }
  ],
  "email1": "jsmith@sugar.com",
  "email2": "sales.kid.dev@example.info",
```

---

```
"invalid_email":false,
"email_opt_out":false,
"email_addresses_non_primary":"","
"salutation":"","
"first_name":"Kaycee",
"last_name":"Gibney",
"full_name":"Kaycee Gibney",
"title":"Mgr Operations",
"facebook":"","
"twitter":"","
"googleplus":"","
"department":"","
"do_not_call":false,
"phone_home":"(599) 165-2396",
"phone_mobile":"(215) 591-9574",
"phone_work":"(771) 945-3648",
"phone_other":"","
"phone_fax":"","
"primary_address_street":"321 University Ave.",
"primary_address_street_2":"","
"primary_address_street_3":"","
"primary_address_city":"Santa Monica",
"primary_address_state":"NY",
"primary_address_postalcode":"96154",
"primary_address_country":"USA",
"alt_address_street":"","
"alt_address_street_2":"","
"alt_address_street_3":"","
"alt_address_city":"","
"alt_address_state":"","
"alt_address_postalcode":"","
"alt_address_country":"","
"assistant":"","
"assistant_phone":"","
"picture":"","
"email_and_name1":"","
"lead_source":"Existing Customer",
"account_name":"Tracker Com LP",
"account_id":"72ad6f00-e345-1cab-b370-56fedbd23deb",
"dnb_principal_id":"","
"opportunity_role_fields":"","
"opportunity_role_id":"","
"opportunity_role":"","
"reports_to_id":"","
"report_to_name":"","
"birthdate":"","
```

---

```
"portal_name": "KayceeGibney33",
"portal_active": true,
"portal_password": true,
"portal_password1": null,
"portal_app": "",
"preferred_language": "en_us",
"campaign_id": "",
"campaign_name": "",
"c_accept_status_fields": "",
"m_accept_status_fields": "",
"accept_status_id": "",
"accept_status_name": "",
"accept_status_calls": "",
"accept_status_meetings": "",
"sync_contact": false,
"mkto_sync": false,
"mkto_id": null,
"mkto_lead_score": null,
"_acl": {
  "fields": {

  }
},
"_module": "Contacts",
"_last_viewed_date": "2016-04-06T10:16:24-05:00"
}
]
}
```

There are 3 records shown above, the `_module` field tells you if the record is from Accounts, Contacts or Leads. The `_last_viewed_date` tells you when the record was last seen.

**Last Modified:** 2021-02-17 02:44:13

## How to Use the Global Search

### Overview

An example in bash script demonstrating how to globally search for records using the REST v11 `/search` GET endpoint.



---

## Authenticating

First, you will need to authenticate to the Sugar API. An example is shown below:

```
curl -X POST -H Cache-Control:no-cache -H "Content-Type: application/json" -d '{
  "grant_type":"password",
  "client_id":"sugar",
  "client_secret":"",
  "username":"admin",
  "password":"password",
  "platform":"custom_api"
}' https://{site_url}/rest/v11/oauth2/token
```

More information on authenticating can be found in the [How to Authenticate and Log Out](#) example and [/oauth2/logout](#) endpoint documentation.

## Searching Records

Next, we will need to identify the records we want to see using the `/search` endpoint. In this case, we are going to search for all records that have the email address of 'jsmith@sugar.com'. In this example, there are 3 records, an Account, a Contact and a Lead.

```
curl -s -X GET -H OAuth-Token:{access_token} -H Cache-Control:no-cache https://{site_url}/rest/v11/search?q=jsmith@sugar.com&max_num=3&offset=0&fields=&order_by=&favorites=false&my_items=false
```

More information on the search API can be found in the [/search](#) documentation.

## Response

The data received from the server is shown below:

```
{
  "next_offset":-1,
  "records":[
```

---

```
{
  "my_favorite":false,
  "following":false,
  "id":"f31b2f00-468c-3d35-1e88-56fedbd3921d",
  "name":"Kaycee Gibney",
  "date_entered":"2016-04-01T20:34:00+00:00",
  "date_modified":"2016-04-06T15:16:24+00:00",
  "modified_user_id":"1",
  "modified_by_name":"Administrator",
  "created_by":"1",
  "created_by_name":"Administrator",
  "doc_owner":"",
  "user_favorites":"",
  "description":"",
  "deleted":false,
  "assigned_user_id":"seed_jim_id",
  "assigned_user_name":"Jim Brennan",
  "team_count":"",
  "team_name":[
    {
      "id":"East",
      "name":"East",
      "name_2":"",
      "primary":true
    }
  ],
  "email":[
    {
      "email_address":"jsmith@sugar.com",
      "invalid_email":false,
      "opt_out":false,
      "primary_address":true,
      "reply_to_address":false
    },
    {
      "email_address":"sales.kid.dev@example.info",
      "invalid_email":false,
      "opt_out":true,
      "primary_address":false,
      "reply_to_address":false
    }
  ],
  "email1":"jsmith@sugar.com",
  "email2":"sales.kid.dev@example.info",
  "invalid_email":false,
  "email_opt_out":false,
```

---

```
"email_addresses_non_primary": "",
"salutation": "",
"first_name": "Kaycee",
"last_name": "Gibney",
"full_name": "Kaycee Gibney",
"title": "Mgr Operations",
"facebook": "",
"twitter": "",
"googleplus": "",
"department": "",
"do_not_call": false,
"phone_home": "(599) 165-2396",
"phone_mobile": "(215) 591-9574",
"phone_work": "(771) 945-3648",
"phone_other": "",
"phone_fax": "",
"primary_address_street": "321 University Ave.",
"primary_address_street_2": "",
"primary_address_street_3": "",
"primary_address_city": "Santa Monica",
"primary_address_state": "NY",
"primary_address_postalcode": "96154",
"primary_address_country": "USA",
"alt_address_street": "",
"alt_address_street_2": "",
"alt_address_street_3": "",
"alt_address_city": "",
"alt_address_state": "",
"alt_address_postalcode": "",
"alt_address_country": "",
"assistant": "",
"assistant_phone": "",
"picture": "",
"email_and_name1": "",
"lead_source": "Existing Customer",
"account_name": "Tracker Com LP",
"account_id": "72ad6f00-e345-1cab-b370-56fedbd23deb",
"dnb_principal_id": "",
"opportunity_role_fields": "",
"opportunity_role_id": "",
"opportunity_role": "",
"reports_to_id": "",
"report_to_name": "",
"birthdate": "",
"portal_name": "KayceeGibney33",
"portal_active": true,
```

---

```

"portal_password":true,
"portal_password1":null,
"portal_app":"","
"preferred_language":"en_us",
"campaign_id":"","
"campaign_name":"","
"c_accept_status_fields":"","
"m_accept_status_fields":"","
"accept_status_id":"","
"accept_status_name":"","
"accept_status_calls":"","
"accept_status_meetings":"","
"sync_contact":false,
"mkto_sync":false,
"mkto_id":null,
"mkto_lead_score":null,
"_acl":{
  "fields":{

  }
},
"_module":"Contacts",
"_search":{
  "score":0.70710677,
  "highlighted":{
    "email1":{
      "text":"\u003Cstrong\u003Ejsmith@sugar.com\u003C\/st
rong\u003E",
      "module":"Contacts",
      "label":"LBL_EMAIL_ADDRESS"
    }
  }
}
},
{
  "my_favorite":false,
  "following":false,
  "id":"e8c641ca-1b8c-74c1-d08d-56fedbdd3187",
  "name":"MTM Investment Bank F S B",
  "date_entered":"2016-04-01T20:34:00+00:00",
  "date_modified":"2016-04-06T15:16:52+00:00",
  "modified_user_id":"1",
  "modified_by_name":"Administrator",
  "created_by":"1",
  "created_by_name":"Administrator",
  "doc_owner":"","

```

---

```
"user_favorites":"","  
"description":"","  
"deleted":false,  
"assigned_user_id":"seed_will_id",  
"assigned_user_name":"Will Westin",  
"team_count":"","  
"team_name":[  
  {  
    "id":"East",  
    "name":"East",  
    "name_2":"","  
    "primary":true  
  },  
  {  
    "id":"West",  
    "name":"West",  
    "name_2":"","  
    "primary":false  
  }  
],  
"email":[  
  {  
    "email_address":"jsmith@sugar.com",  
    "invalid_email":false,  
    "opt_out":false,  
    "primary_address":true,  
    "reply_to_address":false  
  },  
  {  
    "email_address":"the60@example.us",  
    "invalid_email":false,  
    "opt_out":false,  
    "primary_address":false,  
    "reply_to_address":false  
  }  
],  
"email1":"jsmith@sugar.com",  
"email2":"the60@example.us",  
"invalid_email":false,  
"email_opt_out":false,  
"email_addresses_non_primary":"","  
"facebook":"","  
"twitter":"","  
"googleplus":"","  
"account_type":"Customer",  
"industry":"a",
```

---

```
"annual_revenue": "",
"phone_fax": "",
"billing_address_street": "67321 West Siam St.",
"billing_address_street_2": "",
"billing_address_street_3": "",
"billing_address_street_4": "",
"billing_address_city": "Alabama",
"billing_address_state": "NY",
"billing_address_postalcode": "52272",
"billing_address_country": "USA",
"rating": "",
"phone_office": "(012) 704-8075",
"phone_alternate": "",
"website": "www.salesqa.it",
"ownership": "",
"employees": "",
"ticker_symbol": "",
"shipping_address_street": "67321 West Siam St.",
"shipping_address_street_2": "",
"shipping_address_street_3": "",
"shipping_address_street_4": "",
"shipping_address_city": "Alabama",
"shipping_address_state": "NY",
"shipping_address_postalcode": "52272",
"shipping_address_country": "USA",
"parent_id": "",
"sic_code": "",
"duns_num": "",
"parent_name": "",
"campaign_id": "",
"campaign_name": "",
"_acl": {
  "fields": {

  }
},
"_module": "Accounts",
"_search": {
  "score": 0.70710677,
  "highlighted": {
    "email1": {
      "text": "\u003Cstrong\u003Ejsmith@sugar.com\u003C\/st
rong\u003E",
      "module": "Accounts",
      "label": "LBL_EMAIL_ADDRESS"
    }
  }
}
```

---

```
    }
  }
},
{
  "my_favorite":false,
  "following":false,
  "id":"f3951f4d-2d17-7939-c5ec-56fedbb9e92f",
  "name":"Talia Knupp",
  "date_entered":"2016-04-01T20:34:00+00:00",
  "date_modified":"2016-04-06T15:33:24+00:00",
  "modified_user_id":"1",
  "modified_by_name":"Administrator",
  "created_by":"1",
  "created_by_name":"Administrator",
  "doc_owner":"","
  "user_favorites":"","
  "description":"","
  "deleted":false,
  "assigned_user_id":"seed_will_id",
  "assigned_user_name":"Will Westin",
  "team_count":"","
  "team_name":[
    {
      "id":"East",
      "name":"East",
      "name_2":"","
      "primary":true
    },
    {
      "id":"West",
      "name":"West",
      "name_2":"","
      "primary":false
    }
  ],
  "email":[
    {
      "email_address":"jsmith@sugar.com",
      "invalid_email":false,
      "opt_out":false,
      "primary_address":true,
      "reply_to_address":false
    },
    {
      "email_address":"cjsmith@sugar.com",
      "invalid_email":false,
```

---

```
        "opt_out":false,
        "primary_address":false,
        "reply_to_address":false
    }
],
"email1":"jsmith@sugar.com",
"email2":"cjsmith@sugar.com",
"invalid_email":false,
"email_opt_out":false,
"email_addresses_non_primary":"","
"salutation":"","
"first_name":"Talial",
"last_name":"Knupp",
"full_name":"Talial Knupp",
"title":"Senior Product Manager",
"facebook":"","
"twitter":"","
"googleplus":"","
"department":"","
"do_not_call":false,
"phone_home":"(963) 741-3689",
"phone_mobile":"(600) 831-9872",
"phone_work":"(680) 991-2837",
"phone_other":"","
"phone_fax":"","
"primary_address_street":"111 Silicon Valley Road",
"primary_address_street_2":"","
"primary_address_street_3":"","
"primary_address_city":"Sunnyvale",
"primary_address_state":"NY",
"primary_address_postalcode":"99452",
"primary_address_country":"USA",
"alt_address_street":"","
"alt_address_street_2":"","
"alt_address_street_3":"","
"alt_address_city":"","
"alt_address_state":"","
"alt_address_postalcode":"","
"alt_address_country":"","
"assistant":"","
"assistant_phone":"","
"picture":"","
"converted":false,
"referred_by":"","
"lead_source":"Word of mouth",
"lead_source_description":"","
```



---

```
"status":"In Process",
"status_description":"","
"reports_to_id":"","
"report_to_name":"","
"dnb_principal_id":"","
"account_name":"First National S\B",
"account_description":"","
"contact_id":"","
"contact_name":"","
"account_id":"","
"opportunity_id":"","
"opportunity_name":"","
"opportunity_amount":"","
"campaign_id":"","
"campaign_name":"","
"c_accept_status_fields":"","
"m_accept_status_fields":"","
"accept_status_id":"","
"accept_status_name":"","
"accept_status_calls":"","
"accept_status_meetings":"","
"webtolead_email1":[
  {
    "email_address":"jsmith@sugar.com",
    "invalid_email":false,
    "opt_out":false,
    "primary_address":true,
    "reply_to_address":false
  },
  {
    "email_address":"cjsmith@sugar.com",
    "invalid_email":false,
    "opt_out":false,
    "primary_address":false,
    "reply_to_address":false
  }
],
"webtolead_email2":[
  {
    "email_address":"jsmith@sugar.com",
    "invalid_email":false,
    "opt_out":false,
    "primary_address":true,
    "reply_to_address":false
  },
  {
```

```

        "email_address": "cjsmith@sugar.com",
        "invalid_email": false,
        "opt_out": false,
        "primary_address": false,
        "reply_to_address": false
    }
],
"webtolead_email_opt_out": "",
"webtolead_invalid_email": "",
"birthdate": "",
"portal_name": "",
"portal_app": "",
"website": "",
"preferred_language": "",
"mkto_sync": false,
"mkto_id": null,
"mkto_lead_score": null,
"fruits_c": "Apples",
"_acl": {
    "fields": {

    }
},
"_module": "Leads",
"_search": {
    "score": 0.70710677,
    "highlighted": {
        "email1": {
            "text": "\u003Cstrong\u003Ejsmith@sugar.com\u003C\/st
rong\u003E",
            "module": "Leads",
            "label": "LBL_EMAIL_ADDRESS"
        }
    }
}
}
]
}

```

There are 3 records shown above, the `_module` field tells you if the record is from Accounts, Contacts or Leads. The `_search` field is an array that tells you where in the record it found the search string. It gives you back a highlighted string that you can use for display.

**Last Modified:** 2021-02-17 02:44:13

---

# How to Check for Duplicate Records

## Overview

An example in bash script demonstrating how to check for duplicate records using the v11 /<module>/duplicateCheck REST POST endpoint.

## Duplicate Records

### Authenticating

First, you will need to authenticate to the Sugar API. An example is shown below:

```
curl -X POST -H Cache-Control:no-cache -H "Content-Type: application/json" -d '{
  "grant_type":"password",
  "client_id":"sugar",
  "client_secret":"",
  "username":"admin",
  "password":"password",
  "platform":"custom_api"
}' https://{site_url}/rest/v11/oauth2/token
```

More information on authenticating can be found in the [How to Authenticate and Log Out](#) example and [/oauth2/logout](#) endpoint documentation.

### Retrieving Duplicates

Next, we will need to identify the records that are duplicates using the /<module>/duplicateCheck endpoint.

```
curl -s -X POST -H OAuth-Token:{access_token} -H Cache-Control:no-cache -H "Content-Type: application/json" -d '{
  "name":"Test Record"
}' https://{site_url}/rest/v11/Accounts/duplicateCheck
```

More information on the duplicate check API can be found in the [/<module>/duplicateCheck](#) documentation.

---

## Response

The data received from the server is shown below:

```
{
  "next_offset": -1,
  "records": [{
    "id": "7f6ea7be-60d6-11e6-8885-a0999b033b33",
    "name": "Test Record",
    "date_entered": "2016-08-12T14:48:25-07:00",
    "date_modified": "2016-08-12T14:48:25-07:00",
    "modified_user_id": "1",
    "modified_by_name": "Administrator",
    "modified_user_link": {
      "full_name": "Administrator",
      "id": "1",
      "_acl": {
        "fields": [],
        "delete": "no",
        "_hash": "8e11bf9be8f04daddee9d08d44ea891e"
      }
    },
    "created_by": "1",
    "created_by_name": "Administrator",
    "created_by_link": {
      "full_name": "Administrator",
      "id": "1",
      "_acl": {
        "fields": [],
        "delete": "no",
        "_hash": "8e11bf9be8f04daddee9d08d44ea891e"
      }
    },
    "description": "Test Data 1",
    "deleted": false,
    "facebook": "",
    "twitter": "",
    "googleplus": "",
    "account_type": "",
    "industry": "",
    "annual_revenue": "",
    "phone_fax": "",
    "billing_address_street": "",
    "billing_address_street_2": "",
    "billing_address_street_3": "",
    "billing_address_street_4": "",
  }
}
```

---

```
"billing_address_city": "",
"billing_address_state": "",
"billing_address_postalcode": "",
"billing_address_country": "",
"rating": "",
"phone_office": "",
"phone_alternate": "",
"website": "",
"ownership": "",
"employees": "",
"ticker_symbol": "",
"shipping_address_street": "",
"shipping_address_street_2": "",
"shipping_address_street_3": "",
"shipping_address_street_4": "",
"shipping_address_city": "",
"shipping_address_state": "",
"shipping_address_postalcode": "",
"shipping_address_country": "",
"parent_id": "",
"sic_code": "",
"duns_num": "",
"parent_name": "",
"member_of": {
  "name": "",
  "id": "",
  "_acl": {
    "fields": [],
    "_hash": "654d337e0e912edaa00dbb0fb3dc3c17"
  }
},
"campaign_id": "",
"campaign_name": "",
"campaign_accounts": {
  "name": "",
  "id": "",
  "_acl": {
    "fields": [],
    "_hash": "654d337e0e912edaa00dbb0fb3dc3c17"
  }
},
"following": true,
"my_favorite": false,
"tag": [],
"assigned_user_id": "1",
"assigned_user_name": "Administrator",
```

---

```
"assigned_user_link": {
  "full_name": "Administrator",
  "id": "1",
  "_acl": {
    "fields": [],
    "delete": "no",
    "_hash": "8e11bf9be8f04daddee9d08d44ea891e"
  }
},
"team_count": "",
"team_count_link": {
  "team_count": "",
  "id": "1",
  "_acl": {
    "fields": [],
    "_hash": "654d337e0e912edaa00dbb0fb3dc3c17"
  }
},
"team_name": [{
  "id": "1",
  "name": "Global",
  "name_2": "",
  "primary": true
}],
"email": [],
"email1": "",
"email2": "",
"invalid_email": "",
"email_opt_out": "",
"email_addresses_non_primary": "",
"_acl": {
  "fields": {}
},
"_module": "Accounts",
"duplicate_check_rank": 8
}, {
  "id": "868b4f16-60d6-11e6-bdfc-a0999b033b33",
  "name": "Test Record",
  "date_entered": "2016-08-12T14:48:37-07:00",
  "date_modified": "2016-08-12T14:48:37-07:00",
  "modified_user_id": "1",
  "modified_by_name": "Administrator",
  "modified_user_link": {
    "full_name": "Administrator",
    "id": "1",
    "_acl": {
```

---

```
        "fields": [],
        "delete": "no",
        "_hash": "8e11bf9be8f04daddee9d08d44ea891e"
    }
},
"created_by": "1",
"created_by_name": "Administrator",
"created_by_link": {
    "full_name": "Administrator",
    "id": "1",
    "_acl": {
        "fields": [],
        "delete": "no",
        "_hash": "8e11bf9be8f04daddee9d08d44ea891e"
    }
},
"description": "Test Data 2",
"deleted": false,
"facebook": "",
"twitter": "",
"googleplus": "",
"account_type": "",
"industry": "",
"annual_revenue": "",
"phone_fax": "",
"billing_address_street": "",
"billing_address_street_2": "",
"billing_address_street_3": "",
"billing_address_street_4": "",
"billing_address_city": "",
"billing_address_state": "",
"billing_address_postalcode": "",
"billing_address_country": "",
"rating": "",
"phone_office": "",
"phone_alternate": "",
"website": "",
"ownership": "",
"employees": "",
"ticker_symbol": "",
"shipping_address_street": "",
"shipping_address_street_2": "",
"shipping_address_street_3": "",
"shipping_address_street_4": "",
"shipping_address_city": "",
"shipping_address_state": "",
```

---

```
"shipping_address_postalcode": "",
"shipping_address_country": "",
"parent_id": "",
"sic_code": "",
"duns_num": "",
"parent_name": "",
"member_of": {
  "name": "",
  "id": "",
  "_acl": {
    "fields": [],
    "_hash": "654d337e0e912edaa00dbb0fb3dc3c17"
  }
},
"campaign_id": "",
"campaign_name": "",
"campaign_accounts": {
  "name": "",
  "id": "",
  "_acl": {
    "fields": [],
    "_hash": "654d337e0e912edaa00dbb0fb3dc3c17"
  }
},
"following": true,
"my_favorite": false,
"tag": [],
"assigned_user_id": "1",
"assigned_user_name": "Administrator",
"assigned_user_link": {
  "full_name": "Administrator",
  "id": "1",
  "_acl": {
    "fields": [],
    "delete": "no",
    "_hash": "8e11bf9be8f04daddee9d08d44ea891e"
  }
},
"team_count": "",
"team_count_link": {
  "team_count": "",
  "id": "1",
  "_acl": {
    "fields": [],
    "_hash": "654d337e0e912edaa00dbb0fb3dc3c17"
  }
}
```



---

```
    },
    "team_name": [{
        "id": "1",
        "name": "Global",
        "name_2": "",
        "primary": true
    }],
    "email": [],
    "email1": "",
    "email2": "",
    "invalid_email": "",
    "email_opt_out": "",
    "email_addresses_non_primary": "",
    "_acl": {
        "fields": {}
    },
    "_module": "Accounts",
    "duplicate_check_rank": 8
}
}]
}
```

**Last Modified:** 2021-02-17 02:44:13

## How to Manipulate Quotes

### Overview

A Bash example demonstrating how to manipulate Quotes and related record data such as ProductBundles, Products, and ProductBundleNotes.

### Manipulating Quotes

#### Authenticating

First, you will need to authenticate to the Sugar API. An example is shown below:

```
curl -X POST -H Cache-Control:no-cache -H "Content-Type: application/json" -d '{
  "grant_type": "password",
  "client_id": "sugar",
```

---

```
"client_secret":"","  
"username":"admin",  
"password":"password",  
"platform":"custom_api"  
}' https://{site_url}/rest/v11/oauth2/token
```

More information on authenticating can be found in the [How to Authenticate and Log Out](#) example and [/oauth2/logout](#) endpoint documentation.

## Creating a Quote

Once authenticated, we can submit a Quote record using the <module> endpoint. Since a Quote record is a sum of its parts (i.e. ProductBundles and Products) you can submit the related ProductBundles and Products in the same request payload using the relationship Links and the "create" property.

```
curl -X POST -H OAuth-Token:<access_token> -H Cache-Control:no-  
cache -H "Content-Type: application/json" -d '{  
  "name": "Test Quote",  
  "quote_stage": "Draft",  
  "date_quote_expected_closed": "2017-06-12T11:51:57-0400",  
  "product_bundles": {  
    "create": [  
      {  
        "name": "Product Bundle 1",  
        "bundle_stage": "Draft",  
        "currency_id": ":-99",  
        "base_rate": "1.0",  
        "shipping": "0.00",  
        "products": {  
          "create": [  
            {  
              "tax_class": "Taxable",  
              "quantity": 1000,  
              "name": "Test Product 1",  
              "description": "My Test Product",  
              "mft_part_num": "mft100012021",  
              "cost_price": "100.00",  
              "list_price": "200.00",  
              "discount_price": "175.00",  
              "discount_amount": "0.00",  
              "discount_select": 0,  
              "product_template_id": "",  
              "type_id": "",  
              "status": "Quotes"            }  
          ]  
        }  
      ]  
    }  
  }  
}
```

---

```

    }
  ]
},
"product_bundle_notes": {
  "create": [
    {
      "description": "Free shipping",
      "position": 1
    }
  ]
}
},
{
  "name": "Product Bundle 2",
  "bundle_stage": "Draft",
  "currency_id": ":-99",
  "base_rate": "1.0",
  "shipping": "25.00",
  "products": {
    "create": [
      {
        "quantity": 1000,
        "name": "Test Product 2",
        "description": "My Other Product",
        "mft_part_num": "mft100012234",
        "cost_price": "150.00",
        "list_price": "300.00",
        "discount_price": "275.00",
        "discount_amount": "0.00",
        "discount_select": 0,
        "product_template_id": "",
        "type_id": "",
        "status": "Quotes"
      },
      {
        "quantity": 500,
        "name": "Test Product 3",
        "description": "My Other Other Product",
        "mft_part_num": "mft100012123",
        "cost_price": "10.00",
        "list_price": "500.00",
        "discount_price": "400.00",
        "discount_amount": "0.00",
        "discount_select": 0,
        "product_template_id": "",
        "type_id": "",

```

---

```
        "status": "Quotes"
      }
    ]
  }
}
}' http://<site_url>/rest/v11/Quotes
```

## Response

The data received from the server is shown below:

```
{
  "id": "e1e1e1e8-372a-11e7-8bf4-3c15c2c94fb0",
  "name": "Test Quote",
  "date_entered": "2017-05-12T11:51:57-04:00",
  "date_modified": "2017-05-12T11:51:57-04:00",
  "modified_user_id": "1",
  "modified_by_name": "Administrator",
  "modified_user_link": {
    "full_name": "Administrator",
    "id": "1",
    "_acl": {
      "fields": {
        "pwd_last_changed": {
          "write": "no",
          "create": "no"
        },
        "last_login": {
          "write": "no",
          "create": "no"
        }
      }
    },
    "delete": "no",
    "_hash": "08b99a97c2e8d792f7a44d8882b5af6d"
  }
},
  "created_by": "1",
  "created_by_name": "Administrator",
  "created_by_link": {
    "full_name": "Administrator",
    "id": "1",
    "_acl": {
      "fields": {
```

---

```
    "pwd_last_changed": {
      "write": "no",
      "create": "no"
    },
    "last_login": {
      "write": "no",
      "create": "no"
    }
  },
  "delete": "no",
  "_hash": "08b99a97c2e8d792f7a44d8882b5af6d"
}
},
"description": "",
"deleted": false,
"shipper_id": "",
"shipper_name": "",
"shippers": {
  "name": "",
  "id": "",
  "_acl": {
    "fields": [

    ],
    "_hash": "654d337e0e912edaa00dbb0fb3dc3c17"
  }
},
"taxrate_id": "",
"taxrate_name": "",
"taxrates": {
  "name": "",
  "id": "",
  "_acl": {
    "fields": [

    ],
    "_hash": "654d337e0e912edaa00dbb0fb3dc3c17"
  }
},
"taxrate_value": "0.000000",
"show_line_nums": true,
"quote_type": "Quotes",
"date_quote_expected_closed": "2017-06-12",
"original_po_date": "",
"payment_terms": "",
"date_quote_closed": "",
```

---

```
"date_order_shipped": "",
"order_stage": "",
"quote_stage": "Draft",
"purchase_order_num": "",
"quote_num": 2,
"subtotal": "650000.000000",
"subtotal_usdollar": "650000.000000",
"shipping": "0.000000",
"shipping_usdollar": "0.000000",
"discount": "",
"deal_tot": "0.00",
"deal_tot_discount_percentage": "0.00",
"deal_tot_usdollar": "0.00",
"new_sub": "650000.000000",
"new_sub_usdollar": "650000.000000",
"taxable_subtotal": "650000.000000",
"tax": "0.000000",
"tax_usdollar": "0.000000",
"total": "650000.000000",
"total_usdollar": "650000.000000",
"billing_address_street": "",
"billing_address_city": "",
"billing_address_state": "",
"billing_address_postalcode": "",
"billing_address_country": "",
"shipping_address_street": "",
"shipping_address_city": "",
"shipping_address_state": "",
"shipping_address_postalcode": "",
"shipping_address_country": "",
"system_id": 1,
"shipping_account_name": "",
"shipping_accounts": {
  "name": "",
  "id": "",
  "_acl": {
    "fields": [

    ],
    "_hash": "654d337e0e912edaa00dbb0fb3dc3c17"
  }
},
"shipping_account_id": "",
"shipping_contact_name": "",
"shipping_contacts": {
  "full_name": "",
```

---

```
"id": "",
"_acl": {
  "fields": [

  ],
  "_hash": "654d337e0e912edaa00dbb0fb3dc3c17"
},
"last_name": ""
},
"shipping_contact_id": "",
"account_name": "",
"billing_accounts": {
  "name": "",
  "id": "",
  "_acl": {
    "fields": [

    ],
    "_hash": "654d337e0e912edaa00dbb0fb3dc3c17"
  }
},
"account_id": "",
"billing_account_name": "",
"billing_account_id": "",
"billing_contact_name": "",
"billing_contacts": {
  "full_name": "",
  "id": "",
  "_acl": {
    "fields": [

    ],
    "_hash": "654d337e0e912edaa00dbb0fb3dc3c17"
  }
},
"last_name": ""
},
"billing_contact_id": "",
"opportunity_name": "",
"opportunities": {
  "name": "",
  "id": "",
  "_acl": {
    "fields": [

    ],
    "_hash": "654d337e0e912edaa00dbb0fb3dc3c17"
  }
}
```

---

```
    }
  },
  "opportunity_id": "",
  "following": "",
  "my_favorite": false,
  "tag": [

],
"locked_fields": [

],
"assigned_user_id": "",
"assigned_user_name": "",
"assigned_user_link": {
  "full_name": "",
  "id": "",
  "_acl": {
    "fields": [

],
    "_hash": "654d337e0e912edaa00dbb0fb3dc3c17"
  }
},
"team_count": "",
"team_count_link": {
  "team_count": "",
  "id": "1",
  "_acl": {
    "fields": [

],
    "_hash": "654d337e0e912edaa00dbb0fb3dc3c17"
  }
},
"team_name": [
  {
    "id": "a0512788-3680-11e7-b42f-3c15c2c94fb0",
    "name": "Administrator",
    "name_2": "",
    "primary": false,
    "selected": false
  },
  {
    "id": "1",
    "name": "Global",
    "name_2": "",
```



---

```

        "primary": true,
        "selected": false
    }
],
"currency_id": "-99",
"base_rate": "1.000000",
"currency_name": "",
"currencies": {
    "name": "",
    "id": "-99",
    "_acl": {
        "fields": [

            ],
        "_hash": "654d337e0e912edaa00dbb0fb3dc3c17"
    },
    "symbol": ""
},
"currency_symbol": "",
"_acl": {
    "fields": {

    }
},
"_module": "Quotes"
}

```

You might notice that the Response does not contain the related data. To view the related data use the [<module>/<record\\_id>/link/<link\\_name> - GET Endpoint](#).

## Modifying the Quote's Product Bundles

Once the quote is created, you might need to add or remove Product Bundles from the Quote. This can be done using the `/<module>/<record>` - PUT endpoint.

```

//Create a new ProductBundle
curl -X PUT -H OAuth-Token:<access_token> -H Cache-Control:no-cache -d '{
  "product_bundles": {
    "delete": [
      "<related_bundle_id>"
    ],
    "add": [
      "<new_bundle_id>"
    ]
  }
}'

```

---

```
}  
' http://<site_url>/rest/v11/Quotes/<record_id>
```

The above script removes a previously related Product Bundle from the Quote and adds a different already created Product Bundle to the Quote

## Response Payload

The response payload will match the standard [/<module>/<record> - PUT Endpoint](#) Response which is the entire values of the updated record. The previous Response for Creating the quote is the same as shown above.

**Last Modified:** 2021-02-17 02:44:13

# How to Manipulate Tags (CRUD)

## Overview

The following page will provide examples of bash script demonstrating how to use the CRUD (Create, Read, Update, Delete) endpoints for tags in the REST v11 API.

## Authentication

First, you will need to authenticate to the Sugar API. An example is shown below:

```
curl -X POST -H Cache-Control:no-cache -d '{  
  "grant_type":"password",  
  "client_id":"sugar",  
  "client_secret":"",  
  "username":"admin",  
  "password":"password",  
  "platform":"custom_api"  
' http://<site_url>/rest/v11/oauth2/token
```

More information on authenticating can be found in the [How to Authenticate and Log Out](#) example and [/oauth2/logout POST](#) endpoint documentation.

---

## Creating Tags

Once you get `oauth_token` you would need to use it in the following API Calls to create tags.

```
curl -X POST -H OAuth-Token:<access_token> -H Cache-Control:no-cache -d '{
  "name": "Test Name",
}' http://<site_url>/rest/v11/Tags
```

More information on this API endpoint can be found in the [/<module> POST](#) documentation.

## Response

```
{
  "id": "12c6ee48-1000-11e8-8838-6a0001bcacb0",
  "name": "Tag Name",
  "date_entered": "2018-02-12T15:21:52+01:00",
  "date_modified": "2018-02-12T15:21:52+01:00",
  "modified_user_id": "1",
  "modified_by_name": "Administrator",
  "modified_user_link": {
    "full_name": "Administrator",
    "id": "1",
    "_acl": {
      "fields": {
        "pwd_last_changed": { "write": "no", "create": "no" },
        "last_login": { "write": "no", "create": "no" }
      },
      "delete": "no",
      "_hash": "08b99a97c2e8d792f7a44d8882b5af6d"
    }
  },
  "created_by": "1",
  "created_by_name": "Administrator",
  "created_by_link": {
    "full_name": "Administrator",
    "id": "1",
    "_acl": {
      "fields": {
        "pwd_last_changed": { "write": "no", "create": "no" },
        "last_login": { "write": "no", "create": "no" }
      },
    },
  },
}
```

---

```

        "delete": "no",
        "_hash": "08b99a97c2e8d792f7a44d8882b5af6d"
    },
    "description": "",
    "deleted": false,
    "name_lower": "tag name",
    "following": "",
    "my_favorite": false,
    "locked_fields": [],
    "source_id": "",
    "source_type": "",
    "source_meta": "",
    "assigned_user_id": "1",
    "assigned_user_name": "Administrator",
    "assigned_user_link": {
        "full_name": "Administrator",
        "id": "1",
        "_acl": {
            "fields": {
                "pwd_last_changed": { "write": "no", "create": "no" },
                "last_login": { "write": "no", "create": "no" }
            },
            "delete": "no",
            "_hash": "08b99a97c2e8d792f7a44d8882b5af6d"
        }
    },
    "_acl": { "fields": {} },
    "_module": "Tags"
}

```

## Creating Records with Tags

You can also create tags on initial record creation. All you need to do populate the tag field as an array when creating a record. Here is an example that demonstrates using the `/<module>` POST endpoint.

```

curl -X POST -H OAuth-Token:<access_token> -H Cache-Control:no-cache -d '{
    name: "Test Record",
    tag:["First Tag", "Second Tag"]
}' http://<site_url>/rest/v11/Accounts

```

More information on this API endpoint can be found in the [/<module> POST](#) documentation.

---

## Response

The data sent to the server is shown below:

```
{
  "id": "ea507760-0ffd-11e8-bcf5-6a0001bcacb0",
  "name": "Test Record",
  "date_entered": "2018-02-12T15:06:25+01:00",
  "date_modified": "2018-02-12T15:06:25+01:00",
  "modified_user_id": "1",
  "modified_by_name": "Administrator",
  "modified_user_link": {
    "full_name": "Administrator",
    "id": "1",
    "_acl": {
      "fields": {
        "pwd_last_changed": { "write": "no", "create": "no" },
        "last_login": { "write": "no", "create": "no" }
      },
      "delete": "no",
      "_hash": "08b99a97c2e8d792f7a44d8882b5af6d"
    }
  },
  "created_by": "1",
  "created_by_name": "Administrator",
  "created_by_link": {
    "full_name": "Administrator",
    "id": "1",
    "_acl": {
      "fields": {
        "pwd_last_changed": { "write": "no", "create": "no" },
        "last_login": { "write": "no", "create": "no" }
      },
      "delete": "no",
      "_hash": "08b99a97c2e8d792f7a44d8882b5af6d"
    }
  },
  "description": "",
  "deleted": false,
  "facebook": "",
  "twitter": "",
  "googleplus": "",
  "account_type": "",
  "industry": "",
  "annual_revenue": ""
}
```

---

```
"phone_fax": "",
"billing_address_street": "",
"billing_address_street_2": "",
"billing_address_street_3": "",
"billing_address_street_4": "",
"billing_address_city": "",
"billing_address_state": "",
"billing_address_postalcode": "",
"billing_address_country": "",
"rating": "",
"phone_office": "",
"phone_alternate": "",
"website": "",
"ownership": "",
"employees": "",
"ticker_symbol": "",
"shipping_address_street": "",
"shipping_address_street_2": "",
"shipping_address_street_3": "",
"shipping_address_street_4": "",
"shipping_address_city": "",
"shipping_address_state": "",
"shipping_address_postalcode": "",
"shipping_address_country": "",
"parent_id": "",
"sic_code": "",
"duns_num": "",
"parent_name": "",
"member_of": {
  "name": "",
  "id": "",
  "_acl": { "fields": [], "_hash": "654d337e0e912edaa00dbb0fb3dc
3c17" }
},
"campaign_id": "",
"campaign_name": "",
"campaign_accounts": {
  "name": "",
  "id": "",
  "_acl": { "fields": [], "_hash": "654d337e0e912edaa00dbb0fb3dc
3c17" }
},
"following": true,
"my_favorite": false,
"tag": [
  {
```

---

```
    "id": "ea69c120-0ffd-11e8-b5f6-6a0001bcacb0",
    "name": "First Tag",
    "tags__name_lower": "first tag"
  },
  {
    "id": "eafb28e0-0ffd-11e8-8d80-6a0001bcacb0",
    "name": "Second Tag",
    "tags__name_lower": "second tag"
  }
],
"locked_fields": [],
"assigned_user_id": "",
"assigned_user_name": "",
"assigned_user_link": {
  "full_name": "",
  "id": "",
  "_acl": { "fields": [], "_hash": "654d337e0e912edaa00dbb0fb3dc
3c17" }
},
"team_count": "",
"team_count_link": {
  "team_count": "",
  "id": "1",
  "_acl": { "fields": [], "_hash": "654d337e0e912edaa00dbb0fb3dc
3c17" }
},
"team_name": [
  {
    "id": "1",
    "name": "Global",
    "name_2": "",
    "primary": true,
    "selected": false
  }
],
"email": [],
"email1": "",
"email2": "",
"invalid_email": "",
"email_opt_out": "",
"email_addresses_non_primary": "",
"calculated_c": "",
"_acl": { "fields": {} },
"_module": "Accounts"
}
```

---

## Reading/Retrieving Tags

Next, we can retrieve the records using `/Tags/:record` GET endpoint. Here is the example of retrieving the tag record that we created.

```
curl -H OAuth-Token: -H Cache-Control:no-cache http://<site_url>/rest/v11/Tags/12c6ee48-1000-11e8-8838-6a0001bcacb0
```

More information on this API endpoint can be found in the [/<module>/:record GET](#) documentation.

## Response

```
{
  "id": "12c6ee48-1000-11e8-8838-6a0001bcacb0",
  "name": "Tag Name",
  "date_entered": "2018-02-12T15:21:52+01:00",
  "date_modified": "2018-02-12T15:21:52+01:00",
  "modified_user_id": "1",
  "modified_by_name": "Administrator",
  "modified_user_link": {
    "full_name": "Administrator",
    "id": "1",
    "_acl": {
      "fields": {
        "pwd_last_changed": { "write": "no", "create": "no" },
        "last_login": { "write": "no", "create": "no" }
      },
      "delete": "no",
      "_hash": "08b99a97c2e8d792f7a44d8882b5af6d"
    }
  },
  "created_by": "1",
  "created_by_name": "Administrator",
  "created_by_link": {
    "full_name": "Administrator",
    "id": "1",
    "_acl": {
      "fields": {
        "pwd_last_changed": { "write": "no", "create": "no" },
        "last_login": { "write": "no", "create": "no" }
      },
      "delete": "no",
      "_hash": "08b99a97c2e8d792f7a44d8882b5af6d"
    }
  }
}
```



---

```

    },
    "description": "",
    "deleted": false,
    "name_lower": "tag name",
    "following": "",
    "my_favorite": false,
    "locked_fields": [],
    "source_id": "",
    "source_type": "",
    "source_meta": "",
    "assigned_user_id": "1",
    "assigned_user_name": "Administrator",
    "assigned_user_link": {
      "full_name": "Administrator",
      "id": "1",
      "_acl": {
        "fields": {
          "pwd_last_changed": { "write": "no", "create": "no" },
          "last_login": { "write": "no", "create": "no" }
        },
        "delete": "no",
        "_hash": "08b99a97c2e8d792f7a44d8882b5af6d"
      }
    },
    "_acl": { "fields": {} },
    "_module": "Tags"
  }
}

```

## Updating Tags

You can update a tag using the `/Tags/:record` PUT endpoint. In this example, we are going to update the Tag record that we created in the [Creating Tags](#) section and change its name to "Renamed Tag Name".

```

curl -X PUT -H OAuth-Token:<access_token> -H Cache-Control:no-cache -d '{
  "name": "Renamed Tag Name"
}' http://<site_url>/rest/v11/Tags/12c6ee48-1000-11e8-8838-6a0001bcacb0

```

More information on this API endpoint can be found in the </<module>/:record PUT> documentation.

## Response

---

```
{
  "id": "12c6ee48-1000-11e8-8838-6a0001bcacb0",
  "name": "Renamed Tag Name",
  "date_entered": "2018-02-12T15:21:52+01:00",
  "date_modified": "2018-02-12T16:07:18+01:00",
  "modified_user_id": "1",
  "modified_by_name": "Administrator",
  "modified_user_link": {
    "full_name": "Administrator",
    "id": "1",
    "_acl": {
      "fields": {
        "pwd_last_changed": { "write": "no", "create": "no" },
        "last_login": { "write": "no", "create": "no" }
      },
      "delete": "no",
      "_hash": "08b99a97c2e8d792f7a44d8882b5af6d"
    }
  },
  "created_by": "1",
  "created_by_name": "Administrator",
  "created_by_link": {
    "full_name": "Administrator",
    "id": "1",
    "_acl": {
      "fields": {
        "pwd_last_changed": { "write": "no", "create": "no" },
        "last_login": { "write": "no", "create": "no" }
      },
      "delete": "no",
      "_hash": "08b99a97c2e8d792f7a44d8882b5af6d"
    }
  },
  "description": "",
  "deleted": false,
  "name_lower": "renamed tag name",
  "following": "",
  "my_favorite": false,
  "locked_fields": [],
  "source_id": "",
  "source_type": "",
  "source_meta": "",
  "assigned_user_id": "1",
  "assigned_user_name": "Administrator",
  "assigned_user_link": {
```

---

```
"full_name": "Administrator",
"id": "1",
"_acl": {
  "fields": {
    "pwd_last_changed": { "write": "no", "create": "no" },
    "last_login": { "write": "no", "create": "no" }
  },
  "delete": "no",
  "_hash": "08b99a97c2e8d792f7a44d8882b5af6d"
}
},
"_acl": { "fields": {} },
"_module": "Tags"
}
```

## Deleting Tags

Finally, we will delete the record we created using `/Tags/:record DELETE` API request.

```
curl -X DELETE -H OAuth-Token:<access_token> -H Cache-Control:no-cache
  http://<site_url>/rest/v11/Tags/12c6ee48-1000-11e8-8838-6a0001bcacb0
```

More information on this API endpoint can be found in the [/<module>/:record DELETE](#) documentation.

## Response

```
{"id": "12c6ee48-1000-11e8-8838-6a0001bcacb0"}
```

**Last Modified:** 2021-02-17 02:44:13

## PHP

PHP Examples interacting with the v11 REST API.

**Last Modified:** 2021-02-17 02:44:13

---

# How to Export a List of Records

## Overview

An PHP example demonstrating how to export a list of records using the v11 /<module>/export/:record\_list\_id REST GET endpoint.

## Exporting Records

### Authenticating

First, you will need to authenticate to the Sugar API. An example is shown below:

```
<?php

$instance_url = "http://{site_url}/rest/v11";
$username = "admin";
$password = "password";

//Login - POST /oauth2/token
$auth_url = $instance_url . "/oauth2/token";

$oauth2_token_arguments = array(
    "grant_type" => "password",
    //client id - default is sugar.
    //It is recommended to create your own in Admin > OAuth Keys
    "client_id" => "sugar",
    "client_secret" => "",
    "username" => $username,
    "password" => $password,
    //platform type - default is base.
    //It is recommend to change the platform to a custom name such as
    "custom_api" to avoid authentication conflicts.
    "platform" => "custom_api"
);

$auth_request = curl_init($auth_url);
curl_setopt($auth_request, CURLOPT_HTTP_VERSION, CURL_HTTP_VERSION_1_0
);
curl_setopt($auth_request, CURLOPT_HEADER, false);
curl_setopt($auth_request, CURLOPT_SSL_VERIFYPEER, 0);
curl_setopt($auth_request, CURLOPT_RETURNTRANSFER, 1);
curl_setopt($auth_request, CURLOPT_FOLLOWLOCATION, 0);
```

---

```
curl_setopt($auth_request, CURLOPT_HTTPHEADER, array(
    "Content-Type: application/json"
));

//convert arguments to json
$json_arguments = json_encode($oauth2_token_arguments);
curl_setopt($auth_request, CURLOPT_POSTFIELDS, $json_arguments);

//execute request
$oauth2_token_response = curl_exec($auth_request);

//decode oauth2 response to get token
$oauth2_token_response_obj = json_decode($oauth2_token_response);
$oauth_token = $oauth2_token_response_obj->access_token;
```

More information on authenticating can be found in the [How to Authenticate and Log Out](#) example and [/oauth2/logout](#) endpoint documentation.

## Filtering Records

Next, we will need to identify the records we want to export using the `/<module>/filter` endpoint.

```
//Identify records to export - POST /<module>/filter

$filter_url = $instance_url . "/Accounts/filter";

$filter_arguments = array(
    "filter" => array(
        array(
            '$or' => array(
                array(
                    //name starts with 'a'
                    "name" => array(
                        '$starts'=>"A",
                    )
                ),
                array(
                    //name starts with 'b'
                    "name" => array(
                        '$starts'=>"b",
                    )
                )
            )
        ),
    ),
),
```

---

```

    ),
    "max_num" => 2,
    "offset" => 0,
    "fields" => "id",
    "order_by" => "date_entered",
    "favorites" => false,
    "my_items" => false,
);

$filter_request = curl_init($filter_url);
curl_setopt($filter_request, CURLOPT_HTTP_VERSION, CURL_HTTP_VERSION_1_0);
curl_setopt($filter_request, CURLOPT_HEADER, false);
curl_setopt($filter_request, CURLOPT_SSL_VERIFYPEER, 0);
curl_setopt($filter_request, CURLOPT_RETURNTRANSFER, 1);
curl_setopt($filter_request, CURLOPT_FOLLOWLOCATION, 0);
curl_setopt($filter_request, CURLOPT_HTTPHEADER, array(
    "Content-Type: application/json",
    "oauth-token: {$oauth_token}"
));

//convert arguments to json
$json_arguments = json_encode($filter_arguments);
curl_setopt($filter_request, CURLOPT_POSTFIELDS, $json_arguments);

//execute request
$filter_response = curl_exec($filter_request);

//decode json
$filter_response_obj = json_decode($filter_response);

//store ids of records to export
$export_ids = array();
foreach ($filter_response_obj->records as $record)
{
    $export_ids[] = $record->id;
}

```

More information on the filter API can be found in the [/filter](#) documentation.

## Request Payload

The data sent to the server is shown below:

---

```
{
  "filter": [
    {
      "$or": [
        {
          "name": {
            "$starts": "A"
          }
        },
        {
          "name": {
            "$starts": "b"
          }
        }
      ]
    }
  ],
  "max_num": 2,
  "offset": 0,
  "fields": "id",
  "order_by": "date_entered",
  "favorites": false,
  "my_items": false
}
```

## Response

The data received from the server is shown below:

```
{
  "next_offset": 2,
  "records": [
    {
      "id": "f16760a4-3a52-f77d-1522-5703ca28925f",
      "date_modified": "2016-04-05T10:23:28-04:00",
      "_acl": {
        "fields": {
        }
      },
      "_module": "Accounts"
    },
    {
      "id": "ec409fbb-2b22-4f32-7fa1-5703caf78dc3",
      "date_modified": "2016-04-05T10:23:28-04:00",
    }
  ]
}
```

---

```
        "_acl":{
            "fields":{

                }
        },
        "_module":"Accounts"
    }
]
}
```

## Creating a Record List

Once we have the list of ids, we then need to create a record list in Sugar that consists of those ids.

```
//Create a record list - POST /<module>/record_list

$record_list_url = $instance_url . "/Accounts/record_list";

$record_list_arguments = array(
    "records" => $export_ids,
);

$record_list_request = curl_init($record_list_url);
curl_setopt($record_list_request, CURLOPT_HTTP_VERSION, CURL_HTTP_VERSION_1_0);
curl_setopt($record_list_request, CURLOPT_HEADER, false);
curl_setopt($record_list_request, CURLOPT_SSL_VERIFYPEER, 0);
curl_setopt($record_list_request, CURLOPT_RETURNTRANSFER, 1);
curl_setopt($record_list_request, CURLOPT_FOLLOWLOCATION, 0);
curl_setopt($record_list_request, CURLOPT_HTTPHEADER, array(
    "Content-Type: application/json",
    "oauth-token: {$oauth_token}"
));

//convert arguments to json
$json_arguments = json_encode($record_list_arguments);
curl_setopt($record_list_request, CURLOPT_POSTFIELDS, $json_arguments);

//execute request
$record_list_response = curl_exec($record_list_request);
```

## Request Payload



---

The data sent to the server is shown below:

```
{
  "records": [
    "f16760a4-3a52-f77d-1522-5703ca28925f",
    "ec409fbb-2b22-4f32-7fa1-5703caf78dc3"
  ]
}
```

## Response

The data received from the server is shown below:

```
{
  "id": "ef963176-4845-bc55-b03e-570430b4173c",
  "assigned_user_id": "1",
  "module_name": "Accounts",
  "records": [
    "f16760a4-3a52-f77d-1522-5703ca28925f",
    "ec409fbb-2b22-4f32-7fa1-5703caf78dc3"
  ],
  "date_modified": "2016-04-05 21:39:19"
}
```

## Exporting Records

Once we have the record list created, we can then export the CSV file.

```
//Export Records - GET /<module>/export/:record_list_id

$export_url = $instance_url . "/Accounts/export/" . $record_list_response_obj->id;

$export_request = curl_init($export_url);
curl_setopt($export_request, CURLOPT_HTTP_VERSION, CURL_HTTP_VERSION_1_0);
curl_setopt($export_request, CURLOPT_HEADER, true); //needed to return file headers
curl_setopt($export_request, CURLOPT_SSL_VERIFYPEER, 0);
curl_setopt($export_request, CURLOPT_RETURNTRANSFER, 1);
curl_setopt($export_request, CURLOPT_FOLLOWLOCATION, 0);
curl_setopt($export_request, CURLOPT_HTTPHEADER, array(
  "Content-Type: application/json",
```

---

```
    "oauth-token: {$oauth_token}"
  ));

$export_response = curl_exec($export_request);

//set headers from response
list($headers, $content) = explode("\r\n\r\n", $export_response ,2);
foreach (explode("\r\n",$headers) as $header) {
    header($header);
}

$content = trim($content);
echo $content;
```

More information on exporting records can be found in the [<module>/export/:record\\_list\\_id](#) documentation.

## Response

The data received from the server is shown below:

```
HTTP/1.1 200 OK
Date: Tue, 05 Apr 2016 21:50:32
GMT Server: Apache/2.2.29 (Unix)
DAV/2 PHP/5.3.29 mod_ssl/2.2.29
OpenSSL/0.9.8zg X-Powered-By:
PHP/5.3.29 Expires:
Cache-Control: max-age=10,
private Pragma:
Content-Disposition: attachment; filename=Accounts.csv
Content-transfer-encoding: binary
Last-Modified: Tue, 05 Apr 2016 21:50:32
GMT ETag: 9b34f5d74e0298aaf7fd1f27d02e14f2
Content-Length: 1703
Connection: close
Content-Type: application/octet-stream; charset=ISO-8859-1
"Name","ID","Website","Office Phone","Alternate Phone","Fax","Billing
Street","Billing City","Billing State","Billing Postal Code","Billing
Country","Shipping Street","Shipping City","Shipping State","Shipping
Postal Code","Shipping Country","Description","Type","Industry","Annu
al Revenue","Employees","SIC Code","Ticker Symbol","Parent Account ID",
"Ownership","Campaign ID","Rating","Assigned User Name","Assigned User
ID","Team ID","Teams","Team Set ID","Date Created","Date Modified","M
odified By Name","Modified By ID","Created By","Created By ID","Delete
d","test","Facebook Account","Twitter Account","Google Plus ID","DUNS"
```

---

```
, "Email", "Invalid Email", "Email Opt Out", "Non-primary emails"
"Arts & Crafts Inc", "ec409fbb-2b22-4f32-7fa1-5703caf78dc3", "www.hrinfo
.tw", "(252) 456-8602", "", "", "777 West Filmore Ln", "Los Angeles", "CA",
77076", "USA", "777 West Filmore Ln", "Los Angeles", "CA", "77076", "USA", ""
, "Customer", "Hospitality", "", "", "", "", "", "", "", "", "Max Jensen", "seed_m
ax_id", "West", "West, East, Global", "dec43cb2-5273-8be2-968a-5703cadee7
5f", "2016-04-05 10:23", "2016-04-05 10:23", "Administrator", "1", "Adminis
trator", "1", "0", "", "", "", "", "", "sugar.sugar.section@example.org", "0", "
0", "dev.phone@example.biz,0,0"
"B.H. Edwards Inc", "f16760a4-3a52-f77d-1522-5703ca28925f", "www.section
dev.edu", "(361) 765-0216", "", "", "111 Silicon Valley Road", "Persistance
", "CA", "29709", "USA", "111 Silicon Valley Road", "Persistance", "CA", "297
09", "USA", "", "Customer", "Apparel", "", "", "", "", "", "", "", "Sally Brons
en", "seed_sally_id", "West", "West", "West", "2016-04-05 10:23", "2016-04-0
5 10:23", "Administrator", "1", "Administrator", "1", "0", "", "", "", "", "", "i
nfo.sugar@example.de", "0", "1", "phone.sales.section@example.tv,0,0"
```

## Download

You can download the full API example [here](#).

**Last Modified:** 2021-02-17 02:44:13

## How to Filter a List of Records

### Overview

A PHP example demonstrating how to filter records using the v11 /<module>/filter REST POST endpoints.

### Filtering Records

#### Authenticating

First, you will need to authenticate to the Sugar API. An example is shown below:

```
<?php
```

---

```
$instance_url = "http://{site_url}/rest/v11";
$username = "admin";
$password = "password";

//Login - POST /oauth2/token
$auth_url = $instance_url . "/oauth2/token";

$oauth2_token_arguments = array(
    "grant_type" => "password",
    //client id - default is sugar.
    //It is recommended to create your own in Admin > OAuth Keys
    "client_id" => "sugar",
    "client_secret" => "",
    "username" => $username,
    "password" => $password,
    //platform type - default is base.
    //It is recommend to change the platform to a custom name such as
    "custom_api" to avoid authentication conflicts.
    "platform" => "custom_api"
);

$auth_request = curl_init($auth_url);
curl_setopt($auth_request, CURLOPT_HTTP_VERSION, CURL_HTTP_VERSION_1_0
);
curl_setopt($auth_request, CURLOPT_HEADER, false);
curl_setopt($auth_request, CURLOPT_SSL_VERIFYPEER, 0);
curl_setopt($auth_request, CURLOPT_RETURNTRANSFER, 1);
curl_setopt($auth_request, CURLOPT_FOLLOWLOCATION, 0);
curl_setopt($auth_request, CURLOPT_HTTPHEADER, array(
    "Content-Type: application/json"
));

//convert arguments to json
$json_arguments = json_encode($oauth2_token_arguments);
curl_setopt($auth_request, CURLOPT_POSTFIELDS, $json_arguments);

//execute request
$oauth2_token_response = curl_exec($auth_request);

//decode oauth2 response to get token
$oauth2_token_response_obj = json_decode($oauth2_token_response);
$oauth_token = $oauth2_token_response_obj->access_token;
```

More information on authenticating can be found in the [How to Authenticate and Log Out](#) example and [/oauth2/logout](#) endpoint documentation.

---

## Filtering Records

Next, we can filter the records we want to return using the `/<module>/filter` endpoint with a POST request.

```
//Identify records to export - POST /<module>/filter

$filter_url = $instance_url . "/Accounts/filter";

$filter_arguments = array(
    "filter" => array(
        array(
            '$or' => array(
                array(
                    //name starts with 'a'
                    "name" => array(
                        '$starts'=>"A",
                    )
                ),
                array(
                    //name starts with 'b'
                    "name" => array(
                        '$starts'=>"b",
                    )
                )
            ),
        ),
    ),
    "max_num" => 2,
    "offset" => 0,
    "fields" => "id",
    "order_by" => "date_entered",
    "favorites" => false,
    "my_items" => false,
);

$filter_request = curl_init($filter_url);
curl_setopt($filter_request, CURLOPT_HTTP_VERSION, CURL_HTTP_VERSION_1_0);
curl_setopt($filter_request, CURLOPT_HEADER, false);
curl_setopt($filter_request, CURLOPT_SSL_VERIFYPEER, 0);
curl_setopt($filter_request, CURLOPT_RETURNTRANSFER, 1);
curl_setopt($filter_request, CURLOPT_FOLLOWLOCATION, 0);
curl_setopt($filter_request, CURLOPT_HTTPHEADER, array(
    "Content-Type: application/json",
    "oauth-token: {$oauth_token}"
));
```

---

```
));

//convert arguments to json
$json_arguments = json_encode($filter_arguments);
curl_setopt($filter_request, CURLOPT_POSTFIELDS, $json_arguments);

//execute request
$filter_response = curl_exec($filter_request);

//decode json
$filter_response_obj = json_decode($filter_response);
```

More information on the filter API can be found in the [/<module>/filter](#) documentation.

**Note :** The [/<module>/filter](#) endpoint can be called using a GET request as well, though long URL requests can have issues so the POST request is recommended.

## Request Payload

The data sent to the server is shown below:

```
{
  "filter":[
    {
      "$or":[
        {
          "name":{
            "$starts":"A"
          }
        },
        {
          "name":{
            "$starts":"b"
          }
        }
      ]
    }
  ],
  "max_num":2,
  "offset":0,
  "fields":"id",
  "order_by":"date_entered",
  "favorites":false,
  "my_items":false
```

---

```
}
```

## Response

The data received from the server is shown below:

```
{
  "next_offset":2,
  "records":[
    {
      "id":"f16760a4-3a52-f77d-1522-5703ca28925f",
      "date_modified":"2016-04-05T10:23:28-04:00",
      "_acl":{
        "fields":{

        }
      },
      "_module":"Accounts"
    },
    {
      "id":"ec409fbb-2b22-4f32-7fa1-5703caf78dc3",
      "date_modified":"2016-04-05T10:23:28-04:00",
      "_acl":{
        "fields":{

        }
      },
      "_module":"Accounts"
    }
  ]
}
```

## Download

You can download the full API example using POST [here](#) and using GET [here](#).

**Last Modified:** 2021-02-17 02:44:13

## How to Favorite a Record

---

## Overview

A PHP example demonstrating how to favorite a record using the v11 <module>/:record/favorite REST PUT API endpoint.

## Favoriting a Record

### Authenticating

First, you will need to authenticate to the Sugar API. An example is shown below:

```
<?php

$instance_url = "http://{site_url}/rest/v11";
$username = "admin";
$password = "password";

//Login - POST /oauth2/token
$auth_url = $instance_url . "/oauth2/token";

$oauth2_token_arguments = array(
    "grant_type" => "password",
    //client id - default is sugar.
    //It is recommended to create your own in Admin > OAuth Keys
    "client_id" => "sugar",
    "client_secret" => "",
    "username" => $username,
    "password" => $password,
    //platform type - default is base.
    //It is recommend to change the platform to a custom name such as
    "custom_api" to avoid authentication conflicts.
    "platform" => "custom_api"
);

$auth_request = curl_init($auth_url);
curl_setopt($auth_request, CURLOPT_HTTP_VERSION, CURL_HTTP_VERSION_1_0
);
curl_setopt($auth_request, CURLOPT_HEADER, false);
curl_setopt($auth_request, CURLOPT_SSL_VERIFYPEER, 0);
curl_setopt($auth_request, CURLOPT_RETURNTRANSFER, 1);
curl_setopt($auth_request, CURLOPT_FOLLOWLOCATION, 0);
curl_setopt($auth_request, CURLOPT_HTTPHEADER, array(
    "Content-Type: application/json"
));
```



---

```
//convert arguments to json
$json_arguments = json_encode($oauth2_token_arguments);
curl_setopt($auth_request, CURLOPT_POSTFIELDS, $json_arguments);

//execute request
$oauth2_token_response = curl_exec($auth_request);

//decode oauth2 response to get token
$oauth2_token_response_obj = json_decode($oauth2_token_response);
$oauth_token = $oauth2_token_response_obj->access_token;
```

More information on authenticating can be found in the [How to Authenticate and Log Out](#) example and [/oauth2/logout](#) endpoint documentation.

## Favoriting a Record

Next, we can favorite a specific record using the `/<module>/:record/favorite` endpoint.

```
//Favorite record - PUT //:record/favorite

$favorite_url = $instance_url . "/Accounts/ae8b1783-404a-
fcb8-1ele-56f1cc52cd1a/favorite";

$favorite_request = curl_init($favorite_url);

curl_setopt($favorite_request, CURLOPT_CUSTOMREQUEST, "PUT");
curl_setopt($favorite_request, CURLOPT_HTTP_VERSION, CURL_HTTP_VERSION
_1_0);
curl_setopt($favorite_request, CURLOPT_HEADER, false);
curl_setopt($favorite_request, CURLOPT_SSL_VERIFYPEER, 0);
curl_setopt($favorite_request, CURLOPT_RETURNTRANSFER, 1);
curl_setopt($favorite_request, CURLOPT_FOLLOWLOCATION, 0);
curl_setopt($favorite_request, CURLOPT_HTTPHEADER, array(
    "Content-Type: application/json",
    "oauth-token: {$oauth_token}"
));

//execute request
$favorite_response = curl_exec($favorite_request);
```

More information on the `unfavorite` API can be found in the [/<module>/:record/favorite PUT](#) documentation.

---

## Request Payload

The data sent to the server is shown below:

This endpoint does not accept any request arguments.

## Response

The data received from the server is shown below:

```
{
  "id": "ae8b1783-404a-fcb8-1e1e-56f1cc52cd1a",
  "name": "Union Bank",
  "date_entered": "2016-03-22T17:49:50-05:00",
  "date_modified": "2016-03-30T17:44:20-05:00",
  "modified_user_id": "1",
  "modified_by_name": "Administrator",
  "modified_user_link": {
    "full_name": "Administrator",
    "id": "1",
    "_acl": {
      "fields": [],
      "delete": "no",
      "_hash": "8e11bf9be8f04daddee9d08d44ea891e"
    }
  },
  "created_by": "1",
  "created_by_name": "Administrator",
  "created_by_link": {
    "full_name": "Administrator",
    "id": "1",
    "_acl": {
      "fields": [],
      "delete": "no",
      "_hash": "8e11bf9be8f04daddee9d08d44ea891e"
    }
  },
  "description": "",
  "deleted": false,
  "facebook": "",
  "twitter": "",
  "googleplus": "",
  "account_type": "Customer",
  "industry": "Banking",
  "annual_revenue": ""
}
```

---

```
"phone_fax": "",
"billing_address_street": "67321 West Siam St.",
"billing_address_street_2": "",
"billing_address_street_3": "",
"billing_address_street_4": "",
"billing_address_city": "Ohio",
"billing_address_state": "CA",
"billing_address_postalcode": "25159",
"billing_address_country": "USA",
"rating": "",
"phone_office": "(065) 489-6104",
"phone_alternate": "",
"website": "www.qahr.edu",
"ownership": "",
"employees": "",
"ticker_symbol": "",
"shipping_address_street": "67321 West Siam St.",
"shipping_address_street_2": "",
"shipping_address_street_3": "",
"shipping_address_street_4": "",
"shipping_address_city": "Ohio",
"shipping_address_state": "CA",
"shipping_address_postalcode": "25159",
"shipping_address_country": "USA",
"parent_id": "",
"sic_code": "",
"duns_num": "",
"parent_name": "",
"member_of": {
  "name": "",
  "id": "",
  "_acl": {
    "fields": [],
    "_hash": "654d337e0e912edaa00dbb0fb3dc3c17"
  }
},
"campaign_id": "",
"campaign_name": "",
"campaign_accounts": {
  "name": "",
  "id": "",
  "_acl": {
    "fields": [],
    "_hash": "654d337e0e912edaa00dbb0fb3dc3c17"
  }
},
```

---

```
"following": true,
"my_favorite": true,
"tag": [],
"assigned_user_id": "seed_sarah_id",
"assigned_user_name": "Sarah Smith",
"assigned_user_link": {
  "full_name": "Sarah Smith",
  "id": "seed_sarah_id",
  "_acl": {
    "fields": [],
    "_hash": "654d337e0e912edaa00dbb0fb3dc3c17"
  }
},
"team_count": "",
"team_count_link": {
  "team_count": "",
  "id": "West",
  "_acl": {
    "fields": [],
    "_hash": "654d337e0e912edaa00dbb0fb3dc3c17"
  }
},
"team_name": [{
  "id": "East",
  "name": "East",
  "name_2": "",
  "primary": false
}, {
  "id": 1,
  "name": "Global",
  "name_2": "",
  "primary": false
}, {
  "id": "West",
  "name": "West",
  "name_2": "",
  "primary": true
}],
"email": [{
  "email_address": "hr.support.kid@example.info",
  "invalid_email": false,
  "opt_out": false,
  "primary_address": true,
  "reply_to_address": false
}, {
  "email_address": "info.support.the@example.com",
```

---

```
        "invalid_email": false,
        "opt_out": false,
        "primary_address": false,
        "reply_to_address": false
    }],
    "email1": "hr.support.kid@example.info",
    "email2": "info.support.the@example.com",
    "invalid_email": false,
    "email_opt_out": false,
    "email_addresses_non_primary": "",
    "_acl": {
        "fields": {}
    },
    "_module": "Accounts"
}
```

## Download

You can download the full API example [here](#).

**Last Modified:** 2021-02-17 02:44:13

# How to Manipulate File Attachments

## Overview

A PHP example demonstrating how to attach a file to a record using the v11 `<module>/:record/file/:field` REST POST API endpoint, then retrieve it with the GET endpoint.

## Manipulating File Attachments

### Authenticating

First, you will need to authenticate to the Sugar API. An example is shown below:

```
<?php
```

---

```
$instance_url = "http://{site_url}/rest/v11";
$username = "admin";
$password = "password";

//Login - POST /oauth2/token
$auth_url = $instance_url . "/oauth2/token";

$oauth2_token_arguments = array(
    "grant_type" => "password",
    //client id - default is sugar.
    //It is recommended to create your own in Admin > OAuth Keys
    "client_id" => "sugar",
    "client_secret" => "",
    "username" => $username,
    "password" => $password,
    //platform type - default is base.
    //It is recommend to change the platform to a custom name such as
"custom_api" to avoid authentication conflicts.
    "platform" => "custom_api"
);

$auth_request = curl_init($auth_url);
curl_setopt($auth_request, CURLOPT_HTTP_VERSION, CURL_HTTP_VERSION_1_0
);
curl_setopt($auth_request, CURLOPT_HEADER, false);
curl_setopt($auth_request, CURLOPT_SSL_VERIFYPEER, 0);
curl_setopt($auth_request, CURLOPT_RETURNTRANSFER, 1);
curl_setopt($auth_request, CURLOPT_FOLLOWLOCATION, 0);
curl_setopt($auth_request, CURLOPT_HTTPHEADER, array(
    "Content-Type: application/json"
));

//convert arguments to json
$json_arguments = json_encode($oauth2_token_arguments);
curl_setopt($auth_request, CURLOPT_POSTFIELDS, $json_arguments);

//execute request
$oauth2_token_response = curl_exec($auth_request);

//decode oauth2 response to get token
$oauth2_token_response_obj = json_decode($oauth2_token_response);
$oauth_token = $oauth2_token_response_obj->access_token;
```

More information on authenticating can be found in the [How to Authenticate and Log Out](#) example and [/oauth2/logout](#) endpoint documentation.

---

## Submitting a File Attachment

Next, we can create a Note record using the /<module endpoint, and then submit a File to the Note record using the /<module>/:record/file/:field endpoint.

```
//Create Note - POST /
$url = $instance_url . "/Notes";
//Set up the Record details
$record = array(
    'name' => 'Test Note'
);

$curl_request = curl_init($url);
curl_setopt($curl_request, CURLOPT_POST, 1);
curl_setopt($curl_request, CURLOPT_HTTP_VERSION, CURL_HTTP_VERSION_1_0
);
curl_setopt($curl_request, CURLOPT_HEADER, false);
curl_setopt($curl_request, CURLOPT_SSL_VERIFYPEER, 0);
curl_setopt($curl_request, CURLOPT_RETURNTRANSFER, 1);
curl_setopt($curl_request, CURLOPT_FOLLOWLOCATION, 0);
curl_setopt($curl_request, CURLOPT_HTTPHEADER, array(
    "Content-Type: application/json",
    "oauth-token: {$oauth_token}"
));

//convert arguments to json
$json_arguments = json_encode($record);
curl_setopt($curl_request, CURLOPT_POSTFIELDS, $json_arguments);
//execute request
$curl_response = curl_exec($curl_request);
//decode json
$noteRecord = json_decode($curl_response);

//display the created record
echo "Created Record: ". $noteRecord->id;

curl_close($curl_request);

//Add An Attachment to the Note
$url = $instance_url . "/Notes/{$noteRecord->id}/file/filename";

$file_arguments = array(
    "format" => "sugar-html-json",
    "delete_if_fails" => true,
    "oauth_token" => $oauth_token,
);
```

---

```

if ((version_compare(PHP_VERSION, '5.5') >= 0)) {
    $file_arguments['filename'] = new CURLFile($path);
} else {
    $file_arguments['filename'] = '@'.$path;
}

$curl_request = curl_init($url);
curl_setopt($curl_request, CURLOPT_POST, 1);
curl_setopt($curl_request, CURLOPT_HTTP_VERSION, CURL_HTTP_VERSION_1_0);
curl_setopt($curl_request, CURLOPT_HEADER, false);
curl_setopt($curl_request, CURLOPT_SSL_VERIFYPEER, 0);
curl_setopt($curl_request, CURLOPT_RETURNTRANSFER, 1);
curl_setopt($curl_request, CURLOPT_FOLLOWLOCATION, 0);
//Do NOT set Content Type Header to JSON
curl_setopt($curl_request, CURLOPT_HTTPHEADER, array(
    "oauth-token: {$oauth_token}"
));

curl_setopt($curl_request, CURLOPT_POSTFIELDS, $file_arguments);
//execute request
$curl_response = curl_exec($curl_request);
//decode json
$noteRecord = json_decode($curl_response);
//print Note with attachment details
print_r($noteRecord);

curl_close($curl_request);

```

**Note:** As of PHP 5.6, the '@' upload modifier is disabled for security reasons by the CURLOPT\_SAFE\_UPLOAD option. We recommend using CURLFILE if using PHP >= 5.5, If you would prefer to use the upload modifier, you can set the CURLOPT\_SAFE\_UPLOAD option to false.

```
curl_setopt($ch, CURLOPT_SAFE_UPLOAD, false);
```

## Request

```

//Raw Post - not json encoded
Array
(
    [format] => sugar-html-json
    [delete_if_fails] => 1
    [oauth_token] => 09eac950-c99e-4786-8b10-a3670f38fb3f

```



---

```
[filename] => CURLFile Object
(
    [name] => /Library/WebServer/Documents/file_attachment_man
ipulation/testfile.txt
    [mime] =>
    [postname] =>
)
)
```

## Response

```
{
  "filename":{
    "content-type":"text/plain",
    "content-length":13,
    "name":"upload.txt",
    "uri":"http://<site url>/rest/v1/Notes/7b49aebd-8734-9773-
8ef1-53553fa369c7/file/filename"
  },
  "record":{
    "my_favorite":false,
    "following":true,
    "id":"7b49aebd-8734-9773-8ef1-53553fa369c7",
    "name":"My Note",
    "date_modified":"2014-04-21T11:53:53-04:00",
    "modified_user_id":"1",
    "modified_by_name":"admin",
    "created_by":"1",
    "created_by_name":"Administrator",
    "doc_owner":"",
    "user_favorites":[

    ],
    "description":"",
    "deleted":false,
    "assigned_user_id":"",
    "assigned_user_name":"",
    "team_count":"",
    "team_name":[
      {
        "id":1,
        "name":"Global",
        "name_2":"",
        "primary":true
      }
    ]
  }
}
```

---

```

    ],
    "file_mime_type": "text/plain",
    "file_url": "",
    "filename": "upload.txt",
    "parent_type": "",
    "parent_id": "",
    "contact_id": "",
    "portal_flag": false,
    "embed_flag": false,
    "parent_name": "",
    "contact_name": "",
    "contact_phone": "",
    "contact_email": "",
    "account_id": "",
    "opportunity_id": "",
    "acase_id": "",
    "lead_id": "",
    "product_id": "",
    "quote_id": "",
    "_acl": {
        "fields": {

        }
    },
    "_module": "Notes"
}
}
}

```

## Getting a File Attachment

Next, we can retrieve the file attachment stored in Sugar by utilizing the `/<module>/:record/file/:fieldGET` endpoint. The following code example, works when being accessed via a web browser, as it receives the response from Sugar, and sets the Headers received from Sugar on itself, so that the browser knows to download a file.

```

//Get An Attachment on a Note
$url = $instance_url . "/Notes/{$noteRecord->id}/file/filename";

$curl_request = curl_init($url);
curl_setopt($curl_request, CURLOPT_HTTP_VERSION, CURL_HTTP_VERSION_1_0);
//Return Headers
curl_setopt($curl_request, CURLOPT_HEADER, true);
curl_setopt($curl_request, CURLOPT_SSL_VERIFYPEER, 0);

```

---

```
curl_setopt($curl_request, CURLOPT_RETURNTRANSFER, 1);
curl_setopt($curl_request, CURLOPT_FOLLOWLOCATION, 0);
//DO NOT set Content Type Header to JSON
curl_setopt($curl_request, CURLOPT_HTTPHEADER, array(
    "oauth-token: {$oauth_token}"
));

//execute request
$curl_response = curl_exec($curl_request);

//Get Return Headers
$header_size = curl_getinfo($curl_request, CURLINFO_HEADER_SIZE);
$headers = substr($curl_response, 0, $header_size);

//Outputting the file contents
echo 'File saved to download.txt';
$file = substr($curl_response, $header_size);
file_put_contents('download.txt', $file);

curl_close($curl_request);
```

## Request

```
http://{site_url}/rest/v11/Notes/bd490e66-2ea7-9349-19cf-535569400cca/
file/filename
```

**Note:** GET request arguments are passed in the form of a query string.

## Response

HTTP/1.1 200 OK

Date: Wed, 12 Mar 2014 15:15:03 GMT

Server: Apache/2.2.22 (Unix) PHP/5.3.14 mod\_ssl/2.2.22 OpenSSL/0.9.8o

X-Powered-By: PHP/5.3.14 ZendServer/5.0

Set-Cookie: ZDEDebuggerPresent=php,php3; path=/

Expires:

Cache-Control: max-age=0, private

---

Pragma:

Content-Disposition: attachment; filename="upload.txt"

X-Content-Type-Options: nosniff

ETag: d41d8cd98f00b204e9800998ecf8427e

Content-Length: 16

Connection: close

Content-Type: application/octet-stream

This is the file contents.

## Download

You can download the full API example [here](#).

**Last Modified:** 2021-02-17 02:44:13

## How to Fetch Related Records

### Overview

A PHP example demonstrating how to fetch related records using the v11 /<module>/:record/link/:link REST GET endpoints.

### Fetching Related Records

#### Authenticating

First, you will need to authenticate to the Sugar API. An example is shown below:

```
<?php
```

---

```
$instance_url = "http://{site_url}/rest/v11";
$username = "admin";
$password = "password";

//Login - POST /oauth2/token
$auth_url = $instance_url . "/oauth2/token";

$oauth2_token_arguments = array(
    "grant_type" => "password",
    //client id - default is sugar.
    //It is recommended to create your own in Admin > OAuth Keys
    "client_id" => "sugar",
    "client_secret" => "",
    "username" => $username,
    "password" => $password,
    //platform type - default is base.
    //It is recommend to change the platform to a custom name such as
    "custom_api" to avoid authentication conflicts.
    "platform" => "custom_api"
);

$auth_request = curl_init($auth_url);
curl_setopt($auth_request, CURLOPT_HTTP_VERSION, CURL_HTTP_VERSION_1_0
);
curl_setopt($auth_request, CURLOPT_HEADER, false);
curl_setopt($auth_request, CURLOPT_SSL_VERIFYPEER, 0);
curl_setopt($auth_request, CURLOPT_RETURNTRANSFER, 1);
curl_setopt($auth_request, CURLOPT_FOLLOWLOCATION, 0);
curl_setopt($auth_request, CURLOPT_HTTPHEADER, array(
    "Content-Type: application/json"
));

//convert arguments to json
$json_arguments = json_encode($oauth2_token_arguments);
curl_setopt($auth_request, CURLOPT_POSTFIELDS, $json_arguments);

//execute request
$oauth2_token_response = curl_exec($auth_request);

//decode oauth2 response to get token
$oauth2_token_response_obj = json_decode($oauth2_token_response);
$oauth_token = $oauth2_token_response_obj->access_token;
```

More information on authenticating can be found in the [How to Authenticate and Log Out](#) example and [/oauth2/logout](#) endpoint documentation.

---

## Fetching Related Records

Next, we can fetch the related records we want to return using the `<module>/:record/link/:link` endpoint with a GET request where

| Element                     | Meaning                               |
|-----------------------------|---------------------------------------|
| <code>&lt;module&gt;</code> | The parent module name                |
| <code>:record</code>        | The parent records ID                 |
| <code>link</code>           | the actual word "link"                |
| <code>:link</code>          | The name of the relationship to fetch |

In this example, we will fetch the related Contacts for an Account

```
//Identify records to fetch - POST <module>/:record/link/:link

$fetch_url = $instance_url . "/Accounts/d8f05e67-dee3-553d-0040-5342e88f2fd1/link/contacts";

$fetch_request = curl_init($fetch_url);
curl_setopt($fetch_request, CURLOPT_HTTP_VERSION, CURL_HTTP_VERSION_1_0);
curl_setopt($fetch_request, CURLOPT_HEADER, false);
curl_setopt($fetch_request, CURLOPT_SSL_VERIFYPEER, 0);
curl_setopt($fetch_request, CURLOPT_RETURNTRANSFER, 1);
curl_setopt($fetch_request, CURLOPT_FOLLOWLOCATION, 0);
curl_setopt($fetch_request, CURLOPT_HTTPHEADER, array(
    "Content-Type: application/json",
    "oauth-token: {$oauth_token}"
));

//execute request
$fetch_response = curl_exec($fetch_request);

//decode json
$fetch_response_obj = json_decode($fetch_response);
```

## Request

```
http://{site_url}/rest/v11/Accounts/d8f05e67-dee3-553d-0040-5342e88f2fd1/link/contacts
```

---

## Response

The data received from the server is shown below:

```
{
  "next_offset":-1,
  "records":[
    {
      "my_favorite":false,
      "following":false,
      "id":"819f4149-b007-a6da-a5fa-56fedbf2de77",
      "name":"Florine Marcus",
      "date_entered":"2016-04-01T15:34:00-05:00",
      "date_modified":"2016-04-01T15:34:00-05:00",
      "modified_user_id":"1",
      "modified_by_name":"Administrator",
      "created_by":"1",
      "created_by_name":"Administrator",
      "doc_owner":"",
      "user_favorites":"",
      "description":"",
      "deleted":false,
      "assigned_user_id":"seed_will_id",
      "assigned_user_name":"Will Westin",
      "team_count":"",
      "team_name":[
        {
          "id":"East",
          "name":"East",
          "name_2":"",
          "primary":true
        },
        {
          "id":"West",
          "name":"West",
          "name_2":"",
          "primary":false
        }
      ],
      "email":[
        {
          "email_address":"support27@example.tv",
          "primary_address":true,
          "reply_to_address":false,
          "invalid_email":false,
          "opt_out":false
        }
      ]
    }
  ]
}
```

---

```
    },
    {
      "email_address": "support.support.kid@example.net",
      "primary_address": false,
      "reply_to_address": false,
      "invalid_email": false,
      "opt_out": true
    }
  ],
  "email1": "support27@example.tv",
  "email2": "",
  "invalid_email": false,
  "email_opt_out": false,
  "email_addresses_non_primary": "",
  "salutation": "",
  "first_name": "Florine",
  "last_name": "Marcus",
  "full_name": "Florine Marcus",
  "title": "President",
  "facebook": "",
  "twitter": "",
  "googleplus": "",
  "department": "",
  "do_not_call": false,
  "phone_home": "(746) 162-2314",
  "phone_mobile": "(941) 088-2874",
  "phone_work": "(827) 541-9614",
  "phone_other": "",
  "phone_fax": "",
  "primary_address_street": "1715 Scott Dr",
  "primary_address_street_2": "",
  "primary_address_street_3": "",
  "primary_address_city": "Alabama",
  "primary_address_state": "NY",
  "primary_address_postalcode": "70187",
  "primary_address_country": "USA",
  "alt_address_street": "",
  "alt_address_street_2": "",
  "alt_address_street_3": "",
  "alt_address_city": "",
  "alt_address_state": "",
  "alt_address_postalcode": "",
  "alt_address_country": "",
  "assistant": "",
  "assistant_phone": "",
  "picture": "",
```



---

```
"email_and_name1": "",
"lead_source": "Employee",
"account_name": "MTM Investment Bank F S B",
"account_id": "e8c641ca-1b8c-74c1-d08d-56fedbdd3187",
"dnb_principal_id": "",
"opportunity_role_fields": "",
"opportunity_role_id": "",
"opportunity_role": "",
"reports_to_id": "",
"report_to_name": "",
"birthdate": "",
"portal_name": "FlorineMarcus119",
"portal_active": true,
"portal_password": true,
"portal_password1": null,
"portal_app": "",
"preferred_language": "en_us",
"campaign_id": "",
"campaign_name": "",
"c_accept_status_fields": "",
"m_accept_status_fields": "",
"accept_status_id": "",
"accept_status_name": "",
"accept_status_calls": "",
"accept_status_meetings": "",
"sync_contact": false,
"mkto_sync": false,
"mkto_id": null,
"mkto_lead_score": null,
"_acl": {
  "fields": {
    }
  },
"_module": "Contacts"
},
{
  "my_favorite": false,
  "following": false,
  "id": "527ccl1a9-7984-91fe-4148-56fedbc356aa",
  "name": "Shaneka Aceto",
  "date_entered": "2016-04-01T15:34:00-05:00",
  "date_modified": "2016-04-01T15:34:00-05:00",
  "modified_user_id": "1",
  "modified_by_name": "Administrator",
  "created_by": "1",
```

---

```
"created_by_name": "Administrator",
"doc_owner": "",
"user_favorites": "",
"description": "",
"deleted": false,
"assigned_user_id": "seed_will_id",
"assigned_user_name": "Will Westin",
"team_count": "",
"team_name": [
  {
    "id": "East",
    "name": "East",
    "name_2": "",
    "primary": true
  },
  {
    "id": "West",
    "name": "West",
    "name_2": "",
    "primary": false
  }
],
"email": [
  {
    "email_address": "support17@example.cn",
    "primary_address": true,
    "reply_to_address": false,
    "invalid_email": false,
    "opt_out": false
  },
  {
    "email_address": "section.sugar.the@example.tv",
    "primary_address": false,
    "reply_to_address": false,
    "invalid_email": false,
    "opt_out": true
  }
],
"email1": "support17@example.cn",
"email2": "",
"invalid_email": false,
"email_opt_out": false,
"email_addresses_non_primary": "",
"salutation": "",
"first_name": "Shaneka",
"last_name": "Aceto",
```

---

```
"full_name": "Shaneka Aceto",
"title": "IT Developer",
"facebook": "",
"twitter": "",
"googleplus": "",
"department": "",
"do_not_call": false,
"phone_home": "(502) 528-5151",
"phone_mobile": "(816) 719-3739",
"phone_work": "(994) 769-5855",
"phone_other": "",
"phone_fax": "",
"primary_address_street": "123 Anywhere Street",
"primary_address_street_2": "",
"primary_address_street_3": "",
"primary_address_city": "Denver",
"primary_address_state": "NY",
"primary_address_postalcode": "15128",
"primary_address_country": "USA",
"alt_address_street": "",
"alt_address_street_2": "",
"alt_address_street_3": "",
"alt_address_city": "",
"alt_address_state": "",
"alt_address_postalcode": "",
"alt_address_country": "",
"assistant": "",
"assistant_phone": "",
"picture": "",
"email_and_name1": "",
"lead_source": "Email",
"account_name": "MTM Investment Bank F S B",
"account_id": "e8c641ca-1b8c-74c1-d08d-56fedbdd3187",
"dnb_principal_id": "",
"opportunity_role_fields": "",
"opportunity_role_id": "",
"opportunity_role": "",
"reports_to_id": "",
"report_to_name": "",
"birthdate": "",
"portal_name": "ShanekaAceto151",
"portal_active": true,
"portal_password": true,
"portal_password1": null,
"portal_app": "",
"preferred_language": "en_us",
```

---

```
"campaign_id":"","  
"campaign_name":"","  
"c_accept_status_fields":"","  
"m_accept_status_fields":"","  
"accept_status_id":"","  
"accept_status_name":"","  
"accept_status_calls":"","  
"accept_status_meetings":"","  
"sync_contact":false,  
"mkto_sync":false,  
"mkto_id":null,  
"mkto_lead_score":null,  
"_acl":{  
  "fields":{  
  
  }  
},  
"_module":"Contacts"  
},  
{  
  "my_favorite":false,  
  "following":false,  
  "id":"42d703ed-f834-f87c-967d-56fedb044051",  
  "name":"Johnnie Pina",  
  "date_entered":"2016-04-01T15:34:00-05:00",  
  "date_modified":"2016-04-01T15:34:00-05:00",  
  "modified_user_id":"1",  
  "modified_by_name":"Administrator",  
  "created_by":"1",  
  "created_by_name":"Administrator",  
  "doc_owner":"","  
  "user_favorites":"","  
  "description":"","  
  "deleted":false,  
  "assigned_user_id":"seed_will_id",  
  "assigned_user_name":"Will Westin",  
  "team_count":"","  
  "team_name":[  
    {  
      "id":"East",  
      "name":"East",  
      "name_2":"","  
      "primary":true  
    },  
    {  
      "id":"West",
```

---

```
        "name": "West",
        "name_2": "",
        "primary": false
    }
],
"email": [
    {
        "email_address": "sugar.support.hr@example.co.uk",
        "primary_address": true,
        "reply_to_address": false,
        "invalid_email": false,
        "opt_out": false
    },
    {
        "email_address": "support.im@example.tw",
        "primary_address": false,
        "reply_to_address": false,
        "invalid_email": false,
        "opt_out": true
    }
],
"email1": "sugar.support.hr@example.co.uk",
"email2": "",
"invalid_email": false,
"email_opt_out": false,
"email_addresses_non_primary": "",
"salutation": "",
"first_name": "Johnnie",
"last_name": "Pina",
"full_name": "Johnnie Pina",
"title": "VP Operations",
"facebook": "",
"twitter": "",
"googleplus": "",
"department": "",
"do_not_call": false,
"phone_home": "(159) 335-1423",
"phone_mobile": "(580) 140-4050",
"phone_work": "(418) 792-9611",
"phone_other": "",
"phone_fax": "",
"primary_address_street": "345 Sugar Blvd.",
"primary_address_street_2": "",
"primary_address_street_3": "",
"primary_address_city": "Denver",
"primary_address_state": "NY",
```

---

```
"primary_address_postalcode":"70648",
"primary_address_country":"USA",
"alt_address_street":"","
"alt_address_street_2":"","
"alt_address_street_3":"","
"alt_address_city":"","
"alt_address_state":"","
"alt_address_postalcode":"","
"alt_address_country":"","
"assistant":"","
"assistant_phone":"","
"picture":"","
"email_and_name1":"","
"lead_source":"Direct Mail",
"account_name":"MTM Investment Bank F S B",
"account_id":"e8c641ca-1b8c-74c1-d08d-56fedbdd3187",
"dnb_principal_id":"","
"opportunity_role_fields":"","
"opportunity_role_id":"","
"opportunity_role":"","
"reports_to_id":"","
"report_to_name":"","
"birthdate":"","
"portal_name":"JohnniePinal94",
"portal_active":true,
"portal_password":true,
"portal_password1":null,
"portal_app":"","
"preferred_language":"en_us",
"campaign_id":"","
"campaign_name":"","
"c_accept_status_fields":"","
"m_accept_status_fields":"","
"accept_status_id":"","
"accept_status_name":"","
"accept_status_calls":"","
"accept_status_meetings":"","
"sync_contact":false,
"mkto_sync":false,
"mkto_id":null,
"mkto_lead_score":null,
"_acl":{
  "fields":{
    }
  },
```

---

```
        "_module": "Contacts"
    }
]
}
```

## Download

You can download the full API example [here](#)

**Last Modified:** 2021-02-17 02:44:13

## How to Manipulate Records (CRUD)

### Overview

A PHP example demonstrating how to use the CRUD (Create, Read, Update, Delete) endpoints in the REST v11 API.

### CRUD Operations

#### Authenticating

First, you will need to authenticate to the Sugar API. An example is shown below:

```
<?php

$instance_url = "http://{site_url}/rest/v11";
$username = "admin";
$password = "password";

//Login - POST /oauth2/token
$auth_url = $instance_url . "/oauth2/token";

$oauth2_token_arguments = array(
    "grant_type" => "password",
    //client id - default is sugar.
    //It is recommended to create your own in Admin > OAuth Keys
    "client_id" => "sugar",
```

---

```

    "client_secret" => "",
    "username" => $username,
    "password" => $password,
    //platform type - default is base.
    //It is recommend to change the platform to a custom name such as
    "custom_api" to avoid authentication conflicts.
    "platform" => "custom_api"
);

$auth_request = curl_init($auth_url);
curl_setopt($auth_request, CURLOPT_HTTP_VERSION, CURL_HTTP_VERSION_1_0
);
curl_setopt($auth_request, CURLOPT_HEADER, false);
curl_setopt($auth_request, CURLOPT_SSL_VERIFYPEER, 0);
curl_setopt($auth_request, CURLOPT_RETURNTRANSFER, 1);
curl_setopt($auth_request, CURLOPT_FOLLOWLOCATION, 0);
curl_setopt($auth_request, CURLOPT_HTTPHEADER, array(
    "Content-Type: application/json"
));

//convert arguments to json
$json_arguments = json_encode($oauth2_token_arguments);
curl_setopt($auth_request, CURLOPT_POSTFIELDS, $json_arguments);

//execute request
$oauth2_token_response = curl_exec($auth_request);

//decode oauth2 response to get token
$oauth2_token_response_obj = json_decode($oauth2_token_response);
$oauth_token = $oauth2_token_response_obj->access_token;

```

More information on authenticating can be found in the [How to Authenticate and Log Out](#) example and [/oauth2/logout](#) endpoint documentation.

## Creating a Record

Next, we need to submit the record to the Sugar instance using the `/<module>` endpoint. In this example we are going to create an Account record with a Name of 'Test Record' and an email of 'test@sugar.com'.

```

//Create Records - POST /<module>
$url = $instance_url . "/Accounts";
//Set up the Record details
$record = array(
    'name' => 'Test Record',

```



---

```
'email' => array(
    array(
        'email_address' => 'test@sugar.com',
        'primary_address' => true
    )
),
);

$curl_request = curl_init($url);
curl_setopt($curl_request, CURLOPT_HTTP_VERSION, CURL_HTTP_VERSION_1_0
);
curl_setopt($curl_request, CURLOPT_HEADER, false);
curl_setopt($curl_request, CURLOPT_SSL_VERIFYPEER, 0);
curl_setopt($curl_request, CURLOPT_RETURNTRANSFER, 1);
curl_setopt($curl_request, CURLOPT_FOLLOWLOCATION, 0);
curl_setopt($curl_request, CURLOPT_HTTPHEADER, array(
    "Content-Type: application/json",
    "oauth-token: {$oauth_token}"
));

//convert arguments to json
$json_arguments = json_encode($record);
curl_setopt($curl_request, CURLOPT_POSTFIELDS, $json_arguments);
//execute request
$curl_response = curl_exec($curl_request);
//decode json
$createdRecord = json_decode($curl_response);

//display the created record
print_r($createdRecord);
curl_close($curl_request);
```

More information on this API endpoint can be found in the [/<module> - POST](#) documentation.

## Request Payload

The data sent to the server is shown below:

```
{
    "name": "Test Record",
    "email": [{ "email_address": "test@sugar.com", "primary_address":
true }]
}
```

---

## Response

The data received from the server is shown below:

```
{
  "id": "ae78a068-7a0c-11e8-8b9e-6a0001bcacb0",
  "name": "Test Record",
  "date_entered": "2018-06-27T15:19:11+02:00",
  "date_modified": "2018-06-27T15:19:11+02:00",
  "modified_user_id": "1",
  "modified_by_name": "Administrator",
  "modified_user_link": {
    "full_name": "Administrator",
    "id": "1",
    "_acl": {
      "fields": {
        "pwd_last_changed": { "write": "no", "create": "no" },
        "last_login": { "write": "no", "create": "no" }
      },
      "delete": "no",
      "_hash": "08b99a97c2e8d792f7a44d8882b5af6d"
    }
  },
  "created_by": "1",
  "created_by_name": "Administrator",
  "created_by_link": {
    "full_name": "Administrator",
    "id": "1",
    "_acl": {
      "fields": {
        "pwd_last_changed": { "write": "no", "create": "no" },
        "last_login": { "write": "no", "create": "no" }
      },
      "delete": "no",
      "_hash": "08b99a97c2e8d792f7a44d8882b5af6d"
    }
  },
  "description": "",
  "deleted": false,
  "facebook": "",
  "twitter": "",
  "googleplus": "",
  "account_type": "",
  "industry": "",
  "annual_revenue": "",
  "phone_fax": "",
```

---

```
"billing_address_street": "",
"billing_address_street_2": "",
"billing_address_street_3": "",
"billing_address_street_4": "",
"billing_address_city": "",
"billing_address_state": "",
"billing_address_postalcode": "",
"billing_address_country": "",
"rating": "",
"phone_office": "",
"phone_alternate": "",
"website": "",
"ownership": "",
"employees": "",
"ticker_symbol": "",
"shipping_address_street": "",
"shipping_address_street_2": "",
"shipping_address_street_3": "",
"shipping_address_street_4": "",
"shipping_address_city": "",
"shipping_address_state": "",
"shipping_address_postalcode": "",
"shipping_address_country": "",
"parent_id": "",
"sic_code": "",
"duns_num": "",
"parent_name": "",
"member_of": {
  "name": "",
  "id": "",
  "_acl": { "fields": [], "_hash": "654d337e0e912edaa00dbb0fb3dc
3c17" }
},
"campaign_id": "",
"campaign_name": "",
"campaign_accounts": {
  "name": "",
  "id": "",
  "_acl": { "fields": [], "_hash": "654d337e0e912edaa00dbb0fb3dc
3c17" }
},
"following": true,
"my_favorite": false,
"tag": [],
"locked_fields": [],
"assigned_user_id": "",
```

---

```
"assigned_user_name": "",
"assigned_user_link": {
  "full_name": "",
  "id": "",
  "_acl": { "fields": [], "_hash": "654d337e0e912edaa00dbb0fb3dc
3c17" }
},
"team_count": "",
"team_count_link": {
  "team_count": "",
  "id": "1",
  "_acl": { "fields": [], "_hash": "654d337e0e912edaa00dbb0fb3dc
3c17" }
},
"team_name": [
  {
    "id": "1",
    "name": "Global",
    "name_2": "",
    "primary": true,
    "selected": false
  }
],
"email": [
  {
    "email_address": "test@sugar.com",
    "invalid_email": false,
    "opt_out": false,
    "email_address_id": "85125194-7a0a-11e8-9c17-6a0001bcacb0"
  },
  {
    "primary_address": true,
    "reply_to_address": false
  }
],
"email1": "test@sugar.com",
"email2": "",
"invalid_email": false,
"email_opt_out": false,
"email_addresses_non_primary": "",
"test_c": "",
"dri_workflow_template_id": "",
"dri_workflow_template_name": "",
"dri_workflow_template_link": {
  "name": "",
  "id": "",
  "_acl": { "fields": [], "_hash": "654d337e0e912edaa00dbb0fb3dc
```

---

```
3c17" }
    },
    "_acl": { "fields": {} },
    "_module": "Accounts"
}
```

## Getting a Record

Next, we can get the created record from the Sugar instance using the `/<module>/:record` endpoint. In this example, we are going to get an Account record by its ID, but only request the Name, Email, and Industry fields.

```
$id = $createdRecord->id;

//Get Record - GET //:record
$url = $instance_url . "/Accounts/$id";

//Setup request to only return some fields on module
$data = array(
    'fields' => 'name,email,industry'
);

//Add data to the URL
$url = $url."?".http_build_query($data);

$curl_request = curl_init($url);
curl_setopt($curl_request, CURLOPT_HTTP_VERSION, CURL_HTTP_VERSION_1_0);
curl_setopt($curl_request, CURLOPT_HEADER, false);
curl_setopt($curl_request, CURLOPT_SSL_VERIFYPEER, 0);
curl_setopt($curl_request, CURLOPT_RETURNTRANSFER, 1);
curl_setopt($curl_request, CURLOPT_FOLLOWLOCATION, 0);
curl_setopt($curl_request, CURLOPT_HTTPHEADER, array(
    "Content-Type: application/json",
    "oauth-token: {$oauth_token}"
));

//execute request
$curl_response = curl_exec($curl_request);
//decode json
$record = json_decode($curl_response);

//display the created record
print_r($record);
curl_close($curl_request);
```

---

## Updating a Record

Next, we can update the record in the Sugar instance using the `/<module>/:record` endpoint, and the PUT Http method. In this example, we are going to update the Account record and change it's name to "Updated Test Record".

```
$id = $record->id;
//Update Record - PUT /<module>/:record
$url = $instance_url . "/Accounts/$id";
//Set up the Record details
$record->name = 'Updated Test Record';

$curl_request = curl_init($url);
curl_setopt($curl_request, CURLOPT_CUSTOMREQUEST, "PUT");
curl_setopt($curl_request, CURLOPT_HTTP_VERSION, CURL_HTTP_VERSION_1_0
);
curl_setopt($curl_request, CURLOPT_HEADER, false);
curl_setopt($curl_request, CURLOPT_SSL_VERIFYPEER, 0);
curl_setopt($curl_request, CURLOPT_RETURNTRANSFER, 1);
curl_setopt($curl_request, CURLOPT_FOLLOWLOCATION, 0);
curl_setopt($curl_request, CURLOPT_HTTPHEADER, array(
    "Content-Type: application/json",
    "oauth-token: {$oauth_token}"
));

//convert arguments to json
$json_arguments = json_encode($record);
curl_setopt($curl_request, CURLOPT_POSTFIELDS, $json_arguments);
//execute request
$curl_response = curl_exec($curl_request);
//decode json
$updatedRecord = json_decode($curl_response);

//display the created record
echo "Updated Record Name:". $updatedRecord->name;
curl_close($curl_request);
```

More information on this API endpoint can be found in the [/<module>/:record - PUT](#) documentation.

## Request Payload

The URL sent to the server is shown below:

---

```
{"name": "Updated Test Record"}
```

## Response

The data received from the server is shown below:

```
{
  "id": "ae78a068-7a0c-11e8-8b9e-6a0001bcacb0",
  "name": "Updated Test Record",
  "date_entered": "2018-06-27T15:19:11+02:00",
  "date_modified": "2018-06-27T15:23:19+02:00",
  "modified_user_id": "1",
  "modified_by_name": "Administrator",
  "modified_user_link": {
    "full_name": "Administrator",
    "id": "1",
    "_acl": {
      "fields": {
        "pwd_last_changed": { "write": "no", "create": "no" },
        "last_login": { "write": "no", "create": "no" }
      },
      "delete": "no",
      "_hash": "08b99a97c2e8d792f7a44d8882b5af6d"
    }
  },
  "created_by": "1",
  "created_by_name": "Administrator",
  "created_by_link": {
    "full_name": "Administrator",
    "id": "1",
    "_acl": {
      "fields": {
        "pwd_last_changed": { "write": "no", "create": "no" },
        "last_login": { "write": "no", "create": "no" }
      },
      "delete": "no",
      "_hash": "08b99a97c2e8d792f7a44d8882b5af6d"
    }
  },
  "description": "",
  "deleted": false,
  "facebook": "",
  "twitter": "",
  "googleplus": "",
  "account_type": ""
}
```

---

```
"industry": "",
"annual_revenue": "",
"phone_fax": "",
"billing_address_street": "",
"billing_address_street_2": "",
"billing_address_street_3": "",
"billing_address_street_4": "",
"billing_address_city": "",
"billing_address_state": "",
"billing_address_postalcode": "",
"billing_address_country": "",
"rating": "",
"phone_office": "",
"phone_alternate": "",
"website": "",
"ownership": "",
"employees": "",
"ticker_symbol": "",
"shipping_address_street": "",
"shipping_address_street_2": "",
"shipping_address_street_3": "",
"shipping_address_street_4": "",
"shipping_address_city": "",
"shipping_address_state": "",
"shipping_address_postalcode": "",
"shipping_address_country": "",
"parent_id": "",
"sic_code": "",
"duns_num": "",
"parent_name": "",
"member_of": {
  "name": "",
  "id": "",
  "_acl": { "fields": [], "_hash": "654d337e0e912edaa00dbb0fb3dc
3c17" }
},
"campaign_id": "",
"campaign_name": "",
"campaign_accounts": {
  "name": "",
  "id": "",
  "_acl": { "fields": [], "_hash": "654d337e0e912edaa00dbb0fb3dc
3c17" }
},
"following": true,
"my_favorite": false,
```



---

```
"tag": [],
"locked_fields": [],
"assigned_user_id": "",
"assigned_user_name": "",
"assigned_user_link": {
  "full_name": "",
  "id": "",
  "_acl": { "fields": [], "_hash": "654d337e0e912edaa00dbb0fb3dc
3c17" }
},
"team_count": "",
"team_count_link": {
  "team_count": "",
  "id": "1",
  "_acl": { "fields": [], "_hash": "654d337e0e912edaa00dbb0fb3dc
3c17" }
},
"team_name": [
  {
    "id": "1",
    "name": "Global",
    "name_2": "",
    "primary": true,
    "selected": false
  }
],
"email": [
  {
    "email_address": "test@sugar.com",
    "invalid_email": false,
    "opt_out": false,
    "email_address_id": "85125194-7a0a-11e8-9c17-6a0001bcacb0"
  },
  {
    "primary_address": true,
    "reply_to_address": false
  }
],
"email1": "test@sugar.com",
"email2": "",
"invalid_email": false,
"email_opt_out": false,
"email_addresses_non_primary": "",
"test_c": "",
"dri_workflow_template_id": "",
"dri_workflow_template_name": "",
"dri_workflow_template_link": {
```

---

```
        "name": "",
        "id": "",
        "_acl": { "fields": [], "_hash": "654d337e0e912edaa00dbb0fb3dc
3c17" }
    },
    "_acl": { "fields": {} },
    "_module": "Accounts"
}
```

## Deleting a Record

Next, we can delete the record from the Sugar instance using the `/<module>/:record` endpoint, by using the DELETE Http Method.

```
$id = $updatedRecord->id;
//Delete Record - DELETE /<module>/:record
$url = $instance_url . "/Accounts/$id";

$curl_request = curl_init($url);
curl_setopt($curl_request, CURLOPT_CUSTOMREQUEST, "DELETE");
curl_setopt($curl_request, CURLOPT_HTTP_VERSION, CURL_HTTP_VERSION_1_0
);
curl_setopt($curl_request, CURLOPT_HEADER, false);
curl_setopt($curl_request, CURLOPT_SSL_VERIFYPEER, 0);
curl_setopt($curl_request, CURLOPT_RETURNTRANSFER, 1);
curl_setopt($curl_request, CURLOPT_FOLLOWLOCATION, 0);
curl_setopt($curl_request, CURLOPT_HTTPHEADER, array(
    "Content-Type: application/json",
    "oauth-token: {$oauth_token}"
));

//execute request
$curl_response = curl_exec($curl_request);
//decode json
$deletedRecord = json_decode($curl_response);

//display the created record
echo "Deleted Record:". $deletedRecord->id;
curl_close($curl_request);
```

More information on this API endpoint can be found in the [/<module>/:record - DELETE](#) documentation.

## Request Payload

---

The URL sent to the server is shown below:

No payload is sent for this request.

## Response

The data received from the server is shown below:

```
{"id": "ae78a068-7a0c-11e8-8b9e-6a0001bcacb0" }
```

## Download

You can download the full API example [here](#).

**Last Modified:** 2021-02-17 02:44:13

# How to Follow a Record

## Overview

A PHP example demonstrating how to follow a record using the v11 /<module>/record/subscribe REST POST endpoint.

## Following a Record

### Authenticating

First, you will need to authenticate to the Sugar API. An example is shown below:

```
<?php

$instance_url = "http://{site_url}/rest/v11";
$username = "admin";
$password = "password";

//Login - POST /oauth2/token
$auth_url = $instance_url . "/oauth2/token";
```

---

```

$oauth2_token_arguments = array(
    "grant_type" => "password",
    //client id - default is sugar.
    //It is recommended to create your own in Admin > OAuth Keys
    "client_id" => "sugar",
    "client_secret" => "",
    "username" => $username,
    "password" => $password,
    //platform type - default is base.
    //It is recommend to change the platform to a custom name such as
"custom_api" to avoid authentication conflicts.
    "platform" => "custom_api"
);

$auth_request = curl_init($auth_url);
curl_setopt($auth_request, CURLOPT_HTTP_VERSION, CURL_HTTP_VERSION_1_0
);
curl_setopt($auth_request, CURLOPT_HEADER, false);
curl_setopt($auth_request, CURLOPT_SSL_VERIFYPEER, 0);
curl_setopt($auth_request, CURLOPT_RETURNTRANSFER, 1);
curl_setopt($auth_request, CURLOPT_FOLLOWLOCATION, 0);
curl_setopt($auth_request, CURLOPT_HTTPHEADER, array(
    "Content-Type: application/json"
));

//convert arguments to json
$json_arguments = json_encode($oauth2_token_arguments);
curl_setopt($auth_request, CURLOPT_POSTFIELDS, $json_arguments);

//execute request
$oauth2_token_response = curl_exec($auth_request);

//decode oauth2 response to get token
$oauth2_token_response_obj = json_decode($oauth2_token_response);
$oauth_token = $oauth2_token_response_obj->access_token;

```

More information on authenticating can be found in the [How to Authenticate and Log Out](#) example and [/oauth2/logout](#) endpoint documentation.

## Following a Record

Next, we can follow a specific record using the `/<module>/:record/subscribe` endpoint.

---

```
//Subscribe to record - POST //:record/subscribe

$subscribe_url = $instance_url . "/Accounts/ae8b1783-404a-
fcb8-1e1e-56f1cc52cd1a/subscribe";

$subscribe_request = curl_init($subscribe_url);

curl_setopt($subscribe_request, CURLOPT_POST, 1);
curl_setopt($subscribe_request, CURLOPT_HTTP_VERSION, CURL_HTTP_VERSIO
N_1_0);
curl_setopt($subscribe_request, CURLOPT_HEADER, false);
curl_setopt($subscribe_request, CURLOPT_SSL_VERIFYPEER, 0);
curl_setopt($subscribe_request, CURLOPT_RETURNTRANSFER, 1);
curl_setopt($subscribe_request, CURLOPT_FOLLOWLOCATION, 0);
curl_setopt($subscribe_request, CURLOPT_HTTPHEADER, array(
    "Content-Type: application/json",
    "oauth-token: {$oauth_token}"
));

//execute request
$subscribe_response = curl_exec($subscribe_request);
```

More information on the subscribe API can be found in the [/<module>/:record/subscribe POST](#) documentation.

## Request Payload

The data sent to the server is shown below:

This endpoint does not accept any request arguments.

## Response

The data received from the server is shown below:

```
"58f96315-9e75-6562-42e9-5705917d2cdc"
```

## Download

You can download the full API example [here](#).

**Last Modified:** 2021-02-17 02:44:13

---

# How to Unfavorite a Record

## Overview

A PHP example demonstrating how to unfavorite a record using the v11 /<module>/:record/unfavorite REST PUT endpoint.

## Unfavoriting a Record

### Authenticating

First, you will need to authenticate to the Sugar API. An example is shown below:

```
<?php

$instance_url = "http://{site_url}/rest/v11";
$username = "admin";
$password = "password";

//Login - POST /oauth2/token
$auth_url = $instance_url . "/oauth2/token";

$oauth2_token_arguments = array(
    "grant_type" => "password",
    //client id - default is sugar.
    //It is recommended to create your own in Admin > OAuth Keys
    "client_id" => "sugar",
    "client_secret" => "",
    "username" => $username,
    "password" => $password,
    //platform type - default is base.
    //It is recommend to change the platform to a custom name such as
    "custom_api" to avoid authentication conflicts.
    "platform" => "custom_api"
);

$auth_request = curl_init($auth_url);
curl_setopt($auth_request, CURLOPT_HTTP_VERSION, CURL_HTTP_VERSION_1_0
);
curl_setopt($auth_request, CURLOPT_HEADER, false);
curl_setopt($auth_request, CURLOPT_SSL_VERIFYPEER, 0);
```

---

```
curl_setopt($auth_request, CURLOPT_RETURNTRANSFER, 1);
curl_setopt($auth_request, CURLOPT_FOLLOWLOCATION, 0);
curl_setopt($auth_request, CURLOPT_HTTPHEADER, array(
    "Content-Type: application/json"
));

//convert arguments to json
$json_arguments = json_encode($oauth2_token_arguments);
curl_setopt($auth_request, CURLOPT_POSTFIELDS, $json_arguments);

//execute request
$oauth2_token_response = curl_exec($auth_request);

//decode oauth2 response to get token
$oauth2_token_response_obj = json_decode($oauth2_token_response);
$oauth_token = $oauth2_token_response_obj->access_token;
```

More information on authenticating can be found in the [How to Authenticate and Log Out](#) example and [/oauth2/logout](#) endpoint documentation.

## Unfavoriting a Record

Next, we can unfavorit a specific record using the `/<module>/:record/unfavorite` endpoint.

```
//Unfavorite record - PUT //:record/unfavorite

$unfavorite_url = $instance_url . "/Accounts/ae8b1783-404a-
fcb8-1e1e-56f1cc52cd1a/unfavorite";

$unfavorite_request = curl_init($unfavorite_url);

curl_setopt($unfavorite_request, CURLOPT_CUSTOMREQUEST, "PUT");
curl_setopt($unfavorite_request, CURLOPT_HTTP_VERSION, CURL_HTTP_VERSI
ON_1_0);
curl_setopt($unfavorite_request, CURLOPT_HEADER, false);
curl_setopt($unfavorite_request, CURLOPT_SSL_VERIFYPEER, 0);
curl_setopt($unfavorite_request, CURLOPT_RETURNTRANSFER, 1);
curl_setopt($unfavorite_request, CURLOPT_FOLLOWLOCATION, 0);
curl_setopt($unfavorite_request, CURLOPT_HTTPHEADER, array(
    "Content-Type: application/json",
    "oauth-token: {$oauth_token}"
));

//execute request
```

---

```
$unfavorite_response = curl_exec($unfavorite_request);
```

More information on the unfavorite API can be found in the [/record/unfavorite PUT](#) documentation.

## Request Payload

The data sent to the server is shown below:

This endpoint does not accept any request arguments.

## Response

The data received from the server is shown below:

```
{
  "id": "ae8b1783-404a-fcb8-1e1e-56f1cc52cd1a",
  "name": "Union Bank",
  "date_entered": "2016-03-22T17:49:50-05:00",
  "date_modified": "2016-03-30T17:44:20-05:00",
  "modified_user_id": "1",
  "modified_by_name": "Administrator",
  "modified_user_link": {
    "full_name": "Administrator",
    "id": "1",
    "_acl": {
      "fields": [],
      "delete": "no",
      "_hash": "8e11bf9be8f04daddee9d08d44ea891e"
    }
  },
  "created_by": "1",
  "created_by_name": "Administrator",
  "created_by_link": {
    "full_name": "Administrator",
    "id": "1",
    "_acl": {
      "fields": [],
      "delete": "no",
      "_hash": "8e11bf9be8f04daddee9d08d44ea891e"
    }
  },
  "description": "",
  "deleted": false,
```



---

```
"facebook": "",
"twitter": "",
"googleplus": "",
"account_type": "Customer",
"industry": "Banking",
"annual_revenue": "",
"phone_fax": "",
"billing_address_street": "67321 West Siam St.",
"billing_address_street_2": "",
"billing_address_street_3": "",
"billing_address_street_4": "",
"billing_address_city": "Ohio",
"billing_address_state": "CA",
"billing_address_postalcode": "25159",
"billing_address_country": "USA",
"rating": "",
"phone_office": "(065) 489-6104",
"phone_alternate": "",
"website": "www.qahr.edu",
"ownership": "",
"employees": "",
"ticker_symbol": "",
"shipping_address_street": "67321 West Siam St.",
"shipping_address_street_2": "",
"shipping_address_street_3": "",
"shipping_address_street_4": "",
"shipping_address_city": "Ohio",
"shipping_address_state": "CA",
"shipping_address_postalcode": "25159",
"shipping_address_country": "USA",
"parent_id": "",
"sic_code": "",
"duns_num": "",
"parent_name": "",
"member_of": {
  "name": "",
  "id": "",
  "_acl": {
    "fields": [],
    "_hash": "654d337e0e912edaa00dbb0fb3dc3c17"
  }
},
"campaign_id": "",
"campaign_name": "",
"campaign_accounts": {
  "name": "",
```

---

```
    "id": "",
    "_acl": {
      "fields": [],
      "_hash": "654d337e0e912edaa00dbb0fb3dc3c17"
    }
  },
  "following": true,
  "my_favorite": false,
  "tag": [],
  "assigned_user_id": "seed_sarah_id",
  "assigned_user_name": "Sarah Smith",
  "assigned_user_link": {
    "full_name": "Sarah Smith",
    "id": "seed_sarah_id",
    "_acl": {
      "fields": [],
      "_hash": "654d337e0e912edaa00dbb0fb3dc3c17"
    }
  },
  "team_count": "",
  "team_count_link": {
    "team_count": "",
    "id": "West",
    "_acl": {
      "fields": [],
      "_hash": "654d337e0e912edaa00dbb0fb3dc3c17"
    }
  },
  "team_name": [{
    "id": "East",
    "name": "East",
    "name_2": "",
    "primary": false
  }, {
    "id": 1,
    "name": "Global",
    "name_2": "",
    "primary": false
  }, {
    "id": "West",
    "name": "West",
    "name_2": "",
    "primary": true
  }
  ],
  "email": [{
    "email_address": "hr.support.kid@example.info",
```

---

```
    "invalid_email": false,
    "opt_out": false,
    "primary_address": true,
    "reply_to_address": false
  }, {
    "email_address": "info.support.the@example.com",
    "invalid_email": false,
    "opt_out": false,
    "primary_address": false,
    "reply_to_address": false
  }],
  "email1": "hr.support.kid@example.info",
  "email2": "info.support.the@example.com",
  "invalid_email": false,
  "email_opt_out": false,
  "email_addresses_non_primary": "",
  "_acl": {
    "fields": {}
  },
  "_module": "Accounts"
}
```

## Download

You can download the full API example [here](#).

**Last Modified:** 2021-02-17 02:44:13

## How to Unfollow a Record

### Overview

A PHP example demonstrating how to unfollow a record using the v11 `/<module>/:record/unsubscribe` REST DELETE endpoint.

### Unfollowing a Record

#### Authenticating

---

First, you will need to authenticate to the Sugar API. An example is shown below:

```
<?php

$instance_url = "http://{site_url}/rest/v11";
$username = "admin";
$password = "password";

//Login - POST /oauth2/token
$auth_url = $instance_url . "/oauth2/token";

$oauth2_token_arguments = array(
    "grant_type" => "password",
    //client id - default is sugar.
    //It is recommended to create your own in Admin > OAuth Keys
    "client_id" => "sugar",
    "client_secret" => "",
    "username" => $username,
    "password" => $password,
    //platform type - default is base.
    //It is recommend to change the platform to a custom name such as
    "custom_api" to avoid authentication conflicts.
    "platform" => "custom_api"
);

$auth_request = curl_init($auth_url);
curl_setopt($auth_request, CURLOPT_HTTP_VERSION, CURL_HTTP_VERSION_1_0
);
curl_setopt($auth_request, CURLOPT_HEADER, false);
curl_setopt($auth_request, CURLOPT_SSL_VERIFYPEER, 0);
curl_setopt($auth_request, CURLOPT_RETURNTRANSFER, 1);
curl_setopt($auth_request, CURLOPT_FOLLOWLOCATION, 0);
curl_setopt($auth_request, CURLOPT_HTTPHEADER, array(
    "Content-Type: application/json"
));

//convert arguments to json
$json_arguments = json_encode($oauth2_token_arguments);
curl_setopt($auth_request, CURLOPT_POSTFIELDS, $json_arguments);

//execute request
$oauth2_token_response = curl_exec($auth_request);

//decode oauth2 response to get token
$oauth2_token_response_obj = json_decode($oauth2_token_response);
$oauth_token = $oauth2_token_response_obj->access_token;
```

---

More information on authenticating can be found in the [How to Authenticate and Log Out](#) example and [/oauth2/logout](#) endpoint documentation.

## Unfollowing a Record

Next, we can unfollow a specific record using the `/<module>/:record/unsubscribe` endpoint.

```
//Unfollow a record - DELETE /<module>/:record/unsubscribe

$unsubscribe_url = $instance_url . "/Accounts/ae8b1783-404a-
fcb8-1ele-56f1cc52cd1a/unsubscribe";

$unsubscribe_request = curl_init($unsubscribe_url);

curl_setopt($unsubscribe_request, CURLOPT_CUSTOMREQUEST, "DELETE");
curl_setopt($unsubscribe_request, CURLOPT_HTTP_VERSION, CURL_HTTP_VERS
ION_1_0);
curl_setopt($unsubscribe_request, CURLOPT_HEADER, false);
curl_setopt($unsubscribe_request, CURLOPT_SSL_VERIFYPEER, 0);
curl_setopt($unsubscribe_request, CURLOPT_RETURNTRANSFER, 1);
curl_setopt($unsubscribe_request, CURLOPT_FOLLOWLOCATION, 0);
curl_setopt($unsubscribe_request, CURLOPT_HTTPHEADER, array(
  "Content-Type: application/json",
  "oauth-token: {$oauth_token}"
));

//execute request
$unsubscribe_response = curl_exec($unsubscribe_request);
```

More information on the unsubscribe API can be found in the [/<module>/:record/unsubscribe DELETE](#) documentation.

## Request Payload

The data sent to the server is shown below:

This endpoint does not accept any request arguments.

## Response

The data received from the server is shown below:

---

true

## Download

You can download the full API example [here](#).

**Last Modified:** 2021-02-17 02:44:13

# How to Get the Most Active Users

## Overview

A PHP example demonstrating how to fetch the most active users for meetings, calls, inbound emails, and outbound emails using the v11 /mostactiveusers REST GET endpoint.

## Get Most Active Users

### Authenticating

First, you will need to authenticate to the Sugar API. An example is shown below:

```
<?php

$instance_url = "http://{site_url}/rest/v11";
$username = "admin";
$password = "password";

//Login - POST /oauth2/token
$auth_url = $instance_url . "/oauth2/token";

$oauth2_token_arguments = array(
    "grant_type" => "password",
    //client id - default is sugar.
    //It is recommended to create your own in Admin > OAuth Keys
    "client_id" => "sugar",
    "client_secret" => "",
    "username" => $username,
```

---

```
    "password" => $password,
    //platform type - default is base.
    //It is recommend to change the platform to a custom name such as
"custom_api" to avoid authentication conflicts.
    "platform" => "custom_api"
);

$auth_request = curl_init($auth_url);
curl_setopt($auth_request, CURLOPT_HTTP_VERSION, CURL_HTTP_VERSION_1_0
);
curl_setopt($auth_request, CURLOPT_HEADER, false);
curl_setopt($auth_request, CURLOPT_SSL_VERIFYPEER, 0);
curl_setopt($auth_request, CURLOPT_RETURNTRANSFER, 1);
curl_setopt($auth_request, CURLOPT_FOLLOWLOCATION, 0);
curl_setopt($auth_request, CURLOPT_HTTPHEADER, array(
    "Content-Type: application/json"
));

//convert arguments to json
$json_arguments = json_encode($oauth2_token_arguments);
curl_setopt($auth_request, CURLOPT_POSTFIELDS, $json_arguments);

//execute request
$oauth2_token_response = curl_exec($auth_request);

//decode oauth2 response to get token
$oauth2_token_response_obj = json_decode($oauth2_token_response);
$oauth_token = $oauth2_token_response_obj->access_token;
```

More information on authenticating can be found in the [How to Authenticate and Log Out](#) example and [/oauth2/logout](#) endpoint documentation.

## Active Users

Next, we can retrieve the most active users using the `/mostactiveusers` endpoint.

```
//Fetch users - GET /mostactiveusers

$most_active_arguments = array(
    "days" => 30,
);

$most_active_url = $instance_url . "/mostactiveusers";

$most_active_url .= "?" . http_build_query($most_active_arguments);
```

---

```
$most_active_request = curl_init($most_active_url);

curl_setopt($most_active_request, CURLOPT_HTTP_VERSION, CURL_HTTP_VERSION_1_0);
curl_setopt($most_active_request, CURLOPT_HEADER, false);
curl_setopt($most_active_request, CURLOPT_SSL_VERIFYPEER, 0);
curl_setopt($most_active_request, CURLOPT_RETURNTRANSFER, 1);
curl_setopt($most_active_request, CURLOPT_FOLLOWLOCATION, 0);
curl_setopt($most_active_request, CURLOPT_HTTPHEADER, array(
    "Content-Type: application/json",
    "oauth-token: {$oauth_token}"
));

//execute request
$most_active_response = curl_exec($most_active_request);

//decode json
$most_active_response_obj = json_decode($most_active_response);
```

More information on the mostactiveusers API can be found in the [/mostactiveusers](#) documentation.

## Request

The URL sent to the server is shown below:

```
http://{site_url}/rest/v11/mostactiveusers?days=30
```

## Response

The data received from the server is shown below:

```
{
  "meetings": {
    "user_id": "seed_max_id",
    "count": "21",
    "first_name": "Max",
    "last_name": "Jensen"
  },
  "calls": {
    "user_id": "seed_chris_id",
    "count": "4",
    "first_name": "Chris",
```



---

```
        "last_name": "Olliver"
    },
    "inbound_emails": {
        "user_id": "seed_chris_id",
        "count": "23",
        "first_name": "Chris",
        "last_name": "Olliver"
    },
    "outbound_emails": {
        "user_id": "seed_sarah_id",
        "count": "20",
        "first_name": "Sarah",
        "last_name": "Smith"
    }
}
```

## Download

You can download the full API example [here](#).

**Last Modified:** 2021-02-17 02:44:13

# How to Authenticate and Log Out

## Overview

A PHP example on how to authenticate and logout of the v11 REST API using the /oauth2/token and /oauth2/logout POST endpoints.

## Authenticating

The example below demonstrates how to authenticate to the REST v11 API. It is important to note that the oauth2 token arguments takes in several parameters that you should be aware of. The platform argument tends to cause confusion in that it is used to authenticate a user to a specific platform. Since Sugar only allows 1 user in the system at a time per platform, authenticating an integration script with a platform type of "base" will logout any current users in the system using those credentials. To work around this, your custom scripts should have a new

---

platform type specified such as "custom\_api" or any other static text you prefer. The client\_id and client\_secret parameters can be used for additional security based on client types. You can create your own client type in Admin > OAuth Keys. More information can be found in the [/oauth2/token](#) documentation. An example script is shown below:

```
<?php

$instance_url = "http://{site_url}/rest/v11";
$username = "admin";
$password = "password";

//Login - POST /oauth2/token
$auth_url = $instance_url . "/oauth2/token";

$oauth2_token_arguments = array(
    "grant_type" => "password",
    //client id - default is sugar.
    //It is recommended to create your own in Admin > OAuth Keys
    "client_id" => "sugar",
    "client_secret" => "",
    "username" => $username,
    "password" => $password,
    //platform type - default is base.
    //It is recommend to change the platform to a custom name such as
    "custom_api" to avoid authentication conflicts.
    "platform" => "custom_api"
);

$auth_request = curl_init($auth_url);
curl_setopt($auth_request, CURLOPT_HTTP_VERSION, CURL_HTTP_VERSION_1_0
);
curl_setopt($auth_request, CURLOPT_HEADER, false);
curl_setopt($auth_request, CURLOPT_SSL_VERIFYPEER, 0);
curl_setopt($auth_request, CURLOPT_RETURNTRANSFER, 1);
curl_setopt($auth_request, CURLOPT_FOLLOWLOCATION, 0);
curl_setopt($auth_request, CURLOPT_HTTPHEADER, array(
    "Content-Type: application/json"
));

//convert arguments to json
$json_arguments = json_encode($oauth2_token_arguments);
curl_setopt($auth_request, CURLOPT_POSTFIELDS, $json_arguments);

//execute request
$oauth2_token_response = curl_exec($auth_request);
```

---

## Request Payload

The data sent to the server is shown below:

```
{
  "grant_type": "password",
  "client_id": "sugar",
  "client_secret": "",
  "username": "admin",
  "password": "password",
  "platform": "custom_api"
}
```

## Response

The data received from the server is shown below:

```
{
  "access_token": "c6d495c9-bb25-81d2-5f81-533ef6479f9b",
  "expires_in": 3600,
  "token_type": "bearer",
  "scope": null,
  "refresh_token": "cbc40e67-12bc-4b56-a1d9-533ef62f2601",
  "refresh_expires_in": 1209600,
  "download_token": "cc5d1a9f-6627-3349-96e5-533ef6b1a493"
}
```

## Logout

To log out of a session, a request can be made to the `/oauth2/logout` POST endpoint. More information can be found in the [/oauth2/logout](#) documentation. An example extending off of the above authentication example is shown below:

```
//Logout - POST /oauth2/logout

$logout_url = $instance_url . "/oauth2/logout";

//decode oauth2 response to get token
$oauth2_token_response_obj = json_decode($oauth2_token_response);
$oauth_token = $oauth2_token_response_obj->access_token;

$logout_request = curl_init($logout_url);
```

---

```
curl_setopt($logout_request, CURLOPT_HTTP_VERSION, CURL_HTTP_VERSION_1_0);
curl_setopt($logout_request, CURLOPT_HEADER, false);
curl_setopt($logout_request, CURLOPT_SSL_VERIFYPEER, 0);
curl_setopt($logout_request, CURLOPT_RETURNTRANSFER, 1);
curl_setopt($logout_request, CURLOPT_FOLLOWLOCATION, 0);
curl_setopt($logout_request, CURLOPT_HTTPHEADER, array(
    "Content-Type: application/json",
    "oauth-token: {$oauth_token}"
));

//set empty post fields
curl_setopt($logout_request, CURLOPT_POSTFIELDS, array());

//execute request
$oauth2_logout_response = curl_exec($logout_request);
```

## Response

The data received from the server is shown below:

```
{
  "success":true
}
```

## Download

You can download the full API example [here](#).

**Last Modified:** 2021-02-17 02:44:13

## How to Ping

### Overview

A PHP example demonstrating how to ping using the REST v11 /ping GET endpoint.

---

## Pinging

### Authenticating

First, you will need to authenticate to the Sugar API. An example is shown below:

```
<?php

$instance_url = "http://{site_url}/rest/v11";
$username = "admin";
$password = "password";

//Login - POST /oauth2/token
$auth_url = $instance_url . "/oauth2/token";

$oauth2_token_arguments = array(
    "grant_type" => "password",
    //client id - default is sugar.
    //It is recommended to create your own in Admin > OAuth Keys
    "client_id" => "sugar",
    "client_secret" => "",
    "username" => $username,
    "password" => $password,
    //platform type - default is base.
    //It is recommend to change the platform to a custom name such as
    "custom_api" to avoid authentication conflicts.
    "platform" => "custom_api"
);

$auth_request = curl_init($auth_url);
curl_setopt($auth_request, CURLOPT_HTTP_VERSION, CURL_HTTP_VERSION_1_0
);
curl_setopt($auth_request, CURLOPT_HEADER, false);
curl_setopt($auth_request, CURLOPT_SSL_VERIFYPEER, 0);
curl_setopt($auth_request, CURLOPT_RETURNTRANSFER, 1);
curl_setopt($auth_request, CURLOPT_FOLLOWLOCATION, 0);
curl_setopt($auth_request, CURLOPT_HTTPHEADER, array(
    "Content-Type: application/json"
));

//convert arguments to json
$json_arguments = json_encode($oauth2_token_arguments);
curl_setopt($auth_request, CURLOPT_POSTFIELDS, $json_arguments);

//execute request
```

---

```
$oauth2_token_response = curl_exec($auth_request);
```

```
//decode oauth2 response to get token
$oauth2_token_response_obj = json_decode($oauth2_token_response);
$oauth_token = $oauth2_token_response_obj->access_token;
```

More information on authenticating can be found in the [How to Authenticate and Log Out](#) example and [/oauth2/logout](#) endpoint documentation.

## Pinging

Once we have authenticated, we can now ping the system as shown below.

```
//Ping - GET /ping

$ping_url = $instance_url . "/ping";

$ping_request = curl_init($ping_url);
curl_setopt($ping_request, CURLOPT_HTTP_VERSION, CURL_HTTP_VERSION_1_0);
curl_setopt($ping_request, CURLOPT_HEADER, false); //needed to return file headers
curl_setopt($ping_request, CURLOPT_SSL_VERIFYPEER, 0);
curl_setopt($ping_request, CURLOPT_RETURNTRANSFER, 1);
curl_setopt($ping_request, CURLOPT_FOLLOWLOCATION, 0);
curl_setopt($ping_request, CURLOPT_HTTPHEADER, array(
    "Content-Type: application/json",
    "oauth-token: {$oauth_token}"
));

$ping_response = curl_exec($ping_request);
```

More information on pinging can be found in the [/ping](#) documentation.

## Response

```
"pong"
```

## Download

You can download the full API example [here](#).

# How to Fetch the Current Users Time

## Overview

A PHP example demonstrating how to fetch the current users time with the v11 /ping/whattimeisit REST GET endpoint.

## Authenticating

First, you will need to authenticate to the Sugar API. An example is shown below:

```
<?php

$instance_url = "http://{site_url}/rest/v11";
$username = "admin";
$password = "password";

//Login - POST /oauth2/token
$auth_url = $instance_url . "/oauth2/token";

$oauth2_token_arguments = array(
    "grant_type" => "password",
    //client id - default is sugar.
    //It is recommended to create your own in Admin > OAuth Keys
    "client_id" => "sugar",
    "client_secret" => "",
    "username" => $username,
    "password" => $password,
    //platform type - default is base.
    //It is recommend to change the platform to a custom name such as
    "custom_api" to avoid authentication conflicts.
    "platform" => "custom_api"
);

$auth_request = curl_init($auth_url);
curl_setopt($auth_request, CURLOPT_HTTP_VERSION, CURL_HTTP_VERSION_1_0
);
curl_setopt($auth_request, CURLOPT_HEADER, false);
curl_setopt($auth_request, CURLOPT_SSL_VERIFYPEER, 0);
```

---

```
curl_setopt($auth_request, CURLOPT_RETURNTRANSFER, 1);
curl_setopt($auth_request, CURLOPT_FOLLOWLOCATION, 0);
curl_setopt($auth_request, CURLOPT_HTTPHEADER, array(
    "Content-Type: application/json"
));

//convert arguments to json
$json_arguments = json_encode($oauth2_token_arguments);
curl_setopt($auth_request, CURLOPT_POSTFIELDS, $json_arguments);

//execute request
$oauth2_token_response = curl_exec($auth_request);

//decode oauth2 response to get token
$oauth2_token_response_obj = json_decode($oauth2_token_response);
$oauth_token = $oauth2_token_response_obj->access_token;
```

More information on authenticating can be found in the [How to Authenticate and Log Out](#) example and [/oauth2/logout](#) endpoint documentation.

## Getting the Current Time and Date for the User

```
//Set up the time parameters - GET /ping/whattimeisit

$time_url = $instance_url . "/ping/whattimeisit";

$time_request = curl_init($search_url);
curl_setopt($time_request, CURLOPT_HTTP_VERSION, CURL_HTTP_VERSION_1_0
);
curl_setopt($time_request, CURLOPT_HEADER, false);
curl_setopt($time_request, CURLOPT_SSL_VERIFYPEER, 0);
curl_setopt($time_request, CURLOPT_RETURNTRANSFER, 1);
curl_setopt($time_request, CURLOPT_FOLLOWLOCATION, 0);
curl_setopt($time_request, CURLOPT_HTTPHEADER, array(
    "Content-Type: application/json",
    "oauth-token: {$oauth_token}"
));

//execute request
$time_response = curl_exec($time_request);

//decode json
$time_response_obj = json_decode($time_response);
```



---

## Request

`http://{site_url}/rest/v11/ping/whattimeisit`

## Response

`"2014-04-08T14:59:13-04:00"`

## Downloads

You can download the full API example [here](#)

**Last Modified:** 2021-02-17 02:44:13

# How to Fetch Recently Viewed Records

## Overview

A PHP example demonstrating how to retrieve recently viewed records using the `v11 /recent` REST GET endpoint.

## Authenticating

First, you will need to authenticate to the Sugar API. An example is shown below:

```
<?php

$instance_url = "http://{site_url}/rest/v11";
$username = "admin";
$password = "password";

//Login - POST /oauth2/token
$auth_url = $instance_url . "/oauth2/token";

$oauth2_token_arguments = array(
    "grant_type" => "password",
```

---

```
//client id - default is sugar.
//It is recommended to create your own in Admin > OAuth Keys
"client_id" => "sugar",
"client_secret" => "",
"username" => $username,
"password" => $password,
//platform type - default is base.
//It is recommend to change the platform to a custom name such as
"custom_api" to avoid authentication conflicts.
"platform" => "custom_api"
);

$auth_request = curl_init($auth_url);
curl_setopt($auth_request, CURLOPT_HTTP_VERSION, CURL_HTTP_VERSION_1_0
);
curl_setopt($auth_request, CURLOPT_HEADER, false);
curl_setopt($auth_request, CURLOPT_SSL_VERIFYPEER, 0);
curl_setopt($auth_request, CURLOPT_RETURNTRANSFER, 1);
curl_setopt($auth_request, CURLOPT_FOLLOWLOCATION, 0);
curl_setopt($auth_request, CURLOPT_HTTPHEADER, array(
    "Content-Type: application/json"
));

//convert arguments to json
$json_arguments = json_encode($oauth2_token_arguments);
curl_setopt($auth_request, CURLOPT_POSTFIELDS, $json_arguments);

//execute request
$oauth2_token_response = curl_exec($auth_request);

//decode oauth2 response to get token
$oauth2_token_response_obj = json_decode($oauth2_token_response);
$oauth_token = $oauth2_token_response_obj->access_token;
```

More information on authenticating can be found in the [How to Authenticate and Log Out](#) example and [/oauth2/logout](#) endpoint documentation.

## Recently Viewed Records

Next, we will need to identify the records we want to see using the `/recent` endpoint. In this case, we are going to request Accounts, Contacts and Leads.

```
//Set up the search parameters - GET /recent
```

---

```
$recent_url = $instance_url . "/recent";

$recent_arguments = array(
    "module_list" => 'Accounts,Contacts,Leads',
);

//As this request is a GET we will add the arguments to the URL
$recent_url .= "?" . http_build_query($recent_arguments);

$recent_request = curl_init($recent_url);
curl_setopt($recent_request, CURLOPT_HTTP_VERSION, CURL_HTTP_VERSION_1_0);
curl_setopt($recent_request, CURLOPT_HEADER, false);
curl_setopt($recent_request, CURLOPT_SSL_VERIFYPEER, 0);
curl_setopt($recent_request, CURLOPT_RETURNTRANSFER, 1);
curl_setopt($recent_request, CURLOPT_FOLLOWLOCATION, 0);
curl_setopt($recent_request, CURLOPT_HTTPHEADER, array(
    "Content-Type: application/json",
    "oauth-token: {$oauth_token}"
));

//execute request
$recent_response = curl_exec($recent_request);

//decode json
$recent_response_obj = json_decode($recent_response);
```

More information on the search API can be found in the [/recent](#) documentation.

## Request

```
http://{site_url}/rest/v11/recent?module_list=Accounts%2CContacts%2CLEads
```

## Response

The data received from the server is shown below:

```
{
  "next_offset":-1,
  "records":[
    {
```

---

```
"my_favorite":false,
"following":false,
"id":"f3951f4d-2d17-7939-c5ec-56fedbb9e92f",
"name":"Talia Knupp",
"date_entered":"2016-04-01T15:34:00-05:00",
"date_modified":"2016-04-06T10:33:24-05:00",
"modified_user_id":"1",
"modified_by_name":"Administrator",
"created_by":"1",
"created_by_name":"Administrator",
"doc_owner":"","
"user_favorites":"","
"description":"","
"deleted":false,
"assigned_user_id":"seed_will_id",
"assigned_user_name":"Will Westin",
"team_count":"","
"team_name":[
  {
    "id":"East",
    "name":"East",
    "name_2":"","
    "primary":true
  },
  {
    "id":"West",
    "name":"West",
    "name_2":"","
    "primary":false
  }
],
"email":[
  {
    "email_address":"jsmith@sugar.com",
    "invalid_email":false,
    "opt_out":false,
    "primary_address":true,
    "reply_to_address":false
  },
  {
    "email_address":"cjsmith@sugar.com",
    "invalid_email":false,
    "opt_out":false,
    "primary_address":false,
    "reply_to_address":false
  }
]
```

---

```
],
"email1":"jsmith@sugar.com",
"email2":"cjsmith@sugar.com",
"invalid_email":false,
"email_opt_out":false,
"email_addresses_non_primary":"","
"salutation":"","
"first_name":"Talial",
"last_name":"Knupp",
"full_name":"Talial Knupp",
"title":"Senior Product Manager",
"facebook":"","
"twitter":"","
"googleplus":"","
"department":"","
"do_not_call":false,
"phone_home":"(963) 741-3689",
"phone_mobile":"(600) 831-9872",
"phone_work":"(680) 991-2837",
"phone_other":"","
"phone_fax":"","
"primary_address_street":"111 Silicon Valley Road",
"primary_address_street_2":"","
"primary_address_street_3":"","
"primary_address_city":"Sunnyvale",
"primary_address_state":"NY",
"primary_address_postalcode":"99452",
"primary_address_country":"USA",
"alt_address_street":"","
"alt_address_street_2":"","
"alt_address_street_3":"","
"alt_address_city":"","
"alt_address_state":"","
"alt_address_postalcode":"","
"alt_address_country":"","
"assistant":"","
"assistant_phone":"","
"picture":"","
"converted":false,
"referred_by":"","
"lead_source":"Word of mouth",
"lead_source_description":"","
"status":"In Process",
"status_description":"","
"reports_to_id":"","
"report_to_name":"","
```

---

```
"dnb_principal_id":"","  
"account_name":"First National S\B",  
"account_description":"","  
"contact_id":"","  
"contact_name":"","  
"account_id":"","  
"opportunity_id":"","  
"opportunity_name":"","  
"opportunity_amount":"","  
"campaign_id":"","  
"campaign_name":"","  
"c_accept_status_fields":"","  
"m_accept_status_fields":"","  
"accept_status_id":"","  
"accept_status_name":"","  
"accept_status_calls":"","  
"accept_status_meetings":"","  
"webtolead_email1":[  
  {  
    "email_address":"jsmith@sugar.com",  
    "invalid_email":false,  
    "opt_out":false,  
    "primary_address":true,  
    "reply_to_address":false  
  },  
  {  
    "email_address":"cjsmith@sugar.com",  
    "invalid_email":false,  
    "opt_out":false,  
    "primary_address":false,  
    "reply_to_address":false  
  }  
],  
"webtolead_email2":[  
  {  
    "email_address":"jsmith@sugar.com",  
    "invalid_email":false,  
    "opt_out":false,  
    "primary_address":true,  
    "reply_to_address":false  
  },  
  {  
    "email_address":"cjsmith@sugar.com",  
    "invalid_email":false,  
    "opt_out":false,  
    "primary_address":false,  
    "reply_to_address":false  
  }  
]
```

```

        "reply_to_address":false
    }
],
"webtolead_email_opt_out":"","
"webtolead_invalid_email":"","
"birthdate":"","
"portal_name":"","
"portal_app":"","
"website":"","
"preferred_language":"","
"mkto_sync":false,
"mkto_id":null,
"mkto_lead_score":null,
"fruits_c":"Apples",
"_acl":{
    "fields":{

    }
},
"_module":"Leads",
"_last_viewed_date":"2016-04-06T10:33:24-05:00"
},
{
    "my_favorite":false,
    "following":false,
    "id":"e8c641ca-1b8c-74c1-d08d-56fedbdd3187",
    "name":"MTM Investment Bank F S B",
    "date_entered":"2016-04-01T15:34:00-05:00",
    "date_modified":"2016-04-06T10:16:52-05:00",
    "modified_user_id":"1",
    "modified_by_name":"Administrator",
    "created_by":"1",
    "created_by_name":"Administrator",
    "doc_owner":"","
    "user_favorites":"","
    "description":"","
    "deleted":false,
    "assigned_user_id":"seed_will_id",
    "assigned_user_name":"Will Westin",
    "team_count":"","
    "team_name":[
        {
            "id":"East",
            "name":"East",
            "name_2":"","
            "primary":true
        }
    ]
}

```

---

```
    },
    {
      "id": "West",
      "name": "West",
      "name_2": "",
      "primary": false
    }
  ],
  "email": [
    {
      "email_address": "jsmith@sugar.com",
      "invalid_email": false,
      "opt_out": false,
      "primary_address": true,
      "reply_to_address": false
    },
    {
      "email_address": "the60@example.us",
      "invalid_email": false,
      "opt_out": false,
      "primary_address": false,
      "reply_to_address": false
    }
  ],
  "email1": "jsmith@sugar.com",
  "email2": "the60@example.us",
  "invalid_email": false,
  "email_opt_out": false,
  "email_addresses_non_primary": "",
  "facebook": "",
  "twitter": "",
  "googleplus": "",
  "account_type": "Customer",
  "industry": "a",
  "annual_revenue": "",
  "phone_fax": "",
  "billing_address_street": "67321 West Siam St.",
  "billing_address_street_2": "",
  "billing_address_street_3": "",
  "billing_address_street_4": "",
  "billing_address_city": "Alabama",
  "billing_address_state": "NY",
  "billing_address_postalcode": "52272",
  "billing_address_country": "USA",
  "rating": "",
  "phone_office": "(012) 704-8075",
```



---

```
"phone_alternate":"","  
"website":"www.salesqa.it",  
"ownership":"","  
"employees":"","  
"ticker_symbol":"","  
"shipping_address_street":"67321 West Siam St.",  
"shipping_address_street_2":"","  
"shipping_address_street_3":"","  
"shipping_address_street_4":"","  
"shipping_address_city":"Alabama",  
"shipping_address_state":"NY",  
"shipping_address_postalcode":"52272",  
"shipping_address_country":"USA",  
"parent_id":"","  
"sic_code":"","  
"duns_num":"","  
"parent_name":"","  
"campaign_id":"","  
"campaign_name":"","  
"_acl":{  
  "fields":{  
  
  }  
},  
"_module":"Accounts",  
"_last_viewed_date":"2016-04-06T10:16:52-05:00"  
},  
{  
  "my_favorite":false,  
  "following":false,  
  "id":"f31b2f00-468c-3d35-1e88-56fedbd3921d",  
  "name":"Kaycee Gibney",  
  "date_entered":"2016-04-01T15:34:00-05:00",  
  "date_modified":"2016-04-06T10:16:24-05:00",  
  "modified_user_id":"1",  
  "modified_by_name":"Administrator",  
  "created_by":"1",  
  "created_by_name":"Administrator",  
  "doc_owner":"","  
  "user_favorites":"","  
  "description":"","  
  "deleted":false,  
  "assigned_user_id":"seed_jim_id",  
  "assigned_user_name":"Jim Brennan",  
  "team_count":"","  
  "team_name":[
```

---

```
    {
      "id": "East",
      "name": "East",
      "name_2": "",
      "primary": true
    }
  ],
  "email": [
    {
      "email_address": "jsmith@sugar.com",
      "invalid_email": false,
      "opt_out": false,
      "primary_address": true,
      "reply_to_address": false
    },
    {
      "email_address": "sales.kid.dev@example.info",
      "invalid_email": false,
      "opt_out": true,
      "primary_address": false,
      "reply_to_address": false
    }
  ],
  "email1": "jsmith@sugar.com",
  "email2": "sales.kid.dev@example.info",
  "invalid_email": false,
  "email_opt_out": false,
  "email_addresses_non_primary": "",
  "salutation": "",
  "first_name": "Kaycee",
  "last_name": "Gibney",
  "full_name": "Kaycee Gibney",
  "title": "Mgr Operations",
  "facebook": "",
  "twitter": "",
  "googleplus": "",
  "department": "",
  "do_not_call": false,
  "phone_home": "(599) 165-2396",
  "phone_mobile": "(215) 591-9574",
  "phone_work": "(771) 945-3648",
  "phone_other": "",
  "phone_fax": "",
  "primary_address_street": "321 University Ave.",
  "primary_address_street_2": "",
  "primary_address_street_3": "",
```

---

```
"primary_address_city":"Santa Monica",
"primary_address_state":"NY",
"primary_address_postalcode":"96154",
"primary_address_country":"USA",
"alt_address_street":"","
"alt_address_street_2":"","
"alt_address_street_3":"","
"alt_address_city":"","
"alt_address_state":"","
"alt_address_postalcode":"","
"alt_address_country":"","
"assistant":"","
"assistant_phone":"","
"picture":"","
"email_and_name1":"","
"lead_source":"Existing Customer",
"account_name":"Tracker Com LP",
"account_id":"72ad6f00-e345-1cab-b370-56fedbd23deb",
"dnb_principal_id":"","
"opportunity_role_fields":"","
"opportunity_role_id":"","
"opportunity_role":"","
"reports_to_id":"","
"report_to_name":"","
"birthdate":"","
"portal_name":"KayceeGibney33",
"portal_active":true,
"portal_password":true,
"portal_password1":null,
"portal_app":"","
"preferred_language":"en_us",
"campaign_id":"","
"campaign_name":"","
"c_accept_status_fields":"","
"m_accept_status_fields":"","
"accept_status_id":"","
"accept_status_name":"","
"accept_status_calls":"","
"accept_status_meetings":"","
"sync_contact":false,
"mkto_sync":false,
"mkto_id":null,
"mkto_lead_score":null,
"_acl":{
  "fields":{
```

---

```
        }
      },
      "_module": "Contacts",
      "_last_viewed_date": "2016-04-06T10:16:24-05:00"
    }
  ]
}
```

There are 3 records shown above, the `_module` field tells you if the record is from Accounts, Contacts or Leads. The `_last_viewed_date` will tell you when the record was last seen.

## Downloads

You can download the full API example [here](#)

**Last Modified:** 2021-02-17 02:44:13

## How to Use the Global Search

### Overview

A PHP example demonstrating how to globally search for records using the REST v11 /search GET endpoint.

### Authenticating

First, you will need to authenticate to the Sugar API. An example is shown below:

```
<?php

$instance_url = "http://{site_url}/rest/v11";
$username = "admin";
$password = "password";

//Login - POST /oauth2/token
$auth_url = $instance_url . "/oauth2/token";
```

---

```
$oauth2_token_arguments = array(
    "grant_type" => "password",
    //client id - default is sugar.
    //It is recommended to create your own in Admin > OAuth Keys
    "client_id" => "sugar",
    "client_secret" => "",
    "username" => $username,
    "password" => $password,
    //platform type - default is base.
    //It is recommend to change the platform to a custom name such as
"custom_api" to avoid authentication conflicts.
    "platform" => "custom_api"
);

$auth_request = curl_init($auth_url);
curl_setopt($auth_request, CURLOPT_HTTP_VERSION, CURL_HTTP_VERSION_1_0
);
curl_setopt($auth_request, CURLOPT_HEADER, false);
curl_setopt($auth_request, CURLOPT_SSL_VERIFYPEER, 0);
curl_setopt($auth_request, CURLOPT_RETURNTRANSFER, 1);
curl_setopt($auth_request, CURLOPT_FOLLOWLOCATION, 0);
curl_setopt($auth_request, CURLOPT_HTTPHEADER, array(
    "Content-Type: application/json"
));

//convert arguments to json
$json_arguments = json_encode($oauth2_token_arguments);
curl_setopt($auth_request, CURLOPT_POSTFIELDS, $json_arguments);

//execute request
$oauth2_token_response = curl_exec($auth_request);

//decode oauth2 response to get token
$oauth2_token_response_obj = json_decode($oauth2_token_response);
$oauth_token = $oauth2_token_response_obj->access_token;
```

More information on authenticating can be found in the [How to Authenticate and Log Out](#) example and [/oauth2/logout](#) endpoint documentation.

## Searching Records

So, we will need to identify the records we want to see using the `/search` endpoint. In this case, we are going to search for all records that have the email address of 'jsmith@sugar.com'. In this example, there are 3 records, an Account, a Contact

---

and a Lead.

```
//Set up the search parameters - GET /search

$search_url = $instance_url . "/search";

$search_arguments = array(
    "q" => 'jsmith@sugar.com',
    "max_num" => 3,
    "offset" => 0,
    "fields" => "",
    "order_by" => "",
    "favorites" => false,
    "my_items" => false,
);

//As this request is a GET we will add the arguments to the URL
$search_url .= "?" . http_build_query($search_arguments);

$search_request = curl_init($search_url);
curl_setopt($search_request, CURLOPT_HTTP_VERSION, CURL_HTTP_VERSION_1_0);
curl_setopt($search_request, CURLOPT_HEADER, false);
curl_setopt($search_request, CURLOPT_SSL_VERIFYPEER, 0);
curl_setopt($search_request, CURLOPT_RETURNTRANSFER, 1);
curl_setopt($search_request, CURLOPT_FOLLOWLOCATION, 0);
curl_setopt($search_request, CURLOPT_HTTPHEADER, array(
    "Content-Type: application/json",
    "oauth-token: {$oauth_token}"
));

//execute request
$search_response = curl_exec($search_request);

//decode json
$search_response_obj = json_decode($search_response);
```

More information on the search API can be found in the [/search](#) documentation.

## Request

```
http://{site_url}/rest/v11/search?q=jsmith@sugar.com&max_num=3&offset=0&fields=&order_by=&favorites=0&my_items=0
```

---

## Response

The data received from the server is shown below:

```
{
  "next_offset":-1,
  "records":[
    {
      "my_favorite":false,
      "following":false,
      "id":"f31b2f00-468c-3d35-1e88-56fedbd3921d",
      "name":"Kaycee Gibney",
      "date_entered":"2016-04-01T20:34:00+00:00",
      "date_modified":"2016-04-06T15:16:24+00:00",
      "modified_user_id":"1",
      "modified_by_name":"Administrator",
      "created_by":"1",
      "created_by_name":"Administrator",
      "doc_owner":"",
      "user_favorites":"",
      "description":"",
      "deleted":false,
      "assigned_user_id":"seed_jim_id",
      "assigned_user_name":"Jim Brennan",
      "team_count":"",
      "team_name":[
        {
          "id":"East",
          "name":"East",
          "name_2":"",
          "primary":true
        }
      ],
      "email":[
        {
          "email_address":"jsmith@sugar.com",
          "invalid_email":false,
          "opt_out":false,
          "primary_address":true,
          "reply_to_address":false
        },
        {
          "email_address":"sales.kid.dev@example.info",
          "invalid_email":false,
          "opt_out":true,
          "primary_address":false,

```

---

```
        "reply_to_address":false
    }
],
"email1":"jsmith@sugar.com",
"email2":"sales.kid.dev@example.info",
"invalid_email":false,
"email_opt_out":false,
"email_addresses_non_primary":"","
"salutation":"","
"first_name":"Kaycee",
"last_name":"Gibney",
"full_name":"Kaycee Gibney",
"title":"Mgr Operations",
"facebook":"","
"twitter":"","
"googleplus":"","
"department":"","
"do_not_call":false,
"phone_home":"(599) 165-2396",
"phone_mobile":"(215) 591-9574",
"phone_work":"(771) 945-3648",
"phone_other":"","
"phone_fax":"","
"primary_address_street":"321 University Ave.",
"primary_address_street_2":"","
"primary_address_street_3":"","
"primary_address_city":"Santa Monica",
"primary_address_state":"NY",
"primary_address_postalcode":"96154",
"primary_address_country":"USA",
"alt_address_street":"","
"alt_address_street_2":"","
"alt_address_street_3":"","
"alt_address_city":"","
"alt_address_state":"","
"alt_address_postalcode":"","
"alt_address_country":"","
"assistant":"","
"assistant_phone":"","
"picture":"","
"email_and_name1":"","
"lead_source":"Existing Customer",
"account_name":"Tracker Com LP",
"account_id":"72ad6f00-e345-1cab-b370-56fedbd23deb",
"dnb_principal_id":"","
"opportunity_role_fields":"","
```



---

```
"opportunity_role_id":"","  
"opportunity_role":"","  
"reports_to_id":"","  
"report_to_name":"","  
"birthdate":"","  
"portal_name":"KayceeGibney33",  
"portal_active":true,  
"portal_password":true,  
"portal_password1":null,  
"portal_app":"","  
"preferred_language":"en_us",  
"campaign_id":"","  
"campaign_name":"","  
"c_accept_status_fields":"","  
"m_accept_status_fields":"","  
"accept_status_id":"","  
"accept_status_name":"","  
"accept_status_calls":"","  
"accept_status_meetings":"","  
"sync_contact":false,  
"mkto_sync":false,  
"mkto_id":null,  
"mkto_lead_score":null,  
"_acl":{  
  "fields":{  
  
  }  
},  
"_module":"Contacts",  
"_search":{  
  "score":0.70710677,  
  "highlighted":{  
    "email1":{  
      "text":"\u003Cstrong\u003Ejsmith@sugar.com\u003C\/st  
rong\u003E",  
      "module":"Contacts",  
      "label":"LBL_EMAIL_ADDRESS"  
    }  
  }  
}  
},  
{  
  "my_favorite":false,  
  "following":false,  
  "id":"e8c641ca-1b8c-74c1-d08d-56fedbdd3187",  
  "name":"MTM Investment Bank F S B",
```

---

```
"date_entered": "2016-04-01T20:34:00+00:00",
"date_modified": "2016-04-06T15:16:52+00:00",
"modified_user_id": "1",
"modified_by_name": "Administrator",
"created_by": "1",
"created_by_name": "Administrator",
"doc_owner": "",
"user_favorites": "",
"description": "",
"deleted": false,
"assigned_user_id": "seed_will_id",
"assigned_user_name": "Will Westin",
"team_count": "",
"team_name": [
  {
    "id": "East",
    "name": "East",
    "name_2": "",
    "primary": true
  },
  {
    "id": "West",
    "name": "West",
    "name_2": "",
    "primary": false
  }
],
"email": [
  {
    "email_address": "jsmith@sugar.com",
    "invalid_email": false,
    "opt_out": false,
    "primary_address": true,
    "reply_to_address": false
  },
  {
    "email_address": "the60@example.us",
    "invalid_email": false,
    "opt_out": false,
    "primary_address": false,
    "reply_to_address": false
  }
],
"email1": "jsmith@sugar.com",
"email2": "the60@example.us",
"invalid_email": false,
```

---

```
"email_opt_out":false,
"email_addresses_non_primary":"","
"facebook":"","
"twitter":"","
"googleplus":"","
"account_type":"Customer",
"industry":"a",
"annual_revenue":"","
"phone_fax":"","
"billing_address_street":"67321 West Siam St.",
"billing_address_street_2":"","
"billing_address_street_3":"","
"billing_address_street_4":"","
"billing_address_city":"Alabama",
"billing_address_state":"NY",
"billing_address_postalcode":"52272",
"billing_address_country":"USA",
"rating":"","
"phone_office":"(012) 704-8075",
"phone_alternate":"","
"website":"www.salesqa.it",
"ownership":"","
"employees":"","
"ticker_symbol":"","
"shipping_address_street":"67321 West Siam St.",
"shipping_address_street_2":"","
"shipping_address_street_3":"","
"shipping_address_street_4":"","
"shipping_address_city":"Alabama",
"shipping_address_state":"NY",
"shipping_address_postalcode":"52272",
"shipping_address_country":"USA",
"parent_id":"","
"sic_code":"","
"duns_num":"","
"parent_name":"","
"campaign_id":"","
"campaign_name":"","
"_acl":{
  "fields":{
    }
  },
  "_module":"Accounts",
  "_search":{
    "score":0.70710677,
```

---

```
    "highlighted":{
      "email1":{
        "text":"\u003Cstrong\u003Ejsmith@sugar.com\u003C\/st
rong\u003E",
        "module":"Accounts",
        "label":"LBL_EMAIL_ADDRESS"
      }
    }
  },
  {
    "my_favorite":false,
    "following":false,
    "id":"f3951f4d-2d17-7939-c5ec-56fedbb9e92f",
    "name":"Talia Knupp",
    "date_entered":"2016-04-01T20:34:00+00:00",
    "date_modified":"2016-04-06T15:33:24+00:00",
    "modified_user_id":"1",
    "modified_by_name":"Administrator",
    "created_by":"1",
    "created_by_name":"Administrator",
    "doc_owner":"",
    "user_favorites":"",
    "description":"",
    "deleted":false,
    "assigned_user_id":"seed_will_id",
    "assigned_user_name":"Will Westin",
    "team_count":"",
    "team_name":[
      {
        "id":"East",
        "name":"East",
        "name_2":"",
        "primary":true
      },
      {
        "id":"West",
        "name":"West",
        "name_2":"",
        "primary":false
      }
    ],
    "email":[
      {
        "email_address":"jsmith@sugar.com",
        "invalid_email":false,
```

---

```
        "opt_out":false,
        "primary_address":true,
        "reply_to_address":false
    },
    {
        "email_address":"cjsmith@sugar.com",
        "invalid_email":false,
        "opt_out":false,
        "primary_address":false,
        "reply_to_address":false
    }
],
"email1":"jsmith@sugar.com",
"email2":"cjsmith@sugar.com",
"invalid_email":false,
"email_opt_out":false,
"email_addresses_non_primary":"","
"salutation":"","
"first_name":"Talial",
"last_name":"Knupp",
"full_name":"Talial Knupp",
"title":"Senior Product Manager",
"facebook":"","
"twitter":"","
"googleplus":"","
"department":"","
"do_not_call":false,
"phone_home":"(963) 741-3689",
"phone_mobile":"(600) 831-9872",
"phone_work":"(680) 991-2837",
"phone_other":"","
"phone_fax":"","
"primary_address_street":"111 Silicon Valley Road",
"primary_address_street_2":"","
"primary_address_street_3":"","
"primary_address_city":"Sunnyvale",
"primary_address_state":"NY",
"primary_address_postalcode":"99452",
"primary_address_country":"USA",
"alt_address_street":"","
"alt_address_street_2":"","
"alt_address_street_3":"","
"alt_address_city":"","
"alt_address_state":"","
"alt_address_postalcode":"","
"alt_address_country":"","
```

---

```
"assistant":"","  
"assistant_phone":"","  
"picture":"","  
"converted":false,  
"referred_by":"","  
"lead_source":"Word of mouth",  
"lead_source_description":"","  
"status":"In Process",  
"status_description":"","  
"reports_to_id":"","  
"report_to_name":"","  
"dnb_principal_id":"","  
"account_name":"First National S\B",  
"account_description":"","  
"contact_id":"","  
"contact_name":"","  
"account_id":"","  
"opportunity_id":"","  
"opportunity_name":"","  
"opportunity_amount":"","  
"campaign_id":"","  
"campaign_name":"","  
"c_accept_status_fields":"","  
"m_accept_status_fields":"","  
"accept_status_id":"","  
"accept_status_name":"","  
"accept_status_calls":"","  
"accept_status_meetings":"","  
"webtolead_email1":[  
  {  
    "email_address":"jsmith@sugar.com",  
    "invalid_email":false,  
    "opt_out":false,  
    "primary_address":true,  
    "reply_to_address":false  
  },  
  {  
    "email_address":"cjsmith@sugar.com",  
    "invalid_email":false,  
    "opt_out":false,  
    "primary_address":false,  
    "reply_to_address":false  
  }  
],  
"webtolead_email2":[  
  {
```

```
        "email_address": "jsmith@sugar.com",
        "invalid_email": false,
        "opt_out": false,
        "primary_address": true,
        "reply_to_address": false
    },
    {
        "email_address": "cjsmith@sugar.com",
        "invalid_email": false,
        "opt_out": false,
        "primary_address": false,
        "reply_to_address": false
    }
],
"webtolead_email_opt_out": "",
"webtolead_invalid_email": "",
"birthdate": "",
"portal_name": "",
"portal_app": "",
"website": "",
"preferred_language": "",
"mkto_sync": false,
"mkto_id": null,
"mkto_lead_score": null,
"fruits_c": "Apples",
"_acl": {
    "fields": {

    }
},
"_module": "Leads",
"_search": {
    "score": 0.70710677,
    "highlighted": {
        "email1": {
            "text": "\u003Cstrong\u003Ejsmith@sugar.com\u003C\/st
rong\u003E",
            "module": "Leads",
            "label": "LBL_EMAIL_ADDRESS"
        }
    }
}
}
]
```

---

There are 3 records shown above, the `_module` field tells you if the record is from Accounts, Contacts or Leads. The `_search` field is an array that tells you where in the record it found the search string. It gives you back a highlighted string that you can use for display.

## Downloads

You can download the full API example [here](#)

**Last Modified:** 2021-02-17 02:44:13

## How to Check for Duplicate Records

### Overview

An PHP example demonstrating how to check for duplicate records using the v11 `<module>/duplicateCheck` REST POST endpoint.

### Duplicate Records

#### Authenticating

First, you will need to authenticate to the Sugar API. An example is shown below:

```
<?php

$instance_url = "http://{site_url}/rest/v11";
$username = "admin";
$password = "password";

//Login - POST /oauth2/token
$auth_url = $instance_url . "/oauth2/token";

$oauth2_token_arguments = array(
    "grant_type" => "password",
    //client id - default is sugar.
    //It is recommended to create your own in Admin > OAuth Keys
    "client_id" => "sugar",
```



---

```

    "client_secret" => "",
    "username" => $username,
    "password" => $password,
    //platform type - default is base.
    //It is recommend to change the platform to a custom name such as
    "custom_api" to avoid authentication conflicts.
    "platform" => "custom_api"
);

$auth_request = curl_init($auth_url);
curl_setopt($auth_request, CURLOPT_HTTP_VERSION, CURL_HTTP_VERSION_1_0
);
curl_setopt($auth_request, CURLOPT_HEADER, false);
curl_setopt($auth_request, CURLOPT_SSL_VERIFYPEER, 0);
curl_setopt($auth_request, CURLOPT_RETURNTRANSFER, 1);
curl_setopt($auth_request, CURLOPT_FOLLOWLOCATION, 0);
curl_setopt($auth_request, CURLOPT_HTTPHEADER, array(
    "Content-Type: application/json"
));

//convert arguments to json
$json_arguments = json_encode($oauth2_token_arguments);
curl_setopt($auth_request, CURLOPT_POSTFIELDS, $json_arguments);

//execute request
$oauth2_token_response = curl_exec($auth_request);

//decode oauth2 response to get token
$oauth2_token_response_obj = json_decode($oauth2_token_response);
$oauth_token = $oauth2_token_response_obj->access_token;

```

More information on authenticating can be found in the [How to Authenticate and Log Out](#) example and [/oauth2/logout](#) endpoint documentation.

## Retrieving Duplicates

Next, we will need to identify the records that are duplicates using the `/<module>/duplicateCheck` endpoint.

```

//Check for duplicate records - POST /<module>/duplicateCheck

$url = $instance_url . "/Accounts/duplicateCheck";
//Set up the Record details
$record = array(
    'name' => 'Test Record',

```

---

```
);

$curl_request = curl_init($url);
curl_setopt($curl_request, CURLOPT_HTTP_VERSION, CURL_HTTP_VERSION_1_0);
curl_setopt($curl_request, CURLOPT_HEADER, false);
curl_setopt($curl_request, CURLOPT_SSL_VERIFYPEER, 0);
curl_setopt($curl_request, CURLOPT_RETURNTRANSFER, 1);
curl_setopt($curl_request, CURLOPT_FOLLOWLOCATION, 0);
curl_setopt($curl_request, CURLOPT_HTTPHEADER, array(
    "Content-Type: application/json",
    "oauth-token: {$oauth_token}"
));

//convert arguments to json
$json_arguments = json_encode($record);
curl_setopt($curl_request, CURLOPT_POSTFIELDS, $json_arguments);
//execute request
$curl_response = curl_exec($curl_request);
//decode json
$createdRecord = json_decode($curl_response);

//display the created record
print_r($createdRecord);
curl_close($curl_request);
```

More information on the filter API can be found in the [/<module>/duplicateCheck](#) documentation.

## Request Payload

The data sent to the server is shown below:

```
{
  "name": "Test Record"
}
```

## Response

The data received from the server is shown below:

```
{
  "next_offset": -1,
  "records": [{
```

---

```
"id": "7f6ea7be-60d6-11e6-8885-a0999b033b33",
"name": "Test Record",
"date_entered": "2016-08-12T14:48:25-07:00",
"date_modified": "2016-08-12T14:48:25-07:00",
"modified_user_id": "1",
"modified_by_name": "Administrator",
"modified_user_link": {
  "full_name": "Administrator",
  "id": "1",
  "_acl": {
    "fields": [],
    "delete": "no",
    "_hash": "8e11bf9be8f04daddee9d08d44ea891e"
  }
},
"created_by": "1",
"created_by_name": "Administrator",
"created_by_link": {
  "full_name": "Administrator",
  "id": "1",
  "_acl": {
    "fields": [],
    "delete": "no",
    "_hash": "8e11bf9be8f04daddee9d08d44ea891e"
  }
},
"description": "Test Data 1",
"deleted": false,
"facebook": "",
"twitter": "",
"googleplus": "",
"account_type": "",
"industry": "",
"annual_revenue": "",
"phone_fax": "",
"billing_address_street": "",
"billing_address_street_2": "",
"billing_address_street_3": "",
"billing_address_street_4": "",
"billing_address_city": "",
"billing_address_state": "",
"billing_address_postalcode": "",
"billing_address_country": "",
"rating": "",
"phone_office": "",
"phone_alternate": "",
```

---

```
"website": "",
"ownership": "",
"employees": "",
"ticker_symbol": "",
"shipping_address_street": "",
"shipping_address_street_2": "",
"shipping_address_street_3": "",
"shipping_address_street_4": "",
"shipping_address_city": "",
"shipping_address_state": "",
"shipping_address_postalcode": "",
"shipping_address_country": "",
"parent_id": "",
"sic_code": "",
"duns_num": "",
"parent_name": "",
"member_of": {
  "name": "",
  "id": "",
  "_acl": {
    "fields": [],
    "_hash": "654d337e0e912edaa00dbb0fb3dc3c17"
  }
},
"campaign_id": "",
"campaign_name": "",
"campaign_accounts": {
  "name": "",
  "id": "",
  "_acl": {
    "fields": [],
    "_hash": "654d337e0e912edaa00dbb0fb3dc3c17"
  }
},
"following": true,
"my_favorite": false,
"tag": [],
"assigned_user_id": "1",
"assigned_user_name": "Administrator",
"assigned_user_link": {
  "full_name": "Administrator",
  "id": "1",
  "_acl": {
    "fields": [],
    "delete": "no",
    "_hash": "8e11bf9be8f04daddee9d08d44ea891e"
```

---

```
    }
  },
  "team_count": "",
  "team_count_link": {
    "team_count": "",
    "id": "1",
    "_acl": {
      "fields": [],
      "_hash": "654d337e0e912edaa00dbb0fb3dc3c17"
    }
  },
  "team_name": [{
    "id": "1",
    "name": "Global",
    "name_2": "",
    "primary": true
  }],
  "email": [],
  "email1": "",
  "email2": "",
  "invalid_email": "",
  "email_opt_out": "",
  "email_addresses_non_primary": "",
  "_acl": {
    "fields": {}
  },
  "_module": "Accounts",
  "duplicate_check_rank": 8
}, {
  "id": "868b4f16-60d6-11e6-bdfc-a0999b033b33",
  "name": "Test Record",
  "date_entered": "2016-08-12T14:48:37-07:00",
  "date_modified": "2016-08-12T14:48:37-07:00",
  "modified_user_id": "1",
  "modified_by_name": "Administrator",
  "modified_user_link": {
    "full_name": "Administrator",
    "id": "1",
    "_acl": {
      "fields": [],
      "delete": "no",
      "_hash": "8e11bf9be8f04daddee9d08d44ea891e"
    }
  },
  "created_by": "1",
  "created_by_name": "Administrator",
```

---

```
"created_by_link": {
  "full_name": "Administrator",
  "id": "1",
  "_acl": {
    "fields": [],
    "delete": "no",
    "_hash": "8e11bf9be8f04daddee9d08d44ea891e"
  }
},
"description": "Test Data 2",
"deleted": false,
"facebook": "",
"twitter": "",
"googleplus": "",
"account_type": "",
"industry": "",
"annual_revenue": "",
"phone_fax": "",
"billing_address_street": "",
"billing_address_street_2": "",
"billing_address_street_3": "",
"billing_address_street_4": "",
"billing_address_city": "",
"billing_address_state": "",
"billing_address_postalcode": "",
"billing_address_country": "",
"rating": "",
"phone_office": "",
"phone_alternate": "",
"website": "",
"ownership": "",
"employees": "",
"ticker_symbol": "",
"shipping_address_street": "",
"shipping_address_street_2": "",
"shipping_address_street_3": "",
"shipping_address_street_4": "",
"shipping_address_city": "",
"shipping_address_state": "",
"shipping_address_postalcode": "",
"shipping_address_country": "",
"parent_id": "",
"sic_code": "",
"duns_num": "",
"parent_name": "",
"member_of": {
```

---

```
    "name": "",
    "id": "",
    "_acl": {
      "fields": [],
      "_hash": "654d337e0e912edaa00dbb0fb3dc3c17"
    }
  },
  "campaign_id": "",
  "campaign_name": "",
  "campaign_accounts": {
    "name": "",
    "id": "",
    "_acl": {
      "fields": [],
      "_hash": "654d337e0e912edaa00dbb0fb3dc3c17"
    }
  },
  "following": true,
  "my_favorite": false,
  "tag": [],
  "assigned_user_id": "1",
  "assigned_user_name": "Administrator",
  "assigned_user_link": {
    "full_name": "Administrator",
    "id": "1",
    "_acl": {
      "fields": [],
      "delete": "no",
      "_hash": "8e11bf9be8f04daddee9d08d44ea891e"
    }
  },
  "team_count": "",
  "team_count_link": {
    "team_count": "",
    "id": "1",
    "_acl": {
      "fields": [],
      "_hash": "654d337e0e912edaa00dbb0fb3dc3c17"
    }
  },
  "team_name": [{
    "id": "1",
    "name": "Global",
    "name_2": "",
    "primary": true
  }],
}
```

---

```
"email": [],
"email1": "",
"email2": "",
"invalid_email": "",
"email_opt_out": "",
"email_addresses_non_primary": "",
"_acl": {
    "fields": {}
},
"_module": "Accounts",
"duplicate_check_rank": 8
}]
}
```

## Download

You can download the full API example [here](#).

**Last Modified:** 2021-02-17 02:44:13

# How to Manipulate Quotes

## Overview

A PHP example demonstrating how to manipulate Quotes and related record data such as ProductBundles, Products, and ProductBundleNotes.

## Manipulating Quotes

### Authenticating

First, you will need to authenticate to the Sugar API. An example is shown below:

```
<?php

$instance_url = "http://{site_url}/rest/v11";
$username = "admin";
$password = "password";
```



---

```
//Login - POST /oauth2/token
$auth_url = $instance_url . "/oauth2/token";

$oauth2_token_arguments = array(
    "grant_type" => "password",
    //client id - default is sugar.
    //It is recommended to create your own in Admin > OAuth Keys
    "client_id" => "sugar",
    "client_secret" => "",
    "username" => $username,
    "password" => $password,
    //platform type - default is base.
    //It is recommend to change the platform to a custom name such as
"custom_api" to avoid authentication conflicts.
    "platform" => "custom_api"
);

$auth_request = curl_init($auth_url);
curl_setopt($auth_request, CURLOPT_HTTP_VERSION, CURL_HTTP_VERSION_1_0
);
curl_setopt($auth_request, CURLOPT_HEADER, false);
curl_setopt($auth_request, CURLOPT_SSL_VERIFYPEER, 0);
curl_setopt($auth_request, CURLOPT_RETURNTRANSFER, 1);
curl_setopt($auth_request, CURLOPT_FOLLOWLOCATION, 0);
curl_setopt($auth_request, CURLOPT_HTTPHEADER, array(
    "Content-Type: application/json"
));

//convert arguments to json
$json_arguments = json_encode($oauth2_token_arguments);
curl_setopt($auth_request, CURLOPT_POSTFIELDS, $json_arguments);

//execute request
$oauth2_token_response = curl_exec($auth_request);

//decode oauth2 response to get token
$oauth2_token_response_obj = json_decode($oauth2_token_response);
$oauth_token = $oauth2_token_response_obj->access_token;
```

More information on authenticating can be found in the [How to Authenticate and Log Out](#) example and [/oauth2/logout](#) endpoint documentation.

## Creating a Quote

Once authenticated, we can submit a Quote record using the <module> endpoint.

---

Since a Quote record is a sum of its parts (i.e. ProductBundles and Products) you can submit the related ProductBundles and Products in the same request payload using the relationship Links and the "create" property.

```
//Create Records - POST /<module>
$url = $instance_url . "/Quotes";
//Set up the Record details
$DateTime = new DateTime();
//Expected Close Date in 1 Month
$DateTime->add(new DateInterval("P1M"));
//Quote Record
$quote = array(
    'name' => 'Test Quote',
    'quote_stage' => 'Draft',
    'date_quote_expected_closed' => $DateTime->format(DateTime::ISO8601),
),
//Create Product Bundles
'product_bundles' => array(
    'create' => array(
        array(
            "name" => "Product Bundle 1",
            "bundle_stage" => "Draft",
            "currency_id" => ":-99",
            "base_rate" => "1.0",
            "shipping" => "0.00",
            "products" => array(
                //Create Product in Bundle 1
                "create" => array(
                    array(
                        "tax_class" => "Taxable",
                        "quantity" => 1000.00,
                        "name" => "Test Product 1",
                        "description" => "My Test Product",
                        "mft_part_num" => "mft100012021",
                        "cost_price" => "100.00",
                        "list_price" => "200.00",
                        "discount_price" => "175.00",
                        "discount_amount" => "0.00",
                        "discount_select" => 0,
                        "product_template_id" => "",
                        "type_id" => "",
                        "status" => "Quotes"
                    )
                )
            )
        )
    ),
),
//Create Product Bundle Note in Bundle 1
```

---

```

"product_bundle_notes" => array(
  "create" => array(
    array(
      "description" => "Free shipping",
      "position" => 1
    )
  )
),
array(
  "name" => "Product Bundle 2",
  "bundle_stage" => "Draft",
  "currency_id" => ":-99",
  "base_rate" => "1.0",
  "shipping" => "25.00",
  "products" => array(
    //Create Products in Bundle 2
    "create" => array(
      array(
        "quantity" => 1000.00,
        "name" => "Test Product 2",
        "description" => "My Other Product",
        "mft_part_num" => "mft100012234",
        "cost_price" => "150.00",
        "list_price" => "300.00",
        "discount_price" => "275.00",
        "discount_amount" => "0.00",
        "discount_select" => 0,
        "product_template_id" => "",
        "type_id" => "",
        "status" => "Quotes"
      ),
      array(
        "quantity" => 500.00,
        "name" => "Test Product 3",
        "description" => "My Other Other Product",
        "mft_part_num" => "mft100012123",
        "cost_price" => "10.00",
        "list_price" => "500.00",
        "discount_price" => "400.00",
        "discount_amount" => "0.00",
        "discount_select" => 0,
        "product_template_id" => "",
        "type_id" => "",
        "status" => "Quotes"
      )
    )
  )
)

```

---

```

        )
    )
),
)
);

$curl_request = curl_init($url);
curl_setopt($curl_request, CURLOPT_HTTP_VERSION, CURL_HTTP_VERSION_1_0
);
curl_setopt($curl_request, CURLOPT_HEADER, false);
curl_setopt($curl_request, CURLOPT_SSL_VERIFYPEER, 0);
curl_setopt($curl_request, CURLOPT_RETURNTRANSFER, 1);
curl_setopt($curl_request, CURLOPT_FOLLOWLOCATION, 0);
curl_setopt($curl_request, CURLOPT_HTTPHEADER, array(
    "Content-Type: application/json",
    "oauth-token: {$oauth_token}"
));

//convert arguments to json
$json_arguments = json_encode($quote);
curl_setopt($curl_request, CURLOPT_POSTFIELDS, $json_arguments);
//execute request
$curl_response = curl_exec($curl_request);
//decode json
$createdQuote = json_decode($curl_response);

//display the created record
print_r($createdQuote);
curl_close($curl_request);

```

## Request Payload

The data sent to the server is shown below:

```

{
  "name": "Test Quote",
  "quote_stage": "Draft",
  "date_quote_expected_closed": "2017-06-12T11:51:57-0400",
  "product_bundles": {
    "create": [
      {
        "name": "Product Bundle 1",
        "bundle_stage": "Draft",
        "currency_id": ":-99",

```

---

```
"base_rate": "1.0",
"shipping": "0.00",
"products": {
  "create": [
    {
      "tax_class": "Taxable",
      "quantity": 1000,
      "name": "Test Product 1",
      "description": "My Test Product",
      "mft_part_num": "mft100012021",
      "cost_price": "100.00",
      "list_price": "200.00",
      "discount_price": "175.00",
      "discount_amount": "0.00",
      "discount_select": 0,
      "product_template_id": "",
      "type_id": "",
      "status": "Quotes"
    }
  ]
},
"product_bundle_notes": {
  "create": [
    {
      "description": "Free shipping",
      "position": 1
    }
  ]
}
},
{
  "name": "Product Bundle 2",
  "bundle_stage": "Draft",
  "currency_id": ":-99",
  "base_rate": "1.0",
  "shipping": "25.00",
  "products": {
    "create": [
      {
        "quantity": 1000,
        "name": "Test Product 2",
        "description": "My Other Product",
        "mft_part_num": "mft100012234",
        "cost_price": "150.00",
        "list_price": "300.00",
        "discount_price": "275.00",
```



---

```
        "create": "no"
      },
      "last_login": {
        "write": "no",
        "create": "no"
      }
    },
    "delete": "no",
    "_hash": "08b99a97c2e8d792f7a44d8882b5af6d"
  }
},
"created_by": "1",
"created_by_name": "Administrator",
"created_by_link": {
  "full_name": "Administrator",
  "id": "1",
  "_acl": {
    "fields": {
      "pwd_last_changed": {
        "write": "no",
        "create": "no"
      },
      "last_login": {
        "write": "no",
        "create": "no"
      }
    }
  },
  "delete": "no",
  "_hash": "08b99a97c2e8d792f7a44d8882b5af6d"
}
},
"description": "",
"deleted": false,
"shipper_id": "",
"shipper_name": "",
"shippers": {
  "name": "",
  "id": "",
  "_acl": {
    "fields": [

  ],
  "_hash": "654d337e0e912edaa00dbb0fb3dc3c17"
}
},
"taxrate_id": "",
```

---

```
"taxrate_name": "",
"taxrates": {
  "name": "",
  "id": "",
  "_acl": {
    "fields": [

    ],
    "_hash": "654d337e0e912edaa00dbb0fb3dc3c17"
  }
},
"taxrate_value": "0.000000",
"show_line_nums": true,
"quote_type": "Quotes",
"date_quote_expected_closed": "2017-06-12",
"original_po_date": "",
"payment_terms": "",
"date_quote_closed": "",
"date_order_shipped": "",
"order_stage": "",
"quote_stage": "Draft",
"purchase_order_num": "",
"quote_num": 2,
"subtotal": "650000.000000",
"subtotal_usdollar": "650000.000000",
"shipping": "0.000000",
"shipping_usdollar": "0.000000",
"discount": "",
"deal_tot": "0.00",
"deal_tot_discount_percentage": "0.00",
"deal_tot_usdollar": "0.00",
"new_sub": "650000.000000",
"new_sub_usdollar": "650000.000000",
"taxable_subtotal": "650000.000000",
"tax": "0.000000",
"tax_usdollar": "0.000000",
"total": "650000.000000",
"total_usdollar": "650000.000000",
"billing_address_street": "",
"billing_address_city": "",
"billing_address_state": "",
"billing_address_postalcode": "",
"billing_address_country": "",
"shipping_address_street": "",
"shipping_address_city": "",
"shipping_address_state": "",
```



---

```
"shipping_address_postalcode": "",
"shipping_address_country": "",
"system_id": 1,
"shipping_account_name": "",
"shipping_accounts": {
  "name": "",
  "id": "",
  "_acl": {
    "fields": [

    ],
    "_hash": "654d337e0e912edaa00dbb0fb3dc3c17"
  }
},
"shipping_account_id": "",
"shipping_contact_name": "",
"shipping_contacts": {
  "full_name": "",
  "id": "",
  "_acl": {
    "fields": [

    ],
    "_hash": "654d337e0e912edaa00dbb0fb3dc3c17"
  },
  "last_name": ""
},
"shipping_contact_id": "",
"account_name": "",
"billing_accounts": {
  "name": "",
  "id": "",
  "_acl": {
    "fields": [

    ],
    "_hash": "654d337e0e912edaa00dbb0fb3dc3c17"
  }
},
"account_id": "",
"billing_account_name": "",
"billing_account_id": "",
"billing_contact_name": "",
"billing_contacts": {
  "full_name": "",
  "id": "",
```

---

```
"_acl": {
  "fields": [

    ],
    "_hash": "654d337e0e912edaa00dbb0fb3dc3c17"
  },
  "last_name": ""
},
"billing_contact_id": "",
"opportunity_name": "",
"opportunities": {
  "name": "",
  "id": "",
  "_acl": {
    "fields": [

      ],
      "_hash": "654d337e0e912edaa00dbb0fb3dc3c17"
    }
  },
  "opportunity_id": "",
  "following": "",
  "my_favorite": false,
  "tag": [

  ],
  "locked_fields": [

  ],
  "assigned_user_id": "",
  "assigned_user_name": "",
  "assigned_user_link": {
    "full_name": "",
    "id": "",
    "_acl": {
      "fields": [

        ],
        "_hash": "654d337e0e912edaa00dbb0fb3dc3c17"
      }
    }
  },
  "team_count": "",
  "team_count_link": {
    "team_count": "",
    "id": "1",
    "_acl": {
```

---

```

    "fields": [
      ],
      "_hash": "654d337e0e912edaa00dbb0fb3dc3c17"
    }
  },
  "team_name": [
    {
      "id": "a0512788-3680-11e7-b42f-3c15c2c94fb0",
      "name": "Administrator",
      "name_2": "",
      "primary": false,
      "selected": false
    },
    {
      "id": "1",
      "name": "Global",
      "name_2": "",
      "primary": true,
      "selected": false
    }
  ],
  "currency_id": "-99",
  "base_rate": "1.000000",
  "currency_name": "",
  "currencies": {
    "name": "",
    "id": "-99",
    "_acl": {
      "fields": [
        ],
        "_hash": "654d337e0e912edaa00dbb0fb3dc3c17"
      ],
      "symbol": ""
    },
    "currency_symbol": "",
    "_acl": {
      "fields": {
        }
      }
    },
    "_module": "Quotes"
  }
}

```

You might notice that the Response does not contain the related data. To view the

---

related data use the [<module>/<record\\_id>/link/<link\\_name> - GET Endpoint](#).

## Modifying the Quote's Product Bundles

Once the quote is created, you might need to add or remove Product Bundles from the Quote. This can be done using the `/<module>/<record>` - PUT endpoint.

```
//Create a new ProductBundle
$url = $instance_url . "/ProductBundles";
$productBundle = array(
    "name" => "Product Bundle 3",
    "bundle_stage" => "Draft",
    "currency_id" => ":-99",
    "base_rate" => "1.0",
    "shipping" => "0.00",
    "products" => array(
        //Create Product in Bundle 3
        "create" => array(
            array(
                "tax_class" => "Taxable",
                "quantity" => 100.00,
                "name" => "Test Product 3",
                "description" => "Test Product 3",
                "mft_part_num" => "mft100012021",
                "cost_price" => "100.00",
                "list_price" => "250.00",
                "discount_price" => "175.00",
                "discount_amount" => "0.00",
                "discount_select" => 0,
                "product_template_id" => "",
                "type_id" => "",
                "status" => "Quotes",
                "position" => 0
            )
        )
    ),
    //Create Product Bundle Note in Bundle 3
    "product_bundle_notes" => array(
        "create" => array(
            array(
                "description" => "Free shipping",
                "position" => 1
            )
        )
    )
)
```

---

```

    );
    $curl_request = curl_init($url);
    curl_setopt($curl_request, CURLOPT_HTTP_VERSION, CURL_HTTP_VERSION_1_0
    );
    curl_setopt($curl_request, CURLOPT_HEADER, false);
    curl_setopt($curl_request, CURLOPT_SSL_VERIFYPEER, 0);
    curl_setopt($curl_request, CURLOPT_RETURNTRANSFER, 1);
    curl_setopt($curl_request, CURLOPT_FOLLOWLOCATION, 0);
    curl_setopt($curl_request, CURLOPT_HTTPHEADER, array(
        "Content-Type: application/json",
        "oauth-token: {$oauth_token}"
    ));

    //convert arguments to json
    $json_arguments = json_encode($productBundle);
    curl_setopt($curl_request, CURLOPT_POSTFIELDS, $json_arguments);
    //execute request
    $curl_response = curl_exec($curl_request);
    //decode json
    $createdBundle = json_decode($curl_response);

    //display the created record
    print_r($createdBundle);
    curl_close($curl_request);

    //Add Bundle to Previously Created Quote
    //PUT to /Quotes/<record_id>
    $url = $instance_url . "/Quotes/". $createdQuote->id;
    $quote = array(
        'product_bundles' => array(
            'delete' => array(
                'some_bundle_id'
            ),
            'add' => array(
                $createdBundle->id
            )
        )
    );
};

    $curl_request = curl_init($url);
    curl_setopt($curl_request, CURLOPT_HTTP_VERSION, CURL_HTTP_VERSION_1_0
    );
    curl_setopt($curl_request, CURLOPT_HEADER, false);
    curl_setopt($curl_request, CURLOPT_SSL_VERIFYPEER, 0);
    curl_setopt($curl_request, CURLOPT_RETURNTRANSFER, 1);
    curl_setopt($curl_request, CURLOPT_FOLLOWLOCATION, 0);

```

---

```
curl_setopt($curl_request, CURLOPT_HTTPHEADER, array(
    "Content-Type: application/json",
    "oauth-token: {$oauth_token}"
));

//convert arguments to json
$json_arguments = json_encode($quote);
curl_setopt($curl_request, CURLOPT_POSTFIELDS, $json_arguments);
//PUT Request
curl_setopt($curl_request, CURLOPT_CUSTOMREQUEST, "PUT");
//execute request
$curl_response = curl_exec($curl_request);
//decode json
$updatedQuote = json_decode($curl_response);

//display the updated quote record
print_r($updatedQuote);
curl_close($curl_request);
```

The above script removes a previously related Product Bundle from the Quote and adds the Product Bundle that was created before it in the script.

## Request Payload

The data sent to the server to alter the Quotes Product Bundles is shown below:

```
{
  "product_bundles": {
    "delete": [
      "some_bundle_id"
    ],
    "add": [
      "803972ea-3741-11e7-8edc-3c15c2c94fb0"
    ]
  }
}
```

## Response Payload

The response payload will match the standard [/<module>/<record> - PUT Endpoint](#) Response which is the entire values of the updated record. The previous Response for Creating the quote is the same as shown above.

---

## Download

You can download the full API example [here](#).

**Last Modified:** 2021-02-17 02:44:13

## How to Manipulate Tags (CRUD)

### Overview

A PHP example demonstrating how to work with tags using the v11 REST endpoints.

### Authentication

First, you will need to authenticate to the Sugar API. An example is shown below:

```
<?php

$instance_url = "http://{site_url}/rest/v11";
$username = "admin";
$password = "password";

//Login - POST /oauth2/token
$auth_url = $instance_url . "/oauth2/token";

$oauth2_token_arguments = array(
    "grant_type" => "password",
    //client id - default is sugar.
    //It is recommended to create your own in Admin > OAuth Keys
    "client_id" => "sugar",
    "client_secret" => "",
    "username" => $username,
    "password" => $password,
    //platform type - default is base.
    //It is recommend to change the platform to a custom name such as
    "custom_api" to avoid authentication conflicts.
    "platform" => "custom_api"
);
```

---

```
$auth_request = curl_init($auth_url);
curl_setopt($auth_request, CURLOPT_HTTP_VERSION, CURL_HTTP_VERSION_1_0
);
curl_setopt($auth_request, CURLOPT_HEADER, false);
curl_setopt($auth_request, CURLOPT_SSL_VERIFYPEER, 0);
curl_setopt($auth_request, CURLOPT_RETURNTRANSFER, 1);
curl_setopt($auth_request, CURLOPT_FOLLOWLOCATION, 0);
curl_setopt($auth_request, CURLOPT_HTTPHEADER, array(
    "Content-Type: application/json"
));

//convert arguments to json
$json_arguments = json_encode($oauth2_token_arguments);
curl_setopt($auth_request, CURLOPT_POSTFIELDS, $json_arguments);

//execute request
$oauth2_token_response = curl_exec($auth_request);

//decode oauth2 response to get token
$oauth2_token_response_obj = json_decode($oauth2_token_response);
$oauth_token = $oauth2_token_response_obj->access_token;
```

More information on authenticating can be found in the [How to Authenticate and Log Out](#) example and [/oauth2/logout POST](#) endpoint documentation.

## Creating Tags

Once you get `oauth_token` you would need to use it in the following API Calls to create tags.

```
//Create Tags - /Tags POST
$url = $instance_url . "/Tags";
//Set up the tag name
$record = array(
    'name' => 'Tag Name',
);

$curl_request = curl_init($url);
curl_setopt($curl_request, CURLOPT_HTTP_VERSION, CURL_HTTP_VERSION_1_0
);
curl_setopt($curl_request, CURLOPT_HEADER, false);
curl_setopt($curl_request, CURLOPT_SSL_VERIFYPEER, 0);
curl_setopt($curl_request, CURLOPT_RETURNTRANSFER, 1);
curl_setopt($curl_request, CURLOPT_FOLLOWLOCATION, 0);
```



---

```
curl_setopt($curl_request, CURLOPT_HTTPHEADER, array(
    "Content-Type: application/json",
    "oauth-token: {$oauth_token}"
));

//convert arguments to json
$json_arguments = json_encode($record);
curl_setopt($curl_request, CURLOPT_POSTFIELDS, $json_arguments);
//execute request
$curl_response = curl_exec($curl_request);
//decode json
$createdRecord = json_decode($curl_response);

//display the created record
print_r($createdRecord);
curl_close($curl_request);
```

More information on this API endpoint can be found in the [/<module> POST](#) documentation.

## Request Payload

```
{"name": "Tag Name" }
```

## Response

```
{
    "id": "12c6ee48-1000-11e8-8838-6a0001bcacb0",
    "name": "Tag Name",
    "date_entered": "2018-02-12T15:21:52+01:00",
    "date_modified": "2018-02-12T15:21:52+01:00",
    "modified_user_id": "1",
    "modified_by_name": "Administrator",
    "modified_user_link": {
        "full_name": "Administrator",
        "id": "1",
        "_acl": {
            "fields": {
                "pwd_last_changed": { "write": "no", "create": "no" },
                "last_login": { "write": "no", "create": "no" }
            },
            "delete": "no",
            "_hash": "08b99a97c2e8d792f7a44d8882b5af6d"
        }
    }
}
```

---

```

},
"created_by": "1",
"created_by_name": "Administrator",
"created_by_link": {
  "full_name": "Administrator",
  "id": "1",
  "_acl": {
    "fields": {
      "pwd_last_changed": { "write": "no", "create": "no" },
      "last_login": { "write": "no", "create": "no" }
    },
    "delete": "no",
    "_hash": "08b99a97c2e8d792f7a44d8882b5af6d"
  }
},
"description": "",
"deleted": false,
"name_lower": "tag name",
"following": "",
"my_favorite": false,
"locked_fields": [],
"source_id": "",
"source_type": "",
"source_meta": "",
"assigned_user_id": "1",
"assigned_user_name": "Administrator",
"assigned_user_link": {
  "full_name": "Administrator",
  "id": "1",
  "_acl": {
    "fields": {
      "pwd_last_changed": { "write": "no", "create": "no" },
      "last_login": { "write": "no", "create": "no" }
    },
    "delete": "no",
    "_hash": "08b99a97c2e8d792f7a44d8882b5af6d"
  }
},
"_acl": { "fields": {} },
"_module": "Tags"
}

```

## Creating Records with Tags

You can also create tags when creating new records. All you need to do populate

---

the tag field as an array when creating a record. Here is an example that demonstrates using the `/<module> POST` endpoint.

```
//Create Records with Tags - / POST
$url = $instance_url . "/Accounts";
//Set up the Record details with Tags
$record = array(
    'name' => 'Test Record',
    'tag' => array(
        'First Tag',
        'Second Tag'
    )
);

$curl_request = curl_init($url);
curl_setopt($curl_request, CURLOPT_HTTP_VERSION, CURL_HTTP_VERSION_1_0
);
curl_setopt($curl_request, CURLOPT_HEADER, false);
curl_setopt($curl_request, CURLOPT_SSL_VERIFYPEER, 0);
curl_setopt($curl_request, CURLOPT_RETURNTRANSFER, 1);
curl_setopt($curl_request, CURLOPT_FOLLOWLOCATION, 0);
curl_setopt($curl_request, CURLOPT_HTTPHEADER, array(
    "Content-Type: application/json",
    "oauth-token: {$oauth_token}"
));

//convert arguments to json
$json_arguments = json_encode($record);
curl_setopt($curl_request, CURLOPT_POSTFIELDS, $json_arguments);
//execute request
$curl_response = curl_exec($curl_request);
//decode json
$createdRecord = json_decode($curl_response);

//display the created record
print_r($createdRecord);
curl_close($curl_request);
```

More information on this API endpoint can be found in the [/<module> POST](#) documentation.

## Request Payload

The data sent to the server is shown below:

---

```
{
  "name": "Test Record",
  "tag": [
    "First Tag",
    "Second Tag"
  ]
}
```

## Response

The data sent to the server is shown below:

```
{
  "id": "ea507760-0ffd-11e8-bcf5-6a0001bcacb0",
  "name": "Test Record",
  "date_entered": "2018-02-12T15:06:25+01:00",
  "date_modified": "2018-02-12T15:06:25+01:00",
  "modified_user_id": "1",
  "modified_by_name": "Administrator",
  "modified_user_link": {
    "full_name": "Administrator",
    "id": "1",
    "_acl": {
      "fields": {
        "pwd_last_changed": { "write": "no", "create": "no" },
        "last_login": { "write": "no", "create": "no" }
      },
      "delete": "no",
      "_hash": "08b99a97c2e8d792f7a44d8882b5af6d"
    }
  },
  "created_by": "1",
  "created_by_name": "Administrator",
  "created_by_link": {
    "full_name": "Administrator",
    "id": "1",
    "_acl": {
      "fields": {
        "pwd_last_changed": { "write": "no", "create": "no" },
        "last_login": { "write": "no", "create": "no" }
      },
      "delete": "no",
      "_hash": "08b99a97c2e8d792f7a44d8882b5af6d"
    }
  },
}
```

---

```
"description": "",
"deleted": false,
"facebook": "",
"twitter": "",
"googleplus": "",
"account_type": "",
"industry": "",
"annual_revenue": "",
"phone_fax": "",
"billing_address_street": "",
"billing_address_street_2": "",
"billing_address_street_3": "",
"billing_address_street_4": "",
"billing_address_city": "",
"billing_address_state": "",
"billing_address_postalcode": "",
"billing_address_country": "",
"rating": "",
"phone_office": "",
"phone_alternate": "",
"website": "",
"ownership": "",
"employees": "",
"ticker_symbol": "",
"shipping_address_street": "",
"shipping_address_street_2": "",
"shipping_address_street_3": "",
"shipping_address_street_4": "",
"shipping_address_city": "",
"shipping_address_state": "",
"shipping_address_postalcode": "",
"shipping_address_country": "",
"parent_id": "",
"sic_code": "",
"duns_num": "",
"parent_name": "",
"member_of": {
  "name": "",
  "id": "",
  "_acl": { "fields": [], "_hash": "654d337e0e912edaa00dbb0fb3dc
3c17" }
},
"campaign_id": "",
"campaign_name": "",
"campaign_accounts": {
  "name": "",
```

---

```
    "id": "",
    "_acl": { "fields": [], "_hash": "654d337e0e912edaa00dbb0fb3dc
3c17" }
  },
  "following": true,
  "my_favorite": false,
  "tag": [
    {
      "id": "ea69c120-0ffd-11e8-b5f6-6a0001bcacb0",
      "name": "First Tag",
      "tags__name_lower": "first tag"
    },
    {
      "id": "eafb28e0-0ffd-11e8-8d80-6a0001bcacb0",
      "name": "Second Tag",
      "tags__name_lower": "second tag"
    }
  ],
  "locked_fields": [],
  "assigned_user_id": "",
  "assigned_user_name": "",
  "assigned_user_link": {
    "full_name": "",
    "id": "",
    "_acl": { "fields": [], "_hash": "654d337e0e912edaa00dbb0fb3dc
3c17" }
  },
  "team_count": "",
  "team_count_link": {
    "team_count": "",
    "id": "1",
    "_acl": { "fields": [], "_hash": "654d337e0e912edaa00dbb0fb3dc
3c17" }
  },
  "team_name": [
    {
      "id": "1",
      "name": "Global",
      "name_2": "",
      "primary": true,
      "selected": false
    }
  ],
  "email": [],
  "email1": "",
  "email2": "",
```

---

```
"invalid_email": "",
"email_opt_out": "",
"email_addresses_non_primary": "",
"calculated_c": "",
"_acl": { "fields": {} },
"_module": "Accounts"
}
```

## Reading/Retrieving Tags

Next, we can retrieve the records using the `/Tags/:record` GET endpoint. An example for retrieving the tag records is shown below.

```
//Reading/Retrieving Tags - /Tags GET
$url = $instance_url . "/Tags/12c6ee48-1000-11e8-8838-6a0001bcacb0";

$curl_request = curl_init($url);
curl_setopt($curl_request, CURLOPT_HTTP_VERSION, CURL_HTTP_VERSION_1_0);
curl_setopt($curl_request, CURLOPT_HEADER, false);
curl_setopt($curl_request, CURLOPT_SSL_VERIFYPEER, 0);
curl_setopt($curl_request, CURLOPT_RETURNTRANSFER, 1);
curl_setopt($curl_request, CURLOPT_FOLLOWLOCATION, 0);
curl_setopt($curl_request, CURLOPT_HTTPHEADER, array(
    "Content-Type: application/json",
    "oauth-token: {$oauth_token}"
));

//convert arguments to json
$json_arguments = json_encode($record);
curl_setopt($curl_request, CURLOPT_POSTFIELDS, $json_arguments);
//execute request
$curl_response = curl_exec($curl_request);
//decode json
$createdRecord = json_decode($curl_response);

//display the created record
print_r($createdRecord);
curl_close($curl_request);
```

More information on this API endpoint can be found in the [/<module>/:record GET](#) documentation.

## Request Payload

---

No payload is sent for this request.

## Response

```
{
  "id": "12c6ee48-1000-11e8-8838-6a0001bcacb0",
  "name": "Tag Name",
  "date_entered": "2018-02-12T15:21:52+01:00",
  "date_modified": "2018-02-12T15:21:52+01:00",
  "modified_user_id": "1",
  "modified_by_name": "Administrator",
  "modified_user_link": {
    "full_name": "Administrator",
    "id": "1",
    "_acl": {
      "fields": {
        "pwd_last_changed": { "write": "no", "create": "no" },
        "last_login": { "write": "no", "create": "no" }
      },
      "delete": "no",
      "_hash": "08b99a97c2e8d792f7a44d8882b5af6d"
    }
  },
  "created_by": "1",
  "created_by_name": "Administrator",
  "created_by_link": {
    "full_name": "Administrator",
    "id": "1",
    "_acl": {
      "fields": {
        "pwd_last_changed": { "write": "no", "create": "no" },
        "last_login": { "write": "no", "create": "no" }
      },
      "delete": "no",
      "_hash": "08b99a97c2e8d792f7a44d8882b5af6d"
    }
  },
  "description": "",
  "deleted": false,
  "name_lower": "tag name",
  "following": "",
  "my_favorite": false,
  "locked_fields": [],
  "source_id": "",
```



---

```

"source_type": "",
"source_meta": "",
"assigned_user_id": "1",
"assigned_user_name": "Administrator",
"assigned_user_link": {
  "full_name": "Administrator",
  "id": "1",
  "_acl": {
    "fields": {
      "pwd_last_changed": { "write": "no", "create": "no" },
      "last_login": { "write": "no", "create": "no" }
    },
    "delete": "no",
    "_hash": "08b99a97c2e8d792f7a44d8882b5af6d"
  }
},
"_acl": { "fields": {} },
"_module": "Tags"
}

```

## Updating Tags

You can update a tag using the `/Tags/:record` PUT endpoint. In this example, we are going to update the Tag record that we created in [Creating Tags](#) section and change its name to "Renamed Tag Name".

```

//Update Tags - /Tags PUT
$url = $instance_url . "/Tags/12c6ee48-1000-11e8-8838-6a0001bcacb0";
//Set up the new tag name
$record = array(
  'name' => 'Renamed Tag Name',
);

$curl_request = curl_init($url);
curl_setopt($curl_request, CURLOPT_CUSTOMREQUEST, "PUT");
curl_setopt($curl_request, CURLOPT_HTTP_VERSION, CURL_HTTP_VERSION_1_0);
curl_setopt($curl_request, CURLOPT_HEADER, false);
curl_setopt($curl_request, CURLOPT_SSL_VERIFYPEER, 0);
curl_setopt($curl_request, CURLOPT_RETURNTRANSFER, 1);
curl_setopt($curl_request, CURLOPT_FOLLOWLOCATION, 0);
curl_setopt($curl_request, CURLOPT_HTTPHEADER, array(
  "Content-Type: application/json",
  "oauth-token: {$oauth_token}"
));

```

---

```
//convert arguments to json
$json_arguments = json_encode($record);
curl_setopt($curl_request, CURLOPT_POSTFIELDS, $json_arguments);
//execute request
$curl_response = curl_exec($curl_request);
//decode json
$updatedRecord = json_decode($curl_response);

//display the created record
echo "Updated Record Name:" . $updatedRecord->name;
curl_close($curl_request);
```

More information on this API endpoint can be found in the [/record PUT](#) documentation.

## Request Payload

```
{"name": "Renamed Tag Name"}
```

## Response

```
{
  "id": "12c6ee48-1000-11e8-8838-6a0001bcacb0",
  "name": "Renamed Tag Name",
  "date_entered": "2018-02-12T15:21:52+01:00",
  "date_modified": "2018-02-12T16:07:18+01:00",
  "modified_user_id": "1",
  "modified_by_name": "Administrator",
  "modified_user_link": {
    "full_name": "Administrator",
    "id": "1",
    "_acl": {
      "fields": {
        "pwd_last_changed": { "write": "no", "create": "no" },
        "last_login": { "write": "no", "create": "no" }
      },
      "delete": "no",
      "_hash": "08b99a97c2e8d792f7a44d8882b5af6d"
    }
  },
  "created_by": "1",
  "created_by_name": "Administrator",
  "created_by_link": {
```

---

```

    "full_name": "Administrator",
    "id": "1",
    "_acl": {
      "fields": {
        "pwd_last_changed": { "write": "no", "create": "no" },
        "last_login": { "write": "no", "create": "no" }
      },
      "delete": "no",
      "_hash": "08b99a97c2e8d792f7a44d8882b5af6d"
    }
  },
  "description": "",
  "deleted": false,
  "name_lower": "renamed tag name",
  "following": "",
  "my_favorite": false,
  "locked_fields": [],
  "source_id": "",
  "source_type": "",
  "source_meta": "",
  "assigned_user_id": "1",
  "assigned_user_name": "Administrator",
  "assigned_user_link": {
    "full_name": "Administrator",
    "id": "1",
    "_acl": {
      "fields": {
        "pwd_last_changed": { "write": "no", "create": "no" },
        "last_login": { "write": "no", "create": "no" }
      },
      "delete": "no",
      "_hash": "08b99a97c2e8d792f7a44d8882b5af6d"
    }
  },
  "_acl": { "fields": {} },
  "_module": "Tags"
}

```

## Deleting Tags

Finally, we can delete the record we created using the `/Tags/:record DELETE` API request.

```

//Delete Tags - /Tags DELETE
$url = $instance_url . "/Tags/12c6ee48-1000-11e8-8838-6a0001bcacb0";

```

---

```
$curl_request = curl_init($url);
curl_setopt($curl_request, CURLOPT_CUSTOMREQUEST, "DELETE");
curl_setopt($curl_request, CURLOPT_HTTP_VERSION, CURL_HTTP_VERSION_1_0
);
curl_setopt($curl_request, CURLOPT_HEADER, false);
curl_setopt($curl_request, CURLOPT_SSL_VERIFYPEER, 0);
curl_setopt($curl_request, CURLOPT_RETURNTRANSFER, 1);
curl_setopt($curl_request, CURLOPT_FOLLOWLOCATION, 0);
curl_setopt($curl_request, CURLOPT_HTTPHEADER, array(
    "Content-Type: application/json",
    "oauth-token: {$oauth_token}"
));

//execute request
$curl_response = curl_exec($curl_request);
//decode json
$deletedRecord = json_decode($curl_response);

//display the created record
echo "Deleted Record:" . $deletedRecord->id;
curl_close($curl_request);
```

More information on this API endpoint can be found in the [/record DELETE](#) documentation.

## Request Payload

No payload is sent for this request.

## Response

```
{"id": "12c6ee48-1000-11e8-8838-6a0001bcacb0" }
```

**Last Modified:** 2021-02-17 02:44:13

## Legacy API

Examples of the legacy v4\_1 web service endpoints.

---

**Last Modified:** 2021-02-17 02:44:13

## REST

Examples of v4.1 REST API calls.

**Last Modified:** 2021-02-17 02:44:13

## PHP

|                         |
|-------------------------|
| PHP v4_1 REST Examples. |
|-------------------------|

**Last Modified:** 2021-02-17 02:44:13

## Creating Documents

### Overview

A PHP example demonstrating how to create a document using `set_entry` and a document revision with the `set_document_revision` method using `cURL` and the `v4_1` REST API.

### Example

```
<?php
```

```
    $url = "http://{site_url}/service/v4_1/rest.php";
```

```
    $username = "admin";
```

```
    $password = "password";
```

---

```

//function to make cURL request
function call($method, $parameters, $url)
{
    ob_start();
    $curl_request = curl_init();

    curl_setopt($curl_request, CURLOPT_URL, $url);
    curl_setopt($curl_request, CURLOPT_POST, 1);
    curl_setopt($curl_request, CURLOPT_HTTP_VERSION, CURL_HTTP_VER
SION_1_0);
    curl_setopt($curl_request, CURLOPT_HEADER, 1);
    curl_setopt($curl_request, CURLOPT_SSL_VERIFYPEER, 0);
    curl_setopt($curl_request, CURLOPT_RETURNTRANSFER, 1);
    curl_setopt($curl_request, CURLOPT_FOLLOWLOCATION, 0);

    $jsonEncodedData = json_encode($parameters);

    $post = array(
        "method" => $method,
        "input_type" => "JSON",
        "response_type" => "JSON",
        "rest_data" => $jsonEncodedData
    );

    curl_setopt($curl_request, CURLOPT_POSTFIELDS, $post);
    $result = curl_exec($curl_request);
    curl_close($curl_request);

    $result = explode("\r\n\r\n", $result, 2);
    $response = json_decode($result[1]);
    ob_end_flush();

    return $response;
}

//login -----
$login_parameters = array(
    "user_auth" => array(
        "user_name" => $username,
        "password" => md5($password),
        "version" => "1"
    ),
    "application_name" => "RestTest",
    "name_value_list" => array(),
);

```

---

```

$login_result = call("login", $login_parameters, $url);

/*
echo "<pre>";
print_r($login_result);
echo "</pre>";
*/

//get session id
$session_id = $login_result->id;

//create document -----
$set_entry_parameters = array(
    //session id
    "session" => $session_id,

    //The name of the module
    "module_name" => "Documents",

    //Record attributes
    "name_value_list" => array(
        //to update a record, pass in a record id as commented below
        //array("name" => "id", "value" => "9b170af9-3080-e22b-fbcl-4fea74def88f"),
        array("name" => "document_name", "value" => "Example Document"),
        array("name" => "revision", "value" => "1"),
    ),
);

$set_entry_result = call("set_entry", $set_entry_parameters, $url)
;

echo "<pre>";
print_r($set_entry_result);
echo "</pre>";

$document_id = $set_entry_result->id;

//create document revision -----
$content = file_get_contents ("/path/to/example_document.txt");

$set_document_revision_parameters = array(
    //session id
    "session" => $session_id,

```

---

```
//The attachment details
"note" => array(
    //The ID of the parent document.
    'id' => $document_id,

    //The binary contents of the file.
    'file' => base64_encode($contents),

    //The name of the file
    'filename' => 'example_document.txt',

    //The revision number
    'revision' => '1',
),
);

$set_document_revision_result = call("set_document_revision", $set
_document_revision_parameters, $url);

echo "<pre>";
print_r($set_document_revision_result);
echo "</pre>";

?>
```

## Result

```
//set_entry result
stdClass Object
(
    [id] => b769cf46-7881-a369-314d-50abaa238c62
    [entry_list] => stdClass Object
        (
            [document_name] => stdClass Object
                (
                    [name] => document_name
                    [value] => Example Document
                )

            [revision] => stdClass Object
                (
                    [name] => revision
                    [value] => 1
                )
        )
)
```



---

```
        )
    )
)

//set_document_revision result
stdClass Object
(
    [id] => e83f97b9-b818-2d04-1aeb-50abaa8303b5
)
```

**Last Modified:** 2021-02-17 02:44:13

## Creating Notes with Attachments

### Overview

A PHP example demonstrating how to create a note using `set_entry` and add an attachment with the `set_note_attachment` method using `cURL` and the `v4_1` REST API.

### Example

```
<?php

$url = "http://{site_url}/service/v4_1/rest.php";
$username = "admin";
$password = "password";

//function to make cURL request
function call($method, $parameters, $url)
{
    ob_start();
    $curl_request = curl_init();

    curl_setopt($curl_request, CURLOPT_URL, $url);
    curl_setopt($curl_request, CURLOPT_POST, 1);
    curl_setopt($curl_request, CURLOPT_HTTP_VERSION, CURL_HTTP_VER
```

---

```

SION_1_0);
    curl_setopt($curl_request, CURLOPT_HEADER, 1);
    curl_setopt($curl_request, CURLOPT_SSL_VERIFYPEER, 0);
    curl_setopt($curl_request, CURLOPT_RETURNTRANSFER, 1);
    curl_setopt($curl_request, CURLOPT_FOLLOWLOCATION, 0);

    $jsonEncodedData = json_encode($parameters);

    $post = array(
        "method" => $method,
        "input_type" => "JSON",
        "response_type" => "JSON",
        "rest_data" => $jsonEncodedData
    );

    curl_setopt($curl_request, CURLOPT_POSTFIELDS, $post);
    $result = curl_exec($curl_request);
    curl_close($curl_request);

    $result = explode("\r\n\r\n", $result, 2);
    $response = json_decode($result[1]);
    ob_end_flush();

    return $response;
}

//login -----
$login_parameters = array(
    "user_auth" => array(
        "user_name" => $username,
        "password" => md5($password),
        "version" => "1"
    ),
    "application_name" => "RestTest",
    "name_value_list" => array(),
);

$login_result = call("login", $login_parameters, $url);

/*
echo "<pre>";
print_r($login_result);
echo "</pre>";
*/

```

---

```

//get session id
$session_id = $login_result->id;

//create note -----

$set_entry_parameters = array(
    //session id
    "session" => $session_id,

    //The name of the module
    "module_name" => "Notes",

    //Record attributes
    "name_value_list" => array(
        //to update a record, you will need to pass in a record id
        //as commented below
        //array("name" => "id", "value" => "9b170af9-3080-e22b-
        fbcl-4fea74def88f"),
        array("name" => "name", "value" => "Example Note"),
    ),
);

$set_entry_result = call("set_entry", $set_entry_parameters, $url)
;

echo "<pre>";
print_r($set_entry_result);
echo "</pre>";

$note_id = $set_entry_result->id;

//create note attachment -----

$contents = file_get_contents ("/path/to/example_file.php");

$set_note_attachment_parameters = array(
    //session id
    "session" => $session_id,

    //The attachment details
    "note" => array(
        //The ID of the note containing the attachment.
        'id' => $note_id,

        //The file name of the attachment.
        'filename' => 'example_file.php',
    ),
);

```

---

```
        //The binary contents of the file.
        'file' => base64_encode($contents),
    ),
);

$set_note_attachment_result = call("set_note_attachment", $set_note_attachment_parameters, $url);

echo "<pre>";
print_r($set_note_attachment_result);
echo "</pre>";

?>
```

## Result

```
//set_entry result
stdClass Object
(
    [id] => 72508938-db19-3b5c-b7a8-50abc7ec3fdb
    [entry_list] => stdClass Object
        (
            [name] => stdClass Object
                (
                    [name] => name
                    [value] => Example Note
                )
        )
)

//set_note_attachment result
stdClass Object
(
    [id] => 72508938-db19-3b5c-b7a8-50abc7ec3fdb
)
```

**Last Modified:** 2021-02-17 02:44:13

---

# Creating or Updating a Record

## Overview

A PHP example demonstrating how to create or update an Account with the `set_entry` method using cURL and the v4\_1 REST API.

## Example

```
<?php

$url = "http://{site_url}/service/v4_1/rest.php";
$username = "admin";
$password = "password";

//function to make cURL request
function call($method, $parameters, $url)
{
    ob_start();
    $curl_request = curl_init();

    curl_setopt($curl_request, CURLOPT_URL, $url);
    curl_setopt($curl_request, CURLOPT_POST, 1);
    curl_setopt($curl_request, CURLOPT_HTTP_VERSION, CURL_HTTP_VERSION_1_0);
    curl_setopt($curl_request, CURLOPT_HEADER, 1);
    curl_setopt($curl_request, CURLOPT_SSL_VERIFYPEER, 0);
    curl_setopt($curl_request, CURLOPT_RETURNTRANSFER, 1);
    curl_setopt($curl_request, CURLOPT_FOLLOWLOCATION, 0);

    $jsonData = json_encode($parameters);

    $post = array(
        "method" => $method,
        "input_type" => "JSON",
        "response_type" => "JSON",
        "rest_data" => $jsonData
    );

    curl_setopt($curl_request, CURLOPT_POSTFIELDS, $post);
    $result = curl_exec($curl_request);
    curl_close($curl_request);
}
```

---

```

    $result = explode("\r\n\r\n", $result, 2);
    $response = json_decode($result[1]);
    ob_end_flush();

    return $response;
}

//login -----

$login_parameters = array(
    "user_auth" => array(
        "user_name" => $username,
        "password" => md5($password),
        "version" => "1"
    ),
    "application_name" => "RestTest",
    "name_value_list" => array(),
);

$login_result = call("login", $login_parameters, $url);

/*
echo "<pre>";
print_r($login_result);
echo "</pre>";
*/

//get session id
$session_id = $login_result->id;

//create account -----

$set_entry_parameters = array(
    //session id
    "session" => $session_id,

    //The name of the module from which to retrieve records.
    "module_name" => "Accounts",

    //Record attributes
    "name_value_list" => array(
        //to update a record, you will need to pass in a record id
        //as commented below
        //array("name" => "id", "value" => "9b170af9-3080-e22b-
        fbcl-4fea74def88f"),
        array("name" => "name", "value" => "Test Account"),
    ),
);

```

---

```
    ),
);

$set_entry_result = call("set_entry", $set_entry_parameters, $url)
;

echo "<pre>";
print_r($set_entry_result);
echo "</pre>";

?>
```

## Result

```
stdClass Object
(
    [id] => 9b170af9-3080-e22b-fbc1-4fea74def88f
    [entry_list] => stdClass Object
        (
            [name] => stdClass Object
                (
                    [name] => name
                    [value] => Test Account
                )
        )
)
```

**Last Modified:** 2021-02-17 02:44:13

## Creating or Updating Multiple Records

### Overview

A PHP example demonstrating how to create or update multiple contacts with the `set_entries` method using `cURL` and the `v4_1` REST API.

---

## Example

```
<?php

$url = "http://{site_url}/service/v4_1/rest.php";
$username = "admin";
$password = "password";

//function to make cURL request
function call($method, $parameters, $url)
{
    ob_start();
    $curl_request = curl_init();

    curl_setopt($curl_request, CURLOPT_URL, $url);
    curl_setopt($curl_request, CURLOPT_POST, 1);
    curl_setopt($curl_request, CURLOPT_HTTP_VERSION, CURL_HTTP_VERSION_1_0);
    curl_setopt($curl_request, CURLOPT_HEADER, 1);
    curl_setopt($curl_request, CURLOPT_SSL_VERIFYPEER, 0);
    curl_setopt($curl_request, CURLOPT_RETURNTRANSFER, 1);
    curl_setopt($curl_request, CURLOPT_FOLLOWLOCATION, 0);

    $jsonData = json_encode($parameters);

    $post = array(
        "method" => $method,
        "input_type" => "JSON",
        "response_type" => "JSON",
        "rest_data" => $jsonData
    );

    curl_setopt($curl_request, CURLOPT_POSTFIELDS, $post);
    $result = curl_exec($curl_request);
    curl_close($curl_request);

    $result = explode("\r\n\r\n", $result, 2);
    $response = json_decode($result[1]);
    ob_end_flush();

    return $response;
}

//login -----
$logins_parameters = array(
```



---

```

        "user_auth" => array(
            "user_name" => $username,
            "password" => md5($password),
            "version" => "1"
        ),
        "application_name" => "RestTest",
        "name_value_list" => array(),
    );

    $login_result = call("login", $login_parameters, $url);

    /*
    echo "<pre>";
    print_r($login_result);
    echo "</pre>";
    */

    //get session id
    $session_id = $login_result->id;

    //create contacts -----
    $set_entries_parameters = array(
        //session id
        "session" => $session_id,

        //The name of the module from which to retrieve records.
        "module_name" => "Contacts",

        //Record attributes
        "name_value_list" => array(
            array(
                //to update a record, you will need to pass in a record
                id as commented below
                //array("name" => "id", "value" => "912e58c0-73e9-9cb6
-c84e-4ff34d62620e"),
                array("name" => "first_name", "value" => "John"),
                array("name" => "last_name", "value" => "Smith"),
            ),
            array(
                //to update a record, you will need to pass in a record
                id as commented below
                //array("name" => "id", "value" => "99d6ddfd-7d52-d45b-
eba8-4ff34d684964"),
                array("name" => "first_name", "value" => "Jane"),
                array("name" => "last_name", "value" => "Doe"),
            ),
        ),
    );

```

---

```
        ),
    );

    $set_entries_result = call("set_entries", $set_entries_parameters,
$url);

    echo "<pre>";
    print_r($set_entries_result);
    echo "</pre>";

?>
```

## Result

```
stdClass Object
(
    [ids] => Array
        (
            [0] => 912e58c0-73e9-9cb6-c84e-4ff34d62620e
            [1] => 99d6ddfd-7d52-d45b-eba8-4ff34d684964
        )
)
```

**Last Modified:** 2021-02-17 02:44:13

## Creating or Updating Teams

### Overview

A PHP example demonstrating how to manipulate teams using cURL and the v4\_1 REST API.

**Note:** If you are creating a private team for a user, you will need to set `private` to `true` and populate the `associated_user_id` populated. You should also populate the `name` and `name_2` properties with the users first and last name.

---

## Example

```
<?php

$url = "http://{site_url}/service/v4_1/rest.php";
$username = "admin";
$password = "password";

//function to make cURL request
function call($method, $parameters, $url)
{
    ob_start();
    $curl_request = curl_init();

    curl_setopt($curl_request, CURLOPT_URL, $url);
    curl_setopt($curl_request, CURLOPT_POST, 1);
    curl_setopt($curl_request, CURLOPT_HTTP_VERSION, CURL_HTTP_VERSION_1_0);
    curl_setopt($curl_request, CURLOPT_HEADER, 1);
    curl_setopt($curl_request, CURLOPT_SSL_VERIFYPEER, 0);
    curl_setopt($curl_request, CURLOPT_RETURNTRANSFER, 1);
    curl_setopt($curl_request, CURLOPT_FOLLOWLOCATION, 0);

    $jsonData = json_encode($parameters);

    $post = array(
        "method" => $method,
        "input_type" => "JSON",
        "response_type" => "JSON",
        "rest_data" => $jsonData
    );

    curl_setopt($curl_request, CURLOPT_POSTFIELDS, $post);
    $result = curl_exec($curl_request);
    curl_close($curl_request);

    $result = explode("\r\n\r\n", $result, 2);
    $response = json_decode($result[1]);
    ob_end_flush();

    return $response;
}

//login -----
```

---

```

$login_parameters = array(
    "user_auth" => array(
        "user_name" => $username,
        "password" => md5($password),
        "version" => "1"
    ),
    "application_name" => "RestTest",
    "name_value_list" => array(),
);

$login_result = call("login", $login_parameters, $url);

/*
echo "<pre>";
print_r($login_result);
echo "</pre>";
*/

//get session id
$session_id = $login_result->id;

//create team -----

$set_entry_parameters = array(

    // session id
    "session" => $session_id,

    // The name of the module that the record will be create in.
    "module_name" => "Teams",

    // array of arrays for the record attributes
    "name_value_list" => array(
        /* Setting the id with a valid record id will update the r
record.
        array(
            "name" => "id",
            "value" => "47dbab1d-bd78-09e8-4392-5256b4501d90"
        ),
        */
        array(
            "name" => "name",
            "value" => "My Team"
        ),
        array(
            "name" => "description",

```

---

```

        "value" => "My new team"
    ),
    //Whether the team is private.
    //Private teams will have the associated_user_id populated
.
    array(
        "name" => "private",
        "value" => 0
    ),
),
);

$set_entry_result = call("set_entry", $set_entry_parameters, $url)
;

echo "<pre>";
print_r($set_entry_result);
echo "</pre>";

?>

```

## Result

```

stdClass Object
(
    [id] => 5c35a3be-4601-fb45-3afd-52ab78b03f89
    [entry_list] => stdClass Object
        (
            [name] => stdClass Object
                (
                    [name] => name
                    [value] => My Team
                )

            [description] => stdClass Object
                (
                    [name] => description
                    [value] => My new team
                )

            [private] => stdClass Object
                (
                    [name] => private
                    [value] =>

```

---

```
)  
  
)  
  
)
```

**Last Modified:** 2021-02-17 02:44:13

## Logging In

### Overview

A PHP example demonstrating how to log in and retrieve a session key using cURL and the v4\_1 REST API.

### Standard Authentication Example

```
<?php  
  
$url = "http://{site_url}/service/v4_1/rest.php";  
$username = "admin";  
$password = "password";  
  
//function to make cURL request  
function call($method, $parameters, $url)  
{  
    ob_start();  
    $curl_request = curl_init();  
  
    curl_setopt($curl_request, CURLOPT_URL, $url);  
    curl_setopt($curl_request, CURLOPT_POST, 1);  
    curl_setopt($curl_request, CURLOPT_HTTP_VERSION, CURL_HTTP_VER  
SION_1_0);  
    curl_setopt($curl_request, CURLOPT_HEADER, 1);  
    curl_setopt($curl_request, CURLOPT_SSL_VERIFYPEER, 0);  
    curl_setopt($curl_request, CURLOPT_RETURNTRANSFER, 1);  
    curl_setopt($curl_request, CURLOPT_FOLLOWLOCATION, 0);  
  
    $jsonData = json_encode($parameters);
```

---

```
$post = array(
    "method" => $method,
    "input_type" => "JSON",
    "response_type" => "JSON",
    "rest_data" => $jsonEncodedData
);

curl_setopt($curl_request, CURLOPT_POSTFIELDS, $post);
$result = curl_exec($curl_request);
curl_close($curl_request);

$result = explode("\r\n\r\n", $result, 2);
$response = json_decode($result[1]);
ob_end_flush();

return $response;
}

//login -----
$login_parameters = array(
    "user_auth" => array(
        "user_name" => $username,
        "password" => md5($password),
        "version" => "1"
    ),
    "application_name" => "RestTest",
    "name_value_list" => array(),
);

$login_result = call("login", $login_parameters, $url);

echo "<pre>";
print_r($login_result);
echo "</pre>";

//get session id
$session_id = $login_result->id;

?>
```

## LDAP Authentication Example

```
<?php
```

---

```

$url = "http://{site_url}/service/v4_1/rest.php";
$username = "admin";
$password = "password";
$ldap_enc_key = 'LDAP_ENCRYPTION_KEY';

//function to make cURL request
function call($method, $parameters, $url)
{
    ob_start();
    $curl_request = curl_init();

    curl_setopt($curl_request, CURLOPT_URL, $url);
    curl_setopt($curl_request, CURLOPT_POST, 1);
    curl_setopt($curl_request, CURLOPT_HTTP_VERSION, CURL_HTTP_VERSION_1_0);
    curl_setopt($curl_request, CURLOPT_HEADER, 1);
    curl_setopt($curl_request, CURLOPT_SSL_VERIFYPEER, 0);
    curl_setopt($curl_request, CURLOPT_RETURNTRANSFER, 1);
    curl_setopt($curl_request, CURLOPT_FOLLOWLOCATION, 0);

    $jsonData = json_encode($parameters);

    $post = array(
        "method" => $method,
        "input_type" => "JSON",
        "response_type" => "JSON",
        "rest_data" => $jsonData
    );

    curl_setopt($curl_request, CURLOPT_POSTFIELDS, $post);
    $result = curl_exec($curl_request);
    curl_close($curl_request);

    $result = explode("\r\n\r\n", $result, 2);
    $response = json_decode($result[1]);
    ob_end_flush();

    return $response;
}

//login -----
$ldap_enc_key = substr(md5($ldap_enc_key), 0, 24);
$logins_parameters = array(
    "user_auth" => array(
        "user_name" => $username,
        "password" => bin2hex(mcrypt_encrypt(MCRYPT_3DES, $ldap_

```



---

```

enc_key, $password, MCRYPT_MODE_CBC, "password")),
    "version" => "1"
),
"application_name" => "RestTest",
"name_value_list" => array(),
);

/*
The mcrypt extension is deprecated as of PHP 7.1.
If on 7.1+, LDAP passwords will need to be sent unencrypted, w
ith
$login_parameters["user_auth"]["encryption"] set to "PLAIN".
An example is below:
$login_parameters = array(
    "user_auth" => array(
        "user_name" => $username,
        "password" => $password,
        "version" => "1",
        "encryption" => "PLAIN"
    ),
    "application_name" => "RestTest",
    "name_value_list" => array(),
);
*/

$login_result = call("login", $login_parameters, $url);

echo "<pre>";
print_r($login_result);
echo "</pre>";

//get session id
$session_id = $login_result->id;

?>

```

## Result

```

stdClass Object
(
    [id] => lb7479svj8pjtf57ipmshepo80
    [module_name] => Users
    [name_value_list] => stdClass Object
        (

```

---

```
[user_id] => stdClass Object
(
  [name] => user_id
  [value] => 1
)

[user_name] => stdClass Object
(
  [name] => user_name
  [value] => admin
)

[user_language] => stdClass Object
(
  [name] => user_language
  [value] => en_us
)

[user_currency_id] => stdClass Object
(
  [name] => user_currency_id
  [value] => -99
)

[user_is_admin] => stdClass Object
(
  [name] => user_is_admin
  [value] => 1
)

[user_default_team_id] => stdClass Object
(
  [name] => user_default_team_id
  [value] => 1
)

[user_default_dateformat] => stdClass Object
(
  [name] => user_default_dateformat
  [value] => m/d/Y
)

[user_default_timeformat] => stdClass Object
(
  [name] => user_default_timeformat
  [value] => h:ia
```

---

```
    )

[user_number_seperator] => stdClass Object
(
    [name] => user_number_seperator
    [value] => ,
)

[user_decimal_seperator] => stdClass Object
(
    [name] => user_decimal_seperator
    [value] => .
)

[mobile_max_list_entries] => stdClass Object
(
    [name] => mobile_max_list_entries
    [value] => 10
)

[mobile_max_subpanel_entries] => stdClass Object
(
    [name] => mobile_max_subpanel_entries
    [value] => 3
)

[user_currency_name] => stdClass Object
(
    [name] => user_currency_name
    [value] => US Dollars
)

)

)
```

**Last Modified:** 2021-02-17 02:44:13

## Relating Quotes and Products

---

## Overview

A PHP example demonstrating how to create and relate Products to Quotes using cURL and the v4\_1 REST API.

## Example

```
<?php
```

```
$url = "http://{site_url}/service/v4_1/rest.php";
$username = "admin";
$password = "password";

//function to make cURL request
function call($method, $parameters, $url)
{
    ob_start();
    $curl_request = curl_init();

    curl_setopt($curl_request, CURLOPT_URL, $url);
    curl_setopt($curl_request, CURLOPT_POST, 1);
    curl_setopt($curl_request, CURLOPT_HTTP_VERSION, CURL_HTTP_VERSION_1_0);
    curl_setopt($curl_request, CURLOPT_HEADER, 1);
    curl_setopt($curl_request, CURLOPT_SSL_VERIFYPEER, 0);
    curl_setopt($curl_request, CURLOPT_RETURNTRANSFER, 1);
    curl_setopt($curl_request, CURLOPT_FOLLOWLOCATION, 0);

    $jsonData = json_encode($parameters);

    $post = array(
        "method" => $method,
        "input_type" => "JSON",
        "response_type" => "JSON",
        "rest_data" => $jsonData
    );

    curl_setopt($curl_request, CURLOPT_POSTFIELDS, $post);
    $result = curl_exec($curl_request);
    curl_close($curl_request);

    $result = explode("\r\n\r\n", $result, 2);
    $response = json_decode($result[1]);
    ob_end_flush();
}
```

---

```

        return $response;
    }

//login -----
$login_parameters = array(
    "user_auth" => array(
        "user_name" => $username,
        "password" => md5($password),
        "version" => "1"
    ),
    "application_name" => "RestTest",
    "name_value_list" => array(),
);

$login_result = call("login", $login_parameters, $url);

/*
echo "<pre>";
print_r($login_result);
echo "</pre>";
*/

//get session id
$session_id = $login_result->id;

//create quote -----
$createQuoteParams = array(
    'session' => $session_id,
    'module_name' => 'Quotes',
    'name_value_list' => array(
        array(
            'name' => 'name',
            'value' => 'Widget Quote'
        ),
        array(
            'name' => 'team_count',
            'value' => ''
        ),
        array(
            'name' => 'team_name',
            'value' => ''
        ),
        array(
            'name' => 'date_quote_expected_closed',
            'value' => date('Y-m-
```

---

```
d', mktime(0, 0, 0, date('m') , date('d')+7, date('Y'))
    ),
    array(
        'name' => 'quote_stage',
        'value' => 'Negotiation'
    ),
    array(
        'name' => 'quote_num',
        'value' => ''
    ),
    array(
        'name' => 'quote_type',
        'value' => 'Quotes'
    ),
    array(
        'name' => 'subtotal',
        'value' => '1230.23'
    ),
    array(
        'name' => 'subtotal_usdollar',
        'value' => '1230.23'
    ),
),
);
```

```
$createQuoteResult = call('set_entry', $createQuoteParams, $url);
```

```
echo "Create Quote Result<br />";
echo "<pre>";
print_r($createQuoteResult);
echo "</pre>";
```

```
//create product -----
```

```
$createProductParams = array(
    'session' => $session_id,
    'module_name' => 'Products',
    'name_value_list' => array(
        array(
            'name' => 'name',
            'value' => 'Widget'
        ),
        array(
            'name' => 'quote_id',
            'value' => $createQuoteResult->id
        ),
    ),
);
```

---

```

        array(
            'name' => 'status',
            'value' => 'Quotes'
        )
    )
);

$createProductResult = call('set_entry', $createProductParams, $url);

echo "Create Product Result<br />";

echo "<pre>";
print_r($createProductResult);
echo "</pre>";

//create product-
bundle -----

$createProductBundleParams = array(
    "session"          => $session_id,
    "module_name"      => "ProductBundles",
    "name_value_list" => array(
        array(
            'name' => 'name',
            'value' => 'Rest SugarOnline Order'),
        array(
            'name' => 'bundle_stage',
            'value' => 'Draft'
        ),
        array(
            'name' => 'tax',
            'value' => '0.00'
        ),
        array(
            'name' => 'total',
            'value' => '0.00'
        ),
        array(
            'name' => 'subtotal',
            'value' => '0.00'
        ),
        array(
            'name' => 'shippint',
            'value' => '0.00'
        ),
    ),
);

```

---

```

        array(
            'name' => 'currency_id',
            'value' => '-99'
        ),
    ),
);

$createProductBundleResult = call('set_entry', $createProductBundleParams, $url);

echo "Create ProductBundles Result<br />";

echo "<pre>";
print_r($createProductBundleResult);
echo "</pre>";

//relate product to product-
bundle -----

$relationshipProductBundleProductsParams = array(
    'session' => $session_id,
    'module_name' => 'ProductBundles',
    'module_id' => $createProductBundleResult->id,
    'link_field_name' => 'products',
    'related_ids' => array(
        $createProductResult->id
    ),
);

// set the product bundles products relationship
$relationshipProductBundleProductResult = call('set_relationship',
$relationshipProductBundleProductsParams, $url);

echo "Create ProductBundleProduct Relationship Result<br />";

echo "<pre>";
print_r($relationshipProductBundleProductResult);
echo "</pre>";

//relate product-
bundle to quote -----

$relationshipProductBundleQuoteParams = array(
    'session' => $session_id,
    'module_name' => 'Quotes',
    'module_id' => $createQuoteResult->id,

```



---

```

        'link_field_name' => 'product_bundles',
        'related_ids' => array(
            $createProductBundleResult->id
        ),
        'name_value_list' => array()
    );

    // set the product bundles quotes relationship
    $relationshipProductBundleQuoteResult = call('set_relationship', $
relationshipProductBundleQuoteParams, $url);

    echo "Create ProductBundleQuote Relationship Result<br />";

    echo "<pre>";
    print_r($relationshipProductBundleQuoteResult);
    echo "</pre>";

```

## Result

```

//Create Quote Result
stdClass Object
(
    [id] => 2e0cd18b-21da-50f0-10f6-517e835a1e09
    [entry_list] => stdClass Object
        (
            [name] => stdClass Object
                (
                    [name] => name
                    [value] => Widget Quote
                )

            [team_count] => stdClass Object
                (
                    [name] => team_count
                    [value] =>

                )

            [team_name] => stdClass Object
                (
                    [name] => team_name
                    [value] =>

                )

            [date_quote_expected_closed] => stdClass Object

```

---

```
        (
            [name] => date_quote_expected_closed
            [value] => 2013-05-06
        )

[quote_stage] => stdClass Object
    (
        [name] => quote_stage
        [value] => Negotiation
    )

[quote_num] => stdClass Object
    (
        [name] => quote_num
        [value] =>
    )

[quote_type] => stdClass Object
    (
        [name] => quote_type
        [value] => Quotes
    )

[subtotal] => stdClass Object
    (
        [name] => subtotal
        [value] => 1230.23
    )

[subtotal_usdollar] => stdClass Object
    (
        [name] => subtotal_usdollar
        [value] => 1230.23
    )
)

)

//Create Product Result
stdClass Object
(
    [id] => 6c40f344-a269-d4d0-9929-517e83884fb2
    [entry_list] => stdClass Object
        (
            [name] => stdClass Object
```

---

```
(
    [name] => name
    [value] => Widget
)

[quote_id] => stdClass Object
(
    [name] => quote_id
    [value] => 2e0cd18b-21da-50f0-10f6-517e835a1e09
)

[status] => stdClass Object
(
    [name] => status
    [value] => Quotes
)
)

)

//Create ProductBundles Result
stdClass Object
(
    [id] => a8a4e449-7e72-dea5-9495-517e830a7353
    [entry_list] => stdClass Object
        (
            [name] => stdClass Object
                (
                    [name] => name
                    [value] => Rest SugarOnline Order
                )
            [bundle_stage] => stdClass Object
                (
                    [name] => bundle_stage
                    [value] => Draft
                )
            [tax] => stdClass Object
                (
                    [name] => tax
                    [value] => 0
                )
            [total] => stdClass Object
```

---

```
        (
            [name] => total
            [value] => 0
        )

[subtotal] => stdClass Object
    (
        [name] => subtotal
        [value] => 0
    )

[currency_id] => stdClass Object
    (
        [name] => currency_id
        [value] => -99
    )
)

)

//Create ProductBundleProduct Relationship Result
stdClass Object
(
    [created] => 1
    [failed] => 0
    [deleted] => 0
)

//Create ProductBundleQuote Relationship Result
stdClass Object
(
    [created] => 1
    [failed] => 0
    [deleted] => 0
)
```

**Last Modified:** 2021-02-17 02:44:13

## Retrieving a List of Fields From a Module

---

## Overview

A PHP example demonstrating how to retrieve fields vardefs from the accounts module with the `get_module_fields` method using cURL and the `v4_1` REST API.

This example will only retrieve the vardefs for the 'id' and 'name' fields.

## Example

```
<?php

$url = "http://{site_url}/service/v4_1/rest.php";
$username = "admin";
$password = "password";

function call($method, $parameters, $url)
{
    ob_start();
    $curl_request = curl_init();

    curl_setopt($curl_request, CURLOPT_URL, $url);
    curl_setopt($curl_request, CURLOPT_POST, 1);
    curl_setopt($curl_request, CURLOPT_HTTP_VERSION, CURL_HTTP_VERSION_1_0);
    curl_setopt($curl_request, CURLOPT_HEADER, 1);
    curl_setopt($curl_request, CURLOPT_SSL_VERIFYPEER, 0);
    curl_setopt($curl_request, CURLOPT_RETURNTRANSFER, 1);
    curl_setopt($curl_request, CURLOPT_FOLLOWLOCATION, 0);

    $jsonData = json_encode($parameters);

    $post = array(
        "method" => $method,
        "input_type" => "JSON",
        "response_type" => "JSON",
        "rest_data" => $jsonData
    );

    curl_setopt($curl_request, CURLOPT_POSTFIELDS, $post);
    $result = curl_exec($curl_request);
    curl_close($curl_request);

    $result = explode("\r\n\r\n", $result, 2);
    $response = json_decode($result[1]);
}
```

---

```

        ob_end_flush();

        return $response;
    }

//login -----

$login_parameters = array(
    "user_auth" => array(
        "user_name" => $username,
        "password" => md5($password),
        "version" => "1"
    ),
    "application_name" => "RestTest",
    "name_value_list" => array(),
);

$login_result = call("login", $login_parameters, $url);

/*
echo "<pre>";
print_r($login_result);
echo "</pre>";
*/

//get session id
$session_id = $login_result->id;

//retrieve fields -----

$get_module_fields_parameters = array(

    //session id
    'session' => $session_id,

    //The name of the module from which to retrieve records
    'module_name' => 'Accounts',

    //Optional. Returns vardefs for the specified fields. An empty
y array will return all fields.
    'fields' => array(
        'id',
        'name',
    ),
);

```

---

---

```
$get_module_fields_result = call("get_module_fields", $get_module_
fields_parameters, $url);
```

```
echo "<pre>";
print_r($get_module_fields_result);
echo "</pre>";
```

```
?>
```

## Result

```
stdClass Object
(
    [module_name] => Accounts
    [table_name] => accounts
    [module_fields] => stdClass Object
        (
            [id] => stdClass Object
                (
                    [name] => id
                    [type] => id
                    [group] =>
                    [id_name] =>
                    [label] => ID
                    [required] => 1
                    [options] => Array
                        (
                        )

                    [related_module] =>
                    [calculated] =>
                    [len] =>
                )

            [name] => stdClass Object
                (
                    [name] => name
                    [type] => name
                    [group] =>
                    [id_name] =>
                    [label] => Name:
                    [required] => 1
                    [options] => Array
                        (
                        )
                )
        )
)
```

---

```
        )
        [related_module] =>
        [calculated] =>
        [len] => 150
    )
)

[link_fields] => Array
(
)
)
```

**Last Modified:** 2021-02-17 02:44:13

## Retrieving a List of Records

### Overview

A PHP example demonstrating how to retrieve a list of records from a module with the `get_entry_list` method using cURL and the `v4_1` REST API.

This example will retrieve a list of leads.

### Example

```
<?php

$url = "http://{site_url}/service/v4_1/rest.php";
$username = "admin";
$password = "password";

//function to make cURL request
function call($method, $parameters, $url)
{
    ob_start();
    $curl_request = curl_init();
```



---

```

    curl_setopt($curl_request, CURLOPT_URL, $url);
    curl_setopt($curl_request, CURLOPT_POST, 1);
    curl_setopt($curl_request, CURLOPT_HTTP_VERSION, CURL_HTTP_VER
SION_1_0);
    curl_setopt($curl_request, CURLOPT_HEADER, 1);
    curl_setopt($curl_request, CURLOPT_SSL_VERIFYPEER, 0);
    curl_setopt($curl_request, CURLOPT_RETURNTRANSFER, 1);
    curl_setopt($curl_request, CURLOPT_FOLLOWLOCATION, 0);

    $jsonData = json_encode($parameters);

    $post = array(
        "method" => $method,
        "input_type" => "JSON",
        "response_type" => "JSON",
        "rest_data" => $jsonData
    );

    curl_setopt($curl_request, CURLOPT_POSTFIELDS, $post);
    $result = curl_exec($curl_request);
    curl_close($curl_request);

    $result = explode("\r\n\r\n", $result, 2);
    $response = json_decode($result[1]);
    ob_end_flush();

    return $response;
}

//login -----
$login_parameters = array(
    "user_auth" => array(
        "user_name" => $username,
        "password" => md5($password),
        "version" => "1"
    ),
    "application_name" => "RestTest",
    "name_value_list" => array(),
);

$login_result = call("login", $login_parameters, $url);

/*
echo "<pre>";
print_r($login_result);

```

---

```

echo "</pre>";
*/

//get session id
$session_id = $login_result->id;

//get list of records -----

$get_entry_list_parameters = array(

    //session id
    'session' => $session_id,

    //The name of the module from which to retrieve records
    'module_name' => 'Leads',

    //The SQL WHERE clause without the word "where".
    'query' => "",

    //The SQL ORDER BY clause without the phrase "order by".
    'order_by' => "",

    //The record offset from which to start.
    'offset' => '0',

    //Optional. A list of fields to include in the results.
    'select_fields' => array(
        'id',
        'name',
        'title',
    ),

    /*
    A list of link names and the fields to be returned for each l
ink name.
    Example: 'link_name_to_fields_array' => array(array('name' =>
'email_addresses', 'value' => array('id', 'email_address', 'opt_out',
'primary_address'))
    */
    'link_name_to_fields_array' => array(
    ),

    //The maximum number of results to return.
    'max_results' => '2',

    //To exclude deleted records

```

---

```

        'deleted' => '0',

        //If only records marked as favorites should be returned.
        'Favorites' => false,
    );

    $get_entry_list_result = call('get_entry_list', $get_entry_list_pa
rameters, $url);

    echo '<pre>';
    print_r($get_entry_list_result);
    echo '</pre>';

?>

```

## Result

```

stdClass Object
(
    [result_count] => 2
    [total_count] => 200
    [next_offset] => 2
    [entry_list] => Array
        (
            [0] => stdClass Object
                (
                    [id] => 18124607-69d1-b158-47ff-4f7cb69344f7
                    [module_name] => Leads
                    [name_value_list] => stdClass Object
                        (
                            [id] => stdClass Object
                                (
                                    [name] => id
                                    [value] => 18124607-69d1-b158-47ff
-4f7cb69344f7
                                )
                            [name] => stdClass Object
                                (
                                    [name] => name
                                    [value] => Bernie Worthey
                                )
                            [title] => stdClass Object

```

---

```

        (
            [name] => title
            [value] => Senior Product Manager
        )
    )
)

[1] => stdClass Object
(
    [id] => 1cdfddc1-2759-b007-8713-4f7cb64c2e9c
    [module_name] => Leads
    [name_value_list] => stdClass Object
        (
            [id] => stdClass Object
                (
                    [name] => id
                    [value] => 1cdfddc1-2759-b007-8713
-4f7cb64c2e9c
                )
            [name] => stdClass Object
                (
                    [name] => name
                    [value] => Bobbie Kohlmeier
                )
            [title] => stdClass Object
                (
                    [name] => title
                    [value] => Director Operations
                )
        )
    )
)

[relationship_list] => Array
(
)
)

```

# Retrieving a List of Records With Related Info

## Overview

A PHP example demonstrating how to retrieve a list of records with info from a related entity with the `get_entry_list` method using cURL and the v4\_1 REST API.

This example will retrieve a list of contacts and their related email addresses.

## Example

```
<?php

$url = "http://{site_url}/service/v4_1/rest.php";
$username = "admin";
$password = "password";

//function to make cURL request
function call($method, $parameters, $url)
{
    ob_start();
    $curl_request = curl_init();

    curl_setopt($curl_request, CURLOPT_URL, $url);
    curl_setopt($curl_request, CURLOPT_POST, 1);
    curl_setopt($curl_request, CURLOPT_HTTP_VERSION, CURL_HTTP_VERSION_1_0);
    curl_setopt($curl_request, CURLOPT_HEADER, 1);
    curl_setopt($curl_request, CURLOPT_SSL_VERIFYPEER, 0);
    curl_setopt($curl_request, CURLOPT_RETURNTRANSFER, 1);
    curl_setopt($curl_request, CURLOPT_FOLLOWLOCATION, 0);

    $jsonData = json_encode($parameters);

    $post = array(
        "method" => $method,
        "input_type" => "JSON",
        "response_type" => "JSON",
```

---

```

        "rest_data" => $jsonEncodedData
    );

    curl_setopt($curl_request, CURLOPT_POSTFIELDS, $post);
    $result = curl_exec($curl_request);
    curl_close($curl_request);

    $result = explode("\r\n\r\n", $result, 2);
    $response = json_decode($result[1]);
    ob_end_flush();

    return $response;
}

//login -----
$login_parameters = array(
    "user_auth" => array(
        "user_name" => $username,
        "password" => md5($password),
        "version" => "1"
    ),
    "application_name" => "RestTest",
    "name_value_list" => array(),
);

$login_result = call("login", $login_parameters, $url);

/*
echo "<pre>";
print_r($login_result);
echo "</pre>";
*/

//get session id
$session_id = $login_result->id;

//retrieve records -----
$get_entry_list_parameters = array(

    //session id
    'session' => $session_id,

    //The name of the module from which to retrieve records
    'module_name' => "Contacts",

    //The SQL WHERE clause without the word "where".

```

---

```

'query' => "",

//The SQL ORDER BY clause without the phrase "order by".
'order_by' => "",

//The record offset from which to start.
'offset' => "0",

//Optional. The list of fields to be returned in the results
'select_fields' => array(
    'id',
    'first_name',
    'last_name',
),

//A list of link names and the fields to be returned for each
link name
'link_name_to_fields_array' => array(
    array(
        'name' => 'email_addresses',
        'value' => array(
            'id',
            'email_address',
            'opt_out',
            'primary_address'
        ),
    ),
),

//The maximum number of results to return.
'max_results' => '2',

//To exclude deleted records
'deleted' => 0,

//If only records marked as favorites should be returned.
'Favorites' => false,

);

$get_entry_list_result = call("get_entry_list", $get_entry_list_pa
rameters, $url);

echo "<pre>";
print_r($get_entry_list_result);
echo "</pre>";

```

---

?>

## Result

```
stdClass Object
(
  [result_count] => 2
  [total_count] => 200
  [next_offset] => 2
  [entry_list] => Array
    (
      [0] => stdClass Object
        (
          [id] => 116d9bc6-4a24-b826-952e-4f7cb6b25ea7
          [module_name] => Contacts
          [name_value_list] => stdClass Object
            (
              [id] => stdClass Object
                (
                  [name] => id
                  [value] => 116d9bc6-4a24-b826-952e
-4f7cb6b25ea7
                )
              [first_name] => stdClass Object
                (
                  [name] => first_name
                  [value] => Lucinda
                )
              [last_name] => stdClass Object
                (
                  [name] => last_name
                  [value] => Jacoby
                )
            )
          )
        )
      [1] => stdClass Object
        (
          [id] => 11c263ef-ff61-71ff-f090-4f7cb6fc9f68
```



```

[module_name] => Contacts
[name_value_list] => stdClass Object
(
  [id] => stdClass Object
  (
    [name] => id
    [value] => 11c263ef-ff61-71ff-
f090-4f7cb6fc9f68
  )
  [first_name] => stdClass Object
  (
    [name] => first_name
    [value] => Ike
  )
  [last_name] => stdClass Object
  (
    [name] => last_name
    [value] => Gassaway
  )
)
)
)
[relationship_list] => Array
(
  [0] => stdClass Object
  (
    [link_list] => Array
    (
      [0] => stdClass Object
      (
        [name] => email_addresses
        [records] => Array
        (
          [0] => stdClass Object
          (
            [link_value] => st
dClass Object
          (
            [id] => st
dClass Object

```

```

(
  [n
ame] => id
  [v
alue] => 13066f13-d6ea-405c-0f95-4f7cb6fa3a08
)
[email_add
ress] => stdClass Object
(
  [n
ame] => email_address
  [v
alue] => support52@example.org
)
[opt_out]
=> stdClass Object
(
  [n
ame] => opt_out
  [v
alue] => 0
)
[primary_a
ddress] => stdClass Object
(
  [n
ame] => primary_address
  [v
alue] =>
)
)
)
[1] => stdClass Object
(
  [link_value] => st
dClass Object
  (
    [id] => st
dClass Object
    (

```

---

```

ame] => id
alue] => 13e3d111-b226-c363-4832-4f7cb699a3a0
ress] => stdClass Object
ame] => email_address
alue] => qa.section@example.it
=> stdClass Object
ame] => opt_out
alue] => 1
ddress] => stdClass Object
ame] => primary_address
alue] =>
[1] => stdClass Object

```

```

(
  [link_list] => Array
    (
      [0] => stdClass Object
        (
          [name] => email_addresses
          [records] => Array
            (
              [0] => stdClass Object
                (
                  [link_value] => st
dClass Object
                    (
                      [id] => st
dClass Object
                        (
                          [n
ame] => id
                          [v
alue] => 16aeaf8b-b31f-943d-3844-4f7cb6ac63f2
                        )
                      [email_add
ress] => stdClass Object
                        (
                          [n
ame] => email_address
                          [v
alue] => vegan.sales.im@example.cn
                        )
                      [opt_out]
=> stdClass Object
                        (
                          [n
ame] => opt_out
                          [v
alue] => 0
                        )
                      [primary_a
ddress] => stdClass Object
                        (
                          [n
ame] => primary_address
                          [v

```

---

```

alue] =>
                                     )
                                     )
                                     )
[1] => stdClass Object
(
  [link_value] => stdClass Object
(
  [id] => stdClass Object
(
  [name] => id
  [value] => 173bacf5-5ea6-3906-d91d-4f7cb6c6e883
)
[email_address] => stdClass Object
(
  [name] => email_address
  [value] => kid.the.section@example.org
)
[opt_out] => stdClass Object
(
  [name] => opt_out
  [value] => 1
)
[primary_address] => stdClass Object
(
  [name] => primary_address
  [value] =>

```



---

```

//function to make cURL request
function call($method, $parameters, $url)
{
    ob_start();
    $curl_request = curl_init();

    curl_setopt($curl_request, CURLOPT_URL, $url);
    curl_setopt($curl_request, CURLOPT_POST, 1);
    curl_setopt($curl_request, CURLOPT_HTTP_VERSION, CURL_HTTP_VERSION
_1_0);
    curl_setopt($curl_request, CURLOPT_HEADER, 1);
    curl_setopt($curl_request, CURLOPT_SSL_VERIFYPEER, 0);
    curl_setopt($curl_request, CURLOPT_RETURNTRANSFER, 1);
    curl_setopt($curl_request, CURLOPT_FOLLOWLOCATION, 0);

    $jsonEncodedData = json_encode($parameters);

    $post = array(
        "method" => $method,
        "input_type" => "JSON",
        "response_type" => "JSON",
        "rest_data" => $jsonEncodedData
    );

    curl_setopt($curl_request, CURLOPT_POSTFIELDS, $post);
    $result = curl_exec($curl_request);
    curl_close($curl_request);

    $result = explode("\r\n\r\n", $result, 2);
    $response = json_decode($result[1]);
    ob_end_flush();

    return $response;
}

//login -----
$login_parameters = array(
    "user_auth" => array(
        "user_name" => $username,
        "password" => md5($password),
        "version" => "1"
    ),
    "application_name" => "RestTest",
    "name_value_list" => array(),
);

```

---

```
$login_result = call("login", $login_parameters, $url);

/*
echo "<pre>";
print_r($login_result);
echo "</pre>";
*/

//get session id
$session_id = $login_result->id;

//retrieve the email -----

// email id of an email with an attachment
$email_id = '5826bd75-527a-a736-edf5-5205421467bf';

// use get_entry to get the email contents
$get_entry_parameters = array(
    'session' => $session_id,
    'module_name' => 'Emails',
    'id' => $email_id,
    'select_fields' => array(),
    'link_name_to_fields_array' => array(
        array(
            'name' => 'notes',
            'value' => array(
                'id',
                'name',
                'file_mime_type',
                'filename',
                'description',
            ),
        ),
    ),
    'track_view' => false
);

$get_entry_result = call('get_entry', $get_entry_parameters, $url);

//Email record contents
echo "<pre>";
print_r($get_entry_result);
echo "</pre>";

if (!isset($get_entry_result->entry_list[0]))
```



---

```

{
    echo "Email not found!";
    die();
}

if (!isset($get_entry_result->relationship_list) || count($get_entry_r
esult->relationship_list) == 0)
{
    echo "No attachments found!";
    die();
}

//retrieve any attachments -----
--

foreach ($get_entry_result->relationship_list[0][0]->records as $key =
> $attachmentInfo)
{
    $get_note_attachment_parameters = array(
        'session' => $session_id,
        'id'      => $attachmentInfo->id->value,
    );

    $get_note_attachment_result = call('get_note_attachment', $get_not
e_attachment_parameters, $url);

    //attachment contents
    echo "<pre>";
    print_r($get_note_attachment_result);
    echo "</pre>";

    $file_name = $get_note_attachment_result->note_attachment->filenam
e;
    //decode and get file contents
    $file_contents = base64_decode($get_note_attachment_result->note_a
ttachment->file);

    //write file
    file_put_contents($file_name, $file_contents);
}

```

## Result

```
//Email Result
```

---

```
stdClass Object
(
  [entry_list] => Array
    (
      [0] => stdClass Object
        (
          [id] => 5826bd75-527a-a736-edf5-5205421467bf
          [module_name] => Emails
          [name_value_list] => stdClass Object
            (
              [assigned_user_name] => stdClass Object
                (
                  [name] => assigned_user_name
                  [value] => Administrator
                )

              [modified_by_name] => stdClass Object
                (
                  [name] => modified_by_name
                  [value] => Administrator
                )

              [created_by_name] => stdClass Object
                (
                  [name] => created_by_name
                  [value] => Administrator
                )

              [team_id] => stdClass Object
                (
                  [name] => team_id
                  [value] => 1
                )

              [team_set_id] => stdClass Object
                (
                  [name] => team_set_id
                  [value] => 1
                )

              [team_name] => stdClass Object
                (
                  [name] => team_name
                  [value] => Global
                )
            )
          )
        )
    )
)
```

---

a736-edf5-5205421467bf

```
[id] => stdClass Object
(
  [name] => id
  [value] => 5826bd75-527a-

[date_entered] => stdClass Object
(
  [name] => date_entered
  [value] => 2013-08-09 19:28:00

[date_modified] => stdClass Object
(
  [name] => date_modified
  [value] => 2013-08-09 19:29:08

[assigned_user_id] => stdClass Object
(
  [name] => assigned_user_id
  [value] => 1

[modified_user_id] => stdClass Object
(
  [name] => modified_user_id
  [value] => 1

[created_by] => stdClass Object
(
  [name] => created_by
  [value] => 1

[deleted] => stdClass Object
(
  [name] => deleted
  [value] => 0

[from_addr_name] => stdClass Object
(
  [name] => from_addr_name
```

---

```
        [value] => SugarCRM
    )

[to_addrs_names] => stdClass Object
(
    [name] => to_addrs_names
    [value] => email@address.com
)

[description_html] => stdClass Object
(
    [name] => description_html
    [value] =>

)

[description] => stdClass Object
(
    [name] => description
    [value] =>

)

[date_sent] => stdClass Object
(
    [name] => date_sent
    [value] => 2013-08-09 19:28:00
)

[message_id] => stdClass Object
(
    [name] => message_id
    [value] =>

)

[message_uid] => stdClass Object
(
    [name] => message_uid
    [value] =>

)

[name] => stdClass Object
(
    [name] => name
    [value] => Example
)
```

---

```
[type] => stdClass Object
(
  [name] => type
  [value] => out
)

[status] => stdClass Object
(
  [name] => status
  [value] => read
)

[flagged] => stdClass Object
(
  [name] => flagged
  [value] => 0
)

[reply_to_status] => stdClass Object
(
  [name] => reply_to_status
  [value] => 0
)

[intent] => stdClass Object
(
  [name] => intent
  [value] => pick
)

[mailbox_id] => stdClass Object
(
  [name] => mailbox_id
  [value] =>
)

[parent_name] => stdClass Object
(
  [name] => parent_name
  [value] => Having trouble adding n
```

ew items

```
[parent_type] => stdClass Object
(
```

```

        [name] => parent_type
        [value] => Cases
    )
    [parent_id] => stdClass Object
    (
        [name] => parent_id
        [value] => 116d4d46-928c-d4af-
c22e-518ae4eb13fc
    )
)
)
[relationship_list] => Array
(
    [0] => Array
    (
        [0] => stdClass Object
        (
            [name] => notes
            [records] => Array
            (
                [0] => stdClass Object
                (
                    [id] => stdClass Object
                    (
                        [name] => id
                        [value] => 1b63a8f
9-ce67-6aad-b5a4-52054af18c47
                    )
                )
                [name] => stdClass Object
                (
                    [name] => name
                    [value] => Example
.zip
                )
            )
            [file_mime_type] => stdCla
ss Object
            (
                [name] => file_mim
e_type
                [value] => applica
tion/zip
            )

```

```

[filename] => stdClass Obj
ect
    (
        [name] => filename
        [value] => Example
    )
2.zip
[description] => stdClass
Object
    (
        [name] => descript
ion
        [value] =>
    )
[_empty_] => stdClass Obj
ct
    (
        [name] =>
        [value] =>
    )
)
[1] => stdClass Object
    (
        [id] => stdClass Object
            (
                [name] => id
                [value] => 592f382
            )
        [name] => stdClass Object
            (
                [name] => name
                [value] => Example
            )
        [file_mime_type] => stdCla
ss Object
            (
                [name] => file_mim

```





---

```

        [filename] => Example.zip
        [file] => UEsDBAoAAAAIAOujCEOkMbvNa0AAMCFAgAXAAARmlsZXMv
aW
        [related_module_id] => 5826bd75-527a-
a736-edf5-5205421467bf
        [related_module_name] => Emails
    )
)

//Attachment 2 Result
stdClass Object
(
    [note_attachment] => stdClass Object
        (
            [id] => 592f382d-b633-fd5f-803e-5205423a6d0b
            [filename] => Example2.zip
            [file] => AEUoaAAARmlslsZXMvaWZuXujCEOkMbvNa0AAMCFAgAXAAA
Rm
            [related_module_id] => 5826bd75-527a-
a736-edf5-5205421467bf
            [related_module_name] => Emails
        )
)

```

**Last Modified:** 2021-02-17 02:44:13

## Retrieving Multiple Records by ID

### Overview

A PHP example demonstrating how to retrieve multiple records from the accounts module with the `get_entries` method using cURL and the `v4_1` REST API.

This example will only retrieve 2 records and return the following fields: 'name', 'billing\_address\_state' and 'billing\_address\_country'.

### Example

---

<?php

```
$url = "http://{site_url}/service/v4_1/rest.php";
$username = "admin";
$password = "password";

//function to make cURL request
function call($method, $parameters, $url)
{
    ob_start();
    $curl_request = curl_init();

    curl_setopt($curl_request, CURLOPT_URL, $url);
    curl_setopt($curl_request, CURLOPT_POST, 1);
    curl_setopt($curl_request, CURLOPT_HTTP_VERSION, CURL_HTTP_VERSION_1_0);
    curl_setopt($curl_request, CURLOPT_HEADER, 1);
    curl_setopt($curl_request, CURLOPT_SSL_VERIFYPEER, 0);
    curl_setopt($curl_request, CURLOPT_RETURNTRANSFER, 1);
    curl_setopt($curl_request, CURLOPT_FOLLOWLOCATION, 0);

    $jsonData = json_encode($parameters);

    $post = array(
        "method" => $method,
        "input_type" => "JSON",
        "response_type" => "JSON",
        "rest_data" => $jsonData
    );

    curl_setopt($curl_request, CURLOPT_POSTFIELDS, $post);
    $result = curl_exec($curl_request);
    curl_close($curl_request);

    $result = explode("\r\n\r\n", $result, 2);
    $response = json_decode($result[1]);
    ob_end_flush();

    return $response;
}

//login -----

$login_parameters = array(
    "user_auth" => array(
        "user_name" => $username,
```

---

```

        "password" => md5($password),
        "version" => "1"
    ),
    "application_name" => "RestTest",
    "name_value_list" => array(),
);

$login_result = call("login", $login_parameters, $url);

/*
echo "<pre>";
print_r($login_result);
echo "</pre>";
*/

//get session id
$session_id = $login_result->id;

//retrieve records -----

$get_entries_parameters = array(

    //session id
    'session' => $session_id,

    //The name of the module from which to retrieve records
    'module_name' => 'Accounts',

    //An array of SugarBean IDs
    'ids' => array(
        '20328809-9d0a-56fc-0e7c-4f7cb6eb1c83',
        '328b22a6-d784-66d9-0295-4f7cb59e8cbb',
    ),

    //Optional. The list of fields to be returned in the results
    'select_fields' => array(
        'name',
        'billing_address_state',
        'billing_address_country'
    ),

    //A list of link names and the fields to be returned for each
link name
    'link_name_to_fields_array' => array(
    ),
);

```

---

---

```
$get_entries_result = call("get_entries", $get_entries_parameters,
$url);
```

```
echo "<pre>";
print_r($get_entries_result);
echo "</pre>";
```

```
?>
```

## Result

```
stdClass Object
(
    [entry_list] => Array
        (
            [0] => stdClass Object
                (
                    [id] => 20328809-9d0a-56fc-0e7c-4f7cb6eb1c83
                    [module_name] => Accounts
                    [name_value_list] => stdClass Object
                        (
                            [name] => stdClass Object
                                (
                                    [name] => name
                                    [value] => Jungle Systems Inc
                                )

                            [billing_address_state] => stdClass Object
                                (
                                    [name] => billing_address_state
                                    [value] => NY
                                )

                            [billing_address_country] => stdClass Object
                                (
                                    [name] => billing_address_country
                                    [value] => USA
                                )
                        )
                )
        )
)
```

---

```

[1] => stdClass Object
(
  [id] => 328b22a6-d784-66d9-0295-4f7cb59e8cbb
  [module_name] => Accounts
  [name_value_list] => stdClass Object
    (
      [name] => stdClass Object
        (
          [name] => name
          [value] => Riviera Hotels
        )
      [billing_address_state] => stdClass Object
        (
          [name] => billing_address_state
          [value] => CA
        )
      [billing_address_country] => stdClass Object
        (
          [name] => billing_address_country
          [value] => USA
        )
    )
  )
)

[relationship_list] => Array
(
)
)

```

**Last Modified:** 2021-02-17 02:44:13

## Retrieving Records by Email Domain

---

## Overview

A PHP example demonstrating how to retrieve email addresses based on an email domain with the `search_by_module` and `get_entries` methods using cURL and the `v4_1` REST API.

When using the `search_by_module` method, the email address information is not returned in the result. Due to this behavior, we will gather the record ids and pass them back to the `get_entries` method to fetch our related email addresses.

## Example

```
<?php

$url = "http://{site_url}/service/v4_1/rest.php";
$username = "admin";
$password = "password";

//function to make cURL request
function call($method, $parameters, $url)
{
    ob_start();
    $curl_request = curl_init();

    curl_setopt($curl_request, CURLOPT_URL, $url);
    curl_setopt($curl_request, CURLOPT_POST, 1);
    curl_setopt($curl_request, CURLOPT_HTTP_VERSION, CURL_HTTP_VERSION_1_0);
    curl_setopt($curl_request, CURLOPT_HEADER, 1);
    curl_setopt($curl_request, CURLOPT_SSL_VERIFYPEER, 0);
    curl_setopt($curl_request, CURLOPT_RETURNTRANSFER, 1);
    curl_setopt($curl_request, CURLOPT_FOLLOWLOCATION, 0);

    $jsonData = json_encode($parameters);

    $post = array(
        "method" => $method,
        "input_type" => "JSON",
        "response_type" => "JSON",
        "rest_data" => $jsonData
    );

    curl_setopt($curl_request, CURLOPT_POSTFIELDS, $post);
```

---

```

    $result = curl_exec($curl_request);
    curl_close($curl_request);

    $result = explode("\r\n\r\n", $result, 2);
    $response = json_decode($result[1]);
    ob_end_flush();

    return $response;
}

//login -----

$login_parameters = array(
    "user_auth" => array(
        "user_name" => $username,
        "password" => md5($password),
        "version" => "1"
    ),
    "application_name" => "RestTest",
    "name_value_list" => array(),
);

$login_result = call("login", $login_parameters, $url);

/*
echo "<pre>";
print_r($login_result);
echo "</pre>";
*/

//get session id
$session_id = $login_result->id;

//search_by_module -----
--

$search_by_module_parameters = array(
    "session" => $session_id,
    'search_string' => '%@example.com',
    'modules' => array(
        'Accounts',
        'Contacts',
        'Leads',
    ),
    'offset' => 0,
    'max_results' => 1,
);

```

---

```

        'assigned_user_id' => '',
        'select_fields' => array('id'),
        'unified_search_only' => false,
        'favorites' => false
    );

    $search_by_module_results = call('search_by_module', $search_by_module_parameters, $url);

    /*
    echo '<pre>';
    print_r($search_by_module_results);
    echo '</pre>';
    */

    $record_ids = array();
    foreach ($search_by_module_results->entry_list as $results)
    {
        $module = $results->name;

        foreach ($results->records as $records)
        {
            foreach($records as $record)
            {
                if ($record->name = 'id')
                {
                    $record_ids[$module][] = $record->value;
                    //skip any additional fields
                    break;
                }
            }
        }
    }

    $get_entries_results = array();
    $modules = array_keys($record_ids);

    foreach($modules as $module)
    {
        $get_entries_parameters = array(
            //session id
            'session' => $session_id,

            //The name of the module from which to retrieve records
            'module_name' => $module,

```



---

```

//An array of record IDs
'ids' => $record_ids[$module],

//The list of fields to be returned in the results
'select_fields' => array(
    'name',
),

//A list of link names and the fields to be returned for e
ach link name
'link_name_to_fields_array' => array(
    array(
        'name' => 'email_addresses',
        'value' => array(
            'email_address',
            'opt_out',
            'primary_address'
        ),
    ),
),

//Flag the record as a recently viewed item
'track_view' => false,
);

$get_entries_results[$module] = call('get_entries', $get_entr
ies_parameters, $url);
}

echo '<pre>';
print_r($get_entries_results);
echo '</pre>';

```

## Result

```

Array
(
    [Accounts] => stdClass Object
        (
            [entry_list] => Array
                (
                    [0] => stdClass Object
                        (

```

---

53

ng Inc.

cc72-f843-b6ed-5282a38dad7f

```
[id] => 1bb7ef28-64b9-cbd5-e7d6-5282a3b969

[module_name] => Accounts
[name_value_list] => stdClass Object
(
    [name] => stdClass Object
    (
        [name] => name
        [value] => Underwater Mini
    )
)

)

[1] => stdClass Object
(
    [id] => efbc0c4e-
cc72-f843-b6ed-5282a38dad7f
    [module_name] => Accounts
    [name_value_list] => stdClass Object
    (
        [name] => stdClass Object
        (
            [name] => name
            [value] => 360 Vacations
        )
    )
)

)

[relationship_list] => Array
(
    [0] => stdClass Object
    (
        [link_list] => Array
        (
            [0] => stdClass Object
            (
                [name] => email_addresses
                [records] => Array
                (
```

---

```

[0] => stdClass Object
ject
(
[link_valu
e] => stdClass Object
(
[e
mail_address] => stdClass Object
(
[name] => email_address
[value] => beans.the.qa@example.com
)
)
[o
pt_out] => stdClass Object
(
[name] => opt_out
[value] => 0
)
[p
rimary_address] => stdClass Object
(
[name] => primary_address
[value] =>
)
)
)
[1] => stdClass Object
ject
(

```



```

)
[1] => stdClass Object
(
  [link_list] => Array
  (
    [0] => stdClass Object
    (
      [name] => email_addresses
      [records] => Array
      (
        [0] => stdClass Ob
ject
          (
            [link_valu
e] => stdClass Object
              (
                [e
mail_address] => stdClass Object
                  (
                    [name] => email_address
                    [value] => section51@example.com
                  )
                [o
pt_out] => stdClass Object
                  (
                    [name] => opt_out
                    [value] => 0
                  )
                [p
rimary_address] => stdClass Object
                  (
                    [name] => primary_address

```

---

```

    [value] =>
)
)
)
[1] => stdClass Object
ject
(
[link_valu
e] => stdClass Object
(
[e
mail_address] => stdClass Object
(
[name] => email_address
[value] => kid.sugar.qa@example.co.uk
)
)
[o
pt_out] => stdClass Object
(
[name] => opt_out
[value] => 0
)
[p
rimary_address] => stdClass Object
(
[name] => primary_address
[value] =>
)

```



---

```

(
    [name] => name
    [value] => Luis Deegan
)
)
)
)
[relationship_list] => Array
(
    [0] => stdClass Object
    (
        [link_list] => Array
        (
            [0] => stdClass Object
            (
                [name] => email_addresses
                [records] => Array
                (
                    [0] => stdClass Ob
ject
                    (
                        [link_valu
e] => stdClass Object
                        (
                            [e
mail_address] => stdClass Object
                            (
                                [name] => email_address
                                [value] => hr.phone@example.com
                            )
                        )
                    )
                )
            )
        )
    )
)
[0] => stdClass Object
(
    [name] => opt_out

```



---

```

    [value] => 0
  )
  primary_address] => stdClass Object
  (
    [name] => primary_address
    [value] =>
  )
  )
  )
  [1] => stdClass Ob
ject
  (
    [link_valu
e] => stdClass Object
    (
      [e
mail_address] => stdClass Object
      (
        [name] => email_address
        [value] => the.info.phone@example.cn
      )
    )
  )
  [o
pt_out] => stdClass Object
  (
    [name] => opt_out
    [value] => 1
  )

```

```
primary_address] => stdClass Object
```

```
(
```

```
  [name] => primary_address
```

```
  [value] =>
```

```
)
```

```
)
```

```
)
```

```
)
```

```
)
```

```
)
```

```
)
```

```
[1] => stdClass Object
```

```
(
```

```
  [link_list] => Array
```

```
  (
```

```
    [0] => stdClass Object
```

```
    (
```

```
      [name] => email_addresses
```

```
      [records] => Array
```

```
      (
```

```
        [0] => stdClass Ob
```

```
ject
```

```
      (
```

```
        [link_valu
```

```
e] => stdClass Object
```

```
      (
```

```
        [e
```

```
mail_address] => stdClass Object
```

```
(
```

```
  [name] => email_address
```

---

```

    [value] => im.the.sales@example.name
  )
                                                                    [o
pt_out] => stdClass Object
  (
    [name] => opt_out
    [value] => 0
  )
                                                                    [p
primary_address] => stdClass Object
  (
    [name] => primary_address
    [value] =>
  )
                                                                    )
                                                                    )
                                                                    [1] => stdClass Ob
ject
                                                                    (
                                                                    [link_valu
e] => stdClass Object
                                                                    (
                                                                    [e
mail_address] => stdClass Object
  (
    [name] => email_address
    [value] => the36@example.com
  )

```

---

```
pt_out] => stdClass Object
```

```
[o
```

```
(  
  [name] => opt_out  
  [value] => 1  
)
```

```
primary_address] => stdClass Object
```

```
[p
```

```
(  
  [name] => primary_address  
  [value] =>  
)
```

```
)
```

```
)
```

```
)
```

```
)
```

```
)
```

```
)
```

```
)
```

```
)
```

```
[Leads] => stdClass Object
```

```
(  
  [entry_list] => Array  
  (  
    [0] => stdClass Object  
    (  
      [id] => 83abeeff-5e71-0f06-2e5f-5282a3f04f
```

---

41

```
[module_name] => Leads
[name_value_list] => stdClass Object
(
    [name] => stdClass Object
    (
        [name] => name
        [value] => Caryn Wert
    )
)
```

```
)
```

```
[1] => stdClass Object
```

```
(
    [id] => 2a3b304b-5167-8432-d4e7-5282a300ea
```

bb

```
[module_name] => Leads
[name_value_list] => stdClass Object
(
    [name] => stdClass Object
    (
        [name] => name
        [value] => Marco Castongua
```

y

```
)
```

```
)
```

```
)
```

```
)
```

```
[relationship_list] => Array
```

```
(
```

```
[0] => stdClass Object
```

```
(
```

```
[link_list] => Array
```

```
(
```

```
[0] => stdClass Object
```

```
(
```

```
[name] => email_addresses
```

```
[records] => Array
```

```
(
```

```
[0] => stdClass Ob
```



```

)
)
[1] => stdClass Object
(
  [link_list] => Array
  (
    [0] => stdClass Object
    (
      [name] => email_addresses
      [records] => Array
      (
        [0] => stdClass Ob
ject
          (
            [link_valu
e] => stdClass Object
              (
                [e
mail_address] => stdClass Object
                  (
                    [name] => email_address
                    [value] => im.the@example.com
                  )
                [o
pt_out] => stdClass Object
                  (
                    [name] => opt_out
                    [value] => 0
                  )
                [p
rimary_address] => stdClass Object
                  (

```





---

```

$username = "admin";
$password = "password";

//function to make cURL request
function call($method, $parameters, $url)
{
    ob_start();
    $curl_request = curl_init();

    curl_setopt($curl_request, CURLOPT_URL, $url);
    curl_setopt($curl_request, CURLOPT_POST, 1);
    curl_setopt($curl_request, CURLOPT_HTTP_VERSION, CURL_HTTP_VERSION_1_0);
    curl_setopt($curl_request, CURLOPT_HEADER, 1);
    curl_setopt($curl_request, CURLOPT_SSL_VERIFYPEER, 0);
    curl_setopt($curl_request, CURLOPT_RETURNTRANSFER, 1);
    curl_setopt($curl_request, CURLOPT_FOLLOWLOCATION, 0);

    $jsonData = json_encode($parameters);

    $post = array(
        "method" => $method,
        "input_type" => "JSON",
        "response_type" => "JSON",
        "rest_data" => $jsonData
    );

    curl_setopt($curl_request, CURLOPT_POSTFIELDS, $post);
    $result = curl_exec($curl_request);
    curl_close($curl_request);

    $result = explode("\r\n\r\n", $result, 2);
    $response = json_decode($result[1]);
    ob_end_flush();

    return $response;
}

//login -----
$login_parameters = array(
    "user_auth" => array(
        "user_name" => $username,
        "password" => md5($password),
        "version" => "1"
    ),

```

---

```

        "application_name" => "RestTest",
        "name_value_list" => array(),
    );

    $login_result = call("login", $login_parameters, $url);

    /*
    echo "<pre>";
    print_r($login_result);
    echo "</pre>";
    */

    //get session id
    $session_id = $login_result->id;

    //retrieve related list -----

    $get_relationships_parameters = array(

        'session'=>$session_id,

        //The name of the module from which to retrieve records.
        'module_name' => 'ProspectLists',

        //The ID of the specified module bean.
        'module_id' => '76d0e694-ef66-ddd5-9bdf-4febd3af44d5',

        //The relationship name of the linked field from which to return records.
        'link_field_name' => 'leads',

        //The portion of the WHERE clause from the SQL statement used to find the related items.
        'related_module_query' => '',

        //The related fields to be returned.
        'related_fields' => array(
            'id',
            'first_name',
            'last_name',
        ),

        //For every related bean returned, specify link field names to field information.
        'related_module_link_name_to_fields_array' => array(
    ),

```

---

```

//To exclude deleted records
'deleted'=> '0',

//order by
'order_by' => '',

//offset
'offset' => 0,

//limit
'limit' => 5,
);

$get_relationships_result = call("get_relationships", $get_relatio
nships_parameters, $url);

echo "<pre>";
print_r($get_relationships_result);
echo "</pre>";

?>

```

## Results

```

stdClass Object
(
    [entry_list] => Array
        (
            [0] => stdClass Object
                (
                    [id] => 117c26c0-11d4-7b8b-cb8f-4f7cb6823dd8
                    [module_name] => Leads
                    [name_value_list] => stdClass Object
                        (
                            [id] => stdClass Object
                                (
                                    [name] => id
                                    [value] => 117c26c0-11d4-7b8b-
cb8f-4f7cb6823dd8
                                )
                            [first_name] => stdClass Object
                                (

```

---

```
        [name] => first_name
        [value] => Diane
    )

    [last_name] => stdClass Object
    (
        [name] => last_name
        [value] => Mckamey
    )
)

)

[1] => stdClass Object
(
    [id] => 142faeef-1a19-b53a-b780-4f7cb600c553
    [module_name] => Leads
    [name_value_list] => stdClass Object
    (
        [id] => stdClass Object
        (
            [name] => id
            [value] => 142faeef-1a19-b53a-
b780-4f7cb600c553
        )

        [first_name] => stdClass Object
        (
            [name] => first_name
            [value] => Leonor
        )

        [last_name] => stdClass Object
        (
            [name] => last_name
            [value] => Reser
        )
    )
)

)

[relationship_list] => Array
```

---

```
(  
  )  
)
```

**Last Modified:** 2021-02-17 02:44:13

## Searching Records

### Overview

A PHP example demonstrating how to search the accounts module with the `search_by_module` method using cURL and the `v4_1` REST API.

This script will return two results, sorted by the `id` field, and return the value of the `id`, `name`, `account_type`, `phone_office`, and `assigned_user_name` fields.

### Example

```
<?php  
  
$url = "http://{site_url}/service/v4_1/rest.php";  
$username = "admin";  
$password = "password";  
  
//function to make cURL request  
function call($method, $parameters, $url)  
{  
    ob_start();  
    $curl_request = curl_init();  
  
    curl_setopt($curl_request, CURLOPT_URL, $url);  
    curl_setopt($curl_request, CURLOPT_POST, 1);  
    curl_setopt($curl_request, CURLOPT_HTTP_VERSION, CURL_HTTP_VERSION_1_0);  
    curl_setopt($curl_request, CURLOPT_HEADER, 1);  
    curl_setopt($curl_request, CURLOPT_SSL_VERIFYPEER, 0);  
    curl_setopt($curl_request, CURLOPT_RETURNTRANSFER, 1);  
    curl_setopt($curl_request, CURLOPT_FOLLOWLOCATION, 0);
```

---

```

$jsonEncodedData = json_encode($parameters);

$post = array(
    "method" => $method,
    "input_type" => "JSON",
    "response_type" => "JSON",
    "rest_data" => $jsonEncodedData
);

curl_setopt($curl_request, CURLOPT_POSTFIELDS, $post);
$result = curl_exec($curl_request);
curl_close($curl_request);

$result = explode("\r\n\r\n", $result, 2);
$response = json_decode($result[1]);
ob_end_flush();

return $response;
}

//login -----

$login_parameters = array(
    "user_auth" => array(
        "user_name" => $username,
        "password" => md5($password),
        "version" => "1"
    ),
    "application_name" => "RestTest",
    "name_value_list" => array(),
);

$login_result = call("login", $login_parameters, $url);

/*
echo "<pre>";
print_r($login_result);
echo "</pre>";
*/

//get session id
$session_id = $login_result->id;

//search -----

```

---

```

$search_by_module_parameters = array(
    //Session id
    "session" => $session_id,

    //The string to search for.
    'search_string' => 'Customer',

    //The list of modules to query.
    'modules' => array(
        'Accounts',
    ),

    //The record offset from which to start.
    'offset' => 0,

    //The maximum number of records to return.
    'max_results' => 2,

    //Filters records by the assigned user ID.
    //Leave this empty if no filter should be applied.
    'id' => '',

    //An array of fields to return.
    //If empty the default return fields will be from the active l
    istviewdefs.
    'select_fields' => array(
        'id',
        'name',
        'account_type',
        'phone_office',
        'assigned_user_name',
    ),

    //If the search is to only search modules participating in the
    unified search.
    //Unified search is the SugarCRM Global Search alternative to
    Full-Text Search.
    'unified_search_only' => false,

    //If only records marked as favorites should be returned.
    'favorites' => false
);

$search_by_module_result = call('search_by_module', $search_by_mod
ule_parameters, $url);

```

---

```
echo '<pre>';
print_r($search_by_module_result);
echo '</pre>';
```

?>

## Result

```
stdClass Object
(
    [result_count] => 2
    [total_count] => 200
    [next_offset] => 2
    [entry_list] => Array
        (
            [0] => stdClass Object
                (
                    [id] => 18124607-69d1-b158-47ff-4f7cb69344f7
                    [module_name] => Leads
                    [name_value_list] => stdClass Object
                        (
                            [id] => stdClass Object
                                (
                                    [name] => id
                                    [value] => 18124607-69d1-b158-47ff
                                )
                            [name] => stdClass Object
                                (
                                    [name] => name
                                    [value] => Bernie Worthey
                                )
                            [title] => stdClass Object
                                (
                                    [name] => title
                                    [value] => Senior Product Manager
                                )
                        )
                )
        )
)
```



---

```
[1] => stdClass Object
(
  [id] => 1cdfddc1-2759-b007-8713-4f7cb64c2e9c
  [module_name] => Leads
  [name_value_list] => stdClass Object
    (
      [id] => stdClass Object
        (
          [name] => id
          [value] => 1cdfddc1-2759-b007-8713
-4f7cb64c2e9c
        )
      [name] => stdClass Object
        (
          [name] => name
          [value] => Bobbie Kohlmeier
        )
      [title] => stdClass Object
        (
          [name] => title
          [value] => Director Operations
        )
    )
  )
)

[relationship_list] => Array
(
)
)
```

**Last Modified:** 2021-02-17 02:44:13

## SOAP

---

Examples of v4.1 SOAP API calls.

**Last Modified:** 2021-02-17 02:44:13

## C#

C# SOAP v4_1 Examples.
------------------------

**Last Modified:** 2021-02-17 02:44:13

# Creating or Updating a Record

## Overview

A C# example demonstrating how to create or update an account with the `set_entry` method using SOAP and the v4 SOAP API.

## Example

```
using System;
using System.Text;
using System.Security.Cryptography;
using System.Collections.Specialized;

namespace SugarSoap
{
    class Program
    {
        static void Main(string[] args)
        {
            //login -----

            string UserName = "admin";
            string Password = "password";
```

---

```

    string URL = "http://{site_url}/service/v4/soap.php";

    //SugarCRM is a web reference added that points to http://{
{site_url}/service/v4/soap.php?wsdl
    SugarCRM.sugarsoap SugarClient = new SugarCRM.sugarsoap();
    SugarClient.Timeout = 900000;
    SugarClient.Url = URL;

    string SessionID = String.Empty;

    //Create authentication object
    SugarCRM.user_auth UserAuth = new SugarCRM.user_auth();

    //Populate credentials
    UserAuth.user_name = UserName;
    UserAuth.password = getMD5>Password);

    //Try to authenticate
    SugarCRM.name_value[] LoginList = new SugarCRM.name_value[
0];
    SugarCRM.entry_value LoginResult = SugarClient.login(UserA
uth, "SoapTest", LoginList);

    //get session id
    SessionID = LoginResult.id;

    //create account -----

    NameValueCollection fieldListCollection = new NameValueCol
lection();
    //to update a record, you will nee to pass in a record id
as commented below
    //fieldListCollection.Add("id", "68c4781f-75d1-223a-5d8f-5
058bc4e39ea");
    fieldListCollection.Add("name", "Test Account");

    //this is just a trick to avoid having to manually specify
index values for name_value[]
    SugarCRM.name_value[] fieldList = new SugarCRM.name_value[
fieldListCollection.Count];

    int count = 0;
    foreach (string name in fieldListCollection)
    {
        foreach (string value in fieldListCollection.GetValues
(name))

```

```

        {
            SugarCRM.name_value field = new SugarCRM.name_valu
e());
            field.name = name; field.value = value;
            fieldList[count] = field;
        }
        count++;
    }

    try
    {
        SugarCRM.new_set_entry_result result = SugarClient.set
_entry(SessionID, "Accounts", fieldList);
        string RecordID = result.id;

        //show record id to user
        Console.WriteLine(RecordID);
    }
    catch (Exception ex)
    {
        Console.WriteLine(ex.Message);
        Console.WriteLine(ex.Source);
    }

    //Pause Window
    Console.ReadLine();
}

static private string getMD5(string PlainText)
{
    MD5 md5 = MD5.Create();
    byte[] inputBuffer = System.Text.Encoding.ASCII.GetBytes(P
lainText);
    byte[] outputBuffer = md5.ComputeHash(inputBuffer);

    //Convert the byte[] to a hex-string
    StringBuilder builder = new StringBuilder(outputBuffer.Len
gth);

    for (int i = 0; i < outputBuffer.Length; i++)
    {
        builder.Append(outputBuffer[i].ToString("X2"));
    }

    return Builder.ToString().ToLower(); //lowercase as of 7.9
.0.0
}

```

---

```
}  
}
```

## Result

68c4781f-75d1-223a-5d8f-5058bc4e39ea

**Last Modified:** 2021-02-17 02:44:13

## Logging In

### Overview

A C# example demonstrating how to log in and retrieve a session key using SOAP and the v4 SOAP API.

### Example

```
using System;  
using System.Text;  
using System.Security.Cryptography;  
  
namespace SugarSoap  
{  
    class Program  
    {  
        static void Main(string[] args)  
        {  
            string UserName = "admin";  
            string Password = "password";  
            string URL = "http://{site_url}/service/v4/soap.php";  
            string SessionID = String.Empty;  
  
            //SugarCRM is a web reference added that points to http://  
{site_url}/service/v4/soap.php?wsdl  
            SugarCRM.sugarsoap SugarClient = new SugarCRM.sugarsoap();  
            SugarClient.Timeout = 900000;  
        }  
    }  
}
```

---

```

    SugarClient.Url = URL;

    //Create authentication object
    SugarCRM.user_auth UserAuth = new SugarCRM.user_auth();

    //Populate credentials
    UserAuth.user_name = UserName;
    UserAuth.password = getMD5(Password);

    //Try to authenticate
    SugarCRM.name_value[] LoginList = new SugarCRM.name_value[
0];
    SugarCRM.entry_value LoginResult = SugarClient.login(UserA
uth, "SoapTest", LoginList);

    //get session id
    SessionID = LoginResult.id;

    if (SessionID != String.Empty)
    {
        //print session
        Console.WriteLine(SessionID);
    }

    //Pause Window
    Console.ReadLine();
}

static private string getMD5(string TextString)
{
    MD5 md5 = MD5.Create();
    byte[] inputBuffer = System.Text.Encoding.ASCII.GetBytes(T
extString);
    byte[] outputBuffer = md5.ComputeHash(inputBuffer);

    StringBuilder Builder = new StringBuilder(outputBuffer.Len
gth);

    for (int i = 0; i < outputBuffer.Length; i++)
    {
        Builder.Append(outputBuffer[i].ToString("X2"));
    }

    return Builder.ToString().ToLower(); //lowercase as of 7.9
.0.0
}
}

```

---

```
}
```

**Note:** As of 7.9.0.0, the md5 of the password must be lowercase.

## Result

```
b2uv0vrjfiiov41d03sk578ufq6
```

**Last Modified:** 2021-02-17 02:44:13

## PHP

PHP SOAP v4_1 Examples.
-------------------------

**Last Modified:** 2021-02-17 02:44:13

## Creating Documents

### Overview

A PHP example demonstrating how to create a document using `set_entry` and a document revision with the `set_document_revision` method using [NuSOAP](#) and the v4\_1 SOAP API.

### Example

```
<?php

$url = "http://{site_url}/service/v4_1/soap.php?wsdl";
$username = "admin";
$password = "password";
```

---

```

//require NuSOAP
require_once("./nusoap/lib/nusoap.php");

//retrieve WSDL
$client = new nusoap_client($url, 'wsdl');

//display errors
$error = $client->getError();
if ($error)
{
    echo '<h2>Constructor error</h2><pre>' . $error . '</pre>';
    echo '<h2>Debug</h2><pre>' . htmlspecialchars($client->getDebug(), ENT_QUOTES) . '</pre>';
    exit();
}

//login -----

$login_parameters = array(
    'user_auth' => array(
        'user_name' => $username,
        'password' => md5($password),
        'version' => '1'
    ),
    'application_name' => 'SoapTest',
    'name_value_list' => array(
    ),
);

$login_result = $client->call('login', $login_parameters);

/*
echo '<pre>';
print_r($login_result);
echo '</pre>';
*/

//get session id
$session_id = $login_result['id'];

//create document -----

$set_entry_parameters = array(
    //session id
    "session" => $session_id,

```



---

```

//The name of the module
"module_name" => "Documents",

//Record attributes
"name_value_list" => array(
    //to update a record, you will need to pass in a record id
as commented below
    //array("name" => "id", "value" => "9b170af9-3080-e22b-
fbcl-4fea74def88f"),
    array("name" => "document_name", "value" => "Example Docum
ent"),
    array("name" => "revision", "value" => "1"),
),
);

$set_entry_result = $client->call("set_entry", $set_entry_paramete
rs);

echo "<pre>";
print_r($set_entry_result);
echo "</pre>";

$document_id = $set_entry_result['id'];

//create document revision -----

$contents = file_get_contents ("/path/to/example_document.txt");

$set_document_revision_parameters = array(
    //session id
    "session" => $session_id,

    //The attachment details
    "note" => array(
        //The ID of the parent document.
        'id' => $document_id,

        //The binary contents of the file.
        'file' => base64_encode($contents),

        //The name of the file
        'filename' => 'example_document.txt',

        //The revision number
        'revision' => '1',
    ),
),

```

---

```
);

$set_document_revision_result = $client->call("set_document_revisi
on", $set_document_revision_parameters);

echo "<pre>";
print_r($set_document_revision_result);
echo "</pre>";

?>
```

## Result

```
//set_entry result
Array
(
    [id] => 5ab53b9d-2f31-9b69-d92b-50abc2d0f6a2
)

//set_document_revision result
Array
(
    [id] => 906ad157-0aa0-c01e-2694-50abc2adcbf2
)
```

**Last Modified:** 2021-02-17 02:44:13

## Creating Notes with Attachments

### Overview

A PHP example demonstrating how to create a note using `set_entry` and an attachment with the `set_note_attachment` method using [NuSOAP](#) and the `v4_1` SOAP API.

### Example

---

  
<?php

```
$url = "http://{site_url}/service/v4_1/soap.php?wsdl";
$username = "admin";
$password = "password";

//require NuSOAP
require_once("../nusoap/lib/nusoap.php");

//retrieve WSDL
$client = new nusoap_client($url, 'wsdl');

//display errors
$error = $client->getError();
if ($error)
{
    echo '<h2>Constructor error</h2><pre>' . $error . '</pre>';
    echo '<h2>Debug</h2><pre>' . htmlspecialchars($client->getDebug(), ENT_QUOTES) . '</pre>';
    exit();
}

//login -----
$login_parameters = array(
    'user_auth' => array(
        'user_name' => $username,
        'password' => md5($password),
        'version' => '1'
    ),
    'application_name' => 'SoapTest',
    'name_value_list' => array(
    ),
);

$login_result = $client->call('login', $login_parameters);

/*
echo '<pre>';
print_r($login_result);
echo '</pre>';
*/

//get session id
$session_id = $login_result['id'];
```

---

```
//create note -----

$set_entry_parameters = array(
    //session id
    "session" => $session_id,

    //The name of the module
    "module_name" => "Notes",

    //Record attributes
    "name_value_list" => array(
        //to update a record, you will need to pass in a record id
as commented below
        //array("name" => "id", "value" => "9b170af9-3080-e22b-
fbcl-4fea74def88f"),
        array("name" => "name", "value" => "Example Note"),
    ),
);

$set_entry_result = $client->call("set_entry", $set_entry_paramete
rs);

echo "<pre>";
print_r($set_entry_result);
echo "</pre>";

$note_id = $set_entry_result['id'];

//create note attachment -----

$contents = file_get_contents ("/path/to/example_file.php");

$set_note_attachment_parameters = array(
    //session id
    "session" => $session_id,

    //The attachment details
    "note" => array(
        //The ID of the note containing the attachment.
        'id' => $note_id,

        //The file name of the attachment.
        'filename' => 'example_file.php',

        //The binary contents of the file.
        'file' => base64_encode($contents),
```

---

```
    ),
);

$set_note_attachment_result = $client->call("set_note_attachment",
$set_note_attachment_parameters);

echo "<pre>";
print_r($set_note_attachment_result);
echo "</pre>";

?>
```

## Result

```
//set_entry_result
Array
(
    [id] => 59a33435-7c6a-2d97-e61b-50abcc5d2644
)

//set_note_attachment result
Array
(
    [id] => 59a33435-7c6a-2d97-e61b-50abcc5d2644
)
```

**Last Modified:** 2021-02-17 02:44:13

## Creating or Updating a Record

### Overview

A PHP example demonstrating how to create or update an Account with the `set_entry` method using [NuSOAP](#) and the v4\_1 SOAP API.

### Example

---

  
<?php

```
$url = "http://{site_url}/service/v4_1/soap.php?wsdl";
$username = "admin";
$password = "password";

//require NuSOAP
require_once("../nusoap/lib/nusoap.php");

//retrieve WSDL
$client = new nusoap_client($url, 'wsdl');

//display errors
$error = $client->getError();
if ($error)
{
    echo '<h2>Constructor error</h2><pre>' . $error . '</pre>';
    echo '<h2>Debug</h2><pre>' . htmlspecialchars($client->getDebug(), ENT_QUOTES) . '</pre>';
    exit();
}

//login -----
$login_parameters = array(
    'user_auth' => array(
        'user_name' => $username,
        'password' => md5($password),
        'version' => '1'
    ),
    'application_name' => 'SoapTest',
    'name_value_list' => array(
    ),
);

$login_result = $client->call('login', $login_parameters);

/*
echo '<pre>';
print_r($login_result);
echo '</pre>';
*/

//get session id
$session_id = $login_result['id'];
```

---

```
//create account -----

$set_entry_parameters = array(
    //session id
    "session" => $session_id,

    //The name of the module from which to retrieve records.
    "module_name" => "Accounts",

    //Record attributes
    "name_value_list" => array(
        //to update a record, you will need to pass in a record id
        //as commented below
        //array("name" => "id", "value" => "9b170af9-3080-e22b-
        fbc1-4fea74def88f"),
        array("name" => "name", "value" => "Test Account"),
    ),
);

$set_entry_result = $client->call("set_entry", $set_entry_parameters);

echo "<pre>";
print_r($set_entry_result);
echo "</pre>";

?>
```

## Result

```
Array
(
    [id] => 63c103dd-1f47-804c-1282-52af64b870d4
)
```

**Last Modified:** 2021-02-17 02:44:13

## Creating or Updating Multiple Records

---

## Overview

A PHP example demonstrating how to create or update multiple contacts with the `set_entries` method using [NuSOAP](#) and the `v4_1` SOAP API.

## Example

```
<?php

$url = "http://{site_url}/service/v4_1/soap.php?wsdl";
$username = "admin";
$password = "password";

//require NuSOAP
require_once("./nusoap/lib/nusoap.php");

//retrieve WSDL
$client = new nusoap_client($url, 'wsdl');

//display errors
$error = $client->getError();
if ($error)
{
    echo '<h2>Constructor error</h2><pre>' . $error . '</pre>';
    echo '<h2>Debug</h2><pre>' . htmlspecialchars($client->getDebug(), ENT_QUOTES) . '</pre>';
    exit();
}

//login -----

$login_parameters = array(
    'user_auth' => array(
        'user_name' => $username,
        'password' => md5($password),
        'version' => '1'
    ),
    'application_name' => 'SoapTest',
    'name_value_list' => array(
    ),
);

$login_result = $client->call('login', $login_parameters);
```



---

```

/*
echo '<pre>';
print_r($login_result);
echo '</pre>';
*/

//get session id
$session_id = $login_result['id'];

//create contacts -----

$set_entries_parameters = array(
    //session id
    "session" => $session_id,

    //The name of the module from which to retrieve records.
    "module_name" => "Contacts",

    //Record attributes
    "name_value_list" => array(
        array(
            //to update a record, you will need to pass in a record
            id as commented below
            //array("name" => "id", "value" => "912e58c0-73e9-9cb6
-c84e-4ff34d62620e"),
            array("name" => "first_name", "value" => "John"),
            array("name" => "last_name", "value" => "Smith"),
        ),
        array(
            //to update a record, you will need to pass in a record
            id as commented below
            //array("name" => "id", "value" => "99d6ddfd-7d52-d45b-
eba8-4ff34d684964"),
            array("name" => "first_name", "value" => "Jane"),
            array("name" => "last_name", "value" => "Doe"),
        ),
    ),
);

$set_entries_result = $client->call("set_entries", $set_entries_pa
rameters);

echo "<pre>";
print_r($set_entries_result);
echo "</pre>";

```

---

?>

## Result

```
Array
(
    [ids] => Array
        (
            [0] => 912e58c0-73e9-9cb6-c84e-4ff34d62620e
            [1] => 99d6ddfd-7d52-d45b-eba8-4ff34d684964
        )
)
```

**Last Modified:** 2021-02-17 02:44:13

## Creating or Updating Teams

### Overview

A PHP example demonstrating how to manipulate teams using [NuSOAP](#) and the v4\_1 SOAP API.

**Note:** If you are creating a private team for a user, you will need to set `private` to `true` and populate the `associated_user_id` populated. You should also populate the `name` and `name_2` properties with the users first and last name.

### Example

```
<?php

$url = "http://{site_url}/service/v4_1/soap.php?wsdl";
$username = "admin";
$password = "password";

//require NuSOAP
require_once("../nusoap/lib/nusoap.php");
```

---

```

//retrieve WSDL
$client = new nusoap_client($url, 'wsdl');

//display errors
$error = $client->getError();
if ($error)
{
    echo '<h2>Constructor error</h2><pre>' . $error . '</pre>';
    echo '<h2>Debug</h2><pre>' . htmlspecialchars($client->getDebug(), ENT_QUOTES) . '</pre>';
    exit();
}

//login -----

$login_parameters = array(
    'user_auth' => array(
        'user_name' => $username,
        'password' => md5($password),
        'version' => '1'
    ),
    'application_name' => 'SoapTest',
    'name_value_list' => array(
    ),
);

$login_result = $client->call('login', $login_parameters);

/*
echo '<pre>';
print_r($login_result);
echo '</pre>';
*/

//get session id
$session_id = $login_result['id'];

//create team -----

$set_entry_parameters = array(

    // session id
    "session" => $session_id,

    // The name of the module that the record will be create in.

```

---

```

    "module_name" => "Teams",

    // array of arrays for the record attributes
    "name_value_list" => array(
        /* Setting the id with a valid record id will update the r
record.
        array(
            "name" => "id",
            "value" => "47dbab1d-bd78-09e8-4392-5256b4501d90"
        ),
        */
        array(
            "name" => "name",
            "value" => "My Team"
        ),
        array(
            "name" => "description",
            "value" => "My new team"
        ),
        //Whether the team is private.
        //Private teams will have the associated_user_id populated
        .
        array(
            "name" => "private",
            "value" => 0
        ),
    ),
);

$set_entry_result = $client->call('set_entry', $set_entry_paramete
rs);

echo "<pre>";
print_r($set_entry_result);
echo "</pre>";

?>

```

## Result

```

Array
(
    [id] => 90130b4f-4d39-100b-98de-52ab7a638d0d
)

```

---

Last Modified: 2021-02-17 02:44:13

## Logging In

### Overview

A PHP example demonstrating how to log in and retrieve a session key using [NuSOAP](#) and the v4\_1 SOAP API.

### Standard Authentication Example

```
<?php

$url = "http://{site_url}/service/v4_1/soap.php?wsdl";
$username = "admin";
$password = "password";

//require NuSOAP
require_once("./nusoap/lib/nusoap.php");

//retrieve WSDL
$client = new nusoap_client($url, 'wsdl');

//display errors
$error = $client->getError();
if ($error)
{
    echo '<h2>Constructor error</h2><pre>' . $error . '</pre>';
    echo '<h2>Debug</h2><pre>' . htmlspecialchars($client->getDebug(), ENT_QUOTES) . '</pre>';
    exit();
}

//login -----

$login_parameters = array(
    'user_auth' => array(
        'user_name' => $username,
        'password' => md5($password),
```

---

```

        'version' => '1'
    ),
    'application_name' => 'SoapTest',
    'name_value_list' => array(
    ),
);

$login_result = $client->call('login', $login_parameters);

echo '<pre>';
print_r($login_result);
echo '</pre>';

//get session id
$session_id = $login_result['id'];

?>

```

## SugarIdentity Enabled Authentication Example

```

<?php

$url = "http://{site_url}/service/v4_1/soap.php?wsdl";
$username = "admin";
$password = "password";

//require NuSOAP
require_once("./nusoap/lib/nusoap.php");

//retrieve WSDL
$client = new nusoap_client($url, 'wsdl');

//display errors
$error = $client->getError();
if ($error)
{
    echo '<h2>Constructor error</h2><pre>' . $error . '</pre>';
    echo '<h2>Debug</h2><pre>' . htmlspecialchars($client->getDebug(), ENT_QUOTES) . '</pre>';
    exit();
}

//login -----

```

---

```
$login_parameters = array(
    'user_auth' => array(
        'user_name' => $username,
        'password' => $password, // SugarIdentity requires plain
password
        'version' => '1',
        'encryption' => 'PLAIN', // Required parameter for Sugar
Identity
    ),
    'application_name' => 'SoapTest',
    'name_value_list' => array(
    ),
);

$login_result = $client->call('login', $login_parameters);

echo '<pre>';
print_r($login_result);
echo '</pre>';

//get session id
$session_id = $login_result['id'];

?>
```

## LDAP Authentication Example

```
<?php

$url = "http://{site_url}/service/v4_1/soap.php?wsdl";
$username = "admin";
$password = "password";
$ldap_enc_key = 'LDAP_ENCRYPTION_KEY';

//require NuSOAP
require_once("./nusoap/lib/nusoap.php");

//retrieve WSDL
$client = new nusoap_client($url, 'wsdl');

//display errors
$error = $client->getError();
if ($error)
{
```

---

```

        echo '<h2>Constructor error</h2><pre>' . $err . '</pre>';
        echo '<h2>Debug</h2><pre>' . htmlspecialchars($client->getDebug(), ENT_QUOTES) . '</pre>';
        exit();
    }

    //login -----
    $ldap_enc_key = substr(md5($ldap_enc_key), 0, 24);
    $login_parameters = array(
        'user_auth' => array(
            'user_name' => $username,
            'password' => bin2hex(mcrypt_cbc(MCRYPT_3DES, $ldap_enc_key, $password, MCRYPT_ENCRYPT, 'password')),
            'version' => '1'
        ),
        'application_name' => 'SoapTest',
        'name_value_list' => array(
        ),
    );

    $login_result = $client->call('login', $login_parameters);

    echo '<pre>';
    print_r($login_result);
    echo '</pre>';

    //get session id
    $session_id = $login_result['id'];

?>

```

## Result

```

Array
(
    [id] => 9uukc92a61b9v620reqv34mmg1
    [module_name] => Users
    [name_value_list] => Array
        (
            [0] => Array
                (
                    [name] => user_id
                    [value] => 1
                )
        )
)

```



---

```
[1] => Array
(
    [name] => user_name
    [value] => admin
)

[2] => Array
(
    [name] => user_language
    [value] => en_us
)

[3] => Array
(
    [name] => user_currency_id
    [value] => -99
)

[4] => Array
(
    [name] => user_is_admin
    [value] => 1
)

[5] => Array
(
    [name] => user_default_team_id
    [value] => 1
)

[6] => Array
(
    [name] => user_default_dateformat
    [value] => m/d/Y
)

[7] => Array
(
    [name] => user_default_timeformat
    [value] => h:ia
)

[8] => Array
(
    [name] => user_number_seperator
```

---

```
        [value] => ,
    )

[9] => Array
(
    [name] => user_decimal_seperator
    [value] => .
)

[10] => Array
(
    [name] => mobile_max_list_entries
    [value] => 10
)

[11] => Array
(
    [name] => mobile_max_subpanel_entries
    [value] => 3
)

[12] => Array
(
    [name] => user_currency_name
    [value] => US Dollars
)

)

)
```

**Last Modified:** 2021-02-17 02:44:13

## Relating Quotes and Products

### Overview

A PHP example demonstrating how to create and relate Products to Quotes using [NuSOAP](#) and the v4\_1 SOAP API.

---

## Example

```
<?php

$url = "http://{site_url}/service/v4_1/soap.php?wsdl";
$username = "admin";
$password = "password";

//require NuSOAP
require_once("./nusoap/lib/nusoap.php");

//retrieve WSDL
$client = new nusoap_client($url, 'wsdl');

//display errors
$error = $client->getError();
if ($error)
{
    echo '<h2>Constructor error</h2><pre>' . $error . '</pre>';
    echo '<h2>Debug</h2><pre>' . htmlspecialchars($client->getDebug(), ENT_QUOTES) . '</pre>';
    exit();
}

//login -----

$login_parameters = array(
    'user_auth' => array(
        'user_name' => $username,
        'password' => md5($password),
        'version' => '1'
    ),
    'application_name' => 'SoapTest',
    'name_value_list' => array(
    ),
);

$login_result = $client->call("login", $login_parameters);

/*
echo "<pre>";
print_r($login_result);
echo "</pre>";
*/
```

---

```
//get session id
$session_id = $login_result['id'];

//create quote -----

$createQuoteParams = array(
    'session' => $session_id,
    'module_name' => 'Quotes',
    'name_value_list' => array(
        array(
            'name' => 'name',
            'value' => 'Widget Quote'
        ),
        array(
            'name' => 'team_count',
            'value' => ''
        ),
        array(
            'name' => 'team_name',
            'value' => ''
        ),
        array(
            'name' => 'date_quote_expected_closed',
            'value' => date('Y-m-
d', mktime(0, 0, 0, date('m') , date('d')+7, date('Y')))
        ),
        array(
            'name' => 'quote_stage',
            'value' => 'Negotiation'
        ),
        array(
            'name' => 'quote_num',
            'value' => ''
        ),
        array(
            'name' => 'quote_type',
            'value' => 'Quotes'
        ),
        array(
            'name' => 'subtotal',
            'value' => '1230.23'
        ),
        array(
            'name' => 'subtotal_usdollar',
            'value' => '1230.23'
        ),
    ),
);
```

---

```

    ),
);

$createQuoteResult = $client->call('set_entry', $createQuoteParams
);

echo "Create Quote Result<br />";
echo "<pre>";
print_r($createQuoteResult);
echo "</pre>";

//create product -----

$createProductParams = array(
    'session' => $session_id,
    'module_name' => 'Products',
    'name_value_list' => array(
        array(
            'name' => 'name',
            'value' => 'Widget'
        ),
        array(
            'name' => 'quote_id',
            'value' => $createQuoteResult['id']
        ),
        array(
            'name' => 'status',
            'value' => 'Quotes'
        )
    )
);

$createProductResult = $client->call('set_entry', $createProductPa
rams);

echo "Create Product Result<br />";

echo "<pre>";
print_r($createProductResult);
echo "</pre>";

//create product-
bundle -----

$createProductBundleParams = array(
    "session" => $session_id,

```

---

```

"module_name" => "ProductBundles",
"name_value_list" => array(
    array(
        'name' => 'name',
        'value' => 'Order'),
    array(
        'name' => 'bundle_stage',
        'value' => 'Draft'
    ),
    array(
        'name' => 'tax',
        'value' => '0.00'
    ),
    array(
        'name' => 'total',
        'value' => '0.00'
    ),
    array(
        'name' => 'subtotal',
        'value' => '0.00'
    ),
    array(
        'name' => 'shippint',
        'value' => '0.00'
    ),
    array(
        'name' => 'currency_id',
        'value' => '-99'
    ),
)
);

```

```

$createProductBundleResult = $client->call('set_entry', $createProductBundleParams);

```

```

echo "Create ProductBundles Result<br />";

```

```

echo "<pre>";
print_r($createProductBundleResult);
echo "</pre>";

```

```

//relate product to product-
bundle -----

```

```

$relationshipProductBundleProductsParams = array(
    'session' => $session_id,

```

---

```

        'module_name' => 'ProductBundles',
        'module_id' => $createProductBundleResult['id'],
        'link_field_name' => 'products',
        'related_ids' => array(
            $createProductResult['id']
        ),
        'name_value_list' => array(),
        'delete' => 0
    );

    // set the product bundles products relationship
    $relationshipProductBundleProductResult = $client->call('set_relat
ionship', $relationshipProductBundleProductsParams);

    echo "Create ProductBundleProduct Relationship Result<br />";

    echo "<pre>";
    print_r($relationshipProductBundleProductResult);
    echo "</pre>";

    //relate product-
bundle to quote -----

    $relationshipProductBundleQuoteParams = array(
        'session' => $session_id,
        'module_name' => 'Quotes',
        'module_id' => $createQuoteResult['id'],
        'link_field_name' => 'product_bundles',
        'related_ids' => array(
            $createProductBundleResult['id']
        ),
        'name_value_list' => array(),
        'delete' => 0
    );

    // set the product bundles quotes relationship
    $relationshipProductBundleQuoteResult = $client->call('set_relatio
nship', $relationshipProductBundleQuoteParams);

    echo "Create ProductBundleQuote Relationship Result<br />";

    echo "<pre>";
    print_r($relationshipProductBundleQuoteResult);
    echo "</pre>";

```

---

## Result

```
//Create Quote Result
Array
(
    [id] => ad88195a-9d36-20b6-beb1-517ea2b9278d
)

//Create Product Result
Array
(
    [id] => 6f920cba-0fed-7172-9dc0-517ea2adb1d1
)

//Create ProductBundles Result
Array
(
    [id] => 4f397baa-5522-fa0e-2bcf-517ea24a9546
)

//Create ProductBundleProduct Relationship Result
Array
(
    [created] => 1
    [failed] => 0
    [deleted] => 0
)

//Create ProductBundleQuote Relationship Result
Array
(
    [created] => 1
    [failed] => 0
    [deleted] => 0
)
```

**Last Modified:** 2021-02-17 02:44:13

## Retrieving a List of Fields From a Module



---

## Overview

A PHP example demonstrating how to retrieve fields vardefs from the accounts module with the `get_module_fields` method using [NuSOAP](#) and the v4\_1 SOAP API.

This example will only retrieve the vardefs for the 'id' and 'name' fields.

## Example

```
<?php

$url = "http://{site_url}/service/v4_1/soap.php?wsdl";
$username = "admin";
$password = "password";

//require NuSOAP
require_once("./nusoap/lib/nusoap.php");

//retrieve WSDL
$client = new nusoap_client($url, 'wsdl');

//display errors
$error = $client->getError();
if ($error)
{
    echo '<h2>Constructor error</h2><pre>' . $error . '</pre>';
    echo '<h2>Debug</h2><pre>' . htmlspecialchars($client->getDebug(), ENT_QUOTES) . '</pre>';
    exit();
}

//login -----

$login_parameters = array(
    'user_auth' => array(
        'user_name' => $username,
        'password' => md5($password),
        'version' => '1'
    ),
    'application_name' => 'SoapTest',
    'name_value_list' => array(
    ),
);
```

---

```
$login_result = $client->call('login', $login_parameters);

/*
echo '<pre>';
print_r($login_result);
echo '</pre>';
*/

//get session id
$session_id = $login_result['id'];

//retrieve fields -----

$get_module_fields_parameters = array(

    //session id
    'session' => $session_id,

    //The name of the module from which to retrieve records
    'module_name' => 'Accounts',

    //Optional. Returns vardefs for the specified fields. An empty
    array will return all fields.
    'fields' => array(
        'id',
        'name',
    ),
);

$get_module_fields_result = $client->call("get_module_fields", $get_module_fields_parameters);

echo "<pre>";
print_r($get_module_fields_result);
echo "</pre>";

?>
```

## Result

```
Array
(
    [module_name] => Accounts
    [table_name] => accounts
)
```

---

```
[module_fields] => Array
(
  [0] => Array
    (
      [name] => id
      [type] => id
      [group] =>
      [label] => ID
      [required] => 1
      [options] => Array
        (
        )
    )
  [1] => Array
    (
      [name] => name
      [type] => name
      [group] =>
      [label] => Name:
      [required] => 1
      [options] => Array
        (
        )
    )
)

[link_fields] => Array
(
)
)
```

**Last Modified:** 2021-02-17 02:44:13

## Retrieving a List of Records

---

## Overview

A PHP example demonstrating how to retrieve a list of records from a module with the `get_entry_list` method using [NuSOAP](#) and the `v4_1` SOAP API. This example will retrieve a list of leads.

## Example

```
<?php

$url = "http://{site_url}/service/v4_1/soap.php?wsdl";
$username = "admin";
$password = "password";

//require NuSOAP
require_once("./nusoap/lib/nusoap.php");

//retrieve WSDL
$client = new nusoap_client($url, 'wsdl');

//display errors
$error = $client->getError();
if ($error)
{
    echo '<h2>Constructor error</h2><pre>' . $error . '</pre>';
    echo '<h2>Debug</h2><pre>' . htmlspecialchars($client->getDebug(), ENT_QUOTES) . '</pre>';
    exit();
}

//login -----

$login_parameters = array(
    'user_auth' => array(
        'user_name' => $username,
        'password' => md5($password),
        'version' => '1'
    ),
    'application_name' => 'SoapTest',
    'name_value_list' => array(
    ),
);

$login_result = $client->call('login', $login_parameters);
```

---

```

/*
echo '<pre>';
print_r($login_result);
echo '</pre>';
*/

//get session id
$session_id = $login_result['id'];

//get list of records -----

$get_entry_list_parameters = array(

    //session id
    'session' => $session_id,

    //The name of the module from which to retrieve records
    'module_name' => 'Leads',

    //The SQL WHERE clause without the word "where".
    'query' => "",

    //The SQL ORDER BY clause without the phrase "order by".
    'order_by' => "",

    //The record offset from which to start.
    'offset' => '0',

    //Optional. A list of fields to include in the results.
    'select_fields' => array(
        'id',
        'name',
        'title',
    ),
),

/*
A list of link names and the fields to be returned for each l
ink name.
Example: 'link_name_to_fields_array' => array(array('name' =>
'email_addresses', 'value' => array('id', 'email_address', 'opt_out',
'primary_address'))))
*/
'link_name_to_fields_array' => array(
),

```

---

```
//The maximum number of results to return.
'max_results' => '2',

//To exclude deleted records
'deleted' => '0',

//If only records marked as favorites should be returned.
'Favorites' => false,
);

$get_entry_list_result = $client->call('get_entry_list', $get_entr
y_list_parameters);

echo '<pre>';
print_r($get_entry_list_result);
echo '</pre>';

?>
```

## Result

Array

```
(
  [result_count] => 2
  [total_count] => 200
  [next_offset] => 2
  [entry_list] => Array
    (
      [0] => Array
        (
          [id] => 18124607-69d1-b158-47ff-4f7cb69344f7
          [module_name] => Leads
          [name_value_list] => Array
            (
              [0] => Array
                (
                  [name] => id
                  [value] => 18124607-69d1-b158-47ff
-4f7cb69344f7
                )
            )
          [1] => Array
            (
              [name] => name
            )
        )
    )
)
```

---

```
        [value] => Bernie Worthey
      )
    [2] => Array
      (
        [name] => title
        [value] => Senior Product Manager
      )
  )
)

[1] => Array
(
  [id] => 1cdfddc1-2759-b007-8713-4f7cb64c2e9c
  [module_name] => Leads
  [name_value_list] => Array
    (
      [0] => Array
        (
          [name] => id
          [value] => 1cdfddc1-2759-b007-8713
-4f7cb64c2e9c
        )
      [1] => Array
        (
          [name] => name
          [value] => Bobbie Kohlmeier
        )
      [2] => Array
        (
          [name] => title
          [value] => Director Operations
        )
    )
  )
)

[relationship_list] => Array
(
```

---

)  
)  
**Last Modified:** 2021-02-17 02:44:13

## Retrieving a List of Records With Related Info

### Overview

A PHP example demonstrating how to retrieve a list of records with info from a related entity with the `get_entry_list` method using [NuSOAP](#) and the v4\_1 SOAP API.

This example will retrieve a list of contacts and their related email addresses.

### Example

```
<?php

$url = "http://{site_url}/service/v4_1/soap.php?wsdl";
$username = "admin";
$password = "password";

//require NuSOAP
require_once("../nusoap/lib/nusoap.php");

//retrieve WSDL
$client = new nusoap_client($url, 'wsdl');

//display errors
$error = $client->getError();
if ($error)
{
    echo '<h2>Constructor error</h2><pre>' . $error . '</pre>';
    echo '<h2>Debug</h2><pre>' . htmlspecialchars($client->getDebug(), ENT_QUOTES) . '</pre>';
    exit();
}
```



---

```

//login -----
$login_parameters = array(
    'user_auth' => array(
        'user_name' => $username,
        'password' => md5($password),
        'version' => '1'
    ),
    'application_name' => 'SoapTest',
    'name_value_list' => array(
    ),
);

$login_result = $client->call('login', $login_parameters);

/*
echo '<pre>';
print_r($login_result);
echo '</pre>';
*/

//get session id
$session_id = $login_result['id'];

//retrieve records -----

$get_entry_list_parameters = array(

    //session id
    'session' => $session_id,

    //The name of the module from which to retrieve records
    'module_name' => "Contacts",

    //The SQL WHERE clause without the word "where".
    'query' => "",

    //The SQL ORDER BY clause without the phrase "order by".
    'order_by' => "",

    //The record offset from which to start.
    'offset' => "0",

    //Optional. The list of fields to be returned in the results
    'select_fields' => array(

```

---

```

        'id',
        'first_name',
        'last_name',
    ),

    //A list of link names and the fields to be returned for each
link name
    'link_name_to_fields_array' => array(
        array(
            'name' => 'email_addresses',
            'value' => array(
                'id',
                'email_address',
                'opt_out',
                'primary_address'
            ),
        ),
    ),

    //The maximum number of results to return.
    'max_results' => '2',

    //To exclude deleted records
    'deleted' => 0,

    //If only records marked as favorites should be returned.
    'Favorites' => false,
);

$get_entry_list_result = $client->call("get_entry_list", $get_entr
y_list_parameters);

echo "<pre>";
print_r($get_entry_list_result);
echo "</pre>";

?>

```

## Result

```

Array
(
    [result_count] => 2
    [total_count] => -1
)

```

---

```
[next_offset] => 2
[entry_list] => Array
  (
    [0] => Array
      (
        [id] => 10613769-54e0-820d-de9b-5282a31b88cd
        [module_name] => Contacts
        [name_value_list] => Array
          (
            [0] => Array
              (
                [name] => id
                [value] => 10613769-54e0-820d-
de9b-5282a31b88cd
              )
            [1] => Array
              (
                [name] => first_name
                [value] => Son
              )
            [2] => Array
              (
                [name] => last_name
                [value] => Roan
              )
          )
      )
    [1] => Array
      (
        [id] => 129b5f1d-5f1f-c679-beab-5282a325a501
        [module_name] => Contacts
        [name_value_list] => Array
          (
            [0] => Array
              (
                [name] => id
                [value] => 129b5f1d-5f1f-
c679-beab-5282a325a501
              )
            [1] => Array
```

```

(
    [name] => first_name
    [value] => Pasquale
)

[2] => Array
(
    [name] => last_name
    [value] => Gottlieb
)

)

)

[relationship_list] => Array
(
    [0] => Array
    (
        [link_list] => Array
        (
            [0] => Array
            (
                [name] => email_addresses
                [records] => Array
                (
                    [0] => Array
                    (
                        [link_value] => Ar
ray
                    (
                        [0] => Arr
ay
                    (
                        [n
ame] => id
                        [v
alue] => 11980e8f-9cb6-0019-ad4a-5282a3e705cf
                    )
                )
            )
            [1] => Arr
ay
            (
                [n

```

```

ame] => email_address
                                   [v
alue] => kid76@example.us
                                   )
                                   [2] => Arr
ay
                                   (
                                   [n
ame] => opt_out
                                   [v
alue] => 0
                                   )
                                   [3] => Arr
ay
                                   (
                                   [n
ame] => primary_address
                                   [v
alue] =>
                                   )
                                   )
                                   )
                                   [1] => Array
                                   (
                                   [link_value] => Ar
ray
                                   (
                                   [0] => Arr
ay
                                   (
                                   [n
ame] => id
                                   [v
alue] => 11c82450-4664-b210-4b79-5282a339d730
                                   )
                                   [1] => Arr
ay
                                   (
                                   [n
ame] => email_address

```



---

```

ray
(
  [0] => Array
  (
    [name] => id
    [value] => 13bf6b4b-4feb-823f-7c54-5282a36a2f57
  )
  [1] => Array
  (
    [name] => email_address
    [value] => phone.vegan@example.tv
  )
  [2] => Array
  (
    [name] => opt_out
    [value] => 0
  )
  [3] => Array
  (
    [name] => primary_address
    [value] =>
  )
)
[1] => Array
(
  [link_value] => Ar
ray

```





---

**Last Modified:** 2021-02-17 02:44:13

## Retrieving Multiple Records by ID

### Overview

A PHP example demonstrating how to retrieve multiple records from the accounts module with the `get_entries` method using NuSOAP and the `v4_1` SOAP API.

This example will only retrieve 2 records and return the following fields: 'name', 'billing\_address\_state' and 'billing\_address\_country'.

### Example

```
<?php

$url = "http://{site_url}/service/v4_1/soap.php?wsdl";
$username = "admin";
$password = "password";

//require NuSOAP
require_once("../nusoap/lib/nusoap.php");

//retrieve WSDL
$client = new nusoap_client($url, 'wsdl');

//display errors
$error = $client->getError();
if ($error)
{
    echo '<h2>Constructor error</h2><pre>' . $error . '</pre>';
    echo '<h2>Debug</h2><pre>' . htmlspecialchars($client->getDebu
```

---

```

g(), ENT_QUOTES) . '</pre>';
    exit();
}

//login -----
---

$login_parameters = array(
    'user_auth' => array(
        'user_name' => $username,
        'password' => md5($password),
        'version' => '1'
    ),
    'application_name' => 'SoapTest',
    'name_value_list' => array(
    ),
);

$login_result = $client->call('login', $login_parameters);

/*
echo '<pre>';
print_r($login_result);
echo '</pre>';
*/

//get session id
$session_id = $login_result['id'];

//retrieve records -----
--

$get_entries_parameters = array(

    //session id
    'session' => $session_id,

    //The name of the module from which to retrieve records
    'module_name' => 'Accounts',

    //An array of SugarBean IDs
    'ids' => array(
        '20328809-9d0a-56fc-0e7c-4f7cb6eb1c83',
        '328b22a6-d784-66d9-0295-4f7cb59e8cbb',
    ),
);

```

---

```

//Optional. The list of fields to be returned in the results
'select_fields' => array(
    'name',
    'billing_address_state',
    'billing_address_country'
),

//A list of link names and the fields to be returned for each
link name
'link_name_to_fields_array' => array(
),
);

$get_entries_result = $client->call('get_entries', $get_entries_pa
rameters);

echo '<pre>';
print_r($get_entries_result);
echo '</pre>';

?>

```

## Result

```

Array
(
    [entry_list] => Array
        (
            [0] => Array
                (
                    [id] => 20328809-9d0a-56fc-0e7c-4f7cb6eb1c83
                    [module_name] => Accounts
                    [name_value_list] => Array
                        (
                            [0] => Array
                                (
                                    [name] => name
                                    [value] => Jungle Systems Inc
                                )
                            [1] => Array
                                (
                                    [name] => billing_address_state
                                    [value] => NY
                                )
                        )
                )
        )

```

---

```
        )
    [2] => Array
    (
        [name] => billing_address_country
        [value] => USA
    )
)
)
[1] => Array
(
    [id] => 328b22a6-d784-66d9-0295-4f7cb59e8cbb
    [module_name] => Accounts
    [name_value_list] => Array
    (
        [0] => Array
        (
            [name] => name
            [value] => Riviera Hotels
        )

        [1] => Array
        (
            [name] => billing_address_state
            [value] => CA
        )

        [2] => Array
        (
            [name] => billing_address_country
            [value] => USA
        )
    )
)
)
[relationship_list] => Array
(
)
```

---

)

Last Modified: 2021-02-17 02:44:13

## Retrieving Records by Email Domain

### Overview

A PHP example demonstrating how to retrieve email addresses based on an email domain with the `search_by_module` and `get_entries` methods using NuSOAP and the `v4_1` SOAP API.

When using the `search_by_module` method, the email address information is not returned in the result. Due to this behavior, we will gather the record ids and pass them back to the `get_entries` method to fetch our related email addresses.

### Example

```
<?php

$url = "http://{site_url}/service/v4_1/soap.php?wsdl";
$username = "admin";
$password = "password";

//require NuSOAP
require_once("./nusoap/lib/nusoap.php");

//retrieve WSDL
$client = new nusoap_client($url, 'wsdl');

//display errors
$error = $client->getError();
if ($error)
{
    echo '<h2>Constructor error</h2><pre>' . $error . '</pre>';
    echo '<h2>Debug</h2><pre>' . htmlspecialchars($client->getDebug(), ENT_QUOTES) . '</pre>';
    exit();
}
```

---

```
//login -----  
---  
  
$login_parameters = array(  
    'user_auth' => array(  
        'user_name' => $username,  
        'password' => md5($password),  
        'version' => '1'  
    ),  
    'application_name' => 'SoapTest',  
    'name_value_list' => array(  
    ),  
);  
  
$login_result = $client->call('login', $login_parameters);  
  
/*  
echo '<pre>';  
print_r($login_result);  
echo '</pre>';  
*/  
  
//get session id  
$session_id = $login_result['id'];  
  
//search_by_module -----  
  
$search_by_module_parameters = array(  
    "session" => $session_id,  
    'search_string' => '%@example.com',  
    'modules' => array(  
        'Accounts',  
        'Contacts',  
        'Leads',  
    ),  
    'offset' => 0,  
    'max_results' => 1,  
    'assigned_user_id' => '',  
    'select_fields' => array('id'),  
    'unified_search_only' => false,  
    'favorites' => false  
);  
  
$search_by_module_results = $client->call('search_by_module', $search_by_module_parameters);
```

---

```

/*
echo '<pre>';
print_r($search_by_module_results);
echo '</pre>';
*/

$record_ids = array();
foreach ($search_by_module_results['entry_list'] as $results)
{
    $module = $results['name'];

    foreach ($results['records'] as $records)
    {
        foreach($records as $record)
        {
            if ($record['name'] = 'id')
            {
                $record_ids[$module][] = $record['value'];
                //skip any additional fields
                break;
            }
        }
    }
}

$get_entries_results = array();
$modules = array_keys($record_ids);

foreach($modules as $module)
{
    $get_entries_parameters = array(
        //session id
        'session' => $session_id,

        //The name of the module from which to retrieve records
        'module_name' => $module,

        //An array of record IDs
        'ids' => $record_ids[$module],

        //The list of fields to be returned in the results
        'select_fields' => array(
            'name',
        ),
    ),

```

---

---

```

        //A list of link names and the fields to be returned for e
ach link name
        'link_name_to_fields_array' => array(
            array(
                'name' => 'email_addresses',
                'value' => array(
                    'email_address',
                    'opt_out',
                    'primary_address'
                ),
            ),
        ),
        //Flag the record as a recently viewed item
        'track_view' => false,
    );

    $get_entries_results[$module] = $client->call('get_entries', $
get_entries_parameters);
}

echo '<pre>';
print_r($get_entries_results);
echo '</pre>';

```

## Result

```

Array
(
    [Accounts] => Array
        (
            [entry_list] => Array
                (
                    [0] => Array
                        (
                            [id] => 1bb7ef28-64b9-cbd5-e7d6-5282a3b969
                            [module_name] => Accounts
                            [name_value_list] => Array
                                (
                                    [0] => Array
                                        (
                                            [name] => name

```

53



---

```

ng Inc.                                     [value] => Underwater Mini
                                           )
                                           )
                                           )
[1] => Array
(
  [id] => efbc0c4e-
cc72-f843-b6ed-5282a38dad7f
  [module_name] => Accounts
  [name_value_list] => Array
    (
      [0] => Array
        (
          [name] => name
          [value] => 360 Vacations
        )
    )
  )
)

[relationship_list] => Array
(
  [0] => Array
    (
      [link_list] => Array
        (
          [0] => Array
            (
              [name] => email_addresses
              [records] => Array
                (
                  [0] => Array
                    (
                      [link_valu
e] => Array
                    )
                )
            )
          )
        )
      )
    )
  )
] => Array

```

```

(
  [name] => email_address
  [value] => beans.the.qa@example.com
)
] => Array [1]
(
  [name] => opt_out
  [value] => 0
)
] => Array [2]
(
  [name] => primary_address
  [value] =>
)
)
)
[1] => Array
(
  [link_valu
)
] => Array [0]
(
  [name] => email_address

```



---

```

(
    [0] => Array
        (
            [link_valu
e] => Array
                (
                    [0
] => Array
                        (
                            [name] => email_address
                            [value] => section51@example.com
                        )
                    [1
] => Array
                        (
                            [name] => opt_out
                            [value] => 0
                        )
                    [2
] => Array
                        (
                            [name] => primary_address
                            [value] =>
                        )
                )
        )
    [1] => Array
        (
            [link_valu

```

---

```
e] => Array
(
  [0] => Array
  (
    [name] => email_address
    [value] => kid.sugar.qa@example.co.uk
  )
  [1] => Array
  (
    [name] => opt_out
    [value] => 0
  )
  [2] => Array
  (
    [name] => primary_address
    [value] =>
  )
)
)
)
)
)
)
```

---

```
        )
    )
[Contacts] => Array
(
    [entry_list] => Array
    (
        [0] => Array
        (
            [id] => 24330979-0e39-f9ec-2622-5282a372f3
9b
            [module_name] => Contacts
            [name_value_list] => Array
            (
                [0] => Array
                (
                    [name] => name
                    [value] => Errol Goldberg
                )
            )
        )
    )
    [1] => Array
    (
31
        [id] => 2542dad2-85f3-5529-3a30-5282a3104e
        [module_name] => Contacts
        [name_value_list] => Array
        (
            [0] => Array
            (
                [name] => name
                [value] => Luis Deegan
            )
        )
    )
)
[relationship_list] => Array
```

```

(
  [0] => Array
    (
      [link_list] => Array
        (
          [0] => Array
            (
              [name] => email_addresses
              [records] => Array
                (
                  [0] => Array
                    (
                      [link_valu
e] => Array
                                (
                                  [0
] => Array
                                (
                                  [name] => email_address
                                  [value] => hr.phone@example.com
                                )
                                [1
] => Array
                                (
                                  [name] => opt_out
                                  [value] => 0
                                )
                                [2
] => Array
                                (
                                  [name] => primary_address
                                  [value] =>

```

---

```

)
)
)
[1] => Array
(
  [link_valu
e] => Array
(
  [0
] => Array
(
  [name] => email_address
  [value] => the.info.phone@example.cn
)
[1
] => Array
(
  [name] => opt_out
  [value] => 1
)
[2
] => Array
(
  [name] => primary_address
  [value] =>
)
)

```





---

[ 2

] => Array

(

[name] => primary\_address

[value] =>

)

)

)

[1] => Array

(

[link\_valu

e] => Array

(

[0

] => Array

(

[name] => email\_address

[value] => the36@example.com

)

[1

] => Array

(

[name] => opt\_out

[value] => 1

)

[2

] => Array

(



```

bb
[id] => 2a3b304b-5167-8432-d4e7-5282a300ea

[module_name] => Leads
[name_value_list] => Array
  (
    [0] => Array
      (
        [name] => name
        [value] => Marco Castongua
      )
  )
)

)

[relationship_list] => Array
  (
    [0] => Array
      (
        [link_list] => Array
          (
            [0] => Array
              (
                [name] => email_addresses
                [records] => Array
                  (
                    [0] => Array
                      (
                        [link_valu
e] => Array
                      (
                        [0]
] => Array
                      (
                        [name] => email_address
                        [value] => hr60@example.com
                      )
                    [1]

```

---

] => Array

```
(  
  [name] => opt_out  
  [value] => 0  
)
```

[2

] => Array

```
(  
  [name] => primary_address  
  [value] =>  
)
```

)

)

)

)

)

)

[1] => Array

```
(  
  [link_list] => Array  
  (  
    [0] => Array
```

```
(  
  [name] => email_addresses  
  [records] => Array
```

```
(  
  [0] => Array
```

```
(  
  [link_valu
```

```
(  
  [link_valu
```

```
(  
  [link_valu
```

e] => Array



---

)  
)  
)

**Last Modified:** 2021-02-17 02:44:13

## Retrieving Related Records

### Overview

A PHP example demonstrating how to retrieve a list of related records with the `get_relationships` method using [NuSOAP](#) and the `v4_1` SOAP API.

This example will retrieve a list of leads related to a specific target list.

### Example

```
<?php

$url = "http://{site_url}/service/v4_1/soap.php?wsdl";
$username = "admin";
$password = "password";

//require NuSOAP
require_once("../nusoap/lib/nusoap.php");

//retrieve WSDL
$client = new nusoap_client($url, 'wsdl');

//display errors
$error = $client->getError();
if ($error)
{
    echo '<h2>Constructor error</h2><pre>' . $error . '</pre>';
    echo '<h2>Debug</h2><pre>' . htmlspecialchars($client->getDebug(), ENT_QUOTES) . '</pre>';
    exit();
}
```

---

```

}

//login -----

$login_parameters = array(
    'user_auth' => array(
        'user_name' => $username,
        'password' => md5($password),
        'version' => '1'
    ),
    'application_name' => 'SoapTest',
    'name_value_list' => array(
    ),
);

$login_result = $client->call('login', $login_parameters);

/*
echo '<pre>';
print_r($login_result);
echo '</pre>';
*/

//get session id
$session_id = $login_result['id'];

//retrieve related list -----

$get_relationships_parameters = array(

    'session'=>$session_id,

    //The name of the module from which to retrieve records.
    'module_name' => 'ProspectLists',

    //The ID of the specified module bean.
    'module_id' => '76d0e694-ef66-ddd5-9bdf-4febd3af44d5',

    //The relationship name of the linked field from which to return records.
    'link_field_name' => 'leads',

    //The portion of the WHERE clause from the SQL statement used to find the related items.
    'related_module_query' => '',

```

---



---

```
//The related fields to be returned.
'related_fields' => array(
    'id',
    'first_name',
    'last_name',
),

//For every related bean returned, specify link field names to
o field information.
'related_module_link_name_to_fields_array' => array(
),

//To exclude deleted records
'deleted'=> '0',

//order by
'order_by' => '',

//offset
'offset' => 0,

//limit
'limit' => 5,
);

$get_relationships_result = $client->call("get_relationships", $get_
t_relationships_parameters);

echo "<pre>";
print_r($get_relationships_result);
echo "</pre>";

?>
```

## Result

```
Array
(
    [entry_list] => Array
        (
            [0] => Array
                (
                    [id] => 117c26c0-11d4-7b8b-cb8f-4f7cb6823dd8
                    [module_name] => Leads
                )
        )
)
```

---

```
[name_value_list] => Array
(
  [0] => Array
    (
      [name] => id
      [value] => 117c26c0-11d4-7b8b-
cb8f-4f7cb6823dd8
    )
  [1] => Array
    (
      [name] => first_name
      [value] => Diane
    )
  [2] => Array
    (
      [name] => last_name
      [value] => Mckamey
    )
)
)

[1] => Array
(
  [id] => 142faeef-1a19-b53a-b780-4f7cb600c553
  [module_name] => Leads
  [name_value_list] => Array
    (
      [0] => Array
        (
          [name] => id
          [value] => 142faeef-1a19-b53a-
b780-4f7cb600c553
        )
      [1] => Array
        (
          [name] => first_name
          [value] => Leonor
        )
      [2] => Array
        (
```



---

```

//retrieve WSDL
$client = new nusoap_client($url, 'wsdl');

//display errors
$error = $client->getError();
if ($error)
{
    echo '<h2>Constructor error</h2><pre>' . $error . '</pre>';
    echo '<h2>Debug</h2><pre>' . htmlspecialchars($client->getDebug(), ENT_QUOTES) . '</pre>';
    exit();
}

//login -----

$login_parameters = array(
    'user_auth' => array(
        'user_name' => $username,
        'password' => md5($password),
        'version' => '1'
    ),
    'application_name' => 'SoapTest',
    'name_value_list' => array(
    ),
);

$login_result = $client->call('login', $login_parameters);

/*
echo '<pre>';
print_r($login_result);
echo '</pre>';
*/

//get session id
$session_id = $login_result['id'];

//search -----

$search_by_module_parameters = array(
    //Session id
    "session" => $session_id,

    //The string to search for.
    'search_string' => 'Customer',

```

---

```
//The list of modules to query.
'modules' => array(
  'Accounts',
),

//The record offset from which to start.
'offset' => 0,

//The maximum number of records to return.
'max_results' => 2,

//Filters records by the assigned user ID.
//Leave this empty if no filter should be applied.
'id' => '',

//An array of fields to return.
//If empty the default return fields will be from the active l
istviewdefs.
'select_fields' => array(
  'id',
  'name',
  'account_type',
  'phone_office',
  'assigned_user_name',
),

//If the search is to only search modules participating in the
unified search.
//Unified search is the SugarCRM Global Search alternative to
Full-Text Search.
'unified_search_only' => false,

//If only records marked as favorites should be returned.
'favorites' => false
);

$search_by_module_result = $client->call('search_by_module', $sear
ch_by_module_parameters);

echo '<pre>';
print_r($search_by_module_result);
echo '</pre>';

?>
```

---

## Result

```
stdClass Object
(
  [result_count] => 2
  [total_count] => 200
  [next_offset] => 2
  [entry_list] => Array
    (
      [0] => stdClass Object
        (
          [id] => 18124607-69d1-b158-47ff-4f7cb69344f7
          [module_name] => Leads
          [name_value_list] => stdClass Object
            (
              [id] => stdClass Object
                (
                  [name] => id
                  [value] => 18124607-69d1-b158-47ff
-4f7cb69344f7
                )
              [name] => stdClass Object
                (
                  [name] => name
                  [value] => Bernie Worthey
                )
              [title] => stdClass Object
                (
                  [name] => title
                  [value] => Senior Product Manager
                )
            )
          )
        )
      [1] => stdClass Object
        (
          [id] => 1cdfddc1-2759-b007-8713-4f7cb64c2e9c
          [module_name] => Leads
          [name_value_list] => stdClass Object
            (
              [id] => stdClass Object
```

---

```
        (
            [name] => id
            [value] => 1cdfddc1-2759-b007-8713
-4f7cb64c2e9c
        )

        [name] => stdClass Object
        (
            [name] => name
            [value] => Bobbie Kohlmeier
        )

        [title] => stdClass Object
        (
            [name] => title
            [value] => Director Operations
        )
    )

)

)

[relationship_list] => Array
(
)

)
```

**Last Modified:** 2021-02-17 02:44:13